TECHNICAL REFERENCE LIBRARY

Master Electrical Distribution Hardware Catalogue

Panelboards · Switchboards · Circuit Breakers · Mounting & Connection Hardware

Identification · Compatibility · Supersession · OEM Documentation

Edition 0.1

Generated 2026-10-21 from database build 4e7a349

2599 hardware entries · 94 equipment families · 187 breaker families · 461 sources

Manufacturer lineages covered

EAT — Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant
SQD — Square D, Schneider Electric, Federal Pioneer (Canada)
GEA — General Electric Industrial Solutions; ABB from 2018; ReliaGear
SIE — Siemens, ITE, ITE Imperial, Gould, Murray
FPE — Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)
ZIN — Zinsco, GTE-Sylvania
OTH — Other / unassigned

Independent research reference. Not affiliated with or endorsed by any manufacturer named. Trademarks belong to their owners. Compatibility statements carry evidence classes A–D; only class A is manufacturer-documented. Verify before installation.

Document Control

Item	Value
Edition	0.1
Generated	2026-10-21
Database build (git)	4e7a349
Hardware entries	2599
Equipment families	94
Breaker families	187
Sources registered	461
Documents preserved in library	306
Open research leads	122

Revision history (research batches merged)

Batch	Research date	Merged	New parts	Updated	New sources
B0001-eaton-prl-panelboards	2026-10-21	2026-10-21	422	0	12
B0002-eaton-switchboards-legacy	2026-10-21	2026-10-21	38	89	13
B0004-squared-switchboards	2026-10-21	2026-10-21	176	1	49
B0005-ge-abb	2026-10-21	2026-10-21	280	0	22
B0006-siemens-ite	2026-10-21	2026-10-21	244	0	15
B0007-breaker-terminal-kits-eaton-squared	2026-10-21	2026-10-21	381	8	18
B0008-breaker-terminal-kits-ge-siemens	2026-10-21	2026-10-21	184	0	8
B0009-legacy-other-manufacturers	2026-10-21	2026-10-21	152	1	39
B0003-squared-panelboards	2026-10-21	2026-10-21	200	20	66
B0012-archival-legacy-panelboards	2026-10-21	2026-10-21	135	21	29
B0011-docs-ge-squared	2026-10-21	2026-10-21	179	133	38
B0010-docs-eaton-siemens	2026-10-21	2026-10-21	208	252	152

This catalogue is generated automatically from the structured parts database (*data/* → *build/edh_catalogue.sqlite*). Corrections must be made in the database, never in this PDF. Catalogue identifiers (EDH-…, FAM-…, BRK-…, SRC-…) are permanent and are never reused.

Table of Contents

Document Control 2

1 How to Use This Catalogue 8

2 Hardware Identification Guide 9

2.1 Anatomy of a panelboard interior . . . 9

2.2 Breaker mounting styles . . . 9

2.3 Branch connector straps — what to measure . . . 10

2.4 Terminal lug types . . . 10

3 Eaton lineage 22

3.1 BR — Type BR loadcenter . . . 24

3.2 CH-BR-RETRO — Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box) . . . 31

3.3 CDP — Westinghouse CDP / HCDP distribution panelboard . . . 64

3.4 CHA-PM4 — Challenger distribution panelboards (PM4a / PM4b) . . . 91

3.5 CHP/CHB — Cutler-Hammer CHP / CHB lighting panelboards . . . 98

3.6 EE — Cutler-Hammer Type EE plug-in power panelboard / switchboard . . . 98

3.7 EP — Cutler-Hammer Type EP plug-in power panelboard . . . 99

3.8 FDP — Westinghouse FDP fusible distribution panelboard . . . 100

3.9 MP100 — Cutler-Hammer MP100 fusible distribution panelboard . . . 106

3.10 MP40 — Cutler-Hammer MP40 distribution panelboard . . . 107

3.11 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards . . . 113

3.12 NFB — Cutler-Hammer NFB panelboard . . . 114

3.13 NLAB — Westinghouse NLAB lighting panelboard . . . 114

3.14 NM/NMM — Westinghouse NM / NMM / NMIB Multibreaker panelboards . . . 115

3.15 PB — Cutler-Hammer Type PB lighting panelboard . . . 115

3.16 PH — Cutler-Hammer Type PH / PH-L panelboard . . . 115

3.17 PRC — Pow-R-Command lighting control panelboard . . . 116

3.18 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX) . . . 116

3.19 PRL-RETRO — Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB) . . . 117

3.20 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage) . . . 117

3.21 PRL1A — Pow-R-Line 1a . . . 124

3.22 PRL1X — Pow-R-Line Xpert 1X . . . 200

3.23 PRL2A — Pow-R-Line 2a . . . 216

3.24 PRL2X — Pow-R-Line Xpert 2X . . . 217

3.25 PRL3 — Westinghouse Pow-R-Line 3 (vintage) . . . 218

3.26 PRL3A — Pow-R-Line 3a . . . 220

3.27 PRL3E — Pow-R-Line 3E . . . 267

3.28 PRL3FQS — Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard) . . . 268

3.29 PRL3X — Pow-R-Line Xpert 3X . . . 295

3.30 PRL4 — Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout) . . . 297

3.31 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F) . . . 339
3.32 PRL5P — Pow-R-Line 5P plug-on distribution panelboard . . . 340
3.33 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards . . . 348
3.34 ES — Cutler-Hammer Type ES switchboard . . . 348
3.35 IFS — Integrated Facility System switchboard . . . 348
3.36 MP2 — Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section) . . . 349
3.37 PRLC — Pow-R-Line C switchboard . . . 349
3.38 PRLCS — Pow-R-Line CS switchboard . . . 350
3.39 PRLXD — Pow-R-Line XD switchboard . . . 350
3.40 PRLi — Pow-R-Line i switchboard . . . 350
3.41 WF/WRP — Westinghouse WF/WRP switchboard . . . 351
3.42 Breaker-mounted terminal kits and accessories . . . 351
Breaker family Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) . . . 351
Breaker family Series C G-Frame (GD/GHC/GHB) . . . 366
Breaker family Series C J-Frame (JD/HJD/JDC/JDB) . . . 367
Breaker family Series C K-Frame (KD/HKD/KDC/KDB) . . . 374
Breaker family Series C L-Frame (LD/HLD/LDC/LDB) . . . 392
Breaker family Series C M-Frame (MDL/HMDL/MDLB) . . . 401
Breaker family Series C N-Frame (ND/HND/NDC/NB) . . . 408
Breaker family Series C R-Frame (RD/RDC) . . . 413
Breaker family Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) . . . 415
Breaker family Series G JG-Frame (JGE/JGS/JGH/JGC) . . . 421
Breaker family Series G LG-Frame (LGE/LGS/LGH/LGC) . . . 424
Breaker family Series G NG-Frame . . . 432

4 Square D / Schneider Electric 433

4.1 I-LINE — I-Line Circuit Breaker Panelboard / I-Line distribution section . . . 434
4.2 MLN — Square D MLN panelboards and switchboards (ML breakers) . . . 463
4.3 NA1B — Square D NA1B panelboard (E-frame bolted, AC/DC) . . . 467
4.4 NEHB — NEHB panelboard . . . 467
4.5 NF — NF panelboard (Class 1670) . . . 468
4.6 NH1B — Square D NH1B 480 V AC lighting panelboard (FY / FA breakers) . . . 491
4.7 NQ — NQ panelboard (Class 1640) . . . 492
4.8 NQO — NQO / NQOB panelboard . . . 525
4.9 NQOB — Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on) . . . 525
4.10 NQOD — NQOD panelboard (Class 1630) . . . 531
4.11 QMB — QMB Fusible Panelboard / QMB distribution (current design, Series E1) . . . 532
4.12 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors) . . . 580
4.13 QED-2 — Power-Style QED-2 Switchboard . . . 590
4.14 SPEED-D — Speed-D Merchandised Service Section Switchboard . . . 610
4.15 Breaker-mounted terminal kits and accessories . . . 610
Breaker family Square D FA/FH/FC/FI (F-frame 100/150 A) . . . 611

Breaker family Square D KA/KH/KC/KI (K-frame 250 A) . . . 615
Breaker family Square D LA/LH (L-frame 400 A) . . . 618
Breaker family Square D LC/LI/LE/LX/LXI (L-frame 600 A) . . . 622
Breaker family Square D MA/MH/MX/ME (M-frame 1000 A) . . . 626
Breaker family Square D NA/NC/NX/NE (N-frame 1200 A) . . . 627
Breaker family Square D PowerPact D-Frame (DG/DJ/DL) . . . 627
Breaker family Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) . . . 629
Breaker family Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) . . . 635
Breaker family Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) . . . 640
Breaker family Square D PowerPact M-Frame (MG/MJ) . . . 654
Breaker family Square D PowerPact P-Frame (PG/PJ/PL) . . . 656
Breaker family Square D PowerPact R-Frame (RG/RJ/RL) . . . 657
4.16 General / family not yet assigned . . . 658
5 GE / ABB lineage 659
5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU) 660
5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC) . . . 678
5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N') . . . 678
5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts) . . . 691
5.5 CONVERTI-FUSE — Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards . . . 701
5.6 NHB — NAB / NHB bolt-on panelboards (legacy) . . . 701
5.7 NLAB — GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers) . . . 702
5.8 RG-NEXT — ReliaGear neXT Power Panelboards . . . 710
5.9 SCP-PLUS — Spectra Series Type SCP Plus panelboards . . . 711
5.10 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB) . . . 716
5.11 TRUMBULL — Trumbull Electric (Plainville CT) panelboards and switches . . . 865
5.12 AV-LINE — AV-Line switchboards (legacy) . . . 866
5.13 Breaker-mounted terminal kits and accessories . . . 867
Breaker family E150 line (TEB, TED, THED, TEC) . . . 867
Breaker family F225 line (TFJ, TFK, THFK, TFC) . . . 871
Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) . . . 874
Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) . . . 877
Breaker family Record Plus FB 100 . . . 890
Breaker family Record Plus FE 250 . . . 892
Breaker family Record Plus FG 600 . . . 895
Breaker family Spectra RMS SE150 . . . 896
Breaker family Spectra RMS SF250 . . . 899
Breaker family Spectra RMS SG600 . . . 902
Breaker family Spectra RMS SK1200 . . . 906
Breaker family TQD / THQD (Q-Line 225A) . . . 910
5.14 General / family not yet assigned . . . 910
6 Siemens lineage 911
6.1 MURRAY — Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens) . . . 912

6.2 CDP-ITE — ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants) . . . 912
6.3 NLAB — ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards . . . 914
6.4 P1 — Type P1 (original) . . . 915
6.5 P2 — Type P2 panelboard . . . 925
6.6 P3 — Type P3 panelboard . . . 948
6.7 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard . . . 957
6.8 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard . . . 992
6.9 PUSHMATIC — Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions) . . . 1020
6.10 RP1 — Type P1 (Revised P1) . . . 1020
6.11 S1/S2 — Type S1 / S2 lighting panelboards . . . 1085
6.12 SE — Type SE panelboard . . . 1088
6.13 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage) . . . 1088
6.14 SB — Type SB1 / SB2 / SB3 distribution switchboards . . . 1096
6.15 Breaker-mounted terminal kits and accessories . . . 1107
Breaker family BQ / BQH / HBQ / BQXD bolt-on . . . 1108
Breaker family NGG / HGG / LGG (G-frame bolt-on/lug) . . . 1109
Breaker family QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) . . . 1111
Breaker family QR2 / QRH2 / HQR2 (250A frame) . . . 1111
Breaker family Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) . . . 1112
Breaker family Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) . . . 1116
Breaker family Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) . . . 1118
Breaker family Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) . . . 1122
Breaker family Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) . . . 1123
Breaker family Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) . . . 1125
Breaker family Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) . . . 1131
Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) . . . 1132
Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6) . . . 1133
6.16 General / family not yet assigned . . . 1133
7 Federal Pacific Electric 1134
7.1 BDP — FPE BDP distribution panelboard (double-hole bus) . . . 1134
7.2 CDP — FPE CDP distribution panelboard (single-hole bus) . . . 1137
7.3 FDP — FPE FDP fusible distribution panelboard / QMQB switchboard . . . 1141
7.4 NA1B — FPE NA1B / NH1B lighting and appliance panelboards . . . 1148
7.5 NBLP — FPE NBLP / NQLP bolt-on lighting panelboards . . . 1150
7.6 NDP — FPE NDP panelboard . . . 1151
7.7 FPE-SWBD — FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic) . . . 1152
8 Zinsco / Sylvania 1154
8.1 ZIN-DIST — Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus) 1154
8.2 ZIN-Q — Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip) . . . 1159
9 Other manufacturers 1162
9.1 COMMANDER — Commander / CEB panels (Zinsco-type) . . . 1162

9.2 FA — Frank Adam Electric panelboards . . . 1162
9.3 KINNEY — Kinney panelboards . . . 1163
9.4 WADSWORTH — Wadsworth panelboards and breakers . . . 1163
10 Breaker Family Register 1164
11 Cross-Reference Tables 1193
11.1 Supersession and alternate numbers . . . 1193
11.2 Replacement and successor statements . . . 1205
11.3 Companion parts required for installation . . . 1207
12 Indexes 1211
12.1 Manufacturer index . . . 1211
12.2 Equipment family index (including aliases) . . . 1211
12.3 Part-number index (primary and alternate numbers) . . . 1227
12.4 Breaker compatibility index . . . 1307
12.5 Component-type index . . . 1375
12.6 Rating and pole index . . . 1381
12.7 Physical dimension and hole-pattern index . . . 1408
Appendix A Documentation Library 1437
Appendix B Bibliography and Source Register 1452
Appendix C Research Status and Open Questions 1476

1 How to Use This Catalogue

The catalogue is organised by **manufacturer lineage**, then **equipment family** (panelboard, switchboard or loadcenter series), then **component type**. Every hardware item has a permanent catalogue identifier of the form **EDH-<MFR>-nnnnn**.

To identify an unknown part: (1) establish the manufacturer and equipment family from the enclosure nameplate, interior label or breaker type; (2) use Section 2 to decide the component type from its function and mounting style; (3) look up any stamped number in the Part-Number Index (partial numbers are listed in normalised alphanumeric order); (4) if no number is legible, use the Breaker Compatibility Index and the identification-feature table to narrow candidates, then compare dimensions and hole patterns against the part entry.

Claims, not records, carry confidence. Each line in a part entry shows the evidence class of that specific statement and the sources supporting it (S-numbers link to the Source Register in Appendix B). A part may have an OEM-verified part number (A) and only a tentative breaker compatibility (C).

Class	Meaning	Typical evidence
A	**OEM Verified**	Explicitly documented in a manufacturer catalogue, instruction leaflet, drawing or bulletin (page cited).
B	**Strongly Corroborated**	Multiple independent credible sources agree (e.g. two distributors plus a photo of the label).
C	**Tentative**	Single non-OEM source, or plausible but incomplete evidence. Distributor compatibility claims are never above C on their own.
D	**Unverified**	Lead, hearsay or inference requiring investigation.

Evidence basis codes

Code	Meaning
oem_spec	Manufacturer specification text or table
oem_drawing	Manufacturer drawing
distributor	Distributor catalogue / listing
surplus_listing	Surplus / used-equipment listing
photo	Photograph of an actual part or label
field_measurement	Measured from a physical sample (record instrument and date)
inference	Engineering inference — never sufficient for compatibility


Safety and interchangeability notice

Matching dimensions do not establish electrical interchangeability. Panelboard and switchboard assemblies are listed as systems; substituting non-OEM or cross-manufacturer components may void the listing and short-circuit rating. Nothing in this catalogue states that a reproduced or aftermarket part is approved, listed or electrically equivalent unless an explicit, cited source says so. Distinguish OEM specifications from field measurements and manufacturing assumptions at all times.

2 Hardware Identification Guide

The drawings in this section are generic schematics prepared for this catalogue to illustrate terminology and measurement practice. They are not reproductions of manufacturer drawings and do not depict any specific OEM part.


2.1 Anatomy of a panelboard interior

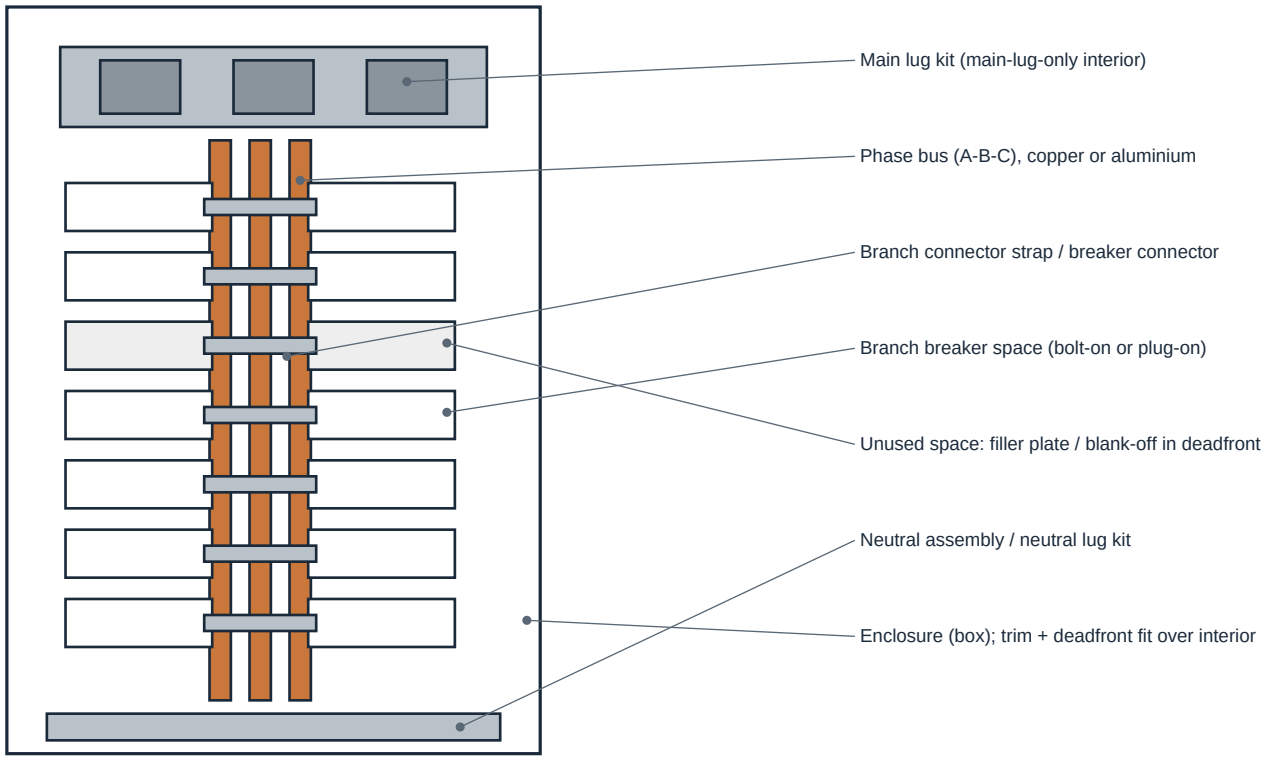

Generic schematic for orientation only — not an OEM drawing, not to scale

Figure 2-1. Generic panelboard interior showing where each component type installs.

2.2 Breaker mounting styles

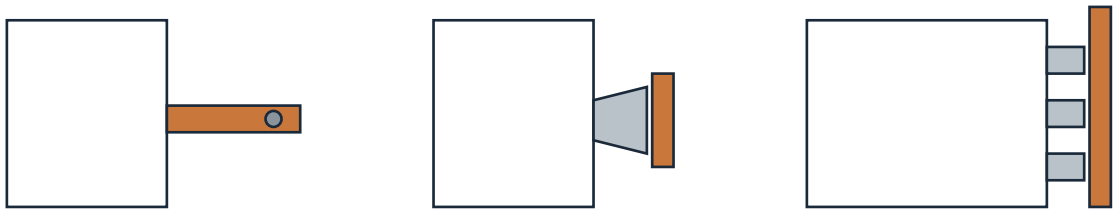

Bolt-on: line terminal screws to bus / connector strap

Plug-on: jaw/clip engages bus stab

Plug-on panel/switchboard unit: jaws onto vertical bus stack

Generic schematics — mounting style is a first-level identification key

Figure 2-2. Bolt-on, plug-on and panel/switchboard plug-on unit mounting.

2.3 Branch connector straps — what to measure

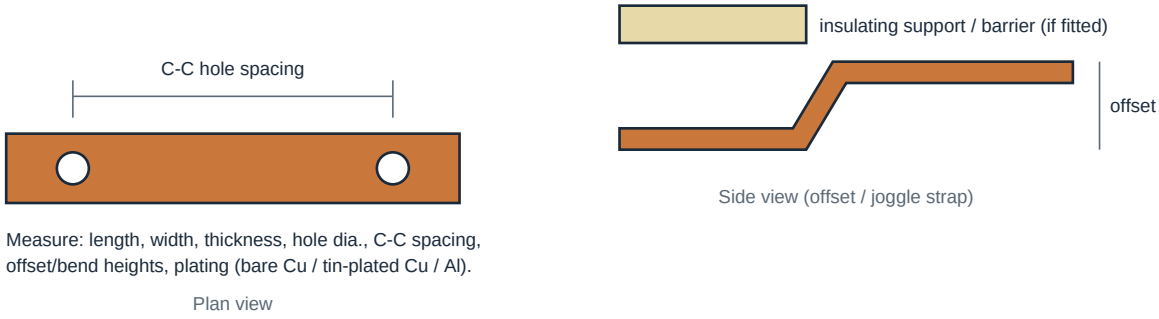


Figure 2-3. Measurement practice for connector straps and bus links.

2.4 Terminal lug types

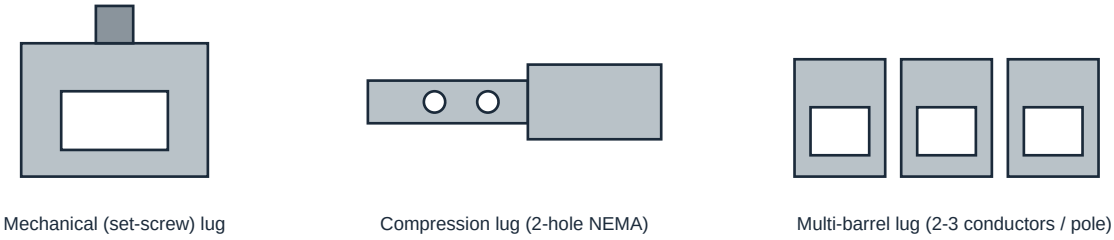


Figure 2-4. Common lug constructions found in main, sub-feed and feed-through lug kits.

2.5 Component-type key

Component type	Function / recognition	Entries
main-breaker-kit	Converts a main-lug interior to main-breaker; includes breaker mounting, connectors to bus.	158
main-lug-kit	Incoming-cable lugs bolted to bus top/bottom; ampere rating set by lug and bus.	218
sub-feed-lug-kit	Second set of lugs to feed a downstream panel from the same bus.	56
through-feed-lug-kit	Lugs at opposite bus end for feeding through to another panel.	9
lug-kit	Lug sets for breakers or assemblies.	274
lug		106
branch-connector-kit	Straps/connectors joining branch breakers to phase bus; series-specific.	361
breaker-mounting-kit	Hardware to mount a breaker frame in a panel/switchboard space.	108
connector-strap	Individual copper/aluminium link between bus and device terminal.	65
bus-assembly		1
neutral-assembly	Neutral bar/lug assembly, incl. 200% neutral options.	127
ground-bar	Equipment grounding bar kit.	32
interior		26
mounting-bracket		26
mounting-rail		8
standoff		1
insulator	Insulating support or standoff for bus or connectors.	8
barrier	Insulating barrier between phases or sections.	116

Component type	Function / recognition	Entries
deadfront	Inner cover exposing only breaker handles.	68
filler-plate	Closes unused breaker space in the deadfront.	216
trim	Front cover/door assembly (surface or flush).	36
box/enclosure		35
hardware-kit		56
fastener		53
conversion-kit	Adapts later breakers or interiors into legacy equipment.	131
spd-kit	Surge-protective-device mounting/connection kit.	8
switch-unit		51
breaker-accessory		159
handle-lock		6
padlock-attachment		15
other		65

2.6 Identification by physical feature

Parts for which distinguishing physical features are recorded. Use with the dimensions and hole-pattern fields of the entry.

Catalogue ID	OEM PN	Features	Pg
EDH-EAT-00218	PRLSEBPD2	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) **A**	214
EDH-EAT-00217	PRLSEBPD3	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) **A**	215
EDH-EAT-00340	KCDPFB100	Kit name retains Westinghouse FB-frame designation; 100 A max (note a) **C**	71
EDH-EAT-00344	KCDPKB	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference) **C**	72
EDH-EAT-00347	KCDPLA600	Kit name retains Westinghouse LA-frame designation **C**	73
EDH-EAT-00345	KCDPLB	Kit name retains Westinghouse LB-frame designation **C**	74
EDH-EAT-00349	KCDPMC	Kit name retains Westinghouse MC-frame designation **C**	75
EDH-EAT-00350	KCDPNC	Note b: connector kits are not rated for 100 percent breakers **A**	76
EDH-EAT-00748	RABR12B3XXX	Main/feed lug wire range #4-1/0 **A**	36
EDH-EAT-00749	RABR12H3XXX	Main/feed lug wire range #4-1/0 **A**	36
EDH-EAT-00756	RABR12L3125	Main/feed lug wire range #8-2/0 **A**	37
EDH-EAT-00737	RABR20BXXX	Main/feed lug wire range #4-2/0 **A**	37
EDH-EAT-00738	RABR20HXXX	Main/feed lug wire range #4-2/0 **A**	38
EDH-EAT-00744	RABR20L125	Main/feed lug wire range #14-2/0 **A**	38
EDH-EAT-00722	RACH18B3XXX	Main/feed lug wire range #2-1/0 **A**	39
EDH-EAT-00706	RACH22BXXX	Main/feed lug wire range #2-1/0 **A**	39
EDH-EAT-00712	RACH24L125	Main/feed lug wire range #4-2/0 **A**	40
EDH-EAT-00725	RACH24L3125	Main/feed lug wire range #6-2/0 **A**	40
EDH-EAT-00726	RACH30L3125	Main/feed lug wire range #4-#1 **A**	41
EDH-EAT-00727	RACH30L3225	Main/feed lug wire range #4-4/0 **A**	41
EDH-EAT-00741	RBBR20BXXX	Main/feed lug wire range #2-300 kcmil **A**	42
EDH-EAT-00758	RBBR24L3150	Main/feed lug wire range #4-4/0 **A**	42
EDH-EAT-00739	RBBR30BCXXX	Main/feed lug wire range #4-1/0 **A**	43
EDH-EAT-00750	RBBR30BXXX	Main/feed lug wire range #4-1/0 **A**	43
EDH-EAT-00751	RBBR30H3XXX	Main/feed lug wire range #4-1/0 **A**	44
EDH-EAT-00740	RBBR30HCXXX	Main/feed lug wire range #4-1/0 **A**	44
EDH-EAT-00745	RBBR30L200	Main/feed lug wire range #1-300 kcmil **A**	45
EDH-EAT-00757	RBBR30L3100	Main/feed lug wire range #8-2/0 **A**	45
EDH-EAT-00708	RBCH24BXXX	Main/feed lug wire range #2-300 kcmil **A**	46
EDH-EAT-00718	RBCH24D225	Main/feed lug wire range #6-300 kcmil **A**	46
EDH-EAT-00733	RBCH24D3225	Main/feed lug wire range #6-300 kcmil **A**	47
EDH-EAT-00707	RBCH30BXXX	Main/feed lug wire range #2-1/0 **A**	47

Catalogue ID	OEM PN	Features	Pg
EDH-EAT-00734	RBCH30D3225	Main/feed lug wire range #6-300 kcmil **A**	48
EDH-EAT-00728	RBCH30L3225	Main/feed lug wire range #4-300 kcmil **A**	48
EDH-EAT-00719	RBCH32D225	Main/feed lug wire range #6-300 kcmil **A**	48
EDH-EAT-00714	RBCH32L225	Main/feed lug wire range #1-300 kcmil **A**	49
EDH-EAT-00713	RBCH42L125	Main/feed lug wire range #4-1/0 **A**	50
EDH-EAT-00715	RBCH42L225	Main/feed lug wire range #4-4/0 **A**	50
EDH-EAT-00729	RBCH42L3125	Main/feed lug wire range #4-#1 **A**	51
EDH-EAT-00730	RBCH42L3225	Main/feed lug wire range #4-4/0 **A**	51
EDH-EAT-00742	RCBR30BXXX	Main/feed lug wire range #2-300 kcmil **A**	52
EDH-EAT-00759	RCBR30L3200	Main/feed lug wire range #4-300 kcmil **A**	52
EDH-EAT-00746	RCBR40L200	Main/feed lug wire range #1-300 kcmil **A**	53
EDH-EAT-00735	RCCH30D3225	Main/feed lug wire range #6-300 kcmil **A**	53
EDH-EAT-00709	RCCH32BXXX	Main/feed lug wire range #2-300 kcmil **A**	54
EDH-EAT-00720	RCCH32D225	Main/feed lug wire range #6-300 kcmil **A**	54
EDH-EAT-00716	RCCH42L225	Main/feed lug wire range #1-300 kcmil **A**	55
EDH-EAT-00731	RCCH42L3225	Main/feed lug wire range #4-300 kcmil **A**	55
EDH-EAT-00752	RDBR30B3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	56
EDH-EAT-00753	RDBR30H3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	56
EDH-EAT-00743	RDBR40BXXX	Main/feed lug wire range #2-300 kcmil **A**	57
EDH-EAT-00747	RDBR42L225	Main/feed lug wire range #1-300 kcmil **A**	57
EDH-EAT-00760	RDBR42L3225	Main/feed lug wire range #4-300 kcmil **A**	58
EDH-EAT-00723	RDCH42B3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	58
EDH-EAT-00710	RDCH42BXXX	Main/feed lug wire range #2-300 kcmil **A**	59
EDH-EAT-00721	RDCH42D225	Main/feed lug wire range #6-300 kcmil **A**	59
EDH-EAT-00736	RDCH42D3225	Main/feed lug wire range #6-300 kcmil **A**	60
EDH-EAT-00724	RDCH42H3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	60
EDH-EAT-00711	RDCH42HXXX	Main/feed lug wire range #4-300 kcmil **A**	61
EDH-EAT-00717	RDCH42L225	Main/feed lug wire range #1-300 kcmil **A**	61
EDH-EAT-00732	RDCH42L3225	Main/feed lug wire range #4-300 kcmil **A**	62
EDH-EAT-00754	REBR42B3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	62
EDH-EAT-00755	REBR42H3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	63
EDH-EAT-00761	REBR42L3225	Main/feed lug wire range #4-300 kcmil **A**	63
EDH-EAT-00901	CCPB-n-xxCF	Indicating CUBEFuse requires date code R38 or later for correct fit; 1-3 A indicating CUBEFuse not available **A**	295
EDH-FPE-00006	KCDP-1A	Label text includes 'J25 (HM1)' and 'LA25037' (meaning unknown) **C**	1149
EDH-GEA-00444	AMCB2FJ	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both) **A**	741
EDH-GEA-00446	AMCB2GM	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end **A**	743
EDH-GEA-00443	AMCB3FJ	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both) **A**	746
EDH-GEA-00447	AMCB3GM	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end **A**	747
EDH-GEA-00452	AMCB4EY	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side **A**	752
EDH-GEA-00445	AMCB4FJ	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps **A**	755
EDH-GEA-00448	AMCB4GB	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly **A**	757
EDH-GEA-00102	AMCB4QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	758
EDH-GEA-00453	AMCB6EY	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side **A**	762
EDH-GEA-00442	AMCB6FJ	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps **A**	765

Catalogue ID	OEM PN	Features	Pg
EDH-GEA-00449	AMCB6GB	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly **A**	766
EDH-GEA-00108	AMCB6QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	768
EDH-GEA-00009	ASPP6EY12D	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc). **A**	679
EDH-GEA-00008	ASPP6EY6D	Crossbar gap 0.06 in **A**	679
EDH-GEA-00005	ASPP6FB6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in **A**	680
EDH-GEA-00007	ASPP6QB12D	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in. **A**	680
EDH-GEA-00006	ASPP6QB6D	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in **A**	681
EDH-GEA-00001	ASPP6QD6D	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in **A**	681
EDH-GEA-00002	ASPP6SE6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in **A**	682
EDH-GEA-00003	ASPP6SF3S	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting. **A**	682
EDH-GEA-00004	ASPP6SG3S	Crossbar gap 0.002 in **A**	683
EDH-GEA-00182	AMC2GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	773
EDH-GEA-00163	AMC3GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	777
EDH-GEA-00595	SRFB3XT4FPK	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	857
EDH-GEA-00594	SRFB3XT4FPX	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	857
EDH-GEA-00599	SRFB3XT5MFPK	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	858
EDH-GEA-00598	SRFB3XT5MFPX	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	858
EDH-GEA-00601	SRFB3XT7MFPK	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	859
EDH-GEA-00600	SRFB3XT7MFPX	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	859
EDH-GEA-00591	SRFB6XT1FPK	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	860
EDH-GEA-00590	SRFB6XT1FPX	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	860
EDH-GEA-00593	SRFB6XT4FPK	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	861
EDH-GEA-00592	SRFB6XT4FPX	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	861
EDH-GEA-00597	SRFB6XT5BFPK	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) **A**	862

Catalogue ID	OEM PN	Features	Pg
EDH-GEA-00596	SRFB6XT5BFPX	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision) A	862
EDH-GEA-00244	AMCB6TEDL	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler A	840
EDH-GEA-00303	TC041	Not UL listed (per table footnote) B	883
EDH-GEA-00561	AMB2120DMA	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	719
EDH-GEA-00559	AMB2120DMC	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	720
EDH-GEA-00556	AMB2120MA	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	721
EDH-GEA-00562	AMB3120DMA	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	727
EDH-GEA-00560	AMB3120DMC	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	727
EDH-GEA-00557	AMB3120MA	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	728
EDH-GEA-00558	AMB3120MC	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit A	729
EDH-GEA-00483	208C1850P3	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off A	802
EDH-GEA-00484	208C1850P4	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off A	803
EDH-GEA-00485	208C1850P5	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off A	803
EDH-GEA-00486	208C1850P6	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off A	803
EDH-SIE-00231	SEBKP1P2P3V1	Drawing ref 11-A-1157-01 / 11-D-2740-01 A	1068
EDH-SIE-00232	SEBKP2V1	Drawing ref 11-D-2733-01 A	935
EDH-SIE-00233	SEBKP2V2	Drawing ref 11-D-2734-01 A	935
EDH-SIE-00234	SEBKP2V3	Drawing ref 11-D-2735-01 A	936
EDH-SIE-00235	SEBKP2V4	Drawing ref 11-D-2736-01 A	936
EDH-SIE-00236	SEBKP2V5	Drawing ref 11-D-2738-01 A	937
EDH-SIE-00237	SEBKP2V6	Drawing ref 11-D-2739-01 A	937
EDH-SIE-00238	SEBKP2V7	Drawing ref 11-D-2898-01 A	938
EDH-SIE-00239	SEBKP3V1	Drawing ref (p.11-67) A	953
EDH-SIE-00224	SEBKRP1V1	Drawing ref 11-A-1148-01 A	1068
EDH-SIE-00225	SEBKRP1V2	Drawing ref 11-A-1148-01 A	1069
EDH-SIE-00226	SEBKRP1V3	Drawing ref 11-A-1149-01 A	1069
EDH-SIE-00227	SEBKRP1V4	Drawing ref 11-A-1149-01 A	1070
EDH-SIE-00228	SEBKRP1V5	Drawing ref 11-A-1165-01 A	1070
EDH-SIE-00229	SEBKRP1V6	Drawing ref 11-A-1194-01 A	1071
EDH-SIE-00230	SEBKRP1V7	Drawing ref 11-B-1060-01 A	1071
EDH-SIE-00240	EWK1	Notched end of end wall faces front A	1079
EDH-SIE-00243	EWK1B	Notched end of end wall faces front A	1079
EDH-SIE-00241	EWK2	Notched end of end wall faces front A	1079
EDH-SIE-00244	EWK2B	Notched end of end wall faces front A	1080
EDH-SIE-00155	6CLE2	2005 list price $845.00 A	994
EDH-SIE-00191	6CLF1	2005 list price $1553.00 A	1097
EDH-SIE-00194	6CLJ1	2005 list price $2122.00 A	1098
EDH-SIE-00198	6CLL1	2005 list price $2525.00 A	1099
EDH-SIE-00188	6E62	2005 list price $845.00 A	1100
EDH-SIE-00190	6F62	2005 list price $1529.00 A	1101
EDH-SIE-00192	6JJ61	2005 list price $2122.00 A	995
EDH-SIE-00193	6JJ62	2005 list price $2349.00 A	1102

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00197	6LL61	2005 list price $2525.00 **A**	995
EDH-SIE-00189	6QJ2	2005 list price $1529.00 **A**	1092
EDH-SIE-00196	6SCJ1	2005 list price $2122.00 **A**	1092
EDH-SIE-00200	6SCL1	2005 list price $2525.00 **A**	1103
EDH-SIE-00195	6SJL1	2005 list price $2122.00 **A**	996
EDH-SIE-00199	6SLL1	2005 list price $2525.00 **A**	997
EDH-SIE-00102	BBKB32	Drawing ref 11-D-2267-01 **A**	926
EDH-SIE-00108	BBKQR1	Drawing ref 11-D-2636-01 **A**	930
EDH-SIE-00103	BBKVA4P2P3	Drawing ref 13-D-2011-13 **A**	931
EDH-SIE-00112	BBKVA5262P2S	Drawing ref 11-D-2894-01 **A**	932
EDH-SIE-00175	MG1D	2005 list price $2938.00 **A**	964
EDH-SIE-00179	NG1D	2005 list price $3489.00 **A**	1000
EDH-SIE-00135	S3VA53T	In P4 applications the B-phase set of straps MUST be taped together **A**	968
EDH-SIE-00161	S3VA53TD	In P4 applications the B-phase set of straps MUST be taped together **A**	968
EDH-SIE-00150	SBLBD	2005 list price $768.00 **A**	972
EDH-SIE-00159	SF6D	Same branch-bus drawing family as Series 6 kit 6F62 (11-5098); items 3, 4 & 11 sub-assembled before packing **A**	1009
EDH-SIE-00176	SLM1D	2005 list price $2938.00 **A**	984
EDH-SIE-00177	SMND	2005 list price $3489.00 **A**	1014
EDH-SIE-00178	SSMND	2005 list price $3489.00 **A**	1017
EDH-SIE-00088	P1CONACPHCU	Drawing ref 11-D-2572-02 **A**	1043
EDH-SIE-00089	P1CONBPHAL	Drawing ref 11-D-2573-01 **A**	1044
EDH-SIE-00090	P1CONBPHCU	Drawing ref 11-D-2573-02 **A**	1044
EDH-SIE-00080	BBKQRP1FK	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01) **A**	947
EDH-SIE-00081	BBKQRP2FK	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34 **A**	957
EDH-SIE-00086	DFK07	Eng./drawing ref 11-D-3018-67 **A**	939
EDH-SIE-00087	DFK08	Eng./drawing ref 11-D-3018-68 **A**	939
EDH-SIE-00085	DFK1	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07) **A**	940
EDH-SIE-00091	P1SCRWS	Drawing ref 11-A-2010-01 **A**	1083
EDH-SIE-00211	6FPB01	Series 6 blank plate; 2005 list price $154.00 **A**	990
EDH-SIE-00212	6FPB02	Series 6 blank plate; 2005 list price $175.00 **A**	990
EDH-SIE-00213	6FPB03	Series 6 blank plate; 2005 list price $175.00 **A**	990
EDH-SIE-00214	6FPB05	Series 6 blank plate; 2005 list price $175.00 **A**	991
EDH-SIE-00215	6FPB10	Series 6 blank plate; 2005 list price $239.00 **A**	991
EDH-SIE-00396	DFFP01A	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole **A**	1072
EDH-SIE-00064	DFFP01B	Eng./drawing ref 11-D-4612-01 **A**	1072
EDH-SIE-00065	DFFP01C	Eng./drawing ref 11-D-4600-01 **A**	1073
EDH-SIE-00062	DFFP1A	Eng. ref 11-D-4613-01; snap-in with small spring side tabs **A**	1073
EDH-SIE-00076	DFFP3	Eng./drawing ref 11-D-2269-01 **A**	943
EDH-SIE-00077	DFFP6	Eng./drawing ref 11-D-2270-01 **A**	944
EDH-SIE-00069	DFFPED01	Eng./drawing ref 12-A-1802-61 **A**	925
EDH-SIE-00070	DFFPFD01	Eng./drawing ref 12-A-1803-61 **A**	1074
EDH-SIE-00071	DFFPJD01	Eng./drawing ref 11-D-4522-61 **A**	1074
EDH-SIE-00072	DFFPJD02	Eng./drawing ref 11-D-4598-01 **A**	1075
EDH-SIE-00073	DFFPQJ01	Eng./drawing ref 12-A-1804-61 **A**	1075
EDH-SIE-00074	DFFPQJ02	Eng./drawing ref 12-A-1804-62 **A**	1075
EDH-SIE-00397	DFFPV5363A	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole **A**	1076
EDH-SIE-00066	DFFPVA41A	Eng./drawing ref 11-D-4604-01 **A**	1076
EDH-SIE-00067	DFFPVA5262A	Eng./drawing ref 11-D-4617-01 **A**	1077
EDH-SIE-00078	DFFPVA5262P2A	Eng./drawing ref 11-D-4610-01 **A**	944
EDH-SIE-00079	DFFPVA5262P2B	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01 **A**	945

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00068	DFFPVA5363A	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20) A	1077
EDH-SIE-00084	DFP3AP01	Eng./drawing ref 11-D-3033-61 (11-D-3033-01) A	945
EDH-SIE-00083	EBF1	Eng./drawing ref 11-D-4529-01 A	954
EDH-SIE-00075	MBKQRFK	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23) A	1078
EDH-SIE-00082	P2QRFP01	Eng./drawing ref 11-D-4564-01 A	945
EDH-SIE-00113	BBKVA5262P2HW	Drawing ref 11-D-2895-61 A	946
EDH-SIE-00096	BK1A	Drawing ref 11-A-2024-01 A	1081
EDH-SIE-00095	IMK1	Drawing ref 11-A-2024-01 A	1081
EDH-SIE-00120	P2BK1	Drawing ref 11-D-2068-01 A	946
EDH-SIE-00121	P2BK2	Drawing ref 11-D-2068-02 A	946
EDH-SIE-00122	P2BK3	Drawing ref 11-D-2068-03 A	947
EDH-SIE-00123	P3BK1	Drawing ref (p.11-67) A	956
EDH-SIE-00117	BNK350N	Drawing ref 11-A-1869-61 A	926
EDH-SIE-00029	4MLKA1	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	922
EDH-SIE-00019	4MLKA1A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	1035
EDH-SIE-00023	4MLKA1B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] A	1036
EDH-SIE-00030	4MLKA3	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	922
EDH-SIE-00020	4MLKA3A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	1036
EDH-SIE-00024	4MLKA3B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] A	1038
EDH-SIE-00031	4MLKC1	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil A	922
EDH-SIE-00021	4MLKC1A	Wire range (1) 1/0-600 kcmil, CU cable only A	1038
EDH-SIE-00032	4MLKC3	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil A	923
EDH-SIE-00022	4MLKC3A	Wire range (1) 1/0-600 kcmil, CU cable only A	1039
EDH-SIE-00025	MLKA1	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	923
EDH-SIE-00015	MLKA1A	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	1039
EDH-SIE-00026	MLKA3	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	923
EDH-SIE-00016	MLKA3A	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	1040
EDH-SIE-00027	MLKC1	Wire range (1) #6 AWG-350 kcmil (CU) A	924
EDH-SIE-00017	MLKC1A	Wire range (1) #6 AWG-350 kcmil (CU) A	1041
EDH-SIE-00028	MLKC3	Wire range (1) #6 AWG-350 kcmil (CU) A	924
EDH-SIE-00018	MLKC3A	Wire range (1) #6 AWG-350 kcmil (CU) A	1041
EDH-SIE-00092	P1DFS250AFT	Drawing ref 11-D-3323 A	1066
EDH-SIE-00093	P1DFS250ANFT	Drawing ref 11-D-3323 A	1067
EDH-SIE-00094	P1DFS400A	Drawing ref 11-D-3315 A	1067
EDH-SIE-00116	BNK2	Drawing ref 11-A-1862 A	933
EDH-SIE-00119	BNKP2EX1	Drawing ref 11-1850-01 / 11-C-2011-01 A	934
EDH-SIE-00038	CNLK42B	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser A	1050
EDH-SIE-00039	CNLK54B	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser A	1051
EDH-SIE-00118	LPP2NB01	Drawing ref 15-A-1800-61 A	934
EDH-SQD-00143	HLW4BL	Surface-mount plate approx. 6.35 in. W x 4.5 in. H C	604
EDH-SQD-00176	CF16RJ63C36	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	600
EDH-SQD-00172	CF20R63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	600
EDH-SQD-00174	CF20RJ63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	601
EDH-SQD-00173	CF25R63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	601
EDH-SQD-00175	CF30RJ63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	601

Catalogue ID	OEM PN	Features	Pg
EDH-SQD-00083	AL175JD	Data sheet: mounting by screws; line and load (upstream/downstream); GTIN 785901686569 **A**	596
EDH-SQD-00221	AL400L61K3	L-frame lugs are pre-tapped for control wire: 8-32 x 1/4 in screw (not provided) into tapped hole in lower left corner of lug **A**	641
EDH-SQD-00313	NQMB2Q	Pan carries B/T hole marks; connection by 4 cable 'main lug wires' rather than bus straps **A**	494
EDH-SQD-00002	QMB221HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	549
EDH-SQD-00001	QMB221TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	550
EDH-SQD-00004	QMB222HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	550
EDH-SQD-00003	QMB222TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	551
EDH-SQD-00006	QMB223HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	551
EDH-SQD-00005	QMB223TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	552
EDH-SQD-00007	QMB224W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	552
EDH-SQD-00008	QMB225W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	553
EDH-SQD-00009	QMB225WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	553
EDH-SQD-00023	QMB261HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	554
EDH-SQD-00022	QMB261TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	554
EDH-SQD-00025	QMB262HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	555
EDH-SQD-00024	QMB262TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	555
EDH-SQD-00027	QMB263HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	556
EDH-SQD-00026	QMB263TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	556
EDH-SQD-00028	QMB264W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	557
EDH-SQD-00011	QMB321HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	557
EDH-SQD-00010	QMB321TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	558
EDH-SQD-00013	QMB322HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	558
EDH-SQD-00012	QMB322TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	558
EDH-SQD-00015	QMB323HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	559
EDH-SQD-00014	QMB323TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	559
EDH-SQD-00016	QMB324W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	560
EDH-SQD-00017	QMB325W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	561
EDH-SQD-00018	QMB325WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	561
EDH-SQD-00019	QMB326W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	562
EDH-SQD-00020	QMB326WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	562
EDH-SQD-00021	QMB327WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	563

Catalogue ID	OEM PN	Features	Pg
EDH-SQD-00030	QMB361HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	563
EDH-SQD-00029	QMB361TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	564
EDH-SQD-00032	QMB362HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	564
EDH-SQD-00033	QMB362T21W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	565
EDH-SQD-00031	QMB362TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	565
EDH-SQD-00035	QMB363HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	566
EDH-SQD-00036	QMB363T31W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	566
EDH-SQD-00037	QMB363T32W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	567
EDH-SQD-00034	QMB363TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	567
EDH-SQD-00038	QMB364W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	568
EDH-SQD-00039	QMB365W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	568
EDH-SQD-00040	QMB365WT6	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	569
EDH-SQD-00041	QMB366W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	569
EDH-SQD-00042	QMB367W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	570

2.7 Equipment family identification key

Summary of every equipment family in the database: use era, voltage, main rating and the breaker types fitted to narrow down an unknown panel before looking up hardware. Values are the highest-confidence claim recorded; see the family sheet for evidence.

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
BR	EAT	loadcenter	Made by Westinghouse's Bryant subsidiary, Bridgepo			24
CDP	EAT	panelboard	Westinghouse power panelboard; with FDP, encompass	Up to 600 V AC, 250 V DC (1957); 1600 A maximum	Original EB/EHB/FB/HFB/KA/KB/JA/JB/DA/LA/LB/LC/MA/MC/NB/NC frames; retrofit with Series C EHD..ND via KCDP kit	64
CH-BR-RETRO	EAT	other	Introduced as 'new' offering in undated Eaton Elec	240 V max class (loadcenter-based plug-on CH 3/4 in and BR 1; MLO 100-225 A; main breaker 60-225 A (XXX = amp rating); AIC	Type CH (3/4 in per pole, CH110-CH3100 etc.) or Type BR (1 in per pole, BR/BRH/BJ/BD/BQ/GFCB/GFEP)	31
CHA-PM4	EAT	panelboard			Challenger CA, CE?, CF, CJ, CK, CL, CM, CN frames (inferred from kit names CCA4K, CED*, CFD*, CJD*, CKD*, CLD*	91
CHP/CHB	EAT	panelboard			CHP: Type CH plug-on; CHB: Type CHB bolt-on	98
EE	EAT	panelboard		1200 A maximum	Plug-in modules for CC, CCH, CHH, FS, FH, FL, JS, JH, JL, KS, KH, LS, LH, LL, MS, MH, NS, NH breakers and 30-8	98
EP	EAT	panelboard		1200 A maximum	FS, FH, FL, CC, CCH, CHH (2X/3X), JS, JH, JL (3X), LSB, LHB, LLB, LC (6X), MS, MH, MC, HMC 800 A (6X/12X), NS,	99
ES	EAT	switchboard	Introduced 1991 by Cutler-Hammer as replacement fo	120-600 V; ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA		348
FDP	EAT	panelboard	Vintage Westinghouse	Up to 600 V AC, 250 V DC; 1600 A maximum	FDPW / FDPB fusible switches 30-1200 A (retrofit); breakers via 'picture frame' adapter (+2X); Measure vertical bus phase spacing: 3.50 in = kit-compatible; 4.25 in = no kits/parts	100
IFS	EAT	switchboard				348
MP100	EAT	panelboard	Shown on the Vol 12 time line together with MP40 (		M50 fusible switches	106
MP2	EAT	switchboard				349

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
MP40	EAT	panelboard	Product History Time Line (V12-T4-3) places Cutler	1600 A maximum	Original branch types per Eaton chart: CC, CCH, CHH, EB, EHB, EC, EHC, FB, HFB, FC, HFC, FH, FS, JA, JB, JS, J	107
NAB	EAT	panelboard	NA1B ('NAIB - AB De-ion') listed in 1946 Westingho		E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	113
NFB	EAT	panelboard			EB, EHB, EHC, EC, CA, CC, FB, HFB, FD, FC, FH, FS, HFC, CCH, CHH	114
NLAB	EAT	panelboard	Westinghouse panelboards manufactured between 1937	NLAB in 120/208 V 3-phase 4-wire and 120/240 V use (installa	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	114
NM/NMM	EAT	panelboard	Sold as NOFUZE Multibreaker panelboards in 1946 (N	NMIB: 115/240 V AC single-phase only; NMM: 115/230 V AC	Westinghouse Multibreaker (1946); typical combinations 15 A 1-pole lighting, 20 A 2-pole water heater, 35/50 A	115
PB	EAT	panelboard		400 A maximum	Cutler-Hammer CH (plug-on) and CHB (bolt-on) breakers	115
PH	EAT	panelboard		PH: 800 A main lug only or 600 A main breaker; PH-L: 225 A m	CH, CHB, CC, CCH, CHH, EB, EHB, EC, EHD, FC, FS, FH, FD	115
PRC	EAT	panelboard	Introduced March 1996	240 or 480Y/277 Vac; 400 A max MLO/main	Bolt-on breakers 225 A max incl. remote-operated breakers	116
PRL-LX	EAT	panelboard	PRL1a/2a-LX introduced December 1997	PRL1a-LX 240 Vac; PRL2a-LX 480Y/277 Vac, 125/250 Vdc; 225 A max MLO or main	Bolt-on breakers 15-30 A (a-LX per s7) / 15-100 A (X-LX per s6)	116
PRL-RETRO	EAT	panelboard				117
PRL1/PRL2	EAT	panelboard	Westinghouse panelboards manufactured after 1988 (	PRL1 240 V class (BAB); PRL2 480Y/277 (GHB) - inferred from ; 600 A maximum	PRL1: BAB-family QUICKLAG; PRL2: GHB-family (from replacement connector kits KPRL1BAB / KPRL2GHB)	117
PRL1A	EAT	panelboard	Introduced October 1996 (Cutler-Hammer); part of '	240 Vac maximum; Main lugs 100, 225, 400, 600 A; main breakers 100-600 A (MLO	Bolt-on QUICKLAG BAB/QBHW (incl. GF/AFCI/RP variants) or plug-on HQP/QPHW chassis, 15-100 A, 1-3 pole. Mains: ; Neutral bar in side gutter (Figure 1); same position as PRL1X/2X/2a	124
PRL1X	EAT	panelboard	Introduced 2020 (time line: May 2020)	240 Vac maximum; MLO 600 A max; main device 600 A max; sub-feed breaker 600 A	Bolt-on or plug-on QUICKLAG (BAB, QBHW, HQP, QPHW, GF/AF/EP variants) 15-100 A; mains/sub-feeds PDG2 (Power De	200
PRL2A	EAT	panelboard	Introduced October 1996	240 Vac or 480Y/277 Vac maximum; 250 Vdc. Not for 480 V delt; Main lugs 100, 225, 400 A (selection guide shows 600 A MLO/m	Bolt-on GHB (480Y/277 only), GHQ, HGHB, GHQRSP, GHBGFEP 15-100 A; mains GHB (horizontal), EHD, FDB, FD, HFD, F	216
PRL2X	EAT	panelboard	Introduced 2020	240 or 480Y/277 Vac; 125/250 Vdc; MLO 600 A; main breaker 600 A	Bolt-on GHB-family 15-100 A; mains PDG2/PDG3/GHB	217
PRL3	EAT	panelboard	Pre-1994 Westinghouse	240/480/600 V class (F-frame kits rated 240/480/600 V; ED ki; 600 A maximum (400 A max bus rating for subchassis)	EHD/FDB/FD/HFD/FDC twin-mounted (KPRL3FD), ED/EDH/EDC (KPRL3ED), CA/CAH/HCA (KPRL3CA); BAB space on subchassis	218
PRL3A	EAT	panelboard	Introduced March 1994	240, 480 or 600 Vac maximum; 250 Vdc; Main lugs 100, 250, 400, 600, 800 A; main breakers 100-600 A	Branch 15-225 A bolt-on: BAB/QBHW family and GHB family (on KPRL3ABA/KPRL3AGB 6-24 circuit kits), EHD/FDB/FD/H; Neutral located in main gutter (end), not side gutter (Figure 1)	220
PRL3E	EAT	panelboard	Shown in January 2018 and June 2020 catalogs	240, 480Y/277 or 480 Vac; 250 Vdc; MLO 100, 250, 400, 600 A; main breakers 100-600 A	EGB/EGS/EGH (E-frame) 15-125 A, 1-3 pole; mains EG (horizontal), EDB/EDS/ED/EDH/EDC, FD/HFD/FDC, DK/KD/HKD/KDC	267
PRL3FQS	EAT	panelboard				268
PRL3X	EAT	panelboard	Introduced 2020	240, 480 or 600 Vac; 250 Vdc; MLO 800 A; main device 600 A	Bolt-on 15-225 A: BAB/QBH family, GHB family, PDG2 (twin to 150 A, single 175-225 A); vertical PDG2/PDG3 mains	295
PRL4	EAT	panelboard	PRL4B/F introduced October 1987	240, 480 or 600 Vac; 600 Vdc maximum; MLO 250, 400, 600, 800, 1200 A; main breakers 250-1200 A; ma	Bolt-on breakers 15-1200 A (EHD..FDC, ED, JD, DK/KD, CKD, LD, LG, LHH, MDL, ND, NHH, CA, FCL, LCL, FB-P, LA-P,	297
PRL4X	EAT	panelboard	Introduced 2020	240, 480 or 600 Vac; 600 Vdc; MLO 1200 A; main device 1200 A	Breakers 15-1200 A (Power Defense PDG2-PDG5 plus legacy Series C/G frames via KPRL4 kits); fusible switches 30	339
PRL5P	EAT	panelboard	Introduced August 1995	Up to 1200 A (lug units 400/600/800 A single bus, 1200 A dou	Plug-on adapter units with EHD..FDC, ED, JD, DK/KD, LD, MDL, ND (no 100% rated)	340
PRLC	EAT	switchboard	Introduced late 1980s (1988) by Westinghouse as su	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rat; Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A	349
PRLCS	EAT	switchboard				350
PRLXD	EAT	switchboard				350

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
PRLi	EAT	switchboard	Evolved in 1991 from Asheville 'Pow-R-I' (itself f	4000 A main bus maximum	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum	350
WEB	EAT	panelboard			WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	348
WF/WRP	EAT	switchboard	Introduced 1955 by Westinghouse, St. Louis MO; des	120-600 V; Switchboard bus 600-4000 A; protective devices 15-4000 A; 10	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure	351
BDP	FPE	panelboard			NE/NEF/HEG (KBDP1C), NEJ/NEJH/HEJ (KBDP2C), [KBDP3C frame not stated], NJL/HJL (KBDP4C), NM/HNM (KBDP5C)	1134
CDP	FPE	panelboard	Advertised May 1962: distribution panelboards type	600 V class (kits KCDP1C, KCDP5C listed 600 V)	FPE rotary-handle molded case breakers 15-800 A (1962)	1137
FDP	FPE	panelboard			QMQB fusible panelboard switches 30-1200 A, 240 V (QMQB..32..) and 600 V (QMQB..36..), 200 kA with class R/J/K	1141
FPE-SWBD	FPE	switchboard		HCB through 2000 A; VCB through 6000 A	NJL/HJL, NJJ, NM/HM (trip units NM03xxxx), NN switches, NP (to 1600 A); Fusematic X-frame XF/XJL current-limit	1152
NA1B	FPE	panelboard			Stab-Lok NA/NB branch breakers (assumed for NA1B); NE/NEF twin-mounted feeders/mains via KCDP-1A / NAIB-NEF ki	1148
NBLP	FPE	panelboard			NB bolt-on miniature breakers (NBLP); NQ breakers (NQLP, e.g., NQ111050)	1150
NDP	FPE	panelboard			NE/NEF and NEJ/NEJH/HEJ twin-mounted with strap kits NDPNE, NDPNEJ	1151
A-SERIES	GEA	panelboard		AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 V; Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THE	660
A-SERIES-COL	GEA	panelboard		Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/		678
A-SERIES-PWR	GEA	panelboard		Mains 125-800 A SG/SK breakers; main lug 600-800 A	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/S	678
AV-LINE	GEA	switchboard				866
CCB-QMR	GEA	panelboard	Types NCB and CCB listed as GE power distribution	1951 Convertible CB panelboards: max 250 V DC, 600 V AC; mai		691
CONVERTI-FUSE	GEA	panelboard	Safe-Converti-Fuse introduced by Trumbull c.1930;	Converti-Fuse: max 250 V DC, 575 V AC, mains 1200 A lugs or		701
NHB	GEA	panelboard	NAB catalogued 1951 (Trumbull, Type AT breakers);	NAB: 125 V DC, 125-250 V or 250 V AC; ABH: max 250 V AC, 125; ABH: max 400 A lugs or 225 A circuit breaker mains	NAB: Type AT, 1/2/3-pole 15, 20, 25, 35, 50 A, one sub-feed up to 225 A; ABH: AT 15-50 A 1/2/3-pole on back pl	701
NLAB	GEA	panelboard	NLAB (formerly NTQ) and NLTQ catalogued 1951; NLTQ	3-wire 120/240 V AC or 4-wire 3-phase 120/208 V AC; branches; Lugs and neutral 100, 225, 400, 600 A (lug table in GEG-1361	NLAB: GE Type TQ (1951), later TQC (handle lock/padlock list); NLTQ: plug-in Type TQL; TQB and TBQ also listed; Breaker family on interior: TQ/TQC/TQB/TQL (GE) vs QC/Quicklag (Westinghouse NLAB); renewal parts card behind	702
RG-NEXT	GEA	panelboard		up to 600 Vac 3ph3w / 600Y/347 V; Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) o	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	710
SCP-PLUS	GEA	panelboard				711
SPECTRA-PP	GEA	panelboard		600 Vac / 250 Vdc max; Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, break	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusibl	716
TRUMBULL	GEA	panelboard	Trumbull Electric Mfg. Co., Plainville CT, labelle		GE-type plug-in (TQL/THQL family) in later panels; ATB-type breakers reported in older Trumbull switchboards (	865
COMMANDER	OTH	loadcenter				1162
FA	OTH	panelboard	Company founded 1891 St. Louis; panels/breakers ma		Fused switches (Fuselok, PULFUZSW, KLAMPSWFUZ); Zinsco-type QSF units in some Frank Adam panelboards; FPE NFJ	1162
KINNEY	OTH	panelboard				1163
WADSWORTH	OTH	panelboard	Common 1950s-1960s; forum claims no Wadsworth brea		Wadsworth A-series (A15NI, A20NI, A230NI, A240NI, A250NI, A260NI, A320, A360, A390) and B-series (B1515, B1530	1163
CDP-ITE	SIE	panelboard				912

Family	Mfr	Type	Era	Voltage / mains	Branch breakers / features	Pg
CDP6	SIE	switchboard	Strap kits fit switchboards manufactured since 197			1088
MURRAY	SIE	loadcenter	Murray line owned by Crouse-Hinds (Cooper) by late		Murray MP / MP-T / MP-HT plug-in; MD-series 2P mains (MD200-H, MD2150V); MEQ9985 / MEQ9683R 150 A 4P 120/240 M	912
NLAB	SIE	panelboard	Listed in 1985 Canadian distributor price book und	NLAB, NHB: 240 V class ('NLAB, NHB-240V basic panel selector	BQ bolt-on (and BQH / HBQ) breakers; HR-7 panels for plug-in breakers; some HB breakers single-branch mounted	914
P1	SIE	panelboard	Pre-2014/2015 (replaced by Revised P1); listed in		BL, BLH, HBL, BQD, NGB/HGB/LGB	915
P2	SIE	panelboard			BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	925
P3	SIE	panelboard				948
P4	SIE	panelboard		Branch devices to 800A (MG1) per strap kit table		957
P5	SIE	panelboard		Branch devices to 1200A (NG1D/SMND)		992
PUSHMATIC	SIE	panelboard	Bulldog Electric Products Co. (Detroit; patents fr	120/240 V 1-ph; some 120/208Y 3-ph panels	Pushmatic push-button breakers (P-series e.g. P1515 dual 15 A condensed); bolt-on to bus	1020
RP1	SIE	panelboard	Introduced 2015 per SpeedFax p.11-7 note ('Revised	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V li; 250A or 400A bus; 400A max mains	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	1020
S1/S2	SIE	panelboard				1085
SB	SIE	switchboard				1096
SE	SIE	panelboard				1088
I-LINE	SQD	panelboard	Catalog copyright 1998-2019	Up to 600 Vac; AC or DC systems; 400-1200 A (HCJ 400-800 A; HCP/HCR-U to 1200 A)	I-Line plug-on breakers 15-1200 A frames: FA, FH, BD/BG/BJ/BK, HD/HG/HJ/HL/HR, QB/QD/QG/QJ, JD/JG/JJ/JL/JR, LA	434
MLN	SQD	panelboard	Sold in the USA from 1962 to 1968		ML breakers (side label part number 999xxx per forum); later FAL, KAL, LAL, MAL via adapter kits; dealer 'ML1'; ML breakers carry a side label with a part number like 999xxx	463
NA1B	SQD	panelboard	Advertised by Square D in September 1960	AC or DC (E frame bolted connection); Main lugs 225 A (300 MCM), 400 A and 600 A (2-500 MCM); main	Square D E-frame bolted breakers	467
NEHB	SQD	panelboard	1983-1995	NY1B (Canada 1985): 240/416 V, 277/480 V, 346/600 V AC with	EH (plug-on), EHB (bolt-on)	467
NF	SQD	panelboard	Series 0: 1995-Oct 2008; Series E1: Oct 2008-prese	600Y/347 Vac max (480Y/277 Vac with EDB/EGB/EJB US breakers); 125, 250, 400, 600 A merchandised; 800 A factory assembled	EDB, EGB, EJB (E-frame bolt-on); EDB/EGB/EJB EPD	468
NH1B	SQD	panelboard	Catalogued in Square D Digest 152 (1970); NEHB is	480 V AC max, AC only; 277/480 V 3-ph 4W, 480 V; 1-ph 2W/3W,; Main lugs 100 A, 225 A (1-300 MCM), 400 A (2-600 MCM); main	FY 1-pole 15-50 A (277 V AC max) and FA 2/3-pole 15-100 A, plug-on or bolt-on (LX bolt-on FA 15-50 A)	491
NQ	SQD	panelboard	2008-present (replaced NQOD in 2008)	240 Vac, 48 Vdc max; 100, 225, 400, 600 A merchandised (250 A main breaker interi	QO plug-on and QOB bolt-on (incl. -VH, -H, AFCI/GFI); 175/200 A QO only in single-phase 400/600 A interiors	492
NQO	SQD	panelboard	late 1960s-1987		Q1 / Q1B	525
NQOB	SQD	panelboard	Advertised by Square D in May and September 1960 (	250 V class AC only (1960: NQO and NQOB 'AC only'); 120/240 ; NQO: 400 A lugs / 400 A main breaker; NQOB: 600 A lugs / 400	1960 USA: QO plug-on / QOB bolt-on 1-pole 15-50 A, 2-pole 15-70 A and 70-100 A, 3-pole 15-50 A and 70-100 A; C	525
NQOD	SQD	panelboard	1987-2008		QO / QOB	531
QED-2	SQD	switchboard	Catalog 2700CT1101 copyright 1995-2012; 'connect t	600 Vac or 250 Vdc max; Sections to 5000 A horizontal bus, 3000 A vertical bus; sing	Group-mounted I-Line: FA, FH, HD, HG, HJ, HL, QB, QD, QG, QJ, JD, JG, JJ, JL, LA, LH, LC, LI, FI, KI, MG, MJ,	590
QMB	SQD	panelboard	Catalog 4620CT9601 copyright 1985-2015; current de	600 Vac / 250 Vdc max; Main lug interiors 225-1200 A; main switch 200-800 A; QMJ on	QMB twin and single fusible switch units 30-800 A (1200 A in QED-2 only), QMJ Class J switch units 30-600 A, Q	532
QMB-LEGACY	SQD	panelboard	QM (31 in. wide box) and QW (38 in. wide box) inte			580
SPEED-D	SQD	switchboard	In 2700CT1101 (2012)			610
ZIN-DIST	ZIN	panelboard		240 V (QSF..33) and 600 V (QSF..53) switch units	QSF fusible switches 30-600 A (T-prefix = twin); bolt-on breakers QB, QFB; FPE N-frame breakers NE/NEF, NEJ, N	1154
ZIN-Q	ZIN	panelboard	Zinsco Electric (Los Angeles) from 1943; Magnatrip	120/240 V 1-ph and 240 V 3-ph (Q24/QFP24 3-pole mains); to 225 A (e.g., MLB20(..)C 225 A max; main lug blocks LK-15	Q, QC, QCN, Q24, R38/RC38 twin, HRGF; bolt-on QB/QCB; mains QFP/QFL/QFB/QFBL	1159

3 Eaton lineage

Lineage / brand markings: Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant

Family	Type	Status	Era	Entries	Pg
BR Type BR loadcenter	loadcenter	current (Eaton Type BR)	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	13	24
CH-BR-RETRO Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	other	Unknown whether still offered as standard kits; Eaton continues custom retrofit interiors via Flex Centers	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand used c.2003-2008)	60	31
CDP Westinghouse CDP / HCDP distribution panelboard	panelboard	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	42	64
CHA-PM4 Challenger distribution panelboards (PM4a / PM4b)	panelboard	Obsolete (Challenger acquired by Westinghouse late 1980s/1994; Eaton from 1994); kits available as surplus	—	23	91
CHP/CHB Cutler-Hammer CHP / CHB lighting panelboards	panelboard	Out of production; connectors not available (note 2)	—	0	98
EE Cutler-Hammer Type EE plug-in power panelboard / switchboard	panelboard	Out of production; parts via RP01400003E	—	2	98
EP Cutler-Hammer Type EP plug-in power panelboard	panelboard	Out of production; parts via RP01400003E	—	0	99
FDP Westinghouse FDP fusible distribution panelboard	panelboard	Obsolete; switch retrofit/connector kits available	Vintage Westinghouse	29	100
MP100 Cutler-Hammer MP100 fusible distribution panelboard	panelboard	Out of production; parts from Sumter SC Aftermarket Center	Shown on the Vol 12 time line together with MP40 (MP40/MP100)	0	106
MP40 Cutler-Hammer MP40 distribution panelboard	panelboard	Out of production; supported by Eaton Aftermarket Center, Sumter SC (renewal parts RP01400003E)	Product History Time Line (V12-T4-3) places Cutler-Hammer MP40/MP100 between the CHP/CHB/NFB era and the 1988 Pow-R-Line redesign (exact start/end years not legible in text extraction)	12	107
NAB Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	panelboard	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	NA1B ('NAIB - AB De-ion') listed in 1946 Westinghouse NOFUZE catalog	0	113
NFB Cutler-Hammer NFB panelboard	panelboard	unknown	—	0	114

Family	Type	Status	Era	Entries	Pg
NLAB Westinghouse NLAB lighting panelboard	panelboard	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	Westinghouse panelboards manufactured between 1937 and 1988	1	114
NM/NMM Westinghouse NM / NMM / NMIB Multibreaker panelboards	panelboard	Obsolete; no Vol 12 replacement row found	Sold as NOFUZE Multibreaker panelboards in 1946 (NMIB 115/240 V single-phase only; NMM 115/230 V AC); Vol 12 time line lists 'Westinghouse NM/NMM' among the earliest types	0	115
PB Cutler-Hammer Type PB lighting panelboard	panelboard	Out of production; connectors not available (chart note 3)	—	0	115
PH Cutler-Hammer Type PH / PH-L panelboard	panelboard	Out of production; parts/retrofit kits via RP01400003E and Sumter Aftermarket Center	—	1	115
PRC Pow-R-Command lighting control panelboard	panelboard	Current (Pow-R-Command E series in 2020 catalog)	Introduced March 1996	22	116
PRL-LX Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	panelboard	Legacy (a) / current (X)	PRL1a/2a-LX introduced December 1997	0	116
PRL-RETRO Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	panelboard	unknown	—	0	117
PRL1/PRL2 Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	panelboard	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	27	117
PRL1A Pow-R-Line 1a	panelboard	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	183	124
PRL1X Pow-R-Line Xpert 1X	panelboard	Current	Introduced 2020 (time line: May 2020)	170	200
PRL2A Pow-R-Line 2a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL2X	Introduced October 1996	179	216
PRL2X Pow-R-Line Xpert 2X	panelboard	Current	Introduced 2020	169	217
PRL3 Westinghouse Pow-R-Line 3 (vintage)	panelboard	Obsolete; limited renewal parts	Pre-1994 Westinghouse	15	218
PRL3A Pow-R-Line 3a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	Introduced March 1994	94	220
PRL3E Pow-R-Line 3E	panelboard	Current in June 2020 catalog	Shown in January 2018 and June 2020 catalogs	0	267
PRL3FQS Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	panelboard	unknown	—	95	268
PRL3X Pow-R-Line Xpert 3X	panelboard	Current	Introduced 2020	69	295
PRL4 Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	PRL4B/F introduced October 1987	54	297

Family	Type	Status	Era	Entries	Pg
PRL4X Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	panelboard	Current	Introduced 2020	53	339
PRL5P Pow-R-Line 5P plug-on distribution panelboard	panelboard	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	Introduced August 1995	29	340
WEB Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	panelboard	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	—	3	348
ES Cutler-Hammer Type ES switchboard	switchboard	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	0	348
IFS Integrated Facility System switchboard	switchboard	current (2018 consulting guide)	—	0	348
MP2 Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	switchboard	Out of production; renewal parts RP01400003E 'Renewal Parts Data for MP40 and MP-200'	—	11	349
PRLC Pow-R-Line C switchboard	switchboard	current (listed in April 2018 consulting guide)	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	0	349
PRLCS Pow-R-Line CS switchboard	switchboard	current (Canadian market; manual IB015002EN effective Nov 2021)	—	0	350
PRLXD Pow-R-Line XD switchboard	switchboard	unknown	—	0	350
PRLi Pow-R-Line i switchboard	switchboard	current (2018 consulting guide)	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	0	350
WF/WRP Westinghouse WF/WRP switchboard	switchboard	discontinued (superseded by Pow-R-Line C)	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	7	351

3.1 BR — Type BR loadcenter

FAM-EAT-026 · loadcenter · aka BR, Bryant BR, Challenger BR, Type BR · markings: Bryant, Challenger, Cutler-Hammer, Eaton, Westinghouse

1-in-per-pole plug-on residential/light-commercial loadcenter family with Westinghouse/Bryant/Challenger lineage. Vol 12 Tab 5 lists replacement main/subfeed lug blocks, filler plates, interlocks and handle accessories.

Attribute	Value	Cl.	Sources
Status	current (Eaton Type BR)	A	S20 p. V12-T5-2; oem_spec
Era of manufacture	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	A	same as above

Breaker families associated: BR

Key documents: S20 CA08100014E Tab 5 Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00453	**BRL200**	Type BR loadcenter main lugs (BRL200)	—	listed October 2016

EDH-EAT-00453	BRL200	Eaton	main-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main lugs (BRL200)

OEM part number	BRL200	**A**	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676460101	**A**	S316 alias; skuPage.BRL200 (General/Product specifications); oem_spec
Description	Main lugs, two-pole 200 A stud mounted (includes deadfront filler plate), #1-300 kcmil	**A**	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Loadcenter Main Devices,Main lug kit,200 A,Stud,Two-pole,Used with Type BR Loadcenters and Circuit Breakers,120/240 V, 208 Y/120, 240 V,#1 AWG-300 kcmil Cu/Al (Eaton web product description)	**A**	S316 skuPage.BRL200 (General/Product specifications); oem_spec
Installation location	Mounting: Stud	**A**	same as above
Poles	Two-pole	**A**	same as above
Voltage rating	120/240V, 208Y/120, 240V	**A**	same as above
Current rating	200 A	**A**	same as above
Kit contents	Used with Type BR Loadcenters and Circuit Breakers	**A**	same as above
Wire range	#1 AWG-300 kcmil Cu/Al	**A**	same as above
Status	listed October 2016	**A**	S20 oem_spec
Listing / approvals	UL Listed	**A**	S316 skuPage.BRL200 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	**A**	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00452	**3BRS225**	Type BR loadcenter main and subfeed lug block (3BRS225)	For BR loadcenter **A**	listed October 2016
EDH-EAT-00451	**3BRSF150**	Type BR loadcenter main and subfeed lug block (3BRSF150)	For BR loadcenter **A**	listed October 2016
EDH-EAT-00450	**BRS225**	Type BR loadcenter main and subfeed lug block (BRS225)	—	listed October 2016
EDH-EAT-00448	**BRSF125**	Type BR loadcenter main and subfeed lug block (BRSF125)	—	listed October 2016
EDH-EAT-00449	**BRSF150**	Type BR loadcenter main and subfeed lug block (BRSF150)	—	listed October 2016

EDH-EAT-00452	3BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRS225)

OEM part number	3BRS225	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676461504	A	S316 alias; skuPage.3BRS225 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 3-pole 225 A, 6 spaces, #2-300 kcmil	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Loadcenter Field Installation Kits and Parts,Requires (6) 1 in spaces,Main and sub-feed lug blocks,225 A,Three-pole,For BR loadcenter,#2 AWG-300 kcmil (Eaton web product description)	A	S316 skuPage.3BRS225 (General/Product specifications); oem_spec
Breaker compatibility	For BR loadcenter (Eaton web 'Used with' attribute)	A	same as above
Poles	Three-pole	A	same as above
Current rating	225 A	A	same as above
Kit contents	Requires (6) 1 in spaces	A	same as above
Wire range	#2 AWG-300 kcmil	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.3BRS225 (General/Product specifications); oem_spec
Installation requirements	(6) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00451	3BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRSF150)

OEM part number	3BRSF150	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676001786	A	S316 alias; skuPage.3BRSF150 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 3-pole 150 A, 3 spaces, #8-2/0 (75 C only)	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts,Requires (3) 1 in spaces,Main and sub-feed lug blocks,150 A,Three-pole,For BR loadcenter,#8-2/0 AWG Cu/Al (Eaton web product description)	A	S316 skuPage.3BRSF150 (General/Product specifications); oem_spec
Breaker compatibility	For BR loadcenter (Eaton web 'Used with' attribute)	A	same as above
Poles	Three-pole	A	same as above
Current rating	150 A	A	same as above
Kit contents	Requires (3) 1 in spaces	A	same as above
Wire range	#8-2/0 AWG Cu/Al	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.3BRSF150 (General/Product specifications); oem_spec
Installation requirements	(3) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00450	BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRS225)

OEM part number	BRS225	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676461405	A	S316 alias; skuPage.BRS225 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 2-pole 225 A, 4 spaces, #2-300 kcmil	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts - Main and Sub-feed Lug Blocks,Requires (4) 1 in spaces,Main and sub-feed lug blocks,225 A,Two-pole,#2 AWG-300 kcmil (Eaton web product description)	A	S316 skuPage.BRS225 (General/Product specifications); oem_spec
Poles	Two-pole	A	same as above
Current rating	225 A	A	same as above
Kit contents	Requires (4) 1 in spaces	A	same as above
Wire range	#2 AWG-300 kcmil	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.BRS225 (General/Product specifications); oem_spec
Installation requirements	(4) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 4.5 in, height 3.5 in, width 3.75 in, weight 0.46 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00448	BRSF125	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF125)

OEM part number	BRSF125	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676001762	A	S316 alias; skuPage.BRSF125 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 2-pole 125 A, 2 spaces, #8-2/0 (75 C only)	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts,Requires (2) 1 in spaces,Main and sub-feed lug blocks,125 A,Two-pole,#8-2/0 AWG Cu/Al (Eaton web product description)	A	S316 skuPage.BRSF125 (General/Product specifications); oem_spec
Poles	Two-pole	A	same as above
Current rating	125 A	A	same as above
Kit contents	Requires (2) 1 in spaces	A	same as above
Wire range	#8-2/0 AWG Cu/Al	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.BRSF125 (General/Product specifications); oem_spec
Installation requirements	(2) 1 in spaces needed (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 1 lb (dimension attributes are placeholders 1 in/1 in/1 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00449	BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF150)

OEM part number	BRSF150	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676001779	A	S316 alias; skuPage.BRSF150 (General/Product specifications); oem_spec
Description	Main and subfeed lug block, 2-pole 150 A, 2 spaces, #8-2/0 (75 C only)	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Field Installation Kits and Parts,Clamshell pack,Main and sub-feed lug blocks,150 A,Two-pole,#8-2/0 AWG Cu/Al (Eaton web product description)	A	S316 skuPage.BRSF150 (General/Product specifications); oem_spec
Poles	Two-pole	A	same as above
Current rating	150 A	A	same as above
Kit contents	Clamshell pack	A	same as above
Wire range	#8-2/0 AWG Cu/Al	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.BRSF150 (General/Product specifications); oem_spec
Installation requirements	(2) 1 in spaces needed, clamshell pack (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 4 in, height 2.25 in, width 3.5 in, weight 0.51 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00457	**NL300**	Type BR loadcenter add-on neutral/ground lug (NL300)	—	listed October 2016

EDH-EAT-00457	NL300	Eaton	lug	LISTED OCTOBER 2016

Type BR loadcenter add-on neutral/ground lug (NL300)

OEM part number	NL300	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Add-on neutral/ground lug, 300 kcmil maximum	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00456	**BINA**	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	—	listed October 2016

EDH-EAT-00456	BINA	Eaton	neutral-assembly	LISTED OCTOBER 2016

Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)

OEM part number	BINA	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Isolated neutral assembly (computer circuits)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00454	**BRFP**	Type BR loadcenter filler plate (BRFP)	—	listed October 2016
EDH-EAT-00455	**BWFP**	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)	—	listed October 2016

EDH-EAT-00454 **BRFP** Eaton filler-plate **LISTED OCTOBER 2016**

Type BR loadcenter filler plate (BRFP)

OEM part number	BRFP	**A**	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate, 1.00 in circuit breaker space; ordering quantity 25	**A**	same as above
Status	listed October 2016	**A**	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00455 **BWFP** Eaton filler-plate **LISTED OCTOBER 2016**

Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)

OEM part number	BWFP	**A**	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate for BW main circuit breaker space (with hardware)	**A**	same as above
Status	listed October 2016	**A**	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00458	**BHT**	Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)	—	listed October 2016

EDH-EAT-00458 **BHT** Eaton handle-lock **LISTED OCTOBER 2016**

Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)

OEM part number	BHT	**A**	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Handle tie bar joining two adjacent single-pole Type BR breakers (metal cylinder pin type); qty 10	**A**	same as above
Status	listed October 2016	**A**	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00459	**BRLW**	Type BR loadcenter padlockable handle lockoff for 1-(BRLW)	For single-,two-three-pole BR and BD circuit breakers **A**	listed October 2016
EDH-EAT-00460	**BRLW1**	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)	—	listed October 2016

EDH-EAT-00459	BRLW	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for 1- (BRLW)

OEM part number	BRLW	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676000499	A	S316 alias; skuPage.BRLW (General/Product specifications); oem_spec
Description	Padlockable handle lockoff for 1-, 2- or 3-pole Type BR (escutcheon mounted); qty 10	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Handle Lockoff,Handle lockoff for type BR circuit breakers and single-pole of type BD duplex or one independent outside pole of type BQ/BQC quadplex circuit breakers,For single-,two-three-pole BR and BD circuit breakers (Eaton web product description)	A	S316 skuPage.BRLW (General/Product specifications); oem_spec
Breaker compatibility	For single-,two-three-pole BR and BD circuit breakers (Eaton web 'Used with' attribute)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.BRLW (General/Product specifications); oem_spec
Installation requirements	Lock in on or off position (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 2 in, height 0.5 in, width 0.5 in, weight 0.1 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00460	BRLW1	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)

OEM part number	BRLW1	A	S20 pp. V12-T5-14..T5-16; oem_spec
Alternate / superseded numbers	UPC 786676376228	A	S316 alias; skuPage.BRLW1 (General/Product specifications); oem_spec
Description	Padlockable handle lockoff for single-pole Type BR (handle mounted, set screw); qty 10	A	S20 pp. V12-T5-14..T5-16; oem_spec
	Eaton Handle Lockoff,Suitable for TT120 loadcenters,Handle lockoff for single-pole type BR circuit breaker,Quantity: 10 (Eaton web product description)	A	S316 skuPage.BRLW1 (General/Product specifications); oem_spec
Kit contents	Suitable for TT120 loadcenters	A	same as above
Status	listed October 2016	A	S20 oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.BRLW1 (General/Product specifications); oem_spec
Installation requirements	Locks in off position (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 7.25 in, height 0.5 in, width 5 in, weight 0.01 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

3.2 CH-BR-RETRO — Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)

FAM-EAT-027 · other · aka Retro Size A-E, RA/RB/RC/RD/RE/RAA retrofit kits, Lincoln Flex Center retrofit · markings: Cutler-Hammer, Eaton

Eaton/Cutler-Hammer standardized retrofit kits for re-using an existing (any-manufacturer, e.g. FPE or Zinsco) flush panel box: a cover assembly (field-drilled picture frame + trim) and a field-adjustable interior assembly with riser accommodating 4-6 in box depth (3.5-5.25 in for size AA). Kits are selected by existing box height into Retro Size groups A (21-30 in, cover 33x24), B (29-36, 40x24), C (34-41, 43x24), D (37-45, 47x24), E (45-54, 56x24), plus AA for boxes 14.5-20.5 in high (covers 19x13 or 21x16). Interiors are 'UL recognized under UL67'; whether the installed assembly in a foreign box is listed is debated (forum), so AHJ/field evaluation may be required. Hosted by InspectAPedia as an FPE Stab-Lok replacement option.

Attribute	Value	Cl.	Sources
Status	Unknown whether still offered as standard kits; Eaton continues custom retrofit interiors via Flex Centers	D	S162, S148 inference
Era of manufacture	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand used c.2003-2008)	D	S162 inference
Voltage rating	240 V max class (loadcenter-based plug-on CH 3/4 in and BR 1 in breakers); 120/240 1-ph and 240 V 3-ph	A	S162 pp. 1, 3-4; oem_spec
Main ampacity	MLO 100-225 A; main breaker 60-225 A (XXX = amp rating); AIC options 10K/22K/25K/35K/100K	A	S162 pp. 6-10, charts 1-11; oem_spec
Branch breakers accepted	Type CH (3/4 in per pole, CH110-CH3100 etc.) or Type BR (1 in per pole, BR/BRH/BJ/BD/BQ/GFCB/GFEP)	A	S162 pp. 3-4; oem_spec
Box range	Standard kits A-E: box widths 14.5-22 in, depths 4 in (BR) / 4.25 in (CH) to 6 in, heights 21-45 in (54 in for E)	A	S162 p. 5; oem_spec
Bus	CH 3-ph and SFL: copper bus with tin-plated copper stabs; CH 1-ph: one-piece copper bus; BR: tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Listing debate	Components listed but field assembly into existing box may need field evaluation per AHJ	D	S163 inference

Key documents: S148 Retrofit kit for Federal Pacific (forum thread); S162 Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (; S163 Eaton's retrofit panel assemblies are not UL listed (forum thread) and related threads

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00764	**RAABR10BXXX**	Cutler-Hammer compact BR retrofit kit RAABR10BXXX	Cutler-Hammer Type BR A	unknown
EDH-EAT-00765	**RAABR10BXXXA**	Cutler-Hammer compact BR retrofit kit RAABR10BXXXA	Cutler-Hammer Type BR A	unknown
EDH-EAT-00762	**RAABR12L125**	Cutler-Hammer compact BR retrofit kit RAABR12L125	Cutler-Hammer Type BR A	unknown
EDH-EAT-00763	**RAABR12L125A**	Cutler-Hammer compact BR retrofit kit RAABR12L125A	Cutler-Hammer Type BR A	unknown
EDH-EAT-00748	**RABR12B3XXX**	Cutler-Hammer BR retrofit kit RABR12B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ A	unknown
EDH-EAT-00749	**RABR12H3XXX**	Cutler-Hammer BR retrofit kit RABR12H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ A	unknown
EDH-EAT-00756	**RABR12L3125**	Cutler-Hammer BR retrofit kit RABR12L3125	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ A	unknown
EDH-EAT-00737	**RABR20BXXX**	Cutler-Hammer BR retrofit kit RABR20BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ A	unknown
EDH-EAT-00738	**RABR20HXXX**	Cutler-Hammer BR retrofit kit RABR20HXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ A	unknown
EDH-EAT-00744	**RABR20L125**	Cutler-Hammer BR retrofit kit RABR20L125	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ A	unknown
EDH-EAT-00722	**RACH18B3XXX**	Cutler-Hammer CH retrofit kit RACH18B3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00706	**RACH22BXXX**	Cutler-Hammer CH retrofit kit RACH22BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00712	**RACH24L125**	Cutler-Hammer CH retrofit kit RACH24L125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00725	**RACH24L3125**	Cutler-Hammer CH retrofit kit RACH24L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00726	**RACH30L3125**	Cutler-Hammer CH retrofit kit RACH30L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00727	**RACH30L3225**	Cutler-Hammer CH retrofit kit RACH30L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00741	**RBBR20BXXX**	Cutler-Hammer BR retrofit kit RBBR20BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00758	**RBBR24L3150**	Cutler-Hammer BR retrofit kit RBBR24L3150	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00739	**RBBR30BCXXX**	Cutler-Hammer BR retrofit kit RBBR30BCXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00750	**RBBR30BXXX**	Cutler-Hammer BR retrofit kit RBBR30BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00751	**RBBR30H3XXX**	Cutler-Hammer BR retrofit kit RBBR30H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00740	**RBBR30HCXXX**	Cutler-Hammer BR retrofit kit RBBR30HCXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00745	**RBBR30L200**	Cutler-Hammer BR retrofit kit RBBR30L200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00757	**RBBR30L3100**	Cutler-Hammer BR retrofit kit RBBR30L3100	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00708	**RBCH24BXXX**	Cutler-Hammer CH retrofit kit RBCH24BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00718	**RBCH24D225**	Cutler-Hammer CH retrofit kit RBCH24D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00733	**RBCH24D3225**	Cutler-Hammer CH retrofit kit RBCH24D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00707	**RBCH30BXXX**	Cutler-Hammer CH retrofit kit RBCH30BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00734	**RBCH30D3225**	Cutler-Hammer CH retrofit kit RBCH30D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00728	**RBCH30L3225**	Cutler-Hammer CH retrofit kit RBCH30L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00719	**RBCH32D225**	Cutler-Hammer CH retrofit kit RBCH32D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00714	**RBCH32L225**	Cutler-Hammer CH retrofit kit RBCH32L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00713	**RBCH42L125**	Cutler-Hammer CH retrofit kit RBCH42L125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00715	**RBCH42L225**	Cutler-Hammer CH retrofit kit RBCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00729	**RBCH42L3125**	Cutler-Hammer CH retrofit kit RBCH42L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00730	**RBCH42L3225**	Cutler-Hammer CH retrofit kit RBCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00742	**RCBR30BXXX**	Cutler-Hammer BR retrofit kit RCBR30BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00759	**RCBR30L3200**	Cutler-Hammer BR retrofit kit RCBR30L3200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00746	**RCBR40L200**	Cutler-Hammer BR retrofit kit RCBR40L200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00735	**RCCH30D3225**	Cutler-Hammer CH retrofit kit RCCH30D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00709	**RCCH32BXXX**	Cutler-Hammer CH retrofit kit RCCH32BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00720	**RCCH32D225**	Cutler-Hammer CH retrofit kit RCCH32D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00716	**RCCH42L225**	Cutler-Hammer CH retrofit kit RCCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00731	**RCCH42L3225**	Cutler-Hammer CH retrofit kit RCCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00752	**RDBR30B3XXX**	Cutler-Hammer BR retrofit kit RDBR30B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00753	**RDBR30H3XXX**	Cutler-Hammer BR retrofit kit RDBR30H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00743	**RDBR40BXXX**	Cutler-Hammer BR retrofit kit RDBR40BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00747	**RDBR42L225**	Cutler-Hammer BR retrofit kit RDBR42L225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00760	**RDBR42L3225**	Cutler-Hammer BR retrofit kit RDBR42L3225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00723	**RDCH42B3XXX**	Cutler-Hammer CH retrofit kit RDCH42B3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00710	**RDCH42BXXX**	Cutler-Hammer CH retrofit kit RDCH42BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00721	**RDCH42D225**	Cutler-Hammer CH retrofit kit RDCH42D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00736	**RDCH42D3225**	Cutler-Hammer CH retrofit kit RDCH42D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00724	**RDCH42H3XXX**	Cutler-Hammer CH retrofit kit RDCH42H3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00711	**RDCH42HXXX**	Cutler-Hammer CH retrofit kit RDCH42HXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00717	**RDCH42L225**	Cutler-Hammer CH retrofit kit RDCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00732	**RDCH42L3225**	Cutler-Hammer CH retrofit kit RDCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00754	**REBR42B3XXX**	Cutler-Hammer BR retrofit kit REBR42B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00755	**REBR42H3XXX**	Cutler-Hammer BR retrofit kit REBR42H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00761	**REBR42L3225**	Cutler-Hammer BR retrofit kit REBR42L3225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown

EDH-EAT-00764 **RAABR10BXXX** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer compact BR retrofit kit RAABR10BXXX

OEM part number	RAABR10BXXX	**A**	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main breaker, 10 spaces / 20 circuits, #6-1/0 wire, cover 19 x 13 in	**A**	same as above
Application	main breaker	**A**	same as above
Breaker compatibility	Cutler-Hammer Type BR	**A**	same as above
Current rating	60-125 A	**A**	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	**A**	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall	**A**	same as above
Status	unknown	**D**	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00765 **RAABR10BXXXA** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer compact BR retrofit kit RAABR10BXXXA

OEM part number	RAABR10BXXXA	**A**	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main breaker, 10 spaces / 20 circuits, #6-1/0 wire, cover 21 x 16 in	**A**	same as above
Application	main breaker	**A**	same as above
Breaker compatibility	Cutler-Hammer Type BR	**A**	same as above
Current rating	60-125 A	**A**	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	**A**	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall	**A**	same as above
Status	unknown	**D**	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00762	RAABR12L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer compact BR retrofit kit RAABR12L125

OEM part number	RAABR12L125	A	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main lugs, 12 spaces / 24 circuits, #6-1/0 wire, cover 19 x 13 in	A	same as above
Application	main lugs	A	same as above
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	125 A	A	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall	A	same as above
Status	unknown	D	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00763	RAABR12L125A	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer compact BR retrofit kit RAABR12L125A

OEM part number	RAABR12L125A	A	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main lugs, 12 spaces / 24 circuits, #6-1/0 wire, cover 21 x 16 in	A	same as above
Application	main lugs	A	same as above
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	125 A	A	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall	A	same as above
Status	unknown	D	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00748	RABR12B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12B3XXX

OEM part number	RABR12B3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00749	RABR12H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12H3XXX

OEM part number	RABR12H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00756	RABR12L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12L3125

OEM part number	RABR12L3125	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #8-2/0	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00737	RABR20BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20BXXX

OEM part number	RABR20BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-2/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00738	RABR20HXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20HXXX

OEM part number	RABR20HXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-2/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00744	RABR20L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20L125

OEM part number	RABR20L125	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #14-2/0	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00722	RACH18B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH18B3XXX

OEM part number	RACH18B3XXX (XXX = main breaker amp rating)	A	S162 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 18 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 4; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-1/0	A	S162 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00706	RACH22BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH22BXXX

OEM part number	RACH22BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 22 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-1/0	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00712	RACH24L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH24L125

OEM part number	RACH24L125	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 24 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-2/0	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00725	RACH24L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH24L3125

OEM part number	RACH24L3125	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 24 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-2/0	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00726	RACH30L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH30L3125

OEM part number	RACH30L3125	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 22-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-#1	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00727	RACH30L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH30L3225

OEM part number	RACH30L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	150-225 (chart rows 150 A 22.5-30 in #4-1/0 and 225 A 24.5-30 in #4-4/0 share this number) A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 22.5-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00741	RBBR20BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR20BXXX

OEM part number	RBBR20BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-30.5 in (#2-250) / 31-36 in (#2-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00758	RBBR24L3150	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR24L3150

OEM part number	RBBR24L3150	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	150 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00739	RBBR30BCXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30BCXXX

OEM part number	RBBR30BCXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00750	RBBR30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30BXXX

OEM part number	RBBR30BXXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		
Open question	*Chart 9 prints 'RBBR30BXXX' for the 3-phase 10K kit, lacking the '3' phase marker used by the other 3-phase numbers (e.g., RBBR30H3XXX) - possibly a typo for RBBR30B3XXX.*		

EDH-EAT-00751	RBBR30H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30H3XXX

OEM part number	RBBR30H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00740	RBBR30HCXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30HCXXX

OEM part number	RBBR30HCXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00745	RBBR30L200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30L200

OEM part number	RBBR30L200	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-31.5 in (#1-250) / 32-36 in (#1-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00757	RBBR30L3100	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30L3100

OEM part number	RBBR30L3100	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	100 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #8-2/0	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00708	RBCH24BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24BXXX

OEM part number	RBCH24BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-200 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-30 in (#2-250 kcmil) / 30.5-36 in (#2-300 kcmil); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00718	RBCH24D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24D225

OEM part number	RBCH24D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00733	RBCH24D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24D3225

OEM part number	RBCH24D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00707	RBCH30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30BXXX

OEM part number	RBCH30BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-1/0	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00734	RBCH30D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30D3225

OEM part number	RBCH30D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 31-33.5 in / 34-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00728	RBCH30L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30L3225

OEM part number	RBCH30L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00719	RBCH32D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH32D225

OEM part number	RBCH32D225	A	S162 p. 6, Selection Chart 3; oem_spec

Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 31-33.5 in (#6-250) / 34-36 in (#6-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		
Open question	*Chart lists 30 circuits but part number implies 32.*		

EDH-EAT-00714 **RBCH32L225** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer CH retrofit kit RBCH32L225

OEM part number	RBCH32L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 32 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00713	RBCH42L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L125

OEM part number	RBCH42L125	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 25-26 in (#4-#1) / 26.5-30 in (#4-1/0); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00715	RBCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L225

OEM part number	RBCH42L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00729	RBCH42L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L3125

OEM part number	RBCH42L3125	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 25-28 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-#1	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00730	RBCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L3225

OEM part number	RBCH42L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00742	RCBR30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR30BXXX

OEM part number	RCBR30BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-35.5 in (#2-250) / 36-41 in (#2-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00759	RCBR30L3200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR30L3200

OEM part number	RCBR30L3200	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-35.5 in (#4-250) / 36-41 in (#4-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00746	RCBR40L200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR40L200

OEM part number	RCBR40L200	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 40 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-36.5 in / 37-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00735	RCCH30D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH30D3225

OEM part number	RCCH30D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00709	RCCH32BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH32BXXX

OEM part number	RCCH32BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 32 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00720	RCCH32D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH32D225

OEM part number	RCCH32D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 32 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00716	RCCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH42L225

OEM part number	RCCH42L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00731	RCCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH42L3225

OEM part number	RCCH42L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00752	RDBR30B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR30B3XXX

OEM part number	RDBR30B3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-200 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00753	RDBR30H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR30H3XXX

OEM part number	RDBR30H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-200 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00743	RDBR40BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR40BXXX

OEM part number	RDBR40BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 40 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (#2-4/0) / 39-40.5 in (#2-250) / 41-45 in (#2-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00747	RDBR42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR42L225

OEM part number	RDBR42L225	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00760	RDBR42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR42L3225

OEM part number	RDBR42L3225	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00723	RDCH42B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42B3XXX

OEM part number	RDCH42B3XXX (XXX = main breaker amp rating)	A	S162 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 4; oem_spec
Current rating	100-225 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00710	RDCH42BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42BXXX

OEM part number	RDCH42BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00721	RDCH42D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42D225

OEM part number	RDCH42D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00736	RDCH42D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42D3225

OEM part number	RDCH42D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00724	RDCH42H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42H3XXX

OEM part number	RDCH42H3XXX (XXX = main breaker amp rating)	A	S162 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 4; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00711	RDCH42HXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42HXXX

OEM part number	RDCH42HXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00717	RDCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42L225

OEM part number	RDCH42L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00732	RDCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42L3225

OEM part number	RDCH42L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00754	REBR42B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42B3XXX

OEM part number	REBR42B3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-225 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00755	REBR42H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42H3XXX

OEM part number	REBR42H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00761	REBR42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42L3225

OEM part number	REBR42L3225	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

3.3 CDP — Westinghouse CDP / HCDP distribution panelboard

FAM-EAT-013 · panelboard · aka CDP, CDP/HCDP, CPD, Cutler-Hammer CDP, HCDP, Westinghouse CDP · markings: Cutler-Hammer, Westinghouse

Westinghouse distribution panelboard in 30-50 in wide boxes with chassis rails and vertical chassis bus, 3.50 in phase-to-phase bus centre-lines (switch kits). Series C retrofit kits (KCDP+breaker catalog no.) use same X space as original breakers; KD onto LB connectors requires TAD3 adapter.

Westinghouse distribution (circuit-breaker) panelboard on a chassis with vertical phase busbars at 3.50 in centers and mounting rails 19.50 in apart; X unit = 1.38 in. Boxes 30, 38, 42, 48 and 50 in wide; neutral in side gutter. Branch breakers mount on breaker mounting brackets with copper connectors to the chassis bus; unused space closed by filler covers (KCDP_X). Sumter supplies KCDP connector kits (connectors+brackets+covers+hardware), KCDP retrofit kits (breaker + connector kit) and -H hardware-only kits. Older 'LB' style connectors accept Series C K-frame with TAD3 adapter.

Evidence-only record for the existing Westinghouse CDP family. 1957 Westinghouse literature: CDP distribution panelboard uses E-M frame AB De-ion breakers 15-800 A with screw-driver convertibility; Vol 12 also lists a Cutler-Hammer-branded CDP on the time line and in the Cutler-Hammer replacement chart (E/EA/EH -> REH; EB/EHB -> EHD; F/FA/HF/HFA -> RHF/RHFA; up to N-frame -> ND), noting 'not rated for 100% rated breakers'. A 1946 Westinghouse 'AB De-ion Convertible' distribution panel is a plausible predecessor (unverified).

Attribute	Value	Cl.	Sources
Status	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	A	S5 oem_spec
	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	A	S13 pp. V12-T4-4, V12-T4-7, V12-T4-9; oem_spec
Era of manufacture	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	A	S13 pp. V12-T4-2, V12-T4-3; oem_spec
	Advertised by Westinghouse by 1957 (and Type CDP & NLAB installations reported June 1958); Vol 12: CDP and FDP were the most significant Westinghouse types 'for more than 34 years'	A	S261, S13 ECM June 1957 pp.188-189; V12-T4-2; oem_spec
	Vintage Westinghouse (pre-Pow-R-Line 4)	C	S5 inference
Successor	PRL4B (Pow-R-Line 4B)	A	S13 p. V12-T4-7; oem_spec
	PRL4B (functional)	D	S5 inference
Voltage rating	Up to 600 V AC, 250 V DC (1957)	A	S261 ECM June 1957 p.189; oem_spec
Main ampacity	1600 A maximum	A	S13 p. V12-T4-9; oem_spec
	1957: main lugs up to 1200 A, main breakers up to 800 A; Vol 12 layout: 1600 A maximum	A	S261, S13 ECM 1957 p.189; V12-T4-9; oem_spec
Branch breakers accepted	Original EB/EHB/FB/HFB/KA/KB/JA/JB/DA/LA/LB/LC/MA/MC/NB/NC frames; retrofit with Series C EHD..ND via KCDP kits	A	S5 pp.12-14; oem_spec
	Westinghouse E, EA, EH, F, FA (pre-1974), EB, EHB, FB, HFB, CA, JA/KA/HKA, JB/KB/HKB, DA, LA/HLA/LAB, LB/LBB/HLB, LC/HLC, MA/HMA, MC/HMC, NB/HNB, NC/HNC, Tri-Pac FB-P/LA-P/NB-P, LCL; Series C upgrades EHD, FDB, FD, HFD, FDC, ED, JD, DK, KD, LD, MDL, ND	A	S13, S14 p. V12-T4-7; RP01400002E pp. 12-14; oem_spec
	1957: E, F, G, J, K, KL, L and M frame AB De-ion breakers 15-800 A; 'screw driver convertibility'	A	S261 ECM June 1957 pp.188-189; oem_spec
Bus spacing	Vertical bus 3.50 in (88.9 mm) phase-to-phase; mounting rails 19.50 in; if 4.25 in spacing, switches will not fit	A	S5 p.17 Figure 2; oem_spec
X unit	One X = 1.38 in (35.1 mm) of panel height; blank fillers required for unused X space	A	S13 p. V12-T4-9; oem_spec
Bus geometry	Vertical busbars 1.38 in typ, phase centers 3.50 in, mounting rails 19.50 in (applies to CDP and FDP chassis)	A	S14, S13 RP01400002E p. 17 Fig. 2; V12-T4-10; oem_spec
Box widths	CDP and FDP standard widths 30.00, 38.00, 42.00, 48.00 and 50.00 in; neutral located in side gutter	A	S14 p. 2; oem_spec

Attribute	Value	Cl.	Sources
Layout	Main lug top gutter 7-1/2 in; main lug section 5X 225 A, 7X 250-400 A, 9X 600 A, 12X/13X 800-1600 A; thru-feed lugs 10X 225 A, 13X 250-400 A, 17X 600-800 A; 30 in box branch: 1P EB/EHB/HFB 1X, 2P EB/EHB/FB 2X, 3P 3X, CA/CAH 2X-3X, JB/KB/HKB 3X (5 in), DA/LB/LBB/HLB 4X, LA/LC/HLC 6X, MC/HMC/NC/HNC/LCL 6X (48 in box)	A	S13 p. V12-T4-9; oem_spec
Breaker mix rule	Only breakers of the same frame size can be installed across from each other (same horizontal plane); KD breakers can be mounted across from LB breakers if a TAD3 line side adapter is used	A	S13 p. V12-T4-7 notes 4,6; oem_spec
Single pole note	When only one EB, EHB or HFB single-pole breaker is required with other frame size breakers, the space required changes from 1X to 2X	A	S13 p. V12-T4-9 note 1; oem_spec
Renewal doc	Renewal parts data RP01400002E; pricing PL01400002E	A	S13 pp. V12-T4-9, V12-T4-23; oem_spec
Subchassis note	If the CDP panelboard has a subchassis lighting panel, contact Sumter Plant Aftermarket Center (803-481-6677) for breaker selection	A	S14 p. 11; oem_spec
Cutler hammer cdp	Cutler-Hammer-labelled CDP exists (time line 'Cutler-Hammer CDP'; replacement chart rows under Cutler-Hammer panelboard type CDP, note 3 'Not rated for 100% rated breakers'); MP40 kits fit Cutler-Hammer-labelled CDP	A	S13, S248 V12-T4-3, V12-T4-4; oem_spec
Predecessor	1946 Westinghouse NOFUZE line listed 'AB De-ion Convertible' and 'MH Multibreaker' distribution panels (Link between 'AB De-ion Convertible' and CDP is an inference)	D	S243 inference

Breaker families associated: CA, CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), DA, E, EB, ED, EHB, EHD, F, FB, FD, HFB, JA, JB, JD, KA, KB, KD, LA, LB, LC, LD, MA, MC, MDL, NB, NC, ND, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames), Westinghouse pre-Series C industrial MCCBs

Key documents: S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S15 RP01400002E (2009) Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition); S243 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -; S248 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S254 sim_ecm_1958-06_57_6; sim_electrical-south_1958-06_38_6 Electrical Construction and Maintenance June 1958 / Electrical South June 1958 - Westingho; S255 sim_plant-engineering_1960-04_14_4 Plant Engineering Vol 14 No 4-6 (April-June 1960) - Westinghouse ad: flush-mounted type NL; S261 sim_ecm_1957-06_56_6 Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distributio

Also fits this family (entry printed elsewhere): TAD3, 5155C81G01, K80522, 8450C62H39, K80429, 114C247G01, 3457B16G01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00366	**KFDP4XT**	Westinghouse FDP switch connector kit KFDP4XT	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin sw A	Listed Feb 2013
EDH-EAT-00367	**KFDP5XT**	Westinghouse FDP switch connector kit KFDP5XT	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in A	Listed Feb 2013
EDH-EAT-00368	**KFDPB6X-2**	Westinghouse FDP switch connector kit KFDPB6X-2	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phas A	Listed Feb 2013
EDH-EAT-00370	**KFDPW11X-6**	Westinghouse FDP switch connector kit KFDPW11X-6	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phas A	Listed Feb 2013
EDH-EAT-00371	**KFDPW11X-8**	Westinghouse FDP switch connector kit KFDPW11X-8	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not A	Listed Feb 2013
EDH-EAT-00372	**KFDPW15X-12**	Westinghouse FDP switch connector kit KFDPW15X-12	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not A	Listed Feb 2013
EDH-EAT-00369	**KFDPW9X-4**	Westinghouse FDP switch connector kit KFDPW9X-4	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phas A	Listed Feb 2013

EDH-EAT-00366 **KFDP4XT** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDP4XT

OEM part number	KFDP4XT	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec

Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin switches: FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	4X space	A	S5 oem_spec
	Occupies 5.50 in (139.7 mm) = 4X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00367 **KFDP5XT** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDP5XT

OEM part number	KFDP5XT	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT3633R 600 V 100-100 A twin switch	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 100 A 600 V FDPWT3633R	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	5X space	A	S5 oem_spec
	Occupies 6.88 in (174.8 mm) = 5X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00368 **KFDPB6X-2** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPB6X-2

OEM part number	KFDPB6X-2	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPBS324R / FDPBS364R 200 A switch	A	S5 p.18; oem_spec

	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	6X space	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00370 **KFDPW11X-6** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW11X-6

OEM part number	KFDPW11X-6	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW326R / FDPW366R 600 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	11X space	A	S5 oem_spec
	Occupies 15.13 in (384.3 mm) = 11X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00371 **KFDPW11X-8** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW11X-8

OEM part number	KFDPW11X-8	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW367 800 A	A	S5 p.18; oem_spec

	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V column, apparent truncation)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	11X space	A	S5 oem_spec
	Occupies 15.13 in (384.3 mm) = 11X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00372 **KFDPW15X-12** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW15X-12

OEM part number	KFDPW15X-12	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW368 1200 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 1200 A FDPW368	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	15X space	A	S5 oem_spec
	Occupies 20.63 in (524.0 mm) = 15X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00369 **KFDPW9X-4** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW9X-4

OEM part number	KFDPW9X-4	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW325R / FDPW365R 400 A	A	S5 p.18; oem_spec

	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	9X space	A	S5 oem_spec
	Occupies 12.38 in (314.5 mm) = 9X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00343	**KCDPCA**	Westinghouse CDP breaker connector kit KCDPCA (CA...)	CA, CAH, HCA 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00341	**KCDPED225**	Westinghouse CDP breaker connector kit KCDPED225 (FD...)	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00340	**KCDPFB100**	Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)	EHD, FDB, FD, HFD, FDC 3-pole (100 A max) A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00342	**KCDPFBP**	Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)	FB-P, FCL 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00344	**KCDPKB**	Westinghouse CDP breaker connector kit KCDPKB (JD...)	JD, JDB, HJD, JDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00346	**KCDPLA400**	Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)	LA-P 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00347	**KCDPLA600**	Westinghouse CDP breaker connector kit KCDPLA600 (LD...)	LD, HLD, LDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00345	**KCDPLB**	Westinghouse CDP breaker connector kit KCDPLB (DK...)	DK, KD, KDB, HKD, KDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00348	**KCDPLCL**	Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)	LCL 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00349	**KCDPMC**	Westinghouse CDP breaker connector kit KCDPMC (MDL...)	MDL, HMDL 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00351	**KCDPNBP**	Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)	NB-P 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00350	**KCDPNC**	Westinghouse CDP breaker connector kit KCDPNC (ND...)	ND, HND 3-pole (not rated for 100% breakers) A	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-EAT-00343	KCDPCA	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPCA (CA...)

OEM part number	KCDPCA	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for CA, CAH, HCA 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above

Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	CA, CAH, HCA 3-pole	A	S5 p.14 Table 19; oem_spec
	CA, CAH, HCA	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	225 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: CA/CAH/HCA 225 A frame, Westinghouse pre-Series C industrial MCCBs, CA		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00341	KCDPED225	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPED225 (FD...)

OEM part number	KCDPED225	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S5 p.14 Table 19; oem_spec
	FD, FDB, HFD, FDC, ED, EDH, EDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	225 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec

Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Westinghouse pre-Series C industrial MCCBs, FD, ED		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00340	**KCDPFB100**	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)

OEM part number	KCDPFB100	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S5 p.14 Table 19; oem_spec
	EHD, FDB, FD, HFD, FDC (100 A maximum)	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A maximum	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse FB-frame designation; 100 A max (note a)	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, EB, EHB, FB, HFB, EHD, FD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00342	**KCDPFBP**	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)

OEM part number	KCDPFBP	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for FB-P, FCL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	FB-P, FCL 3-pole	A	S5 p.14 Table 19; oem_spec

	FB-P, FCL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A (FB-P 15-100 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Current-limiting FCL / LCL (and FDB+LFB), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00344	KCDPKB	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPKB (JD...)

OEM part number	KCDPKB	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for JD, JDB, HJD, JDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	JD, JDB, HJD, JDC 3-pole	A	S5 p.14 Table 19; oem_spec
	JD, JDB, HJD, JDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	250 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference)	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, KB, JB, JD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00346	**KCDPLA400**	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)

OEM part number	KCDPLA400	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LA-P 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LA-P 3-pole	A	S5 p.14 Table 19; oem_spec
	LA-P	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A (LA-P 70-400 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00347	**KCDPLA600**	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLA600 (LD...)

OEM part number	KCDPLA600	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LD, HLD, LDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LD, HLD, LDC 3-pole	A	S5 p.14 Table 19; oem_spec
	LD, HLD, LDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above

Current rating	600 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LA-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse pre-Series C industrial MCCBs, LA, LC, LD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00345	KCDPLB	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLB (DK...)

OEM part number	KCDPLB	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for DK, KD, KDB, HKD, KDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	DK, KD, KDB, HKD, KDC 3-pole	A	S5 p.14 Table 19; oem_spec
	DK, KD, KDB, HKD, KDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	4X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LB-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, DA, LB, KD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00348	KCDPLCL	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)

OEM part number	KCDPLCL	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LCL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LCL 3-pole	A	S5 p.14 Table 19; oem_spec
	LCL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	LCL 125-400 A	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Current-limiting FCL / LCL (and FDB+LFB), Westinghouse pre-Series C industrial MCCBs		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00349	KCDPMC	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPMC (MDL...)

OEM part number	KCDPMC	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for MDL, HMDL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	MDL, HMDL 3-pole	A	S5 p.14 Table 19; oem_spec
	MDL, HMDL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above

Current rating	800 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse MC-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse pre-Series C industrial MCCBs, MA, MC, MDL		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00351	KCDPNBP	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)

OEM part number	KCDPNBP	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for NB-P 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	NB-P 3-pole	A	S5 p.14 Table 19; oem_spec
	NB-P	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	800 A (NB-P 300-800 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00350	KCDPNC	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPNC (ND...)

OEM part number	KCDPNC	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for ND, HND 3-pole (not rated for 100% breakers)	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	ND, HND 3-pole (not rated for 100% breakers)	A	S5 p.14 Table 19; oem_spec
	ND, HND	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	1200 A frame; not rated for 100 percent breakers	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Note b: connector kits are not rated for 100 percent breakers	A	S14 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse pre-Series C industrial MCCBs, NB, NC, ND		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00352	**KCDP_X**	CDP filler cover (any X increment)	—	Listed Feb 2013

EDH-EAT-00352	KCDP_X	Westinghouse	filler-plate	LISTED FEB 2013

CDP filler cover (any X increment)

OEM part number	KCDP_X	A	S5 p.14; oem_spec
	KCDP_X (fill in number of X, e.g. KCDP3X) (pattern; example KCDP3X is constructed, not printed)	A	S14 p. 14 'CDP filler covers'; oem_spec
Description	CDP filler covers available in any 1X (1.38 in) increment; catalog KCDP_X with blank = size (e.g. KCDP3X); includes cover, mounting brackets and hardware	A	S5 p.14; oem_spec
	CDP filler cover available in any increment of 1X = 1.38 in (35.1 mm); includes cover, mounting brackets and hardware	A	S14 p. 14; oem_spec
Installation location	Closes unused X space on CDP chassis; blank fillers are required for unused X space	A	S13 p. V12-T4-9; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	S14 p. 14; oem_spec
Dimensions	Height = n x 1.38 in (35.1 mm)	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: CDP		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00445	**0080429**	Panelboard trim lock — T-handle lock	—	listed 2013; contact Sumter for price

EDH-EAT-00445	0080429	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — T-handle lock

OEM part number	0080429	A	S14 p. 19 Table 22; oem_spec
Description	T-handle lock; once used on all panels over 48.00 in high and on outdoor (N3R) panels	A	same as above
Dimensions	approx. 2.50 in (63.5 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00420	**414A380G02**	Trim clamp for CDP, FDP and NQB	—	Shown as 'No Longer Available' in RP01400002E figure
EDH-EAT-00423	**KCDPFB100-H**	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix	—	listed 2013

EDH-EAT-00420	414A380G02	Cutler-Hammer	hardware-kit	SHOWN AS 'NO LONGER AV

Trim clamp for CDP, FDP and NQB

OEM part number	414A380G02	A	S5, S14 oem_spec
Description	Trim clamp for CDP, FDP and NQB (2.50 in long) - marked 'No Longer Available'	A	S5 oem_spec
	Trim clamp used to mount Fastrims (concealed trim-mounting hardware); bag of six; some larger panels need more than one bag	A	S14 p. 19; oem_spec
Application	accessory	A	same as above
Installation location	Used on CDP, FDP and NQB	A	same as above
Kit contents	Bag of six clamps	A	same as above
Dimensions	Overall length 2.50 in (63.5 mm)	A	same as above
Status	Shown as 'No Longer Available' in RP01400002E figure (Placement of 'No Longer Available' label in figure is ambiguous between 414A380G02 and neighbouring item)	B	S5 p.19; oem_spec
Cross-links	Families: CDP, FDP, NLAB		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00423	KCDPFB100-H	Cutler-Hammer	hardware-kit	LISTED 2013

CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix

OEM part number	KCDPFB100-H	A	S14 p. 14 (Hardware kit example); oem_spec
Alternate / superseded numbers	KCDPFD100H (2009 edition prints the example as KCDPFD100H; 2013 prints KCDPFB100-H. Likely a typo/format change, not a separate part)	C	S15 alias; RP01400002E (2009) p. 14; oem_spec
Description	Hardware kit: mounting bracket(s), filler plates and mounting hardware ONLY. Formed by adding '-H' to the appropriate CDP connector kit catalog number	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Kit contents	Mounting bracket(s), filler plates, mounting hardware (no copper connectors)	A	same as above
Status	listed 2013	B	S14, S15 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: EHD, FD		
Not yet documented	Dimensions, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the -H suffix valid for every KCDP connector kit (e.g. KCDPLB-H, KCDPNC-H)?*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00361	**KCDPDK**	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00353	**KCDPEHD**	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00355	**KCDPFD**	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00354	**KCDPFDB**	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00357	**KCDPHKD**	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00358	**KCDPJD**	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses A	Listed Feb 2013 (Sumter Plant Aftermarket Center)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00360	**KCDPJDB**	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00356	**KCDPKD**	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125- **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00359	**KCDPKDB**	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00362	**KCDPLD**	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00363	**KCDPMDL**	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Se **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00364	**KCDPND**	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-EAT-00361	KCDPDK	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)

OEM part number	KCDPDK	**A**	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPDK (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	**A**	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse DA breaker (existing breaker superseded by this Series C retrofit)	**A**	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	**A**	S5 p.12; oem_spec
	CDP retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	**A**	S14 pp. 12-13; oem_spec
Application	branch	**A**	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	**A**	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse DA (250-400 A) with Series C DK	**A**	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	**A**	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	**A**	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	**B**	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, DA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00353	KCDPEHD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)

OEM part number	KCDPEHD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPEHD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse EB, EHB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, EB, EHB, EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00355	KCDPFD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)

OEM part number	KCDPFD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPFD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HFB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse HFB (15-150 A) with Series C FD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, HFB, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00354	KCDPFDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)

OEM part number	KCDPFDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPFDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse FB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse FB (15-150 A) with Series C FDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, FB, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00357	KCDPHKD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)

OEM part number	KCDPHKD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPHKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HKA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00358	KCDPJD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)

OEM part number	KCDPJD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPJD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KB, HKB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, KB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00360	KCDPJDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)

OEM part number	KCDPJDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPJDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse JB (70-250 A) with Series C JDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, JB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00356	KCDPKD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)

OEM part number	KCDPKD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A) with Series C KD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00359	KCDPKDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)

OEM part number	KCDPKDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPKDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Series C KDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, JA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00362	KCDPLD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)

OEM part number	KCDPLD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPLD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse LA, HLA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A) with Series C LD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse pre-Series C industrial MCCBs, LA, LC, LD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00363	KCDPMDL	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)

OEM part number	KCDPMDL	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPMDL (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse MA, HMA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) with Series C MDL	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse pre-Series C industrial MCCBs, MA, MC, MDL		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00364	KCDPND	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)

OEM part number	KCDPND	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPND (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse NB, HNB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A) with Series C ND	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse pre-Series C industrial MCCBs, NB, NC, ND		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

3.4 CHA-PM4 — Challenger distribution panelboards (PM4a / PM4b)

FAM-EAT-028 · panelboard · aka PM4a, PM4b, Challenger panelboard · markings: Challenger

Challenger Electrical Equipment (formed c.1981 from GTE-Sylvania's distribution business, Jackson MS) built distribution panelboards annotated 'PM4a' and 'PM4b' in relectric's catalogue. Mounting kits follow the pattern C<frame>D<n>K (twin) / C<frame>DS<n>K (single), with 'B' variants (e.g., CED4BK) annotated PM4b. Eaton-numbered KPRL4C*/KPRL4AC*/KPRL4BC* kits appear to adapt Challenger breakers into Pow-R-Line 4 style interiors. Coded EAT per lineage table.

Attribute	Value	Cl.	Sources
Status	Obsolete (Challenger acquired by Westinghouse late 1980s/1994; Eaton from 1994); kits available as surplus	C	S166, S156, S151 surplus
Branch breakers accepted	Challenger CA, CE?, CF, CJ, CK, CL, CM, CN frames (inferred from kit names CCA4K, CED*, CFD*, CJD*, CKD*, CLD*, CMD4K 800 A, CND4K 1200 A)	D	S166 inference

Breaker families associated: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)
Key documents: S151 Zinsco; S156 Challenger / GTE / Zinsco ownership discussion; S166 Challenger Breaker Parts & Accessories Catalog

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00766	**CCA4K**	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	—	discontinued; recertified/new-surplus
EDH-EAT-00767	**CED3K**	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00769	**CED4BK**	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00768	**CED4K**	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	—	discontinued; recertified/new-surplus
EDH-EAT-00770	**CFD3K**	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	—	discontinued; recertified/new-surplus

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00772	**CFD4BK**	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00771	**CFD4K**	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00773	**CJD4K**	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00775	**CJDS4BK**	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00774	**CJDS4K**	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00776	**CKD4K**	Challenger PM4a (no further description) mounting hardware kit CKD4K	—	discontinued; recertified/new-surplus
EDH-EAT-00778	**CKDS4BK**	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00777	**CKDS4K**	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00779	**CLD4K**	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00780	**CLDS4BK**	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00781	**CMD4K**	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00782	**CND4K**	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00788	**KPRL3CF3**	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00784	**KPRL4CD**	Challenger twin mounting hardware kit KPRL4CD, 225 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00783	**KPRL4CED**	Challenger twin mounting hardware kit KPRL4CED, 225 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00785	**KPRL4CSL**	Challenger single mounting hardware kit KPRL4CSL, 600 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00786	**KPRL4CSM**	Challenger single mounting hardware kit KPRL4CSM, 800 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00787	**KPRL4CSN**	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	—	discontinued; recertified/new-surplus

EDH-EAT-00766	CCA4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V

OEM part number	CCA4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	C	same as above
Current rating	225 A max, 240 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00767	CED3K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CED3K, 225 A max, 600 V

OEM part number	CED3K	C	S166 surplus
Description	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	C	same as above
Current rating	225 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00769	CED4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V

OEM part number	CED4BK	C	S166 surplus
Description	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	C	same as above
Current rating	225 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00768	CED4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CED4K, 225 A max, 240 V

OEM part number	CED4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	C	same as above
Current rating	225 A max, 240 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00770	CFD3K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V

OEM part number	CFD3K	C	S166 surplus
Description	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00772	CFD4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V

OEM part number	CFD4BK	C	S166 surplus
Description	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00771	CFD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V

OEM part number	CFD4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00773	CJD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V

OEM part number	CJD4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00775	CJDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V

OEM part number	CJDS4BK	C	S166 surplus
Description	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00774	CJDS4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V

OEM part number	CJDS4K	C	S166 surplus
Description	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00776	CKD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger PM4a (no further description) mounting hardware kit CKD4K

OEM part number	CKD4K	C	S166 surplus
Description	Challenger PM4a (no further description) mounting hardware kit CKD4K	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00778	CKDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V

OEM part number	CKDS4BK	C	S166 surplus
Description	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	C	same as above
Current rating	400 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00777	CKDS4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V

OEM part number	CKDS4K	C	S166 surplus
Description	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	C	same as above
Current rating	400 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00779	CLD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CLD4K, 600 A max, 600 V

OEM part number	CLD4K	C	S166 surplus
Description	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	C	same as above
Current rating	600 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00780	CLDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V

OEM part number	CLDS4BK	C	S166 surplus
Description	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	C	same as above
Current rating	600 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00781	CMD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CMD4K, 800 A max, 600 V

OEM part number	CMD4K	C	S166, S175 surplus
Description	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	C	same as above
Current rating	800 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00782	CND4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CND4K, 1200 A max, 600 V

OEM part number	CND4K	C	S166 surplus
Description	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	C	same as above
Current rating	1200 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00788	KPRL3CF3	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL3CF3, 150 A max

OEM part number	KPRL3CF3	C	S166 surplus
Description	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	C	same as above
Current rating	150 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00784	KPRL4CD	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL4CD, 225 A max

OEM part number	KPRL4CD	C	S166 surplus
Description	Challenger twin mounting hardware kit KPRL4CD, 225 A max	C	same as above
Current rating	225 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00783	KPRL4CED	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL4CED, 225 A max

OEM part number	KPRL4CED	C	S166 surplus
Description	Challenger twin mounting hardware kit KPRL4CED, 225 A max	C	same as above
Current rating	225 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00785	KPRL4CSL	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSL, 600 A max

OEM part number	KPRL4CSL	C	S166 surplus
Description	Challenger single mounting hardware kit KPRL4CSL, 600 A max	C	same as above
Current rating	600 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00786	KPRL4CSM	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSM, 800 A max

OEM part number	KPRL4CSM	C	S166 surplus
Description	Challenger single mounting hardware kit KPRL4CSM, 800 A max	C	same as above
Current rating	800 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00787	KPRL4CSN	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSN, 1200 A max

OEM part number	KPRL4CSN	C	S166 surplus
Description	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	C	same as above
Current rating	1200 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

3.5 CHP/CHB — Cutler-Hammer CHP / CHB lighting panelboards

FAM-EAT-036 · panelboard · aka CHP, CHB panelboard, CH lighting panel · markings: Cutler-Hammer

Cutler-Hammer lighting panelboards named for their CH plug-on (CHP) or CHB bolt-on branch breakers; listed on the Vol 12 time line as 'Cutler-Hammer CHP/CHB' and illustrated as 'Cutler-Hammer CHB'. Replacement is a PRL1a interior that still accepts CH/CHB.

Attribute	Value	Cl.	Sources
Status	Out of production; connectors not available (note 2)	A	S13 V12-T4-4; oem_spec
Successor	Pow-R-Line 1a with CH (CHP) or CHB (CHB) breakers	A	same as above
Branch breakers accepted	CHP: Type CH plug-on; CHB: Type CHB bolt-on	A	same as above

Breaker families associated: Cutler-Hammer CH / CHB

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.6 EE — Cutler-Hammer Type EE plug-in power panelboard / switchboard

FAM-EAT-034 · panelboard · aka Type EE · markings: Cutler-Hammer

Cutler-Hammer plug-in power panelboard (Eaton chart heading 'Plug-In Power Panelboards and Switchboards'). Double-bus 42/48 in wide interiors with 10 in gutters, neutral at top (may be at bottom) taking no X space; main device must be at neutral end of a double-bus panel. Mixes breaker modules and fusible switch units (30 A to 800 A) and 600-1200 A lug units. Successor is PRL5P.

Attribute	Value	Cl.	Sources
Status	Out of production; parts via RP01400003E	A	S13 V12-T4-13; oem_spec
Successor	Pow-R-Line 5P (PRL5P); FS->FD, FH->HFD, FL->FDC, JS->JD, JH->HJD, JL->JDC, KS->KD, KH->HKD, LS->LD, LH->HLD, LL->LDC, MS->MDL, NS->ND	A	S13 V12-T4-6; oem_spec
Main ampacity	1200 A maximum	A	S13 V12-T4-13; oem_spec
Branch breakers accepted	Plug-in modules for CC, CCH, CHH, FS, FH, FL, JS, JH, JL, KS, KH, LS, LH, LL, MS, MH, NS, NH breakers and 30-800 A fusible branch switches (240 V R&T fuse, 600 V T fuse)	A	same as above
Dimensions	42 in and 48 in wide double-bus interiors; 10 in gutters; 7 in side spaces; X = 1.38 in; some units usable in 30.00 in wide single-bus interiors	A	same as above
Neutral location	Neutral at top, no X space (may be at bottom)	A	same as above

Breaker families associated: Cutler-Hammer CC / CCH / CHH

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00802	**EEMODULEFS**	Cutler-Hammer EE panelboard mounting module for FS-frame breaker	FS C	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00802 **EEMODULEFS** Cutler-Hammer breaker-mounting-kit **DISCONTINUED OEM ITEM**

Cutler-Hammer EE panelboard mounting module for FS-frame breaker

OEM part number	EEMODULEFS	C	S251 surplus_listing
Description	EE Mounting Module for FS frame breaker	C	same as above
Installation location	Cutler-Hammer EE plug-in power panelboard	C	same as above
Breaker compatibility	FS	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: EE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00803	**EELD36600SB2**	LD3600 breaker with Cutler-Hammer EE hardware kit	LD 3-pole 600 A (LD3600) C	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00803 **EELD36600SB2** Cutler-Hammer conversion-kit **DISCONTINUED OEM ITEM**

LD3600 breaker with Cutler-Hammer EE hardware kit

OEM part number	EELD36600SB2	C	S251 surplus_listing
Description	LD3600 Breaker with EE Hardware Kit	C	same as above
Installation location	Cutler-Hammer EE panelboard (LS/LH position; Eaton chart maps LS->LD)	C	same as above
Breaker compatibility	LD 3-pole 600 A (LD3600)	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Replacement / successor	Eaton chart: EE LS / LS(A) / LS(E) / LS(B) -> PRL5P LD	A	S13 V12-T4-6; oem_spec
Cross-links	Families: EE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

3.7 EP — Cutler-Hammer Type EP plug-in power panelboard

FAM-EAT-035 · panelboard · aka Type EP · markings: Cutler-Hammer

Breaker-only sibling of EE: 42/48 in wide double-bus interior, 10 in gutters, neutral top or bottom with no X space. Blank wireway fillers are required opposite any dual breaker unit or adapter; main device at neutral end of double-bus panel.

Attribute	Value	Cl.	Sources
Status	Out of production; parts via RP01400003E	A	S13 V12-T4-14; oem_spec
Successor	Pow-R-Line 5P (PRL5P)	A	S13 V12-T4-6; oem_spec
Main ampacity	1200 A maximum	A	S13 V12-T4-14; oem_spec
Branch breakers accepted	FS, FH, FL, CC, CCH, CHH (2X/3X), JS, JH, JL (3X), LSB, LHB, LLB, LC (6X), MS, MH, MC, HMC 800 A (6X/12X), NS, NH, NC, HNC 1200 A (6X/12X)	A	same as above
Layout rules	Blank wireway fillers required opposite any dual breaker unit or adapter; some units usable in 30.00 in wide single-bus interiors; main device at neutral end	A	same as above

Breaker families associated: Cutler-Hammer CC / CCH / CHH

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,

3.8 FDP — Westinghouse FDP fusible distribution panelboard

FAM-EAT-014 · panelboard · aka FDP, Westinghouse FDP · markings: Westinghouse

Westinghouse fusible distribution panelboard (30-50 in wide). FDPW/FDPB switch connector kits KFDP* require 3.50 in bus spacing.

Westinghouse fusible distribution panelboard sharing CDP chassis geometry (3.50 in phase centers, 19.50 in rails). FDPW/FDPB switch connector kits fit only 3.50 in bus spacing; if bus spacing is 4.25 in no parts are available. Circuit breakers can be added to an FDP via a 'picture frame' transition (+2X).

Evidence-only record for the existing FDP family: 1957 ratings, and Eaton note that FDP retrofit kits fit only 3.50 in phase-to-phase vertical bus spacing - at 4.25 in spacing 'these retrofit kits will not fit and no parts are available'; 400-1200 A FDP connectors are not compatible with FDPW switches.

Attribute	Value	Cl.	Sources
Status	Obsolete; switch retrofit/connector kits available	A	S5 oem_spec
	discontinued; replacement panelboard type PRL4F	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	Vintage Westinghouse	C	S5 inference
Successor	PRL4F	A	S13 p. V12-T4-7; oem_spec
	PRL4F (functional)	D	S5 inference
Voltage rating	Up to 600 V AC, 250 V DC	A	S261 oem_spec
Main ampacity	1600 A maximum	A	S13 p. V12-T4-10; oem_spec
	1957: main lugs up to 1200 A, main switches up to 600 A; branch 30-600 A De-ion fusible switch units	A	S261 ECM June 1957 p.189; oem_spec
Branch breakers accepted	FDPW / FDPB fusible switches 30-1200 A (retrofit); breakers via 'picture frame' adapter (+2X)	A	S5 pp.17-18; oem_spec
	FDP fusible switches 30-1200 A; current replacements FDPW (30-100 A twin, 400-1200 A) and FDPB (200 A) switches via KFDP connector/retrofit kits	A	S14 pp. 17-18; oem_spec
Bus spacing limit	Vertical bus bars must be 3.50 in center-line phase to phase; if 4.25 in, switches will not fit and no parts are available	A	S14 p. 17; oem_spec
Breaker in fdp	To install circuit breakers in an FDP panel a 'picture frame' is required; add 2X to breaker size for the transition (contact Sumter)	A	S14 p. 18; oem_spec
Layout	Main lug section 5X 225 A, 8X 250-400 A, 9X 600 A, 12X 800-1600 A; switches 30/60/100 A 4X, 100 A 600 V 5X, 200 A 6X, 400/600 A 11X, 800/1200 A 16X horizontal or 21X vertical	A	S13 p. V12-T4-10; oem_spec
Identification features	Measure vertical bus phase spacing: 3.50 in = kit-compatible; 4.25 in = no kits/parts	A	S248 oem_web
Fdpw note	400A, 600A, 800A, 1200A FDP connectors are NOT compatible with FDPW switches	A	S13 V12-T4-8 note 6; oem_spec

Key documents: S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S248 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S261 sim_ecm_1957-06_56_6 Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distributio

Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12, 5155C81G01, K80522, 8450C62H39, 114C247G01, 3457B16G01, 414A380G02, 0080429

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00373	**KFDP_X**	FDP filler cover (any X increment)	—	Listed Feb 2013

EDH-EAT-00373	KFDP_X	Westinghouse	filler-plate	LISTED FEB 2013

FDP filler cover (any X increment)

OEM part number	KFDP_X	A	S5 p.17; oem_spec
	KFDP_X (fill in size)	A	S14 p. 17 'FDP filler covers'; oem_spec
Description	FDP filler covers in any 1X (1.38 in) increment; catalog KFDP_X; includes cover, mounting brackets and hardware	A	S5 oem_spec
	FDP filler cover available in any 1X (1.38 in / 35.1 mm) increment; includes cover, mounting brackets and hardware	A	S14 p. 17; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: FDP		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00430	**KFDPBS324R**	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00431	**KFDPBS364R**	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00432	**KFDPW325R**	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00434	**KFDPW326R**	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00433	**KFDPW365R**	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00435	**KFDPW366R**	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00436	**KFDPW367**	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00437	**KFDPW368**	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00424	**KFDPWT3211R**	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00426	**KFDPWT3222R**	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00428	**KFDPWT3233R**	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00425	**KFDPWT3611R**	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00427	**KFDPWT3622R**	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00429	**KFDPWT3633R**	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	—	unknown

EDH-EAT-00430	KFDPBS324R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)

OEM part number	KFDPBS324R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	6X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00431	KFDPBS364R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)

OEM part number	KFDPBS364R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	6X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00432	KFDPW325R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)

OEM part number	KFDPW325R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	9X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00434	KFDPW326R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)

OEM part number	KFDPW326R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00433	KFDPW365R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)

OEM part number	KFDPW365R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	9X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00435	KFDPW366R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)

OEM part number	KFDPW366R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00436	KFDPW367	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)

OEM part number	KFDPW367	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	800 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00437	KFDPW368	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)

OEM part number	KFDPW368	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	1200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	15X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00424	KFDPWT3211R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)

OEM part number	KFDPWT3211R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00426	KFDPWT3222R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)

OEM part number	KFDPWT3222R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00428	KFDPWT3233R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)

OEM part number	KFDPWT3233R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00425	KFDPWT3611R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)

OEM part number	KFDPWT3611R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00427	KFDPWT3622R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)

OEM part number	KFDPWT3622R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00429	KFDPWT3633R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)

OEM part number	KFDPWT3633R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	5X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

3.9 MP100 — Cutler-Hammer MP100 fusible distribution panelboard

FAM-EAT-030 · panelboard · aka MP-100 · markings: Cutler-Hammer

Cutler-Hammer fusible-switch counterpart of MP40 using M50 fusible switch units. Eaton lists MP100 fusible switch kits (one 3-pole single or twin switch + connector kit + hardware + instructions, fuses not included) that also add devices to MP2 group-mounted switchboards. Trim locks for MP100, MP2 and M50 appear in RP01400003E (per search snippet).

Attribute	Value	Cl.	Sources
Status	Out of production; parts from Sumter SC Aftermarket Center	A	S13, S248 oem_spec
Era of manufacture	Shown on the Vol 12 time line together with MP40 (MP40/MP100)	B	S13 V12-T4-3; oem_spec
Successor	Pow-R-Line 4F (PRL4F); MP100 'M50 fusible switch' maps to PRL4F M50 fusible switch	A	S13 V12-T4-5; oem_spec
Branch breakers accepted	M50 fusible switches	A	same as above
Kit compatibility	MP100 fusible switch kits can add chassis-mounted devices to MP2 group-mounted switchboards	A	S248 oem_web

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S248 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,

3.10 MP40 — Cutler-Hammer MP40 distribution panelboard

FAM-EAT-029 · panelboard · aka MP-40, MP 40, MP50 (dealer usage) · markings: Cutler-Hammer

Original Cutler-Hammer distribution (circuit-breaker) panelboard built after Cutler-Hammer entered the panelboard business (1962 Mullenbach purchase) and designed/listed for Westinghouse breakers under a supply agreement. Chassis uses 1.38 in X units, 26 in wide (30/38 in boxes in layout), 5 in side gutters, 6.50 in top/bottom gutters up to 400 A (12.0 in for 600-1600 A); standard box depth 10.50 in, 11.38 in for NC/HNC. Branch kits (MP40K-series) add a breaker with connectors, device cover and hardware; Eaton says MP40 kits also fit MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards and 26.5-36 in wide NFB panelboards.

Attribute	Value	Cl.	Sources
Status	Out of production; supported by Eaton Aftermarket Center, Sumter SC (renewal parts RP01400003E)	A	S13, S248 V12-T4-12; oem_spec
Era of manufacture	Product History Time Line (V12-T4-3) places Cutler-Hammer MP40/MP100 between the CHP/CHB/NFB era and the 1988 Pow-R-Line redesign (exact start/end years not legible in text extraction) (Time-line bars are graphical; years not extractable. Cutler-Hammer entered panelboards in 1962 via Mullenbach (V12-T4-2).)	B	S13 V12-T4-3; oem_spec
Successor	Pow-R-Line 4B (PRL4B); replacement chart maps MP40 branch breakers to PRL4B breakers	A	S13 V12-T4-5; oem_spec
Main ampacity	1600 A maximum	A	S13 V12-T4-12; oem_spec
Branch breakers accepted	Original branch types per Eaton chart: CC, CCH, CHH, EB, EHB, EC, EHC, FB, HFB, FC, HFC, FH, FS, JA, JB, JS, JH, JL, KA, KB, HKB, KS-D, KH-D, DA, LA, HLA, LAB, LB, LBB, HLB, LC, LS(A), LH(A), MA, HMA, MC, HMC, MS, MH, NB, HNB, NC, HNC, NS, NH; Eaton/Westinghouse-type (Series C) breakers also listed for kits	A	S13 V12-T4-5; oem_spec
Dimensions	X unit = 1.38 in (35.1 mm); 5 in side gutters; top/bottom gutter 6.50 in through 400 A, 12.0 in 600-1600 A; standard box depth 10.50 in (266.7 mm), NC/HNC require 11.38 in (289.1 mm) deep box; layouts shown for 26/30/38 in widths	A	S13 V12-T4-12; oem_spec
Layout rules	Breakers of same frame size regardless of poles may be mounted opposite each other; if panel has main breaker, no neutral, no split bus or no sub-feed/feed-through lugs add 1X for nameplate; 1600 A lug mains with (4)-600 kcmil Cu per phase can reduce to 4X	A	same as above
Kit compatibility	MP40 branch kits also add chassis-mounted devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards and NFB panelboards 26.5-36 in wide; kits = breaker(s) + connector kit + mounting hardware + device cover + instructions; branch only, not for mains	A	S248 oem_web
Renewal doc	RP01400003E Renewal Parts Data for MP40 and MP-200; PL01400003E price list	A	S13 V12-T4-22; oem_spec

Breaker families associated: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S248 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S250 PL01400003E Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S252 Superbreakers - Mounting Kits, Panels & Accessories collection (Shopify products.json,

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00798	**MP40CHH**	Cutler-Hammer MP40 hardware kit for CHH breakers (twin, 225 A)	CHH (inferred from catalog number) C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00791	**MP40ED225-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A	ED, FD, HFD C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00790	**MP40KC225-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	CA, CAH, HCA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00789	**MP40KF100-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC, 100 A	EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00792	**MP40KJ225-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	JB, KB, JD, HKB C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00793	**MP40KK400-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers), 400 A	KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers) C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00794	**MP40KL400-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A	LA, LS, LC, LD, HLC C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00795	**MP40KL600-3**	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A	LA, LS, LC, LD, HLC C	Discontinued OEM item traded new-surplus / recertified by de

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00796	**MP40KM800-3**	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	MA, MS, MC, MD C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00797	**MP40KN1200-3**	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	NB, NS, NC, ND C	Discontinued OEM item traded new-surplus / recertified by de
EDH-EAT-00800	**MPED1K**	Cutler-Hammer MP-series dual-branch connector kit, 225 A, 600 V (E/F frame)	FDB, FD, HFD, FDC, ED, EHD, EDC (specs) / ED, FD, HFD, FDC, FDB (descr C	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00798 MP40CHH — Cutler-Hammer — branch-connector-kit — DISCONTINUED OEM ITEM

Cutler-Hammer MP40 hardware kit for CHH breakers (twin, 225 A)

OEM part number	MP40CHH	C	S251 surplus_listing
Description	CHR; MP40CHH; Hardware kit; twin; 225 A max	C	same as above
Application	branch (twin)	C	same as above
Installation location	MP40/MP50/MP100/MP200 per dealer	C	same as above
Breaker compatibility	CHH (inferred from catalog number)	C	same as above
Current rating	225 A maximum	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-EAT-00791 MP40ED225-3 — Cutler-Hammer — branch-connector-kit — DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A

OEM part number	MP40ED225-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40ED2253 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 225 A max	C	S251, S252 surplus_listing
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	ED, FD, HFD	C	same as above
Current rating	225 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00790	MP40KC225-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A

OEM part number	MP40KC225-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KC2253 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 225 A max	C	S251, S252 surplus_listing
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	CA, CAH, HCA	C	same as above
Current rating	225 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00789	MP40KF100-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC, 100 A

OEM part number	MP40KF100-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KF1003 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 100 A max	C	S251, S252 surplus_listing
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	EHB, FS, FB, FH, EHD, FDB, FD, HFD, FDC	C	same as above
Current rating	100 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00792	MP40KJ225-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A

OEM part number	MP40KJ225-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KJ2253 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 225 A max	C	S251, S252 surplus_listing
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	JB, KB, JD, HKB	C	same as above
Current rating	225 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00793	MP40KK400-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers), 400 A

OEM part number	MP40KK400-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KK4003 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 400 A max	C	S251, S252 surplus_listing
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	KA, KS, KH, LB, HLB (Relectric); JB, KB, JD, HKB (Superbreakers)	C	same as above
Current rating	400 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00794	MP40KL400-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A

OEM part number	MP40KL400-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KL4003 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 400 A max	C	S251, S252 surplus_listing
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	LA, LS, LC, LD, HLC	C	same as above
Current rating	400 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00795	MP40KL600-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A

OEM part number	MP40KL600-3	C	S251 surplus_listing
Description	Cutler-Hammer twin mounting kit for MP-style panelboards; 600 A max	C	same as above
Application	branch (twin mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	LA, LS, LC, LD, HLC	C	same as above
Current rating	600 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00796	MP40KM800-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A

OEM part number	MP40KM800-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KM8003 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer single mounting kit for MP-style panelboards; 800 A max	C	S251, S252 surplus_listing
Application	branch (single mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	MA, MS, MC, MD	C	same as above
Current rating	800 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00797	MP40KN1200-3	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A

OEM part number	MP40KN1200-3	C	S251, S252 surplus_listing
Alternate / superseded numbers	MP40KN12003 (Superbreakers spelling without hyphen)	C	S252 alias; surplus_listing
Description	Cutler-Hammer single mounting kit for MP-style panelboards; 1200 A max	C	S251, S252 surplus_listing
Application	branch (single mount)	C	same as above
Installation location	MP40 chassis branch position (also MP2/MP200 switchboard distribution sections); Panel types per Relectric spec block: MP40, MP50, MP100, MP200 (MP50 not found in Eaton literature)	C	same as above
Breaker compatibility	NB, NS, NC, ND	C	same as above
Current rating	1200 A maximum	C	same as above
Kit contents	Screws, brackets and panel cover (dealer text); Eaton: MP40 kits = breaker(s) + connector kit + mounting hardware + device cover + instructions when bought as a retrofit kit	C	S252, S248 surplus_listing
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251, S252 surplus_listing
Cross-links	Families: MP40, MP2 · Breakers: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Material, oem_status_confirmation		
Open question	*Is this the OEM catalog number format (Eaton snippets suggest 'KMP40...' pattern in PL01400003E) or a dealer derivative?*		

EDH-EAT-00800	MPED1K	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer MP-series dual-branch connector kit, 225 A, 600 V (E/F frame)

OEM part number	MPED1K	C	S253 surplus_listing
Description	225A dual (twin) branch panelboard connector kit, copper, 600 V	C	same as above
Application	branch (twin)	C	same as above
Installation location	MP40 (also MP50, MP100, MP200 per description)	C	same as above
Breaker compatibility	FDB, FD, HFD, FDC, ED, EHD, EDC (specs) / ED, FD, HFD, FDC, FDB (description)	C	same as above
Voltage rating	600 V	C	same as above
Current rating	225 A	C	same as above
Material	Copper	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: MP40, MP2 · Breakers: Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, oem_status_confirmation		
Open question	*Relationship between MPED1K and MP40ED225-3 (both 225 A twin ED/FD kits)?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00799	**MP403XBLANK**	Cutler-Hammer MP40 3X high filler blank	—	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00799	MP403XBLANK	Cutler-Hammer	filler-plate	DISCONTINUED OEM ITEM

Cutler-Hammer MP40 3X high filler blank

OEM part number	MP403XBLANK	C	S251 surplus_listing
Description	Cutler Hammer MP40 3X high filler blank	C	same as above
Installation location	MP40 chassis unused 3X (3 x 1.38 in) space	C	same as above
Dimensions	3X high (3 x 1.38 in = 4.14 in) - X unit from Vol 12	C	S251, S13 inference
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	S251 surplus_listing
Cross-links	Families: MP40		
Not yet documented	OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Dealer spec block for MP403XBLANK says 'Panel Type PRL3A, BAB QBHW, 100 A' - conflicting; verify against part*		

3.11 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards

FAM-EAT-025 · panelboard · aka A2B, ABH, HNDP, NA1B, NAB, NAIB, NDP, NEB, NH1B, NHB, NHDP, NHEB, NHIB · markings: Cutler-Hammer, Westinghouse

Westinghouse 1937-1988 lighting/appliance and distribution panelboards using E-family plug/bolt breakers. Branch breakers replaced by 'panelboard only' R-prefix breakers (REH, RHF, RHFA) supplied with mounting hardware; connector kits not available. The scope term 'NHB' is not used in Vol 12; nearest OEM designations are NH1B and NHEB.

Evidence-only record: 1946 Westinghouse catalog lists NA1B-AB De-ion lighting panel; Vol 12 Cutler-Hammer chart shows Cutler-Hammer-labelled NA1B, NH1B, NDP and HNDP (E/EA/EH breakers) replaced by PRL3a with REH panelboard replacement breakers, connectors not available.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	NA1B ('NAIB - AB De-ion') listed in 1946 Westinghouse NOFUZE catalog	A	S243 ECM Sept 1946, Westinghouse catalog; oem_spec
Branch breakers accepted	E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	A	S13 p. V12-T4-7; oem_spec
Cutler hammer variant	Cutler-Hammer NA1B (E, EA), NH1B (EH), NDP (E, EA), HNDP (EH) -> PRL3a / REH; connectors not available	A	S13 V12-T4-4; oem_spec

Breaker families associated: E, F, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S243 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -

3.12 NFB — Cutler-Hammer NFB panelboard

FAM-EAT-037 · panelboard · aka Type NFB · markings: Cutler-Hammer
Cutler-Hammer panelboard (pictured as 'Cutler-Hammer NFB' on V12-T4-2) using Westinghouse E/F-frame and CA/CC breakers. Eaton says MP40 branch kits can add chassis-mounted devices to NFB panelboards 26.5-36 in wide.

Attribute	Value	Cl.	Sources
Successor	PRL3a or PRL4B (EB/EHB->EHD, EHC/FB/HFB/FD/FC/FS->FD, FH/HFC->HFD, CA->CA, CC->CC, CHH->CHH)	A	S13 V12-T4-4; oem_spec
Branch breakers accepted	EB, EHB, EHC, EC, CA, CC, FB, HFB, FD, FC, FH, FS, HFC, CCH, CHH	A	same as above
Kit compatibility	MP40 kits fit NFB panelboards 26.5 to 36 in wide	A	S248 oem_web

Breaker families associated: Cutler-Hammer CC / CCH / CHH, Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames)
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S248 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page

3.13 NLAB — Westinghouse NLAB lighting panelboard

FAM-EAT-024 · panelboard · aka NLAB, NLAB single row, NLAB-AB, NLAB-ABH, NLAB-LX, NPLAB, NQB, NQC, NQP · markings: Cutler-Hammer, Westinghouse
Westinghouse plug-in/bolt-on lighting panelboards for Quicklag-type Q breakers. Vol 12 flags 'connectors not available' for this group; replacement is a new PRL1a/PRL3a interior. CDP/FDP/NQB trim clamp 414A380G02 still applies to NQB.

Evidence-only record for the existing Westinghouse NLAB family: 1946 Westinghouse NOFUZE catalog lists NLAB Quicklag De-ion and NLAB single-row (column) panelboards; Vol 12 shows Cutler-Hammer also sold NLAB and NPLAB (QL / P breakers) with connectors not available and PRL1a as replacement. Note that GE also used the NLAB designation (TQ/TQC breakers) - see GEA NLAB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	Westinghouse panelboards manufactured between 1937 and 1988	A	same as above
	Offered by Westinghouse by Sept 1946 as 'NLAB Quicklag De-ion' NOFUZE panelboard (also single-row type for mounting on H or I beams); in wide use 1958-1960; Vol 12 groups it with panelboards made 1937-1988	A	S243, S13 ECM Sept 1946 Westinghouse catalog B62; V12-T4-7; oem_spec
Voltage rating	NLAB in 120/208 V 3-phase 4-wire and 120/240 V use (installation reports) (Trade-press installation stories, not OEM specs)	C	S254, S258, S255 surplus_listing
Branch breakers accepted	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	A	S13 p. V12-T4-7; oem_spec
	Quicklag (QC per Vol 12) breakers; Cutler-Hammer-labelled NLAB used QL per Cutler-Hammer chart	A	S243, S13 V12-T4-4, V12-T4-7; oem_spec
Connectors	Connectors not available (note 2) for NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQC, NQP	A	S13 p. V12-T4-7; oem_spec
Cutler hammer variant	Cutler-Hammer panelboard types NPLAB (P breaker) and NLAB (QL breaker) -> PRL1a, connectors not available	A	S13 V12-T4-4; oem_spec

Breaker families associated: BAB, Westinghouse Quicklag (QC / QL / QP) lighting breakers
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S243 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -; S254 sim_ecm_1958-06_57_6; sim_electrical-south_1958-06_38_6 Electrical Construction and Maintenance June 1958 / Electrical South June 1958 - Westingho; S255 sim_plant-engineering_1960-04_14_4 Plant Engineering Vol 14 No 4-6 (April-June 1960) - Westinghouse ad: flush-mounted type NL; S258 sim_ecm_1959-02_58_2 Electrical Construction and Maintenance, February 1959 - article text: 'Two of the panelbo
Also fits this family (entry printed elsewhere): 414A380G02

3.14 NM/NMM — Westinghouse NM / NMM / NMIB Multibreaker panelboards

FAM-EAT-038 · panelboard · aka NMM, NMIB, NM1B, MH Multibreaker, NOFUZE panelboard · markings: Westinghouse

Earliest Westinghouse NOFUZE (later spelled NOFUSE) circuit-breaker panelboards using Multibreaker units, offered alongside NLAB (Quicklag) and NA1B (AB De-ion) in 1946. NMM and NLAB were also offered in single-row type for mounting on H or I beams. Westinghouse introduced breakers in 1927 and NOFUSE panelboards were initially available up to 225 A at 250 V (Vol 12 history).

Attribute	Value	Cl.	Sources
Status	Obsolete; no Vol 12 replacement row found	B	S13 inference
Era of manufacture	Sold as NOFUZE Multibreaker panelboards in 1946 (NMIB 115/240 V single-phase only; NMM 115/230 V AC); Vol 12 time line lists 'Westinghouse NM/NMM' among the earliest types	A	S243, S13 ECM Sept 1946 B62; V12-T4-3; oem_spec
Voltage rating	NMIB: 115/240 V AC single-phase only; NMM: 115/230 V AC (OCR column order makes the type-to-voltage pairing slightly uncertain)	B	S243 ECM Sept 1946 B62; oem_spec
Branch breakers accepted	Westinghouse Multibreaker (1946); typical combinations 15 A 1-pole lighting, 20 A 2-pole water heater, 35/50 A 2-pole range, 70 A mains	A	S243 oem_spec

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S243 sim_ecm_1946-09_45 Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) -

3.15 PB — Cutler-Hammer Type PB lighting panelboard

FAM-EAT-032 · panelboard · aka Type PB · markings: Cutler-Hammer

Cutler-Hammer lighting panelboard using CH/CHB branch breakers (1 in Cutler-Hammer residential/light-commercial breaker family). Replacement is a new PRL1a interior with CH or CHB breakers; Eaton states connectors are not available. Do not confuse with the Westinghouse/Eaton 'Type PB' power circuit breaker listed elsewhere in Vol 12.

Attribute	Value	Cl.	Sources
Status	Out of production; connectors not available (chart note 3)	A	S13 V12-T4-5; oem_spec
Successor	Pow-R-Line 1a (PRL1a) with CH / CHB breakers	A	same as above
Main ampacity	400 A maximum	A	S13 V12-T4-11; oem_spec
Branch breakers accepted	Cutler-Hammer CH (plug-on) and CHB (bolt-on) breakers	A	S13 V12-T4-5; oem_spec
Dimensions	PB illustrated in 21 in wide box (PB/PH/PH-L page) (Width labels on the page are not unambiguously tied to each type in text extraction)	B	S13 V12-T4-11; oem_spec

Breaker families associated: Cutler-Hammer CH / CHB
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,

3.16 PH — Cutler-Hammer Type PH / PH-L panelboard

FAM-EAT-033 · panelboard · aka PH-L, Type PH · markings: Cutler-Hammer

Cutler-Hammer lighting/appliance-to-power panelboard family accepting CH/CHB small breakers and CC/CCH/CHH, E- and F-frame branch breakers. Shown in 15/21 in and 21/26 in widths on the Vol 12 identification page. Retrofit kits (e.g. KPHCC3175S single-mount CC kit with cover plate) are traded by dealers.

Attribute	Value	Cl.	Sources
Status	Out of production; parts/retrofit kits via RP01400003E and Sumter Aftermarket Center	A	S13 V12-T4-11; oem_spec
Successor	Pow-R-Line 3a (PRL3a); chart maps CH->CH, CHB->CHB, CC->CC, CCH->CCH, CHH->CHH, EB/EHB/EC->EHD, EHD->EHD, FC/FS/FD->FD, FH->HFD	A	S13 V12-T4-5; oem_spec
Main ampacity	PH: 800 A main lug only or 600 A main breaker; PH-L: 225 A maximum	A	S13 V12-T4-11; oem_spec
Branch breakers accepted	CH, CHB, CC, CCH, CHH, EB, EHB, EC, EHD, FC, FS, FH, FD	A	S13 V12-T4-5; oem_spec
Dimensions	Boxes 15 or 21 in wide and 21 or 26 in wide shown for PH-L / PH (page labels) (Assignment of widths to PH vs PH-L not unambiguous in extracted text)	B	S13 V12-T4-11; oem_spec

Breaker families associated: Cutler-Hammer CC / CCH / CHH, Cutler-Hammer CH / CHB
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00801	**KPHCC3175S**	Cutler-Hammer PH panelboard retrofit kit, single-mount CC breaker 3P 175 A, with cover plate	CC C	Discontinued OEM item traded new-surplus / recertified by de

EDH-EAT-00801	KPHCC3175S	Cutler-Hammer	branch-connector-kit	DISCONTINUED OEM ITEM

Cutler-Hammer PH panelboard retrofit kit, single-mount CC breaker 3P 175 A, with cover plate

OEM part number	KPHCC3175S	C	S251 surplus_listing
Description	PH retrofit kit single mount w/cover plate	C	same as above
Application	branch (single mount)	C	same as above
Installation location	Cutler-Hammer PH panelboard	C	same as above
Breaker compatibility	CC	C	same as above
Current rating	175 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: PH · Breakers: Cutler-Hammer CC / CCH / CHH		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Does the kit include the CC breaker (Eaton 'retrofit kit' = breaker + connectors) or hardware only?*		

3.17 PRC — Pow-R-Command lighting control panelboard

FAM-EAT-016 · panelboard · aka Pow-R-Command, PRCE · markings: Cutler-Hammer, Eaton

Lighting control panelboard based on PRL3a/3X chassis; renewal parts (connector kits, grounds, SE kits, deadfronts, trim locks) are per PRL3X/PRL3a section.

Attribute	Value	Cl.	Sources
Status	Current (Pow-R-Command E series in 2020 catalog)	A	S6 oem_spec
Era of manufacture	Introduced March 1996	A	S1, S2 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac	A	S6 p.V2-T3-3; oem_spec
Main ampacity	400 A max MLO/main	A	S6 oem_spec
Branch breakers accepted	Bolt-on breakers 225 A max incl. remote-operated breakers	A	same as above

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): KPRL3ABA06, KPRL3ABA06-1, KPRL3ABA12, KPRL3ABA12-1, KPRL3ABA18, KPRL3ABA18-1, KPRL3ABA24, KPRL3ABA24-1, KPRL3AGB06, KPRL3AGB06-1, KPRL3AGB12, KPRL3AGB12-1, KPRL3AGB18, KPRL3AGB18-1, KPRL3AGB24, KPRL3AGB24-1, 5078A98, 5158C05, 2C11296, 6559C59, 4176B72, 4180B91

3.18 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)

FAM-EAT-010 · panelboard · aka PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX, column panelboard · markings: Cutler-Hammer, Eaton

Narrow column-width lighting panels (box YSC969-YSC990, trims LTC/LTCD). Renewal parts listed are boxes and trims only.

Attribute	Value	Cl.	Sources
Status	Legacy (a) / current (X)	A	S1, S6 oem_spec
Era of manufacture	PRL1a/2a-LX introduced December 1997	A	S1, S2 p.2; oem_spec
Successor	PRL1X-LX / PRL2X-LX	A	S6 oem_spec
Voltage rating	PRL1a-LX 240 Vac; PRL2a-LX 480Y/277 Vac, 125/250 Vdc	A	S7 p.22.0-5; oem_spec
Main ampacity	225 A max MLO or main	A	same as above
Branch breakers accepted	Bolt-on breakers 15-30 A (a-LX per s7) / 15-100 A (X-LX per s6)	A	S6, S7 oem_spec

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

3.19 PRL-RETRO — Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)

FAM-EAT-040 · panelboard · aka P1R, P2R, P1RL, P1RB, P2RL, P2RB, Pow-R-Line Retrofit

Cutler-Hammer/Eaton (Canada) retrofit interiors for installation into existing panelboard enclosures; P1R 240 Vac max, P2R 347/600 Vac max. Mains: lugs (100/225/400 A), BAB (P1R) or GBH/GHB (P2R) 60-100 A, or E/F-frame 60-225 A.

Attribute	Value	Cl.	Sources
Bus joint torque	Bus bar connections (Cu or Al): #10 30 lb-in (2.5 lb-ft, 3.4 N-m); 1/4 in 65 lb-in (5.4 lb-ft, 7.3 N-m); 5/16 in 130 lb-in (10.8 lb-ft, 14.7 N-m); 3/8 in 240 lb-in (20 lb-ft, 27.1 N-m); 1/2 in 600 lb-in (50 lb-ft, 67.8 N-m)	A	S311, S312 IL01417001E Appendix Table 2 (p.13); PUB50895 Appendix Table 4; oem_spec
Mounting	Interior mounted with #10-32 hardware: drill and tap 10-32 holes at minimum 8 mounting locations in back of existing enclosure; depth-adjustment bracket #10-32 screws torqued to 24 in-lb; one existing mounting stud or supplied bonding wire/lug used to bond chassis to enclosure.	A	S311, S312 IL01417001E pp.5-6; PUB50895 pp.6-7; oem_spec
Minimum enclosure	P1RL/P1RB minimum enclosure (H x W x D, in): lug 100 A 18/30/42 ckt 19.5/26.5/33.5 x 14.25 x 4.5; lug 225 A 22/28/34 x 14.25 x 4.5; BAB main 60-100 A 19.5/26.5/33.5 x 14.25 x 4.5; E/F-frame main 60-225 A 30/36/42 x 14.25 x 4.5; lug 400 A 24-42 ckt 48 x 20.0 x 5.75. P2RL/P2RB same heights, depth 4.75 in (400 A 5.75 in), GBH/GHB main 60-100 A.	A	S311 p. 2, Installation Criteria tables; oem_spec

Key documents: S311 IL01417001E Instruction Manual Pow-R-Line Retrofit Panelboards, P1R & P2R Retrofit Panels (IL01417; S312 PUB50895 Instruction Manual PUB50895 Pow-R-Line Retrofit Panelboards P1R 240Vac Max & P2R 347/6

3.20 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)

FAM-EAT-011 · panelboard · aka POW-R-LINE, PRL1, PRL1-LX, PRL2, Pow-R-Line 1, Pow-R-Line 2 · markings: Westinghouse

Original Westinghouse Pow-R-Line lighting panelboards on 20 in wide boxes (YS20xx, 5.75 in deep) with gutter neutral; trims LT20xxS/F. Branch connector kits hold two sets of A/B/C connectors for 12 poles, silver-plated copper suitable for Cu or Al bus, max 140 A per connector. Branch deadfronts 5156C10 (PRL1) / 5156C09 (PRL2).

Vintage Westinghouse lighting (PRL1) and 480Y/277 V (PRL2) panelboards, 20 in wide boxes, neutral at top. Replacement connector kits KPRL1BAB / KPRL2GHB mount up to 12 poles.

Evidence-only record: trademark-register entry showing POW-R-LINE registered in 1975.

Attribute	Value	Cl.	Sources
Status	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	A	S5 oem_spec
	discontinued; replaced by PRL1a / PRL2a	A	S13 p. V12-T4-8; oem_spec
Era of manufacture	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	A	S13 pp. V12-T4-2, V12-T4-8; oem_spec
	Pre-1993 Westinghouse (pre-'Pow-R-Line C'); surplus example PRL1 dated 9/88 (Era bracket from s1 statement that Pow-R-Line C introduced 1993; date of first PRL1 not found)	C	S5 inference
	A 'POW-R-LINE' trademark (US class 21) was registered 14 Oct 1975 (reg. 1,022,520), i.e. the name predates the 1988 Pow-R-Line redesign described in Vol 12; registrant not confirmed (Registrant not visible in snippet; attribution to Westinghouse is inference)	C	S271 inference
Successor	PRL1a / PRL2a (functional successor)	C	S1, S5 inference
Voltage rating	PRL1 240 V class (BAB); PRL2 480Y/277 (GHB) - inferred from replacement connector kits	C	S5 inference
Main ampacity	600 A maximum	A	S13 p. V12-T4-15; oem_spec
Branch breakers accepted	PRL1: BAB-family QUICKLAG; PRL2: GHB-family (from replacement connector kits KPRL1BAB / KPRL2GHB)	A	S5 p.3 Table 1; oem_spec
	PRL1: BAB, QBHW, HQP, QPHW; PRL2: GB, GHB, GHBS	A	S13 p. V12-T4-8; oem_spec
Box	20.00 in wide x 5.75 in deep boxes YS2021-YS2090 (21-90 in high)	A	S5 p.3 Table 2; oem_spec
Box width	Standard width 20.00 in; box depth 5.75 in	A	S14 pp. 2-3; oem_spec

Breaker families associated: BAB, GB, GHB family (480Y/277 bolt-on), QUICKLAG bolt-on (BAB/QBHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S271 trademarkregiste0000vari_k3n0 The Trademark Register of the United States 1976 - entry 'POW-R-LINE - US 21 - 10-14-75 -

Also fits this family (entry printed elsewhere): 5158C05, 5155C81G01, K80522, 8450C62H39, 0080429

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00166	**KPRL1BAB**	Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)	BAB-family QUICKLAG (inferred from catalog number; table names panel t C	Listed in RP01400002E (Feb 2013)
EDH-EAT-00167	**KPRL2GHB**	Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)	GHB-family (inferred from catalog number; table names panel type only) C	Listed in RP01400002E (Feb 2013)

EDH-EAT-00166 — KPRL1BAB — Westinghouse — branch-connector-kit — LISTED IN RP01400002E

Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)

OEM part number	KPRL1BAB	A	S5, S14 p.3 Table 1; oem_spec
Description	Replacement connectors for PRL1: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S5 p.3; oem_spec
	Replacement connectors for vintage PRL1: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S14 p. 3; oem_spec
Application	branch	A	same as above
Breaker compatibility	BAB-family QUICKLAG (inferred from catalog number; table names panel type only)	C	S5 inference
Current rating	Max 140 A connected to any one connector	A	S5 p.3; oem_spec
	Maximum amperes connected to any one connector cannot exceed 140 A	A	S14 p. 3; oem_spec
Material	Silver-plated copper; suitable for copper or aluminum bus	A	S5 p.3; oem_spec
	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S14 p. 3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: QUICKLAG bolt-on (BAB/QBHW family), BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00167 — KPRL2GHB — Westinghouse — branch-connector-kit — LISTED IN RP01400002E

Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)

OEM part number	KPRL2GHB	A	S5, S14 p.3 Table 1; oem_spec
Description	Replacement connectors for PRL2: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S5 p.3; oem_spec
	Replacement connectors for vintage PRL2: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S14 p. 3; oem_spec
Application	branch	A	same as above
Breaker compatibility	GHB-family (inferred from catalog number; table names panel type only)	C	S5 inference
Current rating	Max 140 A connected to any one connector	A	S5 p.3; oem_spec
	Maximum 140 A connected to any one connector	A	S14 p. 3; oem_spec
Material	Silver-plated copper; suitable for copper or aluminum bus	A	S5 p.3; oem_spec
	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S14 p. 3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: GHB family (480Y/277 bolt-on), GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00239	**5158C03**	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	—	Listed Feb 2013
EDH-EAT-00439	**5158C03G01**	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00438	**5158C03G02**	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00441	**5158C03G03**	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00440	**5158C03G04**	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00240	**5158C04G01**	Vintage PRL1/PRL2 400/600 A neutral bar	—	Listed Feb 2013

EDH-EAT-00239 **5158C03** Westinghouse neutral-assembly **LISTED FEB 2013**

Vintage PRL1/PRL2 neutral bar, 100 A and 225 A

OEM part number	5158C03	**A**	S5 p.4 Table 3; oem_spec
Description	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A (G02 100 A >=30 in box; G01 100 A <30 in; G04 225 A >=30 in; G03 225 A <30 in)	**A**	same as above
Status	Listed Feb 2013	**A**	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00439 **5158C03G01** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G01	**A**	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S14 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes less than 30.00 in high	**A**	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00438 **5158C03G02** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G02	**A**	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S14 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes 30.00 in and above	**A**	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00441 **5158C03G03** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G03	**A**	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S14 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes less than 30.00 in high	**A**	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00440	5158C03G04	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G04	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes 30.00 in and above	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00240	5158C04G01	Westinghouse	neutral-assembly	LISTED FEB 2013

Vintage PRL1/PRL2 400/600 A neutral bar

OEM part number	5158C04G01	A	S5, S14 p.4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	Vintage PRL1/PRL2 400/600 A neutral bar	A	S5 p.4 Table 3; oem_spec
	400/600 A neutral bar	A	S14 p. 4 Table 3; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug_count, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00443	**5158C05G01**	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	—	unknown
EDH-EAT-00442	**5158C05G02**	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	—	unknown
EDH-EAT-00237	**5158C05G05**	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	—	Listed Feb 2013
EDH-EAT-00444	**5158C05G06**	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	—	unknown

EDH-EAT-00443	5158C05G01	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G01	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes less than 30.00 in high	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00442	5158C05G02	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G02	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes 30.00 in and above	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00237	5158C05G05	Westinghouse	ground-bar	LISTED FEB 2013

Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in

OEM part number	5158C05G05	A	S5, S14 p.5 Table 5; oem_spec
Alternate / superseded numbers	5158C05G06 (boxes 30 in and above)	A	S5 style_number; p.5; oem_spec
Description	Isolated ground bar for vintage PRL1/PRL2, boxes less than 30 in high (G06 for 30 in and above)	A	S5 p.5 Table 5; oem_spec
	isolated ground bar, boxes less than 30.00 in high	A	S14 p. 5 Table 5; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00444	5158C05G06	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G06	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	isolated ground bar, boxes 30.00 in and above	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00290	**5156C09**	Vintage PRL2 branch section deadfront cover	—	Listed Feb 2013
EDH-EAT-00289	**5156C10**	Vintage PRL1 branch section deadfront cover	—	Listed Feb 2013

EDH-EAT-00290	5156C09	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL2 branch section deadfront cover

OEM part number	5156C09	A	S5 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	A	S5 style_number; oem_spec
Description	PRL2 branch section deadfront cover	A	same as above
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00289	5156C10	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL1 branch section deadfront cover

OEM part number	5156C10	A	S5 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	A	S5 style_number; p.5; oem_spec
Description	PRL1 branch section deadfront cover by max number of circuits	A	S5 oem_spec
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00292	**3456B35H01**	Vintage PRL1/PRL2 blank cover 6.00 in	—	Listed Feb 2013
EDH-EAT-00291	**3456B99H01**	Vintage PRL1/PRL2 blank cover 3.00 in	—	Listed Feb 2013
EDH-EAT-00293	**3456B99H05**	Vintage PRL1/PRL2 blank cover 15.00 in	—	Listed Feb 2013

EDH-EAT-00292	3456B35H01	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 6.00 in

OEM part number	3456B35H01	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 6.00 in (152.4 mm)	A	S5, S14 oem_spec
Dimensions	Height 6.00 in (152.4 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00291	3456B99H01	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 3.00 in

OEM part number	3456B99H01	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 3.00 in (76.2 mm)	A	S5, S14 oem_spec
Dimensions	Height 3.00 in (76.2 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00293	3456B99H05	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 15.00 in

OEM part number	3456B99H05	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 15.00 in (381.0 mm)	A	S5, S14 oem_spec
Dimensions	Height 15.00 in (381.0 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00411	**114C247G01**	Vintage lighting/small power panel trim lock	—	Listed in renewal parts guide(s) s5
EDH-EAT-00412	**3457B16G01**	Vintage lighting and small panel standard trim lock	—	Listed in renewal parts guide(s) s5

EDH-EAT-00411	114C247G01	Eaton	trim	LISTED IN RENEWAL PART

Vintage lighting/small power panel trim lock

OEM part number	114C247G01	A	S5, S14 oem_spec
Description	Vintage lighting/small power panel trim lock (replacement uses WEM-3 key)	A	S5 oem_spec
	Lock used on lighting and small power panels as standard; replacement lock uses WEM-3 key	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s5	A	S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00412	3457B16G01	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Vintage lighting and small panel standard trim lock

OEM part number	3457B16G01	A	S5, S14 oem_spec
Description	Vintage lighting and small panel standard trim lock	A	S5 oem_spec
	Lock used on lighting and small panels as standard	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s5	A	S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00419	**7494A11G02**	Vintage Fastrim trim clamps for B10B and PRL1/2/3	—	Listed in s5

EDH-EAT-00419	7494A11G02	Cutler-Hammer	hardware-kit	LISTED IN S5

Vintage Fastrim trim clamps for B10B and PRL1/2/3

OEM part number	7494A11G02	A	S5 oem_spec
Description	Vintage Fastrim trim clamps for B10B and PRL1/2/3 (bag of 6, 3.13 in long)	A	same as above
Status	Listed in s5	A	same as above
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00446	**414A380G01**	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	—	unknown
EDH-EAT-00447	**8712C73H01**	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	—	unknown

EDH-EAT-00446	414A380G01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)

OEM part number	414A380G01	A	S14 p. 8 Fastrim; oem_spec
Description	Flush Fastrim uses Style Number 414A380G01 trim clamps (supplied with the trim)	A	S14 p. 8; oem_spec
Dimensions	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 (p.19 shows a 3.13 in clamp for B10B/PRL1-3 next to 414A380G02; association with G01 inferred from layout and p.8)	C	S14 p. 19; oem_drawing
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Material		

EDH-EAT-00447	8712C73H01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3

OEM part number	8712C73H01	A	S14 p. 8 Fastrim; oem_spec
Description	Surface Fastrim uses Style Number 8712C73H01 trim clamps; clamps included and shipped with the trim	A	S14 p. 8; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

3.21 PRL1A — Pow-R-Line 1a

FAM-EAT-001 · panelboard · aka PRL1a, PRL-1A, Pow-R-Line 1a, POW-R-LINE 1A · markings: Cutler-Hammer, Eaton

Cutler-Hammer/Eaton 240 Vac lighting & appliance panelboard on a 20 in wide box, neutral located in the side gutter. Branch QUICKLAG breakers mount horizontally on factory connector strips (bolt-on 1C96608 or plug-on 2C11642 assemblies); mains, sub-feed breakers and main/sub-feed/through-feed lugs mount vertically on KB/KL connector kits. Fully rated 10/22 kA, series rated to 200 kA at 240 Vac. Suitable for service entrance when specified (PRLSEB barrier kits, 4180B62 bonding jumper). Note: Eaton literature also uses the umbrella name 'Pow-R-Line C' for Series C breaker panelboards; that name is not unique to PRL1a and is also the name of the PRLC switchboard.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	A	S1 p.2 Table 1; oem_spec
Era of manufacture	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	A	S1, S2 s1 p.2 Table 1; s2 p.2 Table 1; oem_spec
Successor	PRL1X	A	S1, S6 s1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S7 p.22.0-5 Table 22.0-2; p.22.1-1; oem_spec
Main ampacity	Main lugs 100, 225, 400, 600 A; main breakers 100-600 A (MLO and main device 600 A max)	A	S7 p.22.1-1; oem_spec
Branch breakers accepted	Bolt-on QUICKLAG BAB/QBHW (incl. GF/AFCI/RP variants) or plug-on HQP/QPHW chassis, 15-100 A, 1-3 pole. Mains: BAB/QBHW (100 A, horizontal), EHD, FDB, FD/FDE, HFD/HFDE, FDC/FDCE, EDB, EDS, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LGE/LGS/LGH/LGC/LGU	A	S7 p.22.1-1 Tables 22.1-1, 22.1-2; oem_spec
Box width	20.00 in (508.0 mm) standard width	A	S1 p.2; oem_spec
Identification features	Neutral bar in side gutter (Figure 1); same position as PRL1X/2X/2a	A	S1 p.2 Figure 1; oem_spec
Branch connector limit	Sum of horizontally twin-mounted plug-on breakers shall not exceed 140 A; CTL panels max 42 circuits per enclosure	A	S1 p.9 Table 9 notes; oem_spec

Breaker families associated: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00006	**KB11AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00005	**KB11AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00008	**KB11SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00007	**KB11SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00002	**KB13AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00001	**KB13AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00004	**KB13SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00003	**KB13SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00014	**KB21AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00013	**KB21AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00016	**KB21SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00015	**KB21SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00010	**KB23AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00009	**KB23AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00012	**KB23SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00011	**KB23SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00022	**KB41AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00021	**KB41AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00030	**KB41AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00029	**KB41AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00024	**KB41SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00023	**KB41SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00032	**KB41SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00031	**KB41SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00018	**KB43AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00017	**KB43AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00026	**KB43AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00025	**KB43AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00020	**KB43SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00019	**KB43SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00028	**KB43SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00027	**KB43SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00006 **KB11AFB** Cutler-Hammer main-breaker-kit **LISTED AS STOCK RENEWA**

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11AFB	**A**	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	**A**	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	**A**	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	**A**	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	**A**	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	**A**	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	**C**	S1 inference
Current rating	100 A max	**A**	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	**A**	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	**A**	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00005	KB11AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00008	KB11SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00007	KB11SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00002	KB13AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00001	KB13AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00004	KB13SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00003	KB13SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00014	KB21AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00013	KB21AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00016	KB21SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00015	KB21SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00010	KB23AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00009	KB23AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00012	KB23SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00011	KB23SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00022	KB41AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00021	KB41AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00030	KB41AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00029	KB41AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00024	KB41SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00023	KB41SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00032	KB41SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00031	KB41SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00018	KB43AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00017	KB43AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00026	KB43AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00025	KB43AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00020	KB43SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00019	KB43SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00028	KB43SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00027	KB43SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00071	**KL11AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00063	**KL11AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00083	**KL11AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00075	**KL11AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00090	**KL11SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00086	**KL11SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00072	**KL11SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00064	**KL11SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00084	**KL11SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00076	**KL11SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00069	**KL13AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00061	**KL13AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00081	**KL13AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00073	**KL13AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00089	**KL13SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00085	**KL13SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00070	**KL13SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00062	**KL13SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00082	**KL13SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00074	**KL13SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00101	**KL21AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00093	**KL21AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00113	**KL21AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00105	**KL21AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00120	**KL21SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00116	**KL21SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00102	**KL21SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00094	**KL21SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00114	**KL21SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00106	**KL21SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00099	**KL23AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00091	**KL23AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00111	**KL23AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00103	**KL23AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00119	**KL23SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00115	**KL23SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00100	**KL23SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00092	**KL23SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00112	**KL23SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00104	**KL23SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00127	**KL41AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00123	**KL41AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00135	**KL41AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00131	**KL41AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00138	**KL41SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00128	**KL41SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00124	**KL41SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00136	**KL41SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00132	**KL41SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00125	**KL43AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00121	**KL43AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00133	**KL43AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00129	**KL43AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00137	**KL43SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00126	**KL43SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00122	**KL43SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00134	**KL43SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00130	**KL43SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00148	**KL61CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00142	**KL61CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00160	**KL61CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00154	**KL61CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00149	**KL61SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00143	**KL61SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00161	**KL61SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00155	**KL61SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00150	**KL61TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00144	**KL61TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00162	**KL61TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00156	**KL61TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00145	**KL63CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00139	**KL63CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00157	**KL63CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00151	**KL63CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00146	**KL63SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00140	**KL63SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00158	**KL63SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00152	**KL63SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00147	**KL63TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00141	**KL63TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00159	**KL63TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00153	**KL63TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00071 **KL11AMO** Cutler-Hammer main-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00063 **KL11AMS** Cutler-Hammer main-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00083	KL11AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00075	KL11AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00090	KL11SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00086	KL11SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00072	KL11SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00064	KL11SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00084	KL11SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00076	KL11SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00069	KL13AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00061	KL13AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00081	KL13AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00073	KL13AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00089	KL13SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00085	KL13SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00070	KL13SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00062	KL13SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00082	KL13SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00074	KL13SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00101	KL21AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00093	KL21AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00113	KL21AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00105	KL21AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00120	KL21SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00116	KL21SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00102	KL21SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00094	KL21SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00114	KL21SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00106	KL21SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00099	KL23AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00091	KL23AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00111	KL23AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00103	KL23AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00119	KL23SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00115	KL23SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00100	KL23SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00092	KL23SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00112	KL23SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00104	KL23SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00127	KL41AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00123	KL41AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00135	KL41AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00131	KL41AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00138	KL41SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SCO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00128	KL41SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00124	KL41SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00136	KL41SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00132	KL41SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00125	KL43AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00121	KL43AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00133	KL43AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00129	KL43AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00137	KL43SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SCO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00126	KL43SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00122	KL43SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00134	KL43SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00130	KL43SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00148	KL61CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00142	KL61CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00160	KL61CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00154	KL61CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00149	KL61SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00143	KL61SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00161	KL61SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00155	KL61SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00150	KL61TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00144	KL61TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00162	KL61TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00156	KL61TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00145	KL63CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00139	KL63CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00157	KL63CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00151	KL63CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00146	KL63SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00140	KL63SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00158	KL63SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00152	KL63SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00147	KL63TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00141	KL63TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00159	KL63TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00153	KL63TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00067	**KL11AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00079	**KL11AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00088	**KL11SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00068	**KL11SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00080	**KL11SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00065	**KL13AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00077	**KL13AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00087	**KL13SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00066	**KL13SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00078	**KL13SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00097	**KL21AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00109	**KL21AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00118	**KL21SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00098	**KL21SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00110	**KL21SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00095	**KL23AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00107	**KL23AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00117	**KL23SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00096	**KL23SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00108	**KL23SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00067 **KL11AMF** Cutler-Hammer sub-feed-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMF	**A**	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	**A**	same as above
Application	sub-feed	**A**	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	**C**	S1 inference
Current rating	100 A	**A**	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	**A**	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	**A**	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00079	KL11AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00088	KL11SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00068	KL11SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00080	KL11SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00065	KL13AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00077	KL13AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00087	KL13SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00066	KL13SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00078	KL13SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00097	KL21AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00109	KL21AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00118	KL21SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00098	KL21SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00110	KL21SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00095	KL23AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00107	KL23AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00117	KL23SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00096	KL23SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00108	KL23SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00163	**1C96608**	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip n A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00164	**2C11642**	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00163	1C96608	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96608	A	S1, S2, S3 s1 p.8 Table 8; oem_spec
Alternate / superseded numbers	1C96608G01..G63 (odd item numbers)	A	S1 style_number; p.8 Table 8; oem_spec
Description	Horizontally mounted branch connector kit assembly for bolt-on QUICKLAG breakers; order drawing number + G item: 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S1, S2 s1 p.8; oem_spec
Application	branch	A	S1 oem_spec
Installation location	Branch section, PRL1a/1X interior	A	same as above
Breaker compatibility	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip needs one extra circuit)	A	S1, S2 p.8; oem_spec
Kit contents	Connector assembly only; order breakers separately	A	S1 p.8 note 4; oem_spec
Material	Tin-plated aluminum or silver-plated copper connectors (bare copper bus: use silver-plated groups)	A	S1 p.8 note 3; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.8; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Physical difference between 12-circuit and 96-circuit groups (strap length / number of straps) not documented.*		

EDH-EAT-00164	2C11642	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	2C11642	A	S1, S2 s1 p.9 Table 9; oem_spec
Alternate / superseded numbers	2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	A	S1 style_number; p.9; oem_spec
Description	Plug-in QUICKLAG breaker connector assembly; only silver-plated copper groups (G03/G11/.. 3-ph; G07/G15/.. 1-ph) offered	A	S1, S2 p.9 Table 9; oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP	A	S1, S2 p.9; oem_spec
Current rating	Sum of horizontally twin-mounted breakers shall not exceed 140 A	A	S1 p.9 note 4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.9; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00233	**1C96645**	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00221	**1C96646**	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00223	**1C96647**	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00224	**1C96648**	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00225	**1C96649**	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00227	**1C96650**	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00228	**1C96651**	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00229	**1C96652**	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00231	**1C96653**	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00232	**1C96654**	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00234	**1C97022**	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00222	**42C4050**	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00226	**42C4051**	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00230	**42C4052**	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00233	1C96645	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C96645	A	S1, S2 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	A	S1 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 100% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	A	S1 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00221	1C96646	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)

OEM part number	1C96646	A	S1, S2, S4 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S1 style_number; s1 p.11 Table 11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S1 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00223	1C96647	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96647	A	S2 s2 p.12 Table 9; oem_spec
Alternate / superseded numbers	STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	A	S2 s2 p.12 Table 9; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00224	1C96648	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs

OEM part number	1C96648	A	S1, S2 s1 p.11; oem_spec
Alternate / superseded numbers	STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S1 style_number; s1 p.11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S1 s1 p.11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00225	1C96649	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs

OEM part number	1C96649	A	S1, S2, S4 s1 pp.11-12 Tables 11-12; oem_spec
Alternate / superseded numbers	STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S1 style_number; s1 pp.11-12 Tables 11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S1 s1 pp.11-12 Tables 11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00227	1C96650	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96650	A	S2 s2 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	A	S2 s2 pp.12-13; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00228	1C96651	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs

OEM part number	1C96651	A	S1, S2 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S1 style_number; s1 pp.11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S1 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00229	1C96652	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs

OEM part number	1C96652	A	S1, S2, S4 s1 pp.12-13 Tables 12-14; oem_spec
Alternate / superseded numbers	225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S1 style_number; s1 pp.12-13 Tables 12-14; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: 225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S1 s1 pp.12-13 Tables 12-14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00231	1C96653	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)

OEM part number	1C96653	A	S2 s2 p.13 Table 10; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2 [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	A	S2 s2 p.13 Table 10; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00232	1C96654	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs

OEM part number	1C96654	A	S1, S2 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S1 style_number; s1 pp.12-13; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S1 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00234	1C97022	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C97022	A	S1, S2 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S1 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S1 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00222	42C4050	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs

OEM part number	42C4050	A	S1, S3 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S1 style_number; s1 p.11 Table 11; oem_spec
	1C96647 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 p.11 Table 11; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S1 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00226	42C4051	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs

OEM part number	42C4051	A	S1, S3 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S1 style_number; s1 pp.11-12; oem_spec
	1C96650 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 pp.11-12; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S1 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00230	42C4052	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral

OEM part number	42C4052	A	S1, S3 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S1 style_number; s1 pp.12-13; oem_spec
	1C96653 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 pp.12-13; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S1 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00236	**2C11296**	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00235	**5158C05**	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00236	2C11296	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)

OEM part number	2C11296	**A**	S1, S2, S4 s1 p.15 Table 17; p.24 Table 33; oem_spec
Alternate / superseded numbers	G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	**A**	S1 style_number; p.15; oem_spec
Description	Isolated ground bar; PRL3a/3X catalog numbers 2C11296G02 (Al/Cu) and 2C11296G04 (Cu) (Table 17 (G02 = 24 in copper) conflicts with Table 33 (G02 = Al/Cu for PRL3a); s4 Pow-R-Kit lists isolated ground bar as 2C11296G03)	**A**	S1 p.24 Table 33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Resolve 2C11296 G-number conflict between Table 17 and Table 33 / Pow-R-Kit (G03).*		

EDH-EAT-00235	5158C05	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)

OEM part number	5158C05	**A**	S1, S2, S4, S5 s1 p.15 Table 16; s1 p.24 Table 33; s5 pp.5-6; oem_spec
Alternate / superseded numbers	G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	**A**	S1, S5 style_number; s1 p.15; s5 p.5 Table 5; oem_spec
Description	Standard equipment ground bar; PRL3a/3X catalog numbers 5158C05G02 (Al/Cu) and 5158C05G04 (Cu only)	**A**	S1 p.15, p.24; oem_spec
Material	Aluminum/copper-rated or copper bar per G item	**A**	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00215	**PRLSEBFD**	Service entrance barrier kit for FD main breaker	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00216	**PRLSEBGHB**	Service entrance barrier kit for GHB main breaker	GHB **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00214	**PRLSEBJD**	Service entrance barrier kit for JD main breaker	JD **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00213	**PRLSEBLGKD**	Service entrance barrier kit for LG and KD main breaker	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00215	PRLSEBFD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for FD main breaker

OEM part number	PRLSEBFD	A	S1, S3 s1 p.16 Tables 19-20, p.25; oem_spec
Alternate / superseded numbers	UPC 786689014674	A	S316 alias; skuPage.PRLSEBFD (General/Product specifications); oem_spec
Description	Service entrance barrier for FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
	PRL Service Entrance Barrier, Used with FD frame (Eaton web product description)	A	S316 skuPage.PRLSEBFD (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
	FD frame (Eaton web 'Used with' attribute)	A	S316 skuPage.PRLSEBFD (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.PRLSEBFD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11 in, height 4.5 in, width 6.5 in, weight 4 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00216	PRLSEBGHB	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for GHB main breaker

OEM part number	PRLSEBGHB	A	S1, S3, S314, S315 s1 p.16, p.25; oem_spec
Alternate / superseded numbers	UPC 786689014681	A	S316 alias; skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Description	Service entrance barrier for GHB main breaker (service entrance main breaker kit)	A	S1 s1 p.16, p.25; oem_spec
	Service entrance barrier for GHB (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S314, S315 p. 4, Table 22.1-1; oem_spec
	PRL Service Entrance Barrier, Used with GHB frame (Eaton web product description)	A	S316 skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1, S314, S315 oem_spec
Breaker compatibility	GHB	A	S1 s1 p.16, p.25; oem_spec
	Circuit breaker frame GHB	A	S314, S315 p. 4, Table 22.1-1; oem_spec
	GHB frame (Eaton web 'Used with' attribute)	A	S316 skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.16, p.25; oem_spec
	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S314, S315 p. 4; oem_spec

Listing / approvals	UL Listed	**A**	S316 skuPage.PRLSEBGHB (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5 in, height 7 in, width 2 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00214	**PRLSEBJD**	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for JD main breaker

OEM part number	PRLSEBJD	**A**	S1, S3 s1 p.16 Table 20, p.25 Table 36; oem_spec
Description	Service entrance barrier for JD main breaker (service entrance main breaker kit)	**A**	S1 s1 p.16 Table 20, p.25 Table 36; oem_spec
Application	main (service entrance)	**A**	S1 oem_spec
Breaker compatibility	JD	**A**	S1 s1 p.16 Table 20, p.25 Table 36; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00213	PRLSEBLGKD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for LG and KD main breaker

OEM part number	PRLSEBLGKD	A	S1, S3 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Alternate / superseded numbers	UPC 786689014650	A	S316 alias; skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Description	Service entrance barrier for LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
	PRL Service Entrance Barrier, Used with KD/LG frame (Eaton web product description)	A	S316 skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
	KD/LG frame (Eaton web 'Used with' attribute)	A	S316 skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.PRLSEBLGKD (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.9 in, height 4.2 in, width 5.9 in, weight 1.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00250	**1C96619**	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00251	**1C96620**	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00241	**1C96638**	PRL1a/2a/1X/2X deadfront cover assembly	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00245	**4180B03**	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00248	**4180B04**	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00247	**4180B05**	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00246	**4180B61**	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00244	**42C7982**	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00242	**42C8072**	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00243	**42C8073**	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00250	1C96619	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)

OEM part number	1C96619	A	S1, S2 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	A	S1 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP branch section; item and quantity by branch circuit count	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00251	1C96620	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)

OEM part number	1C96620	A	S1, S2 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	A	S1 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted GB, GHB, GHQ, GHBS branch section; item and quantity by branch circuit count	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00241	1C96638	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X deadfront cover assembly

OEM part number	1C96638	A	S1, S2, S4 s1 p.17 Table 21; oem_spec
Alternate / superseded numbers	Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	A	S1 style_number; p.17; oem_spec
Description	Deadfront cover assembly by standard enclosure height; does not apply to PRL4 sub-chassis	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00245	4180B03	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B03	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S2 style_number; p.17; oem_spec
	42C8072	C	S1, S2, S3 superseded_by; inference
Description	100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00248	4180B04	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover

OEM part number	4180B04	A	S1, S2 s1 p.18 Table 23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.18; oem_spec
Description	Deadfront cover, vertical 400 A MLO/SFL/TFL or J-Frame device	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.18; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00247	4180B05	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)

OEM part number	4180B05	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S2 style_number; p.17; oem_spec
	42C7982	C	S1, S2, S3 superseded_by; inference
Description	400 A MLO/TFL or K-Frame vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00246	4180B61	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B61	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S2 style_number; p.17; oem_spec
	42C8073	C	S1, S2, S3 superseded_by; inference
Description	225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00244	42C7982	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover

OEM part number	42C7982	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B05 (4180B05 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C7982 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00242	42C8072	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover

OEM part number	42C8072	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B03 (4180B03 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8072 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00243	42C8073	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover

OEM part number	42C8073	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H04 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B61 (4180B61 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8073 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00249	**4180B08**	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00252	**4180B52H01**	PRL1a/2a filler cover for F, J, K frame vertical device spaces	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00253	**5155C62H01**	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00249 **4180B08** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X deadfront blank covers 1-16 in

OEM part number	4180B08	A	S1, S2 s1 pp.17-18; oem_spec
Alternate / superseded numbers	H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	A	S1 style_number; p.17 Table 22; oem_spec
Description	Blank deadfront covers in 1 in height increments, H01-H16	A	S1, S2 oem_spec
Dimensions	Height 1.00-16.00 in by H number; width not stated	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00252 **4180B52H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a filler cover for F, J, K frame vertical device spaces

OEM part number	4180B52H01	A	S1, S2, S3 s1 p.19 Table 25; oem_spec
Description	Filler cover, F/J/K frame; required in addition to deadfront cover whenever MLO, SFL or TFL are specified	A	S1 p.19 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00253 **5155C62H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

QUICKLAG / GB / GHB 1-pole filler (branch space filler)

OEM part number	5155C62H01	A	S1, S2, S3, S4 s1 p.19 Table 25; p.30 Tables 42-43; oem_spec
Description	Filler cover for QUICKLAG, GB, GHB, GHBS branch spaces (1, 2 or 3 poles per PRL3 tables); required in addition to deadfront cover whenever a branch provision is specified. Pow-R-Kit lists it as 'BAB/GHB 1-Pole Fillers'	A	S1, S4 s1 p.19, p.30; s4 p.12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00410	**1A85194G01**	EZ Trim lock keyed WEM-2	—	Listed in renewal parts guide(s) s4
EDH-EAT-00403	**5155C81G01**	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	—	Listed in renewal parts guide(s) s1, s2, s4, s5
EDH-EAT-00409	**5155C81G03**	EZ Trim lock, 24-48 in	—	Listed in renewal parts guide(s) s1, s3
EDH-EAT-00407	**8450C62H39**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s4, s5

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00406	**K80133**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s1, s2
EDH-EAT-00408	**K80429**	T-handle lock	—	Listed in renewal parts guide(s) s1, s2, s4, s5
EDH-EAT-00405	**K80522**	Trim lock for left-handed door	—	Listed in renewal parts guide(s) s1, s2, s5

EDH-EAT-00410 **1A85194G01** Eaton trim **LISTED IN RENEWAL PART**

EZ Trim lock keyed WEM-2

OEM part number	1A85194G01	**A**	S4 oem_spec
Description	EZ Trim lock keyed WEM-2 (standard); G03 GE75, G05 Corbin WEM-1, G09 Corbin TEU 1, G10 CAT 60	**A**	same as above
Status	Listed in renewal parts guide(s) s4	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00403 **5155C81G01** Cutler-Hammer trim **LISTED IN RENEWAL PART**

Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels

OEM part number	5155C81G01	**A**	S1, S2, S4, S5, S14 oem_spec
Description	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels (LT trims), WEM 2 key	**A**	S1, S2, S4, S5 oem_spec
	Present-day lock used on standard PRL1, 2 and 3; WEM 2 key — No Longer Available	**A**	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	**B**	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	**A**	S1, S2, S4, S5 oem_spec
	No Longer Available	**A**	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00409 **5155C81G03** Cutler-Hammer trim **LISTED IN RENEWAL PART**

EZ Trim lock, 24-48 in

OEM part number	5155C81G03	**A**	S1, S3 oem_spec
Description	EZ Trim lock, 24-48 in (54-60 in: lock 5155C81G03 + latch 5155C81G05; 72-90 in: 5155C81G04 + 5155C81G06)	**A**	same as above
Status	Listed in renewal parts guide(s) s1, s3	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00407	8450C62H39	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	8450C62H39	A	S4, S5, S14 oem_spec
Description	Trim lock for right-handed door (vintage / 2011 listing)	A	S4, S5 oem_spec
	Trim lock for right-handed door (hinged on right side)	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	Listed in renewal parts guide(s) s4, s5	A	S4, S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00406	K80133	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	K80133	A	S1, S2 oem_spec
Alternate / superseded numbers	8450C62H39 (Right-hand door lock listed as K80133 (2009/2021) and 8450C62H39 (2011/2013))	C	S1, S4, S5 equivalent; inference
Description	Trim lock for right-handed door (hinged on right)	A	S1, S2 oem_spec
Status	Listed in renewal parts guide(s) s1, s2	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00408	K80429	Cutler-Hammer	trim	LISTED IN RENEWAL PART

T-handle lock

OEM part number	K80429	A	S1, S2, S4, S5 oem_spec
Alternate / superseded numbers	0080429	B	S4, S5 alias; oem_spec
Description	T-handle lock (trims over 48 in; NEMA 12/3R trims); listed as 0080429 in 2011/2013 docs	A	S1, S2, S4, S5 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	A	S1, S2, S4, S5 oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, CDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00405	K80522	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for left-handed door

OEM part number	K80522	A	S1, S2, S5, S14 oem_spec
Description	Trim lock for left-handed door (hinged on left)	A	S1, S2, S5 oem_spec
	Trim lock for left-handed door (hinged on left side)	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	Listed in renewal parts guide(s) s1, s2, s5	A	S1, S2, S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00413	**2C11641G02**	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	—	Listed in s1, s2, s4
EDH-EAT-00219	**4180B62**	PRL1a/2a/1X/2X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00413	2C11641G02	Cutler-Hammer	hardware-kit	LISTED IN S1, S2, S4

Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X

OEM part number	2C11641G02	A	S1, S2, S4 oem_spec
Description	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X (6 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00219	4180B62	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X service entrance bonding jumper kit

OEM part number	4180B62	A	S1, S2, S4 s1 p.15 Table 18; oem_spec
Alternate / superseded numbers	Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	A	S1 style_number; p.15 Table 18; oem_spec
Description	Service entrance bonding jumper kit, neutral-to-ground; order 4180B62 + G item by main ampere rating, lug type and connector plating	A	S1, S2 s1 p.15; oem_spec
Application	accessory (service entrance)	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*2009 edition lists 400 A row as '400'; 2021 lists '400-600' - same G numbers.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00416	**42C1129H02**	Chassis mounting hardware, PRL1a/2a/3a	—	Listed in s4
EDH-EAT-00414	**5157C83G06**	Trim screws	—	Listed in s1, s2, s4
EDH-EAT-00415	**7499A48G04**	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	—	Listed in s1, s2, s4

EDH-EAT-00416	42C1129H02	Cutler-Hammer	fastener	LISTED IN S4

Chassis mounting hardware, PRL1a/2a/3a

OEM part number	42C1129H02	A	S4 oem_spec
Description	Chassis mounting hardware, PRL1a/2a/3a (Pow-R-Kit)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00414	5157C83G06	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Trim screws

OEM part number	5157C83G06	A	S1, S2, S4 oem_spec
Description	Trim screws (and captive nuts) for PRL1a/2a/3a/1X/2X/3X and PRL4B standard trim (10 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00415	7499A48G04	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X

OEM part number	7499A48G04	A	S1, S2, S4 oem_spec
Description	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00422	**1256C42G01**	BAB 2- and 3-pole lock-off	—	Listed in s4
EDH-EAT-00421	**1256C42G02**	BAB 1-pole lock-off	—	Listed in s4

EDH-EAT-00422	1256C42G01	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 2- and 3-pole lock-off

OEM part number	1256C42G01	A	S4 oem_spec
Description	BAB 2- and 3-pole lock-off (non-padlockable)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL3A · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00421	1256C42G02	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 1-pole lock-off

OEM part number	1256C42G02	A	S4 oem_spec
Description	BAB 1-pole lock-off (non-padlockable)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL3A · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.22 PRL1X — Pow-R-Line Xpert 1X

FAM-EAT-006 · panelboard · aka PRL1x, Pow-R-Line 1X, Pow-R-Line Xpert · markings: Eaton

Pow-R-Line Xpert successor to PRL1a. Shares PRL1a horizontal branch assemblies (1C96608/2C11642/1C96609), lug kits (KL*), neutral/ground assemblies and deadfronts, but vertical main/sub-feed connector kits are for Power Defense frames (KB..2T/B, KB..34, KB..36). Each branch connector rated up to 140 A total by breaker rating.

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020 (time line: May 2020)	A	S1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 600 A max; main device 600 A max; sub-feed breaker 600 A	A	same as above
Branch breakers accepted	Bolt-on or plug-on QUICKLAG (BAB, QBHW, HQP, QPHW, GF/AF/EP variants) 15-100 A; mains/sub-feeds PDG2 (Power Defense 225 A frame), PDG3, GHB	A	S1, S6 s1 pp.4,16; s6 p.V2-T3-33; oem_spec
Main handle location	PRL1X/2X Power Defense frame 2 main: handle centerline to top of box D = 10.06 in (100 A max) / 11.06 in (225 A max); PD frame 3 400 A: 20.426 in (500 kcmil lugs) / 23.426 in (750 kcmil); PD frame 3 600 A: 20.488 / 23.488 in; box example EZB2090R = 90 in; NEC 6 ft 7 in (79 in) max handle height (Dimensions are estimates to be verified by installer (per leaflet))	A	S318 pp. 2-6, Figures 1-5; oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S314 DG014001EN Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024); S318 IL014069EN Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interio

Also fits this family (entry printed elsewhere): KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96608, 2C11642, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00038	**KB11A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00037	**KB11A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00040	**KB11S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00039	**KB11S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00034	**KB13A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00033	**KB13A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00036	**KB13S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00035	**KB13S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00046	**KB21A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00045	**KB21A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00048	**KB21S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00047	**KB21S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00042	**KB23A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00041	**KB23A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00044	**KB23S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00043	**KB23S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00054	**KB41A14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00053	**KB41A14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00056	**KB41S14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00055	**KB41S14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00050	**KB43A34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00049	**KB43A34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00052	**KB43S34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00051	**KB43S34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00060	**KB61S16B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00059	**KB61S16T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00058	**KB63S36B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00057	**KB63S36T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00038	KB11A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00037	KB11A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00040	KB11S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00039	KB11S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00034	KB13A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00033	KB13A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00036	KB13S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00035	KB13S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00046	KB21A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00045	KB21A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00048	KB21S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00047	KB21S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00042	KB23A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00041	KB23A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00044	KB23S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00043	KB23S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00054	KB41A14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41A14B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00053	KB41A14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41A14T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00056	KB41S14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41S14B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00055	KB41S14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector

OEM part number	KB41S14T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00050	KB43A34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43A34B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00049	KB43A34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43A34T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00052	KB43S34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43S34B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00051	KB43S34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector

OEM part number	KB43S34T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00060	KB61S16B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB61S16B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00059	KB61S16T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector

OEM part number	KB61S16T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00058	KB63S36B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB63S36B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00057	KB63S36T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector

OEM part number	KB63S36T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00806	**PRLSEBBAB**	Service entrance barrier for BAB main breaker (PRL1X/2X/3X, PRL4X)	Circuit breaker frame BAB A	Listed in current design guides DG014001EN (Nov 2024) and DG
EDH-EAT-00218	**PRLSEBPD2**	Service entrance barrier kit for PDG2 main breaker	PDG2 A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00217	**PRLSEBPD3**	Service entrance barrier kit for PDF3/PDG3 main breaker	PDF3/PDG3 A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00805	**PRLSEBPD4**	Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)	Circuit breaker frame PD4 A	Listed in current design guides DG014001EN (Nov 2024) and DG
EDH-EAT-00804	**PRLSEBPD5**	Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)	Circuit breaker frame PD5 A	Listed in current design guides DG014001EN (Nov 2024) and DG

EDH-EAT-00806	PRLSEBBAB	Eaton lineage	barrier	LISTED IN CURRENT DESI

Service entrance barrier for BAB main breaker (PRL1X/2X/3X, PRL4X)

OEM part number	PRLSEBBAB	A	S314, S315 DG014001EN p.4 / DG014003EN p.4, Table 22.1-1; oem_spec
Description	Service entrance barrier for BAB (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Application	main (service entrance)	A	S314, S315 p. 4; oem_spec
Breaker compatibility	Circuit breaker frame BAB	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Status	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S314, S315 p. 4; oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-EAT-00218	PRLSEBPD2	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for PDG2 main breaker

OEM part number	PRLSEBPD2	**A**	S1, S3, S314, S315 s1 p.25 Table 35; oem_spec
Alternate / superseded numbers	UPC 786689242091	**A**	S316 alias; skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Description	Service entrance barrier for PDG2 main breaker (service entrance main breaker kit)	**A**	S1 s1 p.25 Table 35; oem_spec
	Service entrance barrier for PD2 (Table 22.1-1 'Service Entrance Main Breaker Kits')	**A**	S314, S315 p. 4, Table 22.1-1; oem_spec
	Eaton Power Defense molded case circuit breaker accessory terminal cover, Terminal cover, PD2 Global, Power Defense, Power Defense (Eaton web product description)	**A**	S316 skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Application	main (service entrance)	**A**	S1, S314, S315 oem_spec
Breaker compatibility	PDG2	**A**	S1 s1 p.25 Table 35; oem_spec
	Circuit breaker frame PD2	**A**	S314, S315 p. 4, Table 22.1-1; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 s1 p.25 Table 35; oem_spec
	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	**A**	S314, S315 p. 4; oem_spec
Identification features	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) (i.e. the service-entrance barrier is supplied as a PD-frame terminal-cover style accessory)	**A**	S316 skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 305 mm, height 157 mm, width 109 mm, weight 1360 g (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	S316 skuPage.PRLSEBPD2 (General/Product specifications); oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00217	PRLSEBPD3	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for PDF3/PDG3 main breaker

OEM part number	PRLSEBPD3	A	S1, S3, S314, S315 s1 p.25 Table 35; oem_spec
Alternate / superseded numbers	UPC 786689242107	A	S316 alias; skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Description	Service entrance barrier for PDF3/PDG3 main breaker (service entrance main breaker kit)	A	S1 s1 p.25 Table 35; oem_spec
	Service entrance barrier for PD3 (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S314, S315 p. 4, Table 22.1-1; oem_spec
	Eaton Power Defense molded case circuit breaker accessory terminal cover, Terminal cover, PD3 Global, Power Defense, Power Defense (Eaton web product description)	A	S316 skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Application	main (service entrance)	A	S1, S314, S315 oem_spec
Breaker compatibility	PDF3/PDG3	A	S1 s1 p.25 Table 35; oem_spec
	Circuit breaker frame PD3	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 s1 p.25 Table 35; oem_spec
	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S314, S315 p. 4; oem_spec
Identification features	Eaton web classifies PRLSEBPD2/PRLSEBPD3 as a Power Defense molded case circuit breaker accessory 'terminal cover' (series PD2/PD3 Global) (i.e. the service-entrance barrier is supplied as a PD-frame terminal-cover style accessory)	A	S316 skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 305 mm, height 157 mm, width 109 mm, weight 1814 g (Package/shipping data per Eaton web; NOT verified component dimensions)	A	S316 skuPage.PRLSEBPD3 (General/Product specifications); oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00805	PRLSEBPD4	Eaton lineage	barrier	LISTED IN CURRENT DESI

Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)

OEM part number	PRLSEBPD4	A	S314, S315 DG014001EN p.4 / DG014003EN p.4, Table 22.1-1; oem_spec
Description	Service entrance barrier for PD4 (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Application	main (service entrance)	A	S314, S315 p. 4; oem_spec
Breaker compatibility	Circuit breaker frame PD4	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Status	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S314, S315 p. 4; oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X		
Not yet documented	Dimensions, OEM instruction document, Material		

EDH-EAT-00804	PRLSEBPD5	Eaton lineage	barrier	LISTED IN CURRENT DESI

Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)

OEM part number	PRLSEBPD5	A	S314, S315 DG014001EN p.4 / DG014003EN p.4, Table 22.1-1; oem_spec
Description	Service entrance barrier for PD5 (Table 22.1-1 'Service Entrance Main Breaker Kits')	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Application	main (service entrance)	A	S314, S315 p. 4; oem_spec
Breaker compatibility	Circuit breaker frame PD5	A	S314, S315 p. 4, Table 22.1-1; oem_spec
Status	Listed in current design guides DG014001EN (Nov 2024) and DG014003EN (Mar 2025)	A	S314, S315 p. 4; oem_spec
Cross-links	Families: PRL1X, PRL2X, PRL3X, PRL4X		
Not yet documented	Dimensions, OEM instruction document, Material		

3.23 PRL2A — Pow-R-Line 2a

FAM-EAT-002 · panelboard · aka PRL2a, PRL-2A, Pow-R-Line 2a · markings: Cutler-Hammer, Eaton

480Y/277 Vac lighting panelboard sharing the PRL1a chassis architecture (20 in box, gutter neutral, KB vertical kits, KL lug kits, 1C96638 deadfront). Branch breakers are GHB-family bolt-ons on 1C96609 horizontal connector assemblies. GHB main breaker is horizontally mounted; all other mains vertical. Fully rated 14 kA at 480Y/277, series rated 22-150 kA.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL2X	A	S1 p.2; oem_spec
Era of manufacture	Introduced October 1996	A	S1, S2 p.2 Table 1; oem_spec
Successor	PRL2X	A	S1, S6 oem_spec
Voltage rating	240 Vac or 480Y/277 Vac maximum; 250 Vdc. Not for 480 V delta (use PRL3a); 3-phase 3-wire only when derived from 480Y/277 4-wire service	A	S7 p.22.2-1; oem_spec
Main ampacity	Main lugs 100, 225, 400 A (selection guide shows 600 A MLO/main at 240/480Y; 400 A dc); main breakers 100-600 A (Text on p.22.2-1 says MLO ampere ratings 100, 225 and 400 but 'Main Lugs 100-600 A' in ratings box)	A	S7 p.22.0-5, 22.2-1; oem_spec
Branch breakers accepted	Bolt-on GHB (480Y/277 only), GHQ, HGHB, GHQRSP, GHBGFEP 15-100 A; mains GHB (horizontal), EHD, FDB, FD, HFD, FDC, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LG-family	A	S7 p.22.2-1 Tables 22.2-1, 22.2-2; oem_spec
Box width	20.00 in (508.0 mm)	A	S1 p.2; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Also fits this family (entry printed elsewhere): KB13AFT, KB13AFB, KB13SFT, KB13SFB, KB11AFT, KB11AFB, KB11SFT, KB11SFB, KB23AFT, KB23AFB, KB23SFT, KB23SFB, KB21AFT, KB21AFB, KB21SFT, KB21SFB, KB43AJT, KB43AJB, KB43SJT, KB43SJB, KB41AJT, KB41AJB, KB41SJT, KB41SJB, KB43AKT, KB43AKB, KB43SKT, KB43SKB, KB41AKT, KB41AKB, KB41SKT, KB41SKB, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B03, 4180B61, 4180B05, 4180B04, 4180B08, 1C96619, 1C96620, 4180B52H01, 5155C62H01, 5155C81G01, K80522, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00165	**1C96609**	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	GB, GHB, GHQ, GHBS A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00165	1C96609	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96609	A	S1, S2 s1 p.10 Table 10; oem_spec
Alternate / superseded numbers	1C96609G01..G63 (same G scheme as 1C96608)	A	S1 style_number; p.10; oem_spec
Description	GB/GHB/GHQ/GHBS breaker connector assembly; 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S1, S2 p.10; oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.10; oem_spec
Cross-links	Families: PRL2A, PRL2X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) places table under 'PRL1X, PRL1a horizontally mounted' heading while s2 (2009) titles it 'PRL2a Horizontally Mounted' - confirm PRL2a/2X use.*		

3.24 PRL2X — Pow-R-Line Xpert 2X

FAM-EAT-007 · panelboard · aka PRL2x, Pow-R-Line 2X · markings: Eaton

Pow-R-Line Xpert successor to PRL2a; parts tables shared with PRL1X/PRL1a/PRL2a in RP01400001E.

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac; 125/250 Vdc	A	S6 p.V2-T3-2; oem_spec
Main ampacity	MLO 600 A; main breaker 600 A	A	S6 p.V2-T3-11; oem_spec
Branch breakers accepted	Bolt-on GHB-family 15-100 A; mains PDG2/PDG3/GHB	A	S1, S6 oem_spec
Main handle location	As PRL1X: PD2 main D = 10.06 in (100 A) / 11.06 in (225 A); PD3 400 A D = 20.426 / 23.426 in; PD3 600 A D = 20.488 / 23.488 in (Dimensions are estimates to be verified by installer (per leaflet))	A	S318 pp. 2-6, Figures 1-5; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S314 DG014001EN Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024); S318 IL014069EN Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interio

Also fits this family (entry printed elsewhere): KB13A2T, KB13A2B, KB13S2T, KB13S2B, KB11A2T, KB11A2B, KB11S2T, KB11S2B, KB23A2T, KB23A2B, KB23S2T, KB23S2B, KB21A2T, KB21A2B, KB21S2T, KB21S2B, KB43A34T, KB43A34B, KB43S34T, KB43S34B, KB41A14T, KB41A14B, KB41S14T, KB41S14B, KB63S36T, KB63S36B, KB61S16T, KB61S16B, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96609, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, PRLSEBPD3, PRLSEBPD2, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04, PRLSEBPD5, PRLSEBPD4, PRLSEBBAB

3.25 PRL3 — Westinghouse Pow-R-Line 3 (vintage)

FAM-EAT-012 · panelboard · aka PRL3, PRL3-LX, Pow-R-Line 3 · markings: Westinghouse

Westinghouse distribution panelboard, 20 in box, main-gutter neutral, trims LTT20xxS/F. Eaton notes the PRL3 connector kits also fit Westinghouse panelboards WEB, WCA, WEHB, WFB and HWFB.

Vintage Westinghouse power panelboard with lighting subchassis and vertical-bus branch area, 20 in wide. KPRL3FD/KPRL3ED/KPRL3CA connector kits; the PRL3 kits also fit WEB, WCA, WEHB, WFB and HWFB panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; limited renewal parts	A	S5 oem_spec
	discontinued; replaced by PRL3a	A	S13 p. V12-T4-8; oem_spec
Era of manufacture	Pre-1994 Westinghouse	C	S1, S5 inference
Successor	PRL3a	C	S5 inference
Voltage rating	240/480/600 V class (F-frame kits rated 240/480/600 V; ED kit 240 V max)	A	S5 p.7; oem_spec
Main ampacity	600 A maximum (400 A max bus rating for subchassis)	A	S13 p. V12-T4-16; oem_spec
Branch breakers accepted	EHD/FDB/FD/HFD/FDC twin-mounted (KPRL3FD), ED/EDH/EDC (KPRL3ED), CA/CAH/HCA (KPRL3CA); BAB space on subchassis	A	S5 p.7; oem_spec
	BAB/QBH subchassis, GB/GHB, EHD, FDB, FD, HFD, FDC, ED, CA/CAH/HCA; mains up to JD, KD, LC/LA, LCL, LA-P	A	S13 pp. V12-T4-8, V12-T4-16; oem_spec
Cross fit	PRL3 connector kits fit WEB, WCA, WEHB, WFB, HWFB panelboards	A	S5 p.7 note; oem_spec

Breaker families associated: BAB, CA, CA/CAH/HCA 225 A frame, ED, EHD, FD, GB, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): 5158C05, 5155C81G01, K80522, 8450C62H39, 114C247G01, 3457B16G01, 7494A11G02, 5158C05G02, 5158C05G01, 0080429, 414A380G01, 8712C73H01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00212	**KPRL3CA**	Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit W A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00211	**KPRL3ED**	Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00210	**KPRL3FD**	Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD, FDC)	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers A	Listed in RP01400002E (Feb 2013)

EDH-EAT-00212	KPRL3CA	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)

OEM part number	KPRL3CA	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for CA, CAH, HCA; one 2- or 3-pole breaker	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware, cover and instructions to mount one two- or three-pole CA-frame breaker	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	CA, CAH, HCA	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: CA/CAH/HCA 225 A frame, CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00211	KPRL3ED	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)

OEM part number	KPRL3ED	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for ED, EDH, EDC (240 V max); one 3-pole breaker	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware, cover and instructions to mount one three-pole breaker (single-mount only)	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	ED, EDH, EDC (240 V max)	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00210	KPRL3FD	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD, FDC)

OEM part number	KPRL3FD	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A)	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware and instructions to twin-mount two three-pole breakers; max 150 A per breaker and 200 A per connector (50-150 A)	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A). PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	EHD, FDB, FD, HFD, FDC (240/480/600 V)	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.26 PRL3A — Pow-R-Line 3a

FAM-EAT-003 · panelboard · aka PRL-3A, PRL3a, Pow-R-Line 3a · markings: Cutler-Hammer, Eaton

Power distribution panelboard on a 20 in wide box with the neutral in the main (top/bottom) gutter. Chassis height measured in X units (1X = 1.38 in); deadfront is a rail-and-end-cover frame (6559C59) with individual device covers. Branch devices are horizontally mounted on bus-stab connector kits that ship with their own device deadfront cover. Max 200 A on any one connector.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	B	S1, S8, S9 oem_spec
Era of manufacture	Introduced March 1994	A	S1, S2 p.2 Table 1; oem_spec
Successor	PRL3X	A	S1, S6 oem_spec
Voltage rating	240, 480 or 600 Vac maximum; 250 Vdc	A	S7 p.22.0-5; 22.3-1; oem_spec
Main ampacity	Main lugs 100, 250, 400, 600, 800 A; main breakers 100-600 A	A	S7 p.22.3-1; oem_spec
Branch breakers accepted	Branch 15-225 A bolt-on: BAB/QBHW family and GHB family (on KPRL3ABA/KPRL3AGB 6-24 circuit kits), EHD/FDB/FD/HFD/FDC twin-mounted to 150 A (KPRL3AFD*), FD/HFD/FDC/ED/EDH/EDC single-mounted 175-225 A (KPRL3AED*), CA/CAH/HCA; vertical mains/sub-feeds J, K, L, FB-P, LA-P, FCL, LCL, PT363/PT364 bolt switches	A	S1, S7 s1 pp.22-29; s7 p.22.3-2; oem_spec
X unit	1X = 1.38 in (35.1 mm); 1X blank cover fills 1 3/8 in, 13 in wide	A	S4 p.7 Table 12; oem_spec
Identification features	Neutral located in main gutter (end), not side gutter (Figure 1)	A	S1 p.2 Figure 1; oem_spec

Breaker families associated: CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), GHB family (480Y/277 bolt-on), QUICKLAG bolt-on (BAB/QBHW family), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, TRI-PAC integrally fused (FB-P, LA-P, NB-P)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S4 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S8 Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019; S9 Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B0

Also fits this family (entry printed elsewhere): PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 5158C05, 2C11296, 5155C62H01, 5155C81G01, K80522, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02, 1256C42G02, 1256C42G01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00184	**KPRL3ABA06**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00185	**KPRL3ABA06-1**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00186	**KPRL3ABA12**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00187	**KPRL3ABA12-1**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00188	**KPRL3ABA18**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00189	**KPRL3ABA18-1**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00190	**KPRL3ABA24**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00191	**KPRL3ABA24-1**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00209	**KPRL3AED2**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame device **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00208	**KPRL3AED3**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A ma **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00207	**KPRL3AFD1**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices abo **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00206	**KPRL3AFD2**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices abo **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00205	**KPRL3AFD3**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00192	**KPRL3AGB06**	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00193	**KPRL3AGB06-1**	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00194	**KPRL3AGB12**	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00195	**KPRL3AGB12-1**	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00196	**KPRL3AGB18**	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00197	**KPRL3AGB18-1**	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00198	**KPRL3AGB24**	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00199	**KPRL3AGB24-1**	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00201	**KPRL3X22**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00203	**KPRL3X22T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be s **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00200	**KPRL3X23**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00202	**KPRL3X23T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00168	**KPRL3XBA06**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00169	**KPRL3XBA06-1**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00170	**KPRL3XBA12**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00171	**KPRL3XBA12-1**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00172	**KPRL3XBA18**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00173	**KPRL3XBA18-1**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00174	**KPRL3XBA24**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00175	**KPRL3XBA24-1**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00176	**KPRL3XGB06**	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00177	**KPRL3XGB06-1**	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00178	**KPRL3XGB12**	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00179	**KPRL3XGB12-1**	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00180	**KPRL3XGB18**	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00181	**KPRL3XGB18-1**	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00182	**KPRL3XGB24**	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00183	**KPRL3XGB24-1**	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00184	KPRL3ABA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA06	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887257	**A**	S316 alias; skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, prl3a horizontally mounted connector kit assembly, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	**A**	S316 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Installation location	Mounting: Twin	**A**	S316 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	**A**	S316 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	**A**	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	**A**	S316 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	**A**	S316 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	**A**	S316 skuPage.KPRL3ABA06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00185	KPRL3ABA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA06-1	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887271	**A**	S316 alias; skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec

Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton PRL3 PBconnector kit, phase connectors, dead-front cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3ABA06-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 8.25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00186 **KPRL3ABA12** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA12	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887295	A	S316 alias; skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton PRL3 connector kit, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec

	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3ABA12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8.25 in, height 3 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00187	KPRL3ABA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA12-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887301	A	S316 alias; skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, PB connector kit, phase connectors, dead-front cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec

	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3ABA12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 5.5 in, height 3 in, width 8.25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00188 **KPRL3ABA18** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA18	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887318	A	S316 alias; skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton PRL3 panelboard connector kit, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3ABA18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 11 in, height 3 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00189	KPRL3ABA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA18-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887332	A	S316 alias; skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, hardware and instructions, phase connectors, deadfront cover (Eaton web product description)	A	S316 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3ABA18-1 (General/Product specifications); oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00190	KPRL3ABA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA24	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887349	A	S316 alias; skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, hardware and instructions, panelboard connector kit, phase connectors, deadfront cover (Eaton web product description)	A	S316 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec

Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3ABA24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 13.75 in, height 3 in, width 8.25 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00191	KPRL3ABA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA24-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00209	KPRL3AED2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED2	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00208	KPRL3AED3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED3	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Alternate / superseded numbers	UPC 786689040796	A	S316 alias; skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max; phases A/B/C	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	Eaton, connector kit, available from regional satellite plants (Eaton web product description)	A	S316 skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
	Eaton catalog note 'DATE DELETED: 01271997' (i.e. deleted 1997-01-27); SKU still shown as available from regional satellite plants	A	S316, S317 skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3AED3 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 25.5 in, height 3.3 in, width 9.6 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00207	KPRL3AFD1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD1	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00206	KPRL3AFD2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD2	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Alternate / superseded numbers	UPC 782114887363	A	S316 alias; skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max; phases A/C	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	Eaton, panelboard connector kit, phase connectors, hardware and instructions, deadfront cover, prl3 conn kit (Eaton web product description)	A	S316 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Poles	Single-phase, three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	same as above
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3AFD2 (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 2.25 in, height 1.75 in, width 2.6 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00205	KPRL3AFD3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD3	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Alternate / superseded numbers	UPC 782114887370	A	S316 alias; skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	Eaton panelboard connector kit, deadfront cover, phase connectors, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
	EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Poles	Single-phase, three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	same as above
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3AFD3 (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00192	KPRL3AGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB06	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887387	A	S316 alias; skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, deadfront cover, panelboard connector kit, phase connectors, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec

Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3AGB06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 3.4 in, height 3.5 in, width 8.25 in, weight 2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00193	KPRL3AGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB06-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00194	KPRL3AGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB12	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887400	A	S316 alias; skuPage.KPRL3AGB12 (General/Product specifications); oem_spec

Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit deadfront cover, hardware and instructions, phase connectors (Eaton web product description)	A	S316 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3AGB12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 6.2 in, height 3.5 in, width 8.25 in, weight 2.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00195 **KPRL3AGB12-1** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB12-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887417	A	S316 alias; skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, phase connectors, deadfront cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec

	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3AGB12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 8 in, height 4.5 in, width 6 in, weight 3.8 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00196 **KPRL3AGB18** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB18	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887424	A	S316 alias; skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, phase connectors, panelboard connector kit, deadfront cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec

	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3AGB18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 10.3 in, height 3.5 in, width 8.25 in, weight 3 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00197 **KPRL3AGB18-1** Cutler-Hammer branch-connector-kit **LISTED AS STOCK RENEWA**

PRL3a horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB18-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887431	A	S316 alias; skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, phase connectors, deadfront cover (Eaton web product description)	A	S316 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Installation location	Mounting: Twin	A	S316 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Poles	Single-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	A	S316 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL3AGB18-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 10.3 in, height 3.5 in, width 8.25 in, weight 3.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00198	KPRL3AGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB24	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	UPC 782114887448	**A**	S316 alias; skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	Eaton, panelboard connector kit, phase connectors, hardware and instructions (Eaton web product description)	**A**	S316 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Installation location	Mounting: Twin	**A**	S316 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
	GB, GHB, GHBS breakers (Eaton web 'Used with' attribute)	**A**	S316 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	**A**	same as above
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
	140A max (Eaton web states '140A max'; RP01400001E kit label text in catalogue says 100 A max per device - conflict to resolve)	**A**	S316 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	**A**	S316 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL Listed UL 67	**A**	S316 skuPage.KPRL3AGB24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 13 in, height 3.5 in, width 8.25 in, weight 2.5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00199	KPRL3AGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB24-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) Table 30 prints 'KPRL3XGB24-1' in the PRL3a row - treated as typo; s2/s4 give KPRL3AGB24-1.*		

EDH-EAT-00201	KPRL3X22	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)

OEM part number	KPRL3X22	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242664	A	S316 alias; skuPage.KPRL3X22 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole, single mount 175-225 A; phases A/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, mounting brackets, copper connectors (Eaton web product description)	A	S316 skuPage.KPRL3X22 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL3X22 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3X22 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00203	KPRL3X22T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)

OEM part number	KPRL3X22T	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242671	A	S316 alias; skuPage.KPRL3X22T (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole twin mount, 150 A max; phases A/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, mounting brackets, covers, hardware and instructions, copper connectors, (Eaton web product description)	A	S316 skuPage.KPRL3X22T (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL3X22T (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3X22T (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00200	KPRL3X23	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)

OEM part number	KPRL3X23	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242640	A	S316 alias; skuPage.KPRL3X23 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole, single mount 175-225 A (1) 225 A max; phases A/B/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, copper connectors, covers, hardware and instructions, mounting brackets (Eaton web product description)	A	S316 skuPage.KPRL3X23 (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL3X23 (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3X23 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 4.6 in, width 14.3 in, weight 2.55 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00202	KPRL3X23T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)

OEM part number	KPRL3X23T	A	S1 s1 p.23 Table 31; oem_spec
Alternate / superseded numbers	UPC 786689242657	A	S316 alias; skuPage.KPRL3X23T (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	S1 s1 p.23 Table 31; oem_spec
	Eaton, panelboard connector kit, copper connectors, covers, mounting brackets, hardware and instructions, prl3x conn kit twn mt 150a 3p 3ph pd2 bk (Eaton web product description)	A	S316 skuPage.KPRL3X23T (General/Product specifications); oem_spec
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL3X23T (General/Product specifications); oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.23; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL3X23T (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 6.4 in, height 2.2 in, width 9.4 in, weight 2.2 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00168	KPRL3XBA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA06	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346935	**A**	S316 alias; skuPage.KPRL3XBA06 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 6 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA06 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00169	KPRL3XBA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA06-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346959	**A**	S316 alias; skuPage.KPRL3XBA06-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 6 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA06-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA06-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00170	KPRL3XBA12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA12	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346942	**A**	S316 alias; skuPage.KPRL3XBA12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 12 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA12 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00171	KPRL3XBA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA12-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346966	**A**	S316 alias; skuPage.KPRL3XBA12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 12 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA12-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00172	KPRL3XBA18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA18	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346973	**A**	S316 alias; skuPage.KPRL3XBA18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 18 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA18 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00173	KPRL3XBA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA18-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346980	**A**	S316 alias; skuPage.KPRL3XBA18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 18 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA18-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA18-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00174	KPRL3XBA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA24	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689346997	**A**	S316 alias; skuPage.KPRL3XBA24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 24 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA24 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00175	KPRL3XBA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA24-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347031	**A**	S316 alias; skuPage.KPRL3XBA24-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT BAB 24 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XBA24-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XBA24-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00176	KPRL3XGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB06	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347048	**A**	S316 alias; skuPage.KPRL3XGB06 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	PRL3X CONN KIT GHB 6 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB06 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB06 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00177	KPRL3XGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB06-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347000	**A**	S316 alias; skuPage.KPRL3XGB06-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 6 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB06-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB06-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00178	KPRL3XGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB12	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347017	**A**	S316 alias; skuPage.KPRL3XGB12 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 12 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB12 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB12 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00179	KPRL3XGB12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB12-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347024	**A**	S316 alias; skuPage.KPRL3XGB12-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 12 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB12-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB12-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00180	KPRL3XGB18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB18	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347062	**A**	S316 alias; skuPage.KPRL3XGB18 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 18 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB18 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB18 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00181	KPRL3XGB18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB18-1	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347079	**A**	S316 alias; skuPage.KPRL3XGB18-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 18 CKT 1 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB18-1 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB18-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00182	KPRL3XGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB24	**A**	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347086	**A**	S316 alias; skuPage.KPRL3XGB24 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	**A**	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 24 CKT 3 PH (Eaton web product description)	**A**	S316 skuPage.KPRL3XGB24 (General/Product specifications); oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Listing / approvals	UL 67	**A**	S316 skuPage.KPRL3XGB24 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00183	KPRL3XGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB24-1	A	S1 s1 p.22 Table 29; oem_spec
Alternate / superseded numbers	UPC 786689347093	A	S316 alias; skuPage.KPRL3XGB24-1 (General/Product specifications); oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	S1 s1 p.22 Table 29; oem_spec
	Eaton PRL3X CONN KIT GHB 24 CKT 1 PH (Eaton web product description)	A	S316 skuPage.KPRL3XGB24-1 (General/Product specifications); oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Listing / approvals	UL 67	A	S316 skuPage.KPRL3XGB24-1 (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 28.25 in, height 6.6 in, width 12.375 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00261	**4176B51**	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00264	**4176B56**	PRL3a/3X deadfront device cover: LCL vertical cover 21X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00263	**4176B57**	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00259	**4176B60**	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00260	**4176B61**	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00275	**4176B66**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00277	**4176B67**	PRL3a/3X horizontal deadfront cover: BA/BAB/BABR P/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00267	**4176B68**	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00278	**4176B69**	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00262	**4176B70**	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00265	**4176B79**	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00276	**4176B80**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00280	**4178B08**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00281	**4179B39**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00282	**4179B40**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00283	**4179B41**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00284	**4179B42**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00266	**4180B79**	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00279	**4180B91**	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00268	**4180B93**	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00255	**42C8076**	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00256	**42C8077**	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00270	**42C8078**	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00271	**42C8079**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00272	**42C8080**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00273	**42C8081**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00274	**42C8082**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00254	**6559C59**	PRL3a/3X deadfront assembly frame (rails and end covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00261	4176B51	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)

OEM part number	4176B51	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: L-Frame vertical cover 17X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00264	4176B56	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LCL vertical cover 21X

OEM part number	4176B56	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01/H02 top; H03/H04 bottom (without/with lock-offs)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LCL vertical cover 21X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00263	4176B57	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only

OEM part number	4176B57	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LA-P vertical cover 21X, top only	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00259	4176B60	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)

OEM part number	4176B60	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame vertical cover 14X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00260	4176B61	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)

OEM part number	4176B61	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: K-Frame vertical cover 15X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00275	4176B66	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)

OEM part number	4176B66	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00277	4176B67	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover

OEM part number	4176B67	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00267	4176B68	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)

OEM part number	4176B68	A	S2, S3 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S2 style_number; p.24; oem_spec
	42C8076	C	S1, S2 superseded_by; inference
Description	EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00278	4176B69	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover

OEM part number	4176B69	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00262	4176B70	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X

OEM part number	4176B70	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 FCL; H02 FB-P	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB), TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00265	4176B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X

OEM part number	4176B79	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame sub-feed twin cover 20X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00276	4176B80	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)

OEM part number	4176B80	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00280	4178B08	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)

OEM part number	4178B08	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8078	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00281	4179B39	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)

OEM part number	4179B39	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8079	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00282	4179B40	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	4179B40	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8080	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00283	4179B41	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X

OEM part number	4179B41	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8082	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00284	4179B42	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X

OEM part number	4179B42	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8081	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00266	4180B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover

OEM part number	4180B79	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00279	4180B91	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover

OEM part number	4180B91	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	Controller 5X H01; Expansion 7X H02, 16X H03	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: Pow-R-Command controller / expansion cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00268	4180B93	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)

OEM part number	4180B93	A	S2, S3 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S2 style_number; p.24; oem_spec
	42C8077	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00255	42C8076	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal

OEM part number	42C8076	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom (same with/without lock-offs)	A	S1 style_number; pp.26-27; oem_spec
	4176B68 (4176B68 (H01 top/H03 top w lock-off; H04 bottom/H05 bottom w lock-off) in same PRL3a table row in 2009/2017 editions)	C	S1, S2, S3 supersedes; inference
Description	Vertical device deadfront cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	A	S1 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00256	42C8077	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal

OEM part number	42C8077	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; pp.26-27; oem_spec
	4180B93 (4180B93 (H01/H03 top; H04/H05 bottom) in same PRL3a table row in 2009/2017 editions)	C	S1, S2, S3 supersedes; inference
Description	Vertical device deadfront cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	A	S1 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00270	42C8078	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover

OEM part number	42C8078	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	A	S1 style_number; pp.28-29; oem_spec
	4178B08 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00271	42C8079	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover

OEM part number	42C8079	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	4 ckt 2X H01; 8/4X H02; ... 32/16X H08	A	S1 style_number; pp.28-29; oem_spec
	4179B39 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00272	42C8080	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	42C8080	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B40 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00273	42C8081	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X

OEM part number	42C8081	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B42 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00274	42C8082	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X

OEM part number	42C8082	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B41 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00254	6559C59	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront assembly frame (rails and end covers)

OEM part number	6559C59	A	S1, S2 s1 p.25 Table 37; oem_spec
Alternate / superseded numbers	Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	A	S1 style_number; p.25; oem_spec
Description	Assembly includes frame only (two rails and two end covers); device covers ordered separately; all connector kits ship with a deadfront cover for that device	A	S1 p.25 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.25; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00269	**4176B72**	PRL3a/3X neutral / blank cover 1X-12X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00286	**4178B06H01**	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	—	Listed through Oct 2017 edition; replaced by 42C8083H01 in A
EDH-EAT-00285	**42C8083H01**	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00287	**6555C40H01**	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00288	**6555C41H01**	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00269	4176B72	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/3X neutral / blank cover 1X-12X

OEM part number	4176B72	A	S1, S2, S4 s1 pp.26-27; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	H01 = 1X ... H12 = 12X	A	S1, S4 style_number; oem_spec
Description	Neutral/blank deadfront cover in X increments	A	S1 oem_spec
Dimensions	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes)	A	S4 p.7 Table 12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00286	4178B06H01	Cutler-Hammer	filler-plate	LISTED THROUGH OCT 201

PRL3a F-frame 1-pole provision filler (panels built before April 2019)

OEM part number	4178B06H01	A	S2, S3, S4, S9 s2 p.25 Table 29; s4 p.12; oem_spec
Alternate / superseded numbers	42C8083H01	B	S1, S8, S9 superseded_by; oem_spec
Description	PRL3a deadfront cover blank filler, F-Frame, 1, 2 or 3 poles (Pow-R-Kit: 'PRL 3a F-Frame 1-Pole Provision Fillers')	A	S2, S4 oem_spec
Application	Panels built prior to April 2019	C	S9 distributor
Finish / plating	Black	C	same as above
Status	Listed through Oct 2017 edition; replaced by 42C8083H01 in April 2021 edition; still listed by Rexel (UPC 786685467672)	B	S1, S3, S9 oem_spec
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00285	42C8083H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)

OEM part number	42C8083H01	A	S1, S8 s1 p.30 Tables 42-43; oem_spec
Alternate / superseded numbers	4178B06H01 (Same table row (F-Frame blank filler) in 2017 edition; distributors describe 4178B06H01 as for panels built prior to April 2019 and 42C8083H01 as after April 2019 - not interchangeable across build dates)	B	S1, S3, S8, S9 supersedes; oem_spec
Description	Deadfront cover blank filler, F-Frame (PRL3a) / PDG2 (PRL3X), 1, 2 or 3 poles	A	S1 p.30; oem_spec
Application	Panels built after April 2019	C	S8 distributor
Dimensions	Length 4.220 in	C	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00287	6555C40H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler

OEM part number	6555C40H01	A	S1, S2 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 2-pole	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00288	6555C41H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler

OEM part number	6555C41H01	A	S1, S2 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 3-pole	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00220	**5078A98**	PRL3a/PRL3X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00220	5078A98	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL3a/PRL3X service entrance bonding jumper kit

OEM part number	5078A98	A	S1, S2, S4 s1 p.24 Table 34; oem_spec
Alternate / superseded numbers	Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	A	S1 style_number; p.24; oem_spec
Description	Service entrance bonding jumper kit; example 100 A tin-plated aluminum = 5078A98G01	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.27 PRL3E — Pow-R-Line 3E

FAM-EAT-004 · panelboard · aka PRL3e, Pow-R-Line 3E · markings: Cutler-Hammer, Eaton

Compact distribution panelboard variant built around Eaton EG-frame (Series G E-frame) bolt-on branch breakers up to 125 A. Not covered by the renewal-parts guides found; no PRL3E connector kits identified.

Attribute	Value	Cl.	Sources
Status	Current in June 2020 catalog	A	S6 p.V2-T3-2; oem_spec
Era of manufacture	Shown in January 2018 and June 2020 catalogs	A	S6, S7 oem_spec
Voltage rating	240, 480Y/277 or 480 Vac; 250 Vdc	A	S6, S7 s6 p.V2-T3-11; oem_spec
Main ampacity	MLO 100, 250, 400, 600 A; main breakers 100-600 A	A	S7 p.22.3-5; oem_spec
Branch breakers accepted	EGB/EGS/EGH (E-frame) 15-125 A, 1-3 pole; mains EG (horizontal), EDB/EDS/ED/EDH/EDC, FD/HFD/FDC, DK/KD/HKD/KDC, LHH, LGE/LGH	A	S7 p.22.3-5 Tables 22.3-8, 22.3-9; oem_spec

Breaker families associated: Series G E-frame (EGB/EGS/EGH)

Key documents: S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

3.28 PRL3FQS — Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)

FAM-EAT-041 · panelboard · aka 3FQS, Pow-R-Line 3FQS, Quik-Spec Coordination Panelboard, QSCP

Fusible branch panelboard using Bussmann CCPB (Compact Circuit Protector Base) ampacity-rejecting branch disconnects with CUBEFuse (TCF) fuses, 30-400 A mains (lugs, non-fused or Class J fused main disconnect). Bussmann-heritage product sold under the Eaton Pow-R-Line name.

Attribute	Value	Cl.	Sources
Torque label	Agency label 3A1064 (E3A1064) on panelboard carries wire sizes and fastener torque values; chassis to enclosure four 1/4-20 hex flange nuts 35 lb-in (2.8 N-m); CCPB bus tab #10-32 x 1/4 in screw 25 lb-in (2.82 N-m)	A	S313 pp. 5-7, 10; oem_spec

Key documents: S313 E3A1071 RevG Pow-R-Line 3FQS Fusible Panelboard Instruction Leaflet E3A1071 RevG (December 2010)

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00825	**2A1909-19**	3FQS kit, main disconnect 30-60A 1-phase, 2 wire	—	unknown
EDH-EAT-00835	**2A1909-29**	3FQS kit, main disconnect 225-400A	—	unknown
EDH-EAT-00810	**2A1909-4**	3FQS kit, main disconnect 70-200A	—	unknown
EDH-EAT-00814	**2A1909-8**	3FQS kit, main disconnect 30-60A 1-phase, 3 wire	—	unknown
EDH-EAT-00815	**2A1909-9**	3FQS kit, main disconnect 30-60A 3-phase	—	unknown

EDH-EAT-00825 **2A1909-19** Eaton lineage main-breaker-kit **STATUS UNKNOWN**

3FQS kit, main disconnect 30-60A 1-phase, 2 wire

OEM part number	2A1909-19	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 30-60A 1-phase, 2 wire	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	30-60A	A	same as above
Wire range	18-10 AWG single/dual, 8-6 AWG single/dual, 4 AWG single; use only 75 C conductors	A	S313 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00835 **2A1909-29** Eaton lineage main-breaker-kit **STATUS UNKNOWN**

3FQS kit, main disconnect 225-400A

OEM part number	2A1909-29	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 225-400A	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG; use only 75 C conductors	A	S313 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00810	2A1909-4	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 70-200A

OEM part number	2A1909-4	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 70-200A	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG; use only 75 C conductors	A	S313 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00814	2A1909-8	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 30-60A 1-phase, 3 wire

OEM part number	2A1909-8	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 30-60A 1-phase, 3 wire	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	30-60A	A	same as above
Wire range	18-10 AWG single/dual, 8-6 AWG single/dual, 4 AWG single; use only 75 C conductors	A	S313 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00815	2A1909-9	Eaton lineage	main-breaker-kit	STATUS UNKNOWN

3FQS kit, main disconnect 30-60A 3-phase

OEM part number	2A1909-9	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, main disconnect 30-60A 3-phase	A	same as above
Application	main disconnect	A	same as above
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	same as above
Current rating	30-60A	A	same as above
Wire range	18-10 AWG single/dual, 8-6 AWG single/dual, 4 AWG single; use only 75 C conductors	A	S313 p. 10, Main Disconnects; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00807	**2A1909-1**	3FQS kit, compression lug 3-phase, 70-200A	—	unknown
EDH-EAT-00816	**2A1909-10**	3FQS kit, compression lug 3-phase, 30-60A	—	unknown
EDH-EAT-00817	**2A1909-11**	3FQS kit, mechanical lug 3-phase, 30-60A	—	unknown
EDH-EAT-00818	**2A1909-12**	3FQS kit, compression lug 1-phase, 3 wire, 30-60A	—	unknown
EDH-EAT-00819	**2A1909-13**	3FQS kit, mechanical lug 1-phase, 3 wire, 30-60A	—	unknown
EDH-EAT-00820	**2A1909-14**	3FQS kit, compression lug 1-phase, 2 wire, 70-200A	—	unknown
EDH-EAT-00821	**2A1909-15**	3FQS kit, mechanical lug 1-phase, 2 wire, 70-200A	—	unknown
EDH-EAT-00823	**2A1909-17**	3FQS kit, compression lug 1-phase, 2 wire, 30-60A	—	unknown
EDH-EAT-00824	**2A1909-18**	3FQS kit, mechanical lug 1-phase, 2 wire, 30-60A	—	unknown
EDH-EAT-00808	**2A1909-2**	3FQS kit, mechanical lug 3-phase, 70-200A	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00826	**2A1909-20**	3FQS kit, compression lug 3-phase, 225-400A	—	unknown
EDH-EAT-00827	**2A1909-21**	3FQS kit, mechanical lug 3-phase, 225-400A	—	unknown
EDH-EAT-00829	**2A1909-23**	3FQS kit, compression lug 1-phase, 3 wire, 225-400A	—	unknown
EDH-EAT-00830	**2A1909-24**	3FQS kit, mechanical lug 1-phase, 3 wire, 225-400A	—	unknown
EDH-EAT-00832	**2A1909-26**	3FQS kit, compression lug 1-phase, 2 wire, 225-400A	—	unknown
EDH-EAT-00833	**2A1909-27**	3FQS kit, mechanical lug 1-phase, 2 wire, 225-400A	—	unknown
EDH-EAT-00811	**2A1909-5**	3FQS kit, compression lug 1-phase, 3 wire, 70-200A	—	unknown
EDH-EAT-00812	**2A1909-6**	3FQS kit, mechanical lug 1-phase, 3 wire, 70-200A	—	unknown

EDH-EAT-00807 — 2A1909-1

Eaton lineage | main-lug-kit | **STATUS UNKNOWN**

3FQS kit, compression lug 3-phase, 70-200A

OEM part number	2A1909-1	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 3-phase, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00816 — 2A1909-10

Eaton lineage | main-lug-kit | **STATUS UNKNOWN**

3FQS kit, compression lug 3-phase, 30-60A

OEM part number	2A1909-10	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 3-phase, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	8 AWG-1/0, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00817	2A1909-11	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 3-phase, 30-60A

OEM part number	2A1909-11	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 3-phase, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	2-14 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00818	2A1909-12	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 3 wire, 30-60A

OEM part number	2A1909-12	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 3 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	8 AWG-1/0, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00819	2A1909-13	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 3 wire, 30-60A

OEM part number	2A1909-13	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 3 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	2-14 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00820	2A1909-14	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 2 wire, 70-200A

OEM part number	2A1909-14	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 2 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00821	2A1909-15	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 2 wire, 70-200A

OEM part number	2A1909-15	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 2 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00823	2A1909-17	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 2 wire, 30-60A

OEM part number	2A1909-17	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 2 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	8 AWG-1/0, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00824	2A1909-18	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 2 wire, 30-60A

OEM part number	2A1909-18	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 2 wire, 30-60A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-60A	A	same as above
Wire range	2-14 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00808	2A1909-2	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 3-phase, 70-200A

OEM part number	2A1909-2	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 3-phase, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00826	2A1909-20	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 3-phase, 225-400A

OEM part number	2A1909-20	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 3-phase, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-250 kcmil, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00827	2A1909-21	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 3-phase, 225-400A

OEM part number	2A1909-21	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 3-phase, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00829	2A1909-23	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 3 wire, 225-400A

OEM part number	2A1909-23	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 3 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-250 kcmil, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00830	2A1909-24	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 3 wire, 225-400A

OEM part number	2A1909-24	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 3 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00832	2A1909-26	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 2 wire, 225-400A

OEM part number	2A1909-26	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 2 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-250 kcmil, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00833	2A1909-27	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 2 wire, 225-400A

OEM part number	2A1909-27	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 2 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00811	2A1909-5	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, compression lug 1-phase, 3 wire, 70-200A

OEM part number	2A1909-5	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, compression lug 1-phase, 3 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-4 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00812	2A1909-6	Eaton lineage	main-lug-kit	STATUS UNKNOWN

3FQS kit, mechanical lug 1-phase, 3 wire, 70-200A

OEM part number	2A1909-6	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, mechanical lug 1-phase, 3 wire, 70-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	70-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00822	**2A1909-16**	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 30-200A	—	unknown
EDH-EAT-00828	**2A1909-22**	3FQS kit, double/sub-feed lug 3-phase, 225-400A	—	unknown
EDH-EAT-00831	**2A1909-25**	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 225-400A	—	unknown
EDH-EAT-00834	**2A1909-28**	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 225-400A	—	unknown
EDH-EAT-00809	**2A1909-3**	3FQS kit, double/sub-feed lug 3-phase, 30-200A	—	unknown
EDH-EAT-00813	**2A1909-7**	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 30-200A	—	unknown

EDH-EAT-00822	2A1909-16	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 2 wire, 30-200A

OEM part number	2A1909-16	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 2 wire, 30-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00828	2A1909-22	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 3-phase, 225-400A

OEM part number	2A1909-22	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 3-phase, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00831	2A1909-25	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 3 wire, 225-400A

OEM part number	2A1909-25	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 3 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00834	2A1909-28	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 2 wire, 225-400A

OEM part number	2A1909-28	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 2 wire, 225-400A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	225-400A	A	same as above
Wire range	600 kcmil-2 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00809	2A1909-3	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 3-phase, 30-200A

OEM part number	2A1909-3	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 3-phase, 30-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00813	2A1909-7	Eaton lineage	sub-feed-lug-kit	STATUS UNKNOWN

3FQS kit, double/sub-feed lug 1-phase, 3 wire, 30-200A

OEM part number	2A1909-7	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Description	Kit, double/sub-feed lug 1-phase, 3 wire, 30-200A	A	same as above
Application	main lug; also for use as feed-through lugs based upon panelboard ampacity rating	A	S313 pp. 12-13, Coordination panelboard replacement parts (asterisked items); oem_spec
Installation location	A & B - Main devices and lugs position, Pow-R-Line 3FQS coordination panelboard	A	S313 pp. 12-13, Coordination panelboard replacement parts; oem_spec
Current rating	30-200A	A	same as above
Wire range	300 kcmil-6 AWG, 60/75 C Cu-Al conductors	A	S313 p. 10, Main & Feed-Through Lugs; oem_spec
Cross-links	Families: PRL3FQS		
Not yet documented	Dimensions, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00838	**2A1908-1**	3FQS Neutral bar kit, 200A unbonded	—	unknown
EDH-EAT-00839	**2A1908-2**	3FQS Neutral bar kit, 400A unbonded	—	unknown
EDH-EAT-00840	**2A1908-3**	3FQS Neutral bar kit, 200A bonded	—	unknown
EDH-EAT-00841	**2A1908-4**	3FQS Neutral bar kit, 400A bonded	—	unknown
EDH-EAT-00842	**2A1908-5**	3FQS Neutral bar kit, 800A unbonded	—	unknown
EDH-EAT-00843	**2A1908-6**	3FQS Neutral bar kit, 800A bonded	—	unknown

EDH-EAT-00838	2A1908-1	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 200A unbonded

OEM part number	2A1908-1	A	S313 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 200A unbonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S313 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00839	2A1908-2	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 400A unbonded

OEM part number	2A1908-2	A	S313 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 400A unbonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S313 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00840	2A1908-3	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 200A bonded

OEM part number	2A1908-3	A	S313 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 200A bonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S313 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00841	2A1908-4	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 400A bonded

OEM part number	2A1908-4	A	S313 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 400A bonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S313 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00842	2A1908-5	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 800A unbonded

OEM part number	2A1908-5	A	S313 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 800A unbonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S313 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00843	2A1908-6	Eaton lineage	neutral-assembly	STATUS UNKNOWN

3FQS Neutral bar kit, 800A bonded

OEM part number	2A1908-6	A	S313 pp. 12-13, Coordination panelboard replacement parts, D - Neutral Bars; oem_spec
Description	Neutral bar kit, 800A bonded	A	same as above
OEM instruction document	Install Neutral Bar with supplied #10-32 x 1/2 in long screws (NEMA 1: either side; NEMA 3R: left side). Service entrance: bonding wire between neutral bar stud (1/4-20 hex flange nut) and enclosure (#10-32 x 1/4 in screw). Drawings show 200A, 400A and 800A neutral bar styles.	A	S313 pp. 5-6; oem_spec
Cross-links	Families: PRL3FQS		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00836	**2A1907-1**	3FQS Ground bar kit, non-isolated	—	unknown
EDH-EAT-00837	**2A1907-2**	3FQS Ground bar kit, isolated	—	unknown

EDH-EAT-00836	2A1907-1	Eaton lineage	ground-bar	STATUS UNKNOWN

3FQS Ground bar kit, non-isolated

OEM part number	2A1907-1	A	S313 pp. 12-13, Coordination panelboard replacement parts, C - Ground Bars; oem_spec
Description	Ground bar kit, non-isolated	A	same as above
OEM instruction document	Install Grounding Bar with supplied #10-32 x 1/2 in long screws (NEMA 3R: right side)	A	S313 p. 5; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00837	2A1907-2	Eaton lineage	ground-bar	STATUS UNKNOWN

3FQS Ground bar kit, isolated

OEM part number	2A1907-2	A	S313 pp. 12-13, Coordination panelboard replacement parts, C - Ground Bars; oem_spec
Description	Ground bar kit, isolated	A	same as above
OEM instruction document	Install Grounding Bar with supplied #10-32 x 1/2 in long screws (NEMA 3R: right side)	A	S313 p. 5; oem_spec
Cross-links	Families: PRL3FQS		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00854	**2A1906-1**	3FQS Branch deadfront kit, single KO, 18 positions	—	unknown
EDH-EAT-00855	**2A1906-2**	3FQS Branch deadfront kit, single KO, 30 positions	—	unknown
EDH-EAT-00856	**2A1906-3**	3FQS Branch deadfront kit, single KO, 42 positions	—	unknown
EDH-EAT-00857	**2A1960-1**	3FQS Branch deadfront kit, double KO, 18 positions	—	unknown
EDH-EAT-00858	**2A1960-2**	3FQS Branch deadfront kit, double KO, 30 positions	—	unknown
EDH-EAT-00859	**2A1960-3**	3FQS Branch deadfront kit, double KO, 42 positions	—	unknown

EDH-EAT-00854	2A1906-1	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, single KO, 18 positions

OEM part number	2A1906-1	A	S313 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, single KO, 18 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00855	2A1906-2	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, single KO, 30 positions

OEM part number	2A1906-2	A	S313 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, single KO, 30 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00856	2A1906-3	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, single KO, 42 positions

OEM part number	2A1906-3	A	S313 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, single KO, 42 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00857	2A1960-1	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, double KO, 18 positions

OEM part number	2A1960-1	A	S313 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, double KO, 18 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00858	2A1960-2	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, double KO, 30 positions

OEM part number	2A1960-2	A	S313 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, double KO, 30 positions	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00859	2A1960-3	Eaton lineage	deadfront	STATUS UNKNOWN

3FQS Branch deadfront kit, double KO, 42 positions

OEM part number	2A1960-3	A	S313 pp. 12-13, Coordination panelboard replacement parts, G - Dead Fronts; oem_spec
Description	Branch deadfront kit, double KO, 42 positions	A	same as above
Cross-links	Families: PRL3FQS		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00873	**2A1918-1**	3FQS Kit, branch knockout covers, <=60A	—	unknown
EDH-EAT-00874	**2A1918-2**	3FQS Kit, branch knockout covers, 70A-100A	—	unknown

EDH-EAT-00873	2A1918-1	Eaton lineage	filler-plate	STATUS UNKNOWN

3FQS Kit, branch knockout covers, <=60A

OEM part number	2A1918-1	A	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, branch knockout covers, <=60A	A	same as above
Application	Covers unused/open branch circuit positions in branch deadfront	A	S313 p. 8; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00874	2A1918-2	Eaton lineage	filler-plate	STATUS UNKNOWN

3FQS Kit, branch knockout covers, 70A-100A

OEM part number	2A1918-2	A	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, branch knockout covers, 70A-100A	A	same as above
Application	Covers unused/open branch circuit positions in branch deadfront	A	S313 p. 8; oem_spec
Cross-links	Families: PRL3FQS		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00877	**E2A1667-1**	3FQS enclosure Door, surface for 50 in box (200 A)	—	unknown
EDH-EAT-00886	**E2A1667-10**	3FQS enclosure Door, flush for 69 in box (400 A)	—	unknown
EDH-EAT-00887	**E2A1667-11**	3FQS enclosure Door-in-door, surface for 69 in box (400 A)	—	unknown
EDH-EAT-00888	**E2A1667-12**	3FQS enclosure Door-in-door, flush for 69 in box (400 A)	—	unknown
EDH-EAT-00889	**E2A1667-13**	3FQS enclosure Door, surface for 33 in box (200 A)	—	unknown
EDH-EAT-00890	**E2A1667-14**	3FQS enclosure Door, flush for 33 in box (200 A)	—	unknown
EDH-EAT-00891	**E2A1667-15**	3FQS enclosure Door-in-door, surface for 33 in box (200 A)	—	unknown
EDH-EAT-00892	**E2A1667-16**	3FQS enclosure Door-in-door, flush for 33 in box (200 A)	—	unknown
EDH-EAT-00893	**E2A1667-17**	3FQS enclosure Door, surface for 50 in box (400 A)	—	unknown
EDH-EAT-00894	**E2A1667-18**	3FQS enclosure Door, flush for 50 in box (400 A)	—	unknown
EDH-EAT-00895	**E2A1667-19**	3FQS enclosure Door-in-door, surface for 50 in box (400 A)	—	unknown
EDH-EAT-00878	**E2A1667-2**	3FQS enclosure Door, surface for 59 in box (200 A)	—	unknown
EDH-EAT-00896	**E2A1667-20**	3FQS enclosure Door-in-door, flush for 50 in box (400 A)	—	unknown
EDH-EAT-00897	**E2A1667-21**	3FQS enclosure Door, surface for 59 in box (400 A)	—	unknown
EDH-EAT-00898	**E2A1667-22**	3FQS enclosure Door, flush for 59 in box (400 A)	—	unknown
EDH-EAT-00899	**E2A1667-23**	3FQS enclosure Door-in-door, surface for 59 in box (400 A)	—	unknown
EDH-EAT-00900	**E2A1667-24**	3FQS enclosure Door-in-door, flush for 59 in box (400 A)	—	unknown
EDH-EAT-00879	**E2A1667-3**	3FQS enclosure Door, flush for 50 in box (200 A)	—	unknown
EDH-EAT-00880	**E2A1667-4**	3FQS enclosure Door, flush for 59 in box (200 A)	—	unknown
EDH-EAT-00881	**E2A1667-5**	3FQS enclosure Door-in-door, surface for 50 in box (200 A)	—	unknown
EDH-EAT-00882	**E2A1667-6**	3FQS enclosure Door-in-door, surface for 59 in box (200 A)	—	unknown
EDH-EAT-00883	**E2A1667-7**	3FQS enclosure Door-in-door, flush for 50 in box (200 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00884	**E2A1667-8**	3FQS enclosure Door-in-door, flush for 59 in box (200 A)	—	unknown
EDH-EAT-00885	**E2A1667-9**	3FQS enclosure Door, surface for 69 in box (400 A)	—	unknown

EDH-EAT-00877 **E2A1667-1** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, surface for 50 in box (200 A)

OEM part number	E2A1667-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 50 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00886 **E2A1667-10** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, flush for 69 in box (400 A)

OEM part number	E2A1667-10	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00887 **E2A1667-11** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door-in-door, surface for 69 in box (400 A)

OEM part number	E2A1667-11	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00888 **E2A1667-12** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door-in-door, flush for 69 in box (400 A)

OEM part number	E2A1667-12	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 69 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00889 **E2A1667-13** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, surface for 33 in box (200 A)

OEM part number	E2A1667-13	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00890 **E2A1667-14** Eaton lineage trim **STATUS UNKNOWN**

3FQS enclosure Door, flush for 33 in box (200 A)

OEM part number	E2A1667-14	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00891	E2A1667-15	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 33 in box (200 A)

OEM part number	E2A1667-15	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00892	E2A1667-16	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 33 in box (200 A)

OEM part number	E2A1667-16	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 33 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00893	E2A1667-17	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 50 in box (400 A)

OEM part number	E2A1667-17	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00894	E2A1667-18	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 50 in box (400 A)

OEM part number	E2A1667-18	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00895	E2A1667-19	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 50 in box (400 A)

OEM part number	E2A1667-19	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00878	E2A1667-2	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 59 in box (200 A)

OEM part number	E2A1667-2	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 59 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00896	E2A1667-20	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 50 in box (400 A)

OEM part number	E2A1667-20	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 50 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00897	E2A1667-21	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 59 in box (400 A)

OEM part number	E2A1667-21	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00898	E2A1667-22	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 59 in box (400 A)

OEM part number	E2A1667-22	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00899	E2A1667-23	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 59 in box (400 A)

OEM part number	E2A1667-23	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00900	E2A1667-24	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 59 in box (400 A)

OEM part number	E2A1667-24	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 59 in box (400 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00879	E2A1667-3	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 50 in box (200 A)

OEM part number	E2A1667-3	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 50 in box (200 A)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00880	E2A1667-4	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, flush for 59 in box (200 A)

OEM part number	E2A1667-4	A	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, flush for 59 in box (200 A)	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00881	E2A1667-5	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 50 in box (200 A)

OEM part number	E2A1667-5	A	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 50 in box (200 A)	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00882	E2A1667-6	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, surface for 59 in box (200 A)

OEM part number	E2A1667-6	A	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, surface for 59 in box (200 A)	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00883	E2A1667-7	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 50 in box (200 A)

OEM part number	E2A1667-7	A	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 50 in box (200 A)	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00884	E2A1667-8	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door-in-door, flush for 59 in box (200 A)

OEM part number	E2A1667-8	A	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door-in-door, flush for 59 in box (200 A)	A	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00885	E2A1667-9	Eaton lineage	trim	STATUS UNKNOWN

3FQS enclosure Door, surface for 69 in box (400 A)

OEM part number	E2A1667-9	A	S313 pp. 12-13, Coordination panelboard replacement parts, F - Enclosure Doors; oem_spec
Description	Door, surface for 69 in box (400 A)	A	same as above
Cross-links	Families: PRL3FQS		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00844	**2A1690-1XX**	3FQS NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)	—	unknown
EDH-EAT-00845	**2A1690-2XX**	3FQS NEMA 1 box, 59 in tall (XX = B/K endwalls)	—	unknown
EDH-EAT-00846	**2A1690-3XX**	3FQS NEMA 1 box, 69 in tall (XX = B/K endwalls)	—	unknown
EDH-EAT-00847	**2A1690-4XX**	3FQS NEMA 1 box, 33 in tall (XX = B/K endwalls)	—	unknown
EDH-EAT-00852	**2A1916-1**	3FQS Kit, blank enclosure endwall (set of 2)	—	unknown
EDH-EAT-00853	**2A1916-2**	3FQS Kit, knockout enclosure endwall (set of 2)	—	unknown
EDH-EAT-00848	**E2A1649-1**	3FQS NEMA 3R enclosure, 51.5 in tall	—	unknown
EDH-EAT-00849	**E2A1649-2**	3FQS NEMA 3R enclosure, 60.5 in tall	—	unknown
EDH-EAT-00850	**E2A1649-3**	3FQS NEMA 3R enclosure, 70.5 in tall	—	unknown
EDH-EAT-00851	**E2A1649-4**	3FQS NEMA 3R enclosure, 34.5 in tall	—	unknown

EDH-EAT-00844 **2A1690-1XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)

OEM part number	2A1690-1XX	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00845 **2A1690-2XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 59 in tall (XX = B/K endwalls)

OEM part number	2A1690-2XX	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 59 in tall (XX = B/K endwalls)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00846 **2A1690-3XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 69 in tall (XX = B/K endwalls)

OEM part number	2A1690-3XX	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 69 in tall (XX = B/K endwalls)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00847 **2A1690-4XX** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS NEMA 1 box, 33 in tall (XX = B/K endwalls)

OEM part number	2A1690-4XX	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 1 box, 33 in tall (XX = B/K endwalls)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00852 **2A1916-1** Eaton lineage box/enclosure **STATUS UNKNOWN**

3FQS Kit, blank enclosure endwall (set of 2)

OEM part number	2A1916-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	Kit, blank enclosure endwall (set of 2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00853	2A1916-2	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS Kit, knockout enclosure endwall (set of 2)

OEM part number	2A1916-2	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	Kit, knockout enclosure endwall (set of 2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00848	E2A1649-1	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 51.5 in tall

OEM part number	E2A1649-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 51.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00849	E2A1649-2	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 60.5 in tall

OEM part number	E2A1649-2	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 60.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00850	E2A1649-3	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 70.5 in tall

OEM part number	E2A1649-3	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 70.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00851	E2A1649-4	Eaton lineage	box/enclosure	STATUS UNKNOWN

3FQS NEMA 3R enclosure, 34.5 in tall

OEM part number	E2A1649-4	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, E - Enclosures and Boxes; oem_spec
Description	NEMA 3R enclosure, 34.5 in tall	**A**	same as above
Cross-links	Families: PRL3FQS		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00872	**2A1917-2**	3FQS Kit, CCPB hardware (10 screws)	—	unknown
EDH-EAT-00871	**E2A1917-1**	3FQS Kit, panelboard hardware	—	unknown

EDH-EAT-00872	2A1917-2	Eaton lineage	hardware-kit	STATUS UNKNOWN

3FQS Kit, CCPB hardware (10 screws)

OEM part number	2A1917-2	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, CCPB hardware (10 screws)	**A**	same as above
Fasteners	CCPB bus-tab screws #10-32 x 1/4 in, torque 25 lb-in (2.82 N-m)	**A**	S313 p. 7; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00871	E2A1917-1	Eaton lineage	hardware-kit	STATUS UNKNOWN

3FQS Kit, panelboard hardware

OEM part number	E2A1917-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, panelboard hardware	**A**	same as above
Cross-links	Families: PRL3FQS		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00864	**2A1912-1**	3FQS Lockout kit, 70-400A main	—	unknown
EDH-EAT-00865	**2A1912-2**	3FQS Lockout kit, 30-60A main	—	unknown
EDH-EAT-00866	**2A1912-3**	3FQS Branch lockout kit (3M Panelsafe), 18 position	—	unknown
EDH-EAT-00867	**2A1912-4**	3FQS Branch lockout kit (3M Panelsafe), 30 position	—	unknown
EDH-EAT-00868	**2A1912-5**	3FQS Branch lockout kit (3M Panelsafe), 42 position	—	unknown

EDH-EAT-00864	2A1912-1	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Lockout kit, 70-400A main

OEM part number	2A1912-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Lockout kit, 70-400A main	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00865	2A1912-2	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Lockout kit, 30-60A main

OEM part number	2A1912-2	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Lockout kit, 30-60A main	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00866	2A1912-3	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Branch lockout kit (3M Panelsafe), 18 position

OEM part number	2A1912-3	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Branch lockout kit (3M Panelsafe), 18 position	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00867	2A1912-4	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Branch lockout kit (3M Panelsafe), 30 position

OEM part number	2A1912-4	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Branch lockout kit (3M Panelsafe), 30 position	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00868	2A1912-5	Eaton lineage	padlock-attachment	STATUS UNKNOWN

3FQS Branch lockout kit (3M Panelsafe), 42 position

OEM part number	2A1912-5	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Lockout/Tagout Devices; oem_spec
Description	Branch lockout kit (3M Panelsafe), 42 position	**A**	same as above
Cross-links	Families: PRL3FQS		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00860	**2A1910-1**	3FQS Kit, NEMA 3R replacement keys (2)	—	unknown
EDH-EAT-00861	**2A1910-2**	3FQS Kit, NEMA 1 door lock and 2 keys	—	unknown
EDH-EAT-00862	**2A1910-3**	3FQS Kit, NEMA 3R door lock and 2 keys	—	unknown
EDH-EAT-00863	**2A1910-4**	3FQS Kit, NEMA 1 replacement keys (2)	—	unknown
EDH-EAT-00870	**2A1915**	3FQS Kit, circuit number and fuse rating labels	—	unknown
EDH-EAT-00875	**2A1919**	3FQS Kit, touch-up paint	—	unknown
EDH-EAT-00876	**2A1961-1**	3FQS Kit, spare fuse compartment TCF 1-100A	—	unknown
EDH-EAT-00901	**CCPB-n-xxCF**	Bussmann CCPB ampacity-rejecting branch disconnect (catalog pattern CCPB-<poles>-<amps>CF)	—	unknown
EDH-EAT-00869	**E2A1914**	3FQS Kit, circuit directory card and sleeve	—	unknown

EDH-EAT-00860	2A1910-1	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 3R replacement keys (2)

OEM part number	2A1910-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 3R replacement keys (2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00861	2A1910-2	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 1 door lock and 2 keys

OEM part number	2A1910-2	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 1 door lock and 2 keys	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00862	2A1910-3	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 3R door lock and 2 keys

OEM part number	2A1910-3	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 3R door lock and 2 keys	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00863	2A1910-4	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, NEMA 1 replacement keys (2)

OEM part number	2A1910-4	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, H - Keys and Locks; oem_spec
Description	Kit, NEMA 1 replacement keys (2)	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00870	2A1915	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, circuit number and fuse rating labels

OEM part number	2A1915	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, circuit number and fuse rating labels	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00875	2A1919	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, touch-up paint

OEM part number	2A1919	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, touch-up paint	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00876	2A1961-1	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, spare fuse compartment TCF 1-100A

OEM part number	2A1961-1	**A**	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, spare fuse compartment TCF 1-100A	**A**	same as above
Cross-links	Families: PRL3FQS		

EDH-EAT-00901	CCPB-n-xxCF	Eaton lineage	other	STATUS UNKNOWN

Bussmann CCPB ampacity-rejecting branch disconnect (catalog pattern CCPB-<poles>-<amps>CF)

OEM part number	CCPB-1-(amp)CF / CCPB-2-(amp)CF / CCPB-3-(amp)CF; amps 15, 20, 30, 40, 50, 60, 70, 90, 100	A	S313 pp. 10, 14 (I - CCPB Branch Disconnects); oem_spec
Description	Compact Circuit Protector Base fusible branch disconnect, accepts CUBEFuse TCF (amps)RN / TCF (amps) indicating fuses of rating <= CCPB rating	A	S313 p. 14; oem_spec
Fasteners	Slides onto branch sub-assembly by 'T' slot; bus tab fixed with #10-32 x 1/4 in screw(s) (one per pole) torqued 25 lb-in (2.82 N-m)	A	S313 p. 7; oem_spec
Torque values	Bus tab screws #10-32 x 1/4 in: 25 lb-in (2.82 N-m); load terminal per label 3A1064	A	same as above
Identification features	Indicating CUBEFuse requires date code R38 or later for correct fit; 1-3 A indicating CUBEFuse not available	A	S313 p. 14; oem_spec
Cross-links	Families: PRL3FQS		

EDH-EAT-00869	E2A1914	Eaton lineage	other	STATUS UNKNOWN

3FQS Kit, circuit directory card and sleeve

OEM part number	E2A1914	A	S313 pp. 12-13, Coordination panelboard replacement parts, Miscellaneous; oem_spec
Description	Kit, circuit directory card and sleeve	A	same as above
Cross-links	Families: PRL3FQS		

3.29 PRL3X — Pow-R-Line Xpert 3X

FAM-EAT-008 · panelboard · aka PRL3x, Pow-R-Line 3X · markings: Eaton

Successor to PRL3a; same 20 in box and X-unit chassis concept. Uses KPRL3X* connector kits and 42C80xx deadfront covers (PDG2 replaces F-frame).

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 250 Vdc	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 800 A; main device 600 A	A	same as above
Branch breakers accepted	Bolt-on 15-225 A: BAB/QBH family, GHB family, PDG2 (twin to 150 A, single 175-225 A); vertical PDG2/PDG3 mains	A	S1, S6 oem_spec
Main handle location	PRL3X PD frame 2 main: D = 10.901 in (100 A max) / 15.026 in (225 A max); PD frame 3 400 A: 19.962 in (500 kcmil) / 24.087 in (750 kcmil) (Dimensions are estimates to be verified by installer (per leaflet))	A	S318 pp. 2-6, Figures 1-5; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), QUICKLAG bolt-on (BAB/QBHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S314 DG014001EN Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024); S318 IL014069EN Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interio

Also fits this family (entry printed elsewhere): KPRL3XBA06, KPRL3XBA06-1, KPRL3XBA12, KPRL3XBA12-1, KPRL3XBA18, KPRL3XBA18-1, KPRL3XBA24, KPRL3XBA24-1, KPRL3XGB06, KPRL3XGB06-1, KPRL3XGB12, KPRL3XGB12-1, KPRL3XGB18, KPRL3XGB18-1, KPRL3XGB24, KPRL3XGB24-1, KPRL3ABA06, KPRL3ABA06-1, KPRL3ABA12, KPRL3ABA12-1, KPRL3ABA18, KPRL3ABA18-1, KPRL3ABA24, KPRL3AGB06, KPRL3AGB12, KPRL3AGB12-1, KPRL3AGB18, KPRL3AGB18-1, KPRL3AGB24, KPRL3X23, KPRL3X22, KPRL3X23T, KPRL3X22T, KPRL3AFD3, KPRL3AFD2, KPRL3AED3, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, PRLSEBPD3, PRLSEBPD2, 5078A98, 5158C05, 2C11296, 5155C62H01, 6559C59, 42C8076, 42C8077, 4176B72, 42C8078, 42C8079, 42C8080, 42C8081, 42C8082, 4176B67, 4176B69, 4180B91, 42C8083H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04, PRLSEBPD5, PRLSEBPD4, PRLSEBBAB

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00204	**KPRL3X21T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be s A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00204	KPRL3X21T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)

OEM part number	KPRL3X21T	A	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 1-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00257	**42C7980**	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00258	**42C8055**	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00257	42C7980	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)

OEM part number	42C7980	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top (thermal-magnetic), H02 bottom (PXR)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 400 A vertical cover, 15X (PRL3X)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00258	42C8055	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version

OEM part number	42C8055	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.30 PRL4 — Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)

FAM-EAT-005 · panelboard · aka PRL-4, PRL4, PRL4B, PRL4D, PRL4F, PRL4X, Pow-R-Line 4, Pow-R-Line 4B, Pow-R-Line 4D, Pow-R-Line 4F · markings: Cutler-Hammer, Eaton, Westinghouse

Heavy distribution panelboard in 24, 36 or 44 in wide boxes (BX2457..BX4490), neutral in main gutter, vertical bus with branch devices horizontally mounted single or twin on KPRL4* connector kits measured in X units (1X = 1.38 in). Front is a vented cover assembly (two side rails, top/bottom vented covers, 6574C74) plus individual device covers and blank covers (6554C01/6554C02). Density-rated bus option required for some 100% rated breaker kits.

Westinghouse-origin power distribution panelboard (24, 36, 44 in box widths) that replaced CDP (PRL4B) and FDP (PRL4F). Its KPRL4 breaker connector kits (copper connectors, brackets, covers, hardware) are the most completely documented group-mount kits for Series C FD/JD/KD/LD/MDL/ND frames; included here because the same device X-spacing is used in Pow-R-Line C switchboard distribution chassis.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	A	S1, S6 oem_spec
	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	A	S3 p. 32; oem_spec
Era of manufacture	PRL4B/F introduced October 1987	A	S1, S2 p.2 Table 1; oem_spec
	PRL4B/F introduced October 1987 (originally a Westinghouse product)	A	S16, S13 RP01400001E (2017) p. 2 Table 1; V12-T4-18; oem_spec
Successor	PRL4X	A	S1, S6 oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc maximum	A	S7 p.22.4-1; oem_spec
Main ampacity	MLO 250, 400, 600, 800, 1200 A; main breakers 250-1200 A; main switches 200-1200 A	A	same as above
	1200 A maximum	A	S13 p. V12-T4-18; oem_spec
Branch breakers accepted	Bolt-on breakers 15-1200 A (EHD..FDC, ED, JD, DK/KD, CKD, LD, LG, LHH, MDL, ND, NHH, CA, FCL, LCL, FB-P, LA-P, NB-P); drawout 20-600 A (PRL4D); fusible switches FDPW/FDPB 30-1200 A (PRL4F)	A	S1, S7 s1 pp.32-34; s7 p.22.4-1; oem_spec
Box width	24.00, 36.00, 44.00 in (609.6, 914.4, 1117.6 mm)	A	S1 p.2; oem_spec
Bus	250-1200 A tin-plated aluminum standard, copper optional, density-rated bus optional	A	S7 p.22.4-1; oem_spec
Box widths	PRL4 standard widths 24.00, 36.00 and 44.00 in	A	S16 p. 2; oem_spec

Breaker families associated: CA, CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), ED, EHD, FD, JD, KD, LD, MDL, ND, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S3 RP01400001E Renewal Parts RP01400001E - Current Eaton panelboards; S4 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S16 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F,

Also fits this family (entry printed elsewhere): K80522, K80133, K80429, 5157C83G06

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00331	**KPRL44X**	PRL4F fusible switch connector kit KPRL44X	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00333	**KPRL45X**	PRL4F fusible switch connector kit KPRL45X	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, no A	Listed in 2009/2011 editions only
EDH-EAT-00332	**KPRL45X1**	PRL4F fusible switch connector kit KPRL45X1	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switc A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00334	**KPRL45XS**	PRL4F fusible switch connector kit KPRL45XS	FDPW 100 A single-mount switch (three-pole switch, not included) A	Listed in 2009/2011 editions only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00335	**KPRL4B6XS**	PRL4F fusible switch connector kit KPRL4B6XS	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not incl **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00336	**KPRL4B6XT**	PRL4F fusible switch connector kit KPRL4B6XT	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (thr **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00338	**KPRL4W11X**	PRL4F fusible switch connector kit KPRL4W11X	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (**A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00339	**KPRL4W15X**	PRL4F fusible switch connector kit KPRL4W15X	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not i **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00337	**KPRL4W9X**	PRL4F fusible switch connector kit KPRL4W9X	FDPW325R / FDPW365R 400 A (three-pole switch, not included) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00331	KPRL44X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL44X

OEM part number	KPRL44X	**A**	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114796184	**A**	S316 alias; skuPage.KPRL44X (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches	**A**	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S16 p. 25; oem_spec
	Eaton, panelboard connector kit, for fdpwt3222r, fdpwt3211r, fdpwt3622r, fdptwt3611r, fdpwt3233r, three-phase, three-pole, 30-100a, includes copper connectors, extension wings (when required), hardware and instructions (Eaton web product description)	**A**	S316 skuPage.KPRL44X (General/Product specifications); oem_spec
Application	branch	**A**	S16 p. 25; oem_spec
Breaker compatibility	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches (three-pole switch, not included)	**A**	S1, S2, S3, S4 oem_spec
	60 A FDPWT3222R/FDPWT3622R (also fits FDP and FDPW switches)	**A**	S16 p. 25 Table 38; oem_spec
	FDPWT3222R, FDPWT3211R, FDPWT3622R, FDPTWT3611R, FDPWT3233R (Eaton web 'Used with' attribute)	**A**	S316 skuPage.KPRL44X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	**A**	same as above
Current rating	30-100A	**A**	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S1 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	**A**	S316 skuPage.KPRL44X (General/Product specifications); oem_spec
Dimensions	Switch space 4X (5.50 in)	**A**	S1 oem_spec
	4X switch height	**A**	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S3 oem_spec
Listing / approvals	UL Listed UL 67	**A**	S316 skuPage.KPRL44X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. Will fit FDPW switches. (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 1.5 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above

Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00333	KPRL45X	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45X

OEM part number	KPRL45X	A	S2, S4 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114796214	A	S316 alias; skuPage.KPRL45X (General/Product specifications); oem_spec
	KPRL45X1	C	S1, S2, S3 superseded_by; inference
Description	PRL4F fusible switch connector kit for FDPW 100-100 A twin switch, 600 V (2009 number)	A	S2, S4 oem_spec
	Eaton, panelboard connector kit, copper connectors, extension wings (when required), hardware and instructions, panelboard connector kit (Eaton web product description)	A	S316 skuPage.KPRL45X (General/Product specifications); oem_spec
Breaker compatibility	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, not included)	A	S2, S4 oem_spec
	FDPWT3633R (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL45X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S2 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S316 skuPage.KPRL45X (General/Product specifications); oem_spec
Dimensions	Switch space 5X (6.88 in)	A	S2 oem_spec
Status	Listed in 2009/2011 editions only	B	S2, S4 inference
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL45X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. Will fit FDPW switches. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 1.5 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00332	KPRL45X1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL45X1

OEM part number	KPRL45X1	A	S1, S3, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	KPRL45X (Same table row; 2009 KPRL45X, 2017/2021 KPRL45X1)	C	S1, S2, S3 supersedes; inference
Description	PRL4F fusible switch connector kit for FDPWT3633R 600 V 100-100 A twin switch (2021 number)	A	S1, S3 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switch, not included)	A	S1, S3 oem_spec
	100 A 600 V FDPWT3633R	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 5X (6.88 in)	A	same as above
	5X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00334	KPRL45XS	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45XS

OEM part number	KPRL45XS	A	S4 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114796207	A	S316 alias; skuPage.KPRL45XS (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPW 100 A single-mount switch	A	S4 oem_spec
	Eaton, panelboard connector kit, copper connectors, , hardware and instructions, extension wings (when required), panelboard connector kit (Eaton web product description)	A	S316 skuPage.KPRL45XS (General/Product specifications); oem_spec
Breaker compatibility	FDPW 100 A single-mount switch (three-pole switch, not included)	A	S4 oem_spec
	FDPWS323R, FDPWS363R (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL45XS (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	100A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S4 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S316 skuPage.KPRL45XS (General/Product specifications); oem_spec
Dimensions	Switch space unknown	D	S4 oem_spec
Status	Listed in 2009/2011 editions only	B	S4 inference
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL45XS (General/Product specifications); oem_spec
Installation requirements	Switches are not included. Will fit FDPW switches. (Eaton web 'Catalog Notes')	A	same as above

Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 1.5 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00335	KPRL4B6XS	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4B6XS

OEM part number	KPRL4B6XS	**A**	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPBS324R / FDPBS364R 200 A single switch	**A**	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S16 p. 25; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not included)	**A**	S1, S2, S3, S4 oem_spec
	200 A FDPBS324R/FDPBS364R	**A**	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S1 oem_spec
Dimensions	Switch space 6X (8.25 in)	**A**	same as above
	6X switch height	**A**	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00336	KPRL4B6XT	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4B6XT

OEM part number	KPRL4B6XT	**A**	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required	**A**	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S16 p. 25; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (three-pole switch, not included)	**A**	S1, S2, S3, S4 oem_spec
	200 A FDPBT3244R/FDPBT3644R (44 in box)	**A**	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S1 oem_spec
Dimensions	Switch space 6X (8.25 in)	**A**	same as above
	6X switch height	**A**	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00338	KPRL4W11X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W11X

OEM part number	KPRL4W11X	**A**	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 782114795194	**A**	S316 alias; skuPage.KPRL4W11X (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box)	**A**	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S16 p. 25; oem_spec
	Eaton, replacement kit, copper connectors, extension wings (when required), hardware and instructions (Eaton web product description)	**A**	S316 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Application	branch	**A**	S16 p. 25; oem_spec
Breaker compatibility	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (three-pole switch, not included)	**A**	S1, S2, S3, S4 oem_spec
	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box)	**A**	S16 p. 25 Table 38; oem_spec
	FDPW326R, FDPW327, FDPW366R, FDPW367 (Eaton web 'Used with' attribute)	**A**	S316 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	**A**	same as above
Current rating	600-800A	**A**	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S1 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	**A**	S316 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Dimensions	Switch space 11X (15.13 in)	**A**	S1 oem_spec
	11X switch height	**A**	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S3 oem_spec
Listing / approvals	UL Listed	**A**	S316 skuPage.KPRL4W11X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. 44-inch box width required for both R and J fuse applications. (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.5 in, height 3.5 in, width 9.5 in, weight 10 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00339	KPRL4W15X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W15X

OEM part number	KPRL4W15X	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW328 / FDPW368 1200 A; 44 in box required	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	1200 A FDPW328/FDPW368 (44 in box)	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 15X (20.63 in)	A	same as above
	15X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00337	KPRL4W9X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W9X

OEM part number	KPRL4W9X	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	UPC 786679004203	A	S316 alias; skuPage.KPRL4W9X (General/Product specifications); oem_spec
Description	PRL4F fusible switch connector kit for FDPW325R / FDPW365R 400 A	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
	Eaton, panelboard connector kit, copper connectors, extension wings (when required), hardware - instructions, panelboard connector kit (Eaton web product description)	A	S316 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Application	branch	A	S16 p. 25; oem_spec
Breaker compatibility	FDPW325R / FDPW365R 400 A (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	400 A FDPW325R/FDPW365R	A	S16 p. 25 Table 38; oem_spec
	FDPW325R, FDPW365R (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Poles	Three-phase (Eaton web 'Phase' attribute)	A	same as above
Current rating	400A	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
	Copper connectors, extension wings (when required), hardware and instructions	A	S316 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Dimensions	Switch space 9X (12.38 in)	A	S1 oem_spec
	9X switch height	A	S16 p. 25; oem_spec

Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S3 oem_spec
Listing / approvals	UL Listed UL 67	**A**	S316 skuPage.KPRL4W9X (General/Product specifications); oem_spec
Installation requirements	Switches are not included. (Eaton web 'Catalog Notes')	**A**	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 23.5 in, height 1.5 in, width 7.25 in, weight 5.83 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	**A**	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00308	**KPRL4CA**	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	CA/CAH/HCA 2-pole (2X) or 3-pole (3X) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00322	**KPRL4CKD**	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	100% rated CKD/CHKD/CKDC 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00324	**KPRL4CND**	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole)	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00329	**KPRL4ED**	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	ED, EDH, EDC 3-pole **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00327	**KPRL4ED2**	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	ED, EDH, EDC 2-pole **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00311	**KPRL4FBP**	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	FCL, FB-P, FD/LFD 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00328	**KPRL4FD**	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00325	**KPRL4FD1**	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole) **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00326	**KPRL4FD2**	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EHD, FD, FDB, HFD, FDC 2-pole **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00307	**KPRL4FDCL**	PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)	FD current limiter, 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00309	**KPRL4JDS**	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	JD, JDB, HJD, JDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00310	**KPRL4JDT**	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	JD, JDB, HJD, JDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00312	**KPRL4KDS**	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	DK, KD, KDB, HKD, KDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00313	**KPRL4KDT**	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	DK, KD, KDB, HKD, KDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00317	**KPRL4LAP**	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	LA-P 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00314	**KPRL4LC**	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/ **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00318	**KPRL4LCL**	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	LCL 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00330	**KPRL4LD**	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00315	**KPRL4LG**	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	LHH 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00316	**KPRL4MC**	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00323	**KPRL4MD**	PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00319	**KPRL4NBP**	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	NB-P 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00320	**KPRL4NC**	PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)	NC/NCY/HNC [NB/HNB] 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00321	**KPRL4ND**	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00299	**KPRL4X12**	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted 1-pole))	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-po **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00300	**KPRL4X22**	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	PDG2 2-pole; EHD/FDB/FD/ HFD/FDC/ED/EDH/EDC 2-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00301	**KPRL4X32**	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	PDG2 3-pole; ED/EDH/EDC/ FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00302	**KPRL4X334S**	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mounting)	PDG3 400 A frame, 3-pole, single mounting **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00303	**KPRL4X334T**	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin mounting)	PDG3 400 A frame, 3-pole, twin mounting **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00304	**KPRL4X336**	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00305	**KPRL4X34**	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	PDG4; MDL/HMDL 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00306	**KPRL4X35**	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	PDG5; ND/HND/NDC/NGS/ NGH/NGC 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00308 KPRL4CA Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))

OEM part number	KPRL4CA	**A**	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887462	**A**	S316 alias; skuPage.KPRL4CA (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	**A**	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	**A**	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for ca, cah, hca breakers, three-phase, three-pole, 225a (Eaton web product description)	**A**	S316 skuPage.KPRL4CA (General/Product specifications); oem_spec
Application	branch	**A**	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	**C**	S1 inference

Installation location	Mounting: Twin (2-pole: 36 in min box)	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	A	S1 s1 pp.32-33; oem_spec
	CA/CAH/HCA	A	S3 pp. 32-33; oem_spec
	CA, CAH, HCA breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4CA (General/Product specifications); oem_spec
Poles	2, 3	A	S3 pp. 32-33; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4CA (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4CA (General/Product specifications); oem_spec
Dimensions	Space required 2X/3X (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4CA (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: CA/CAH/HCA 225 A frame, CA		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00322	KPRL4CKD	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)

OEM part number	KPRL4CKD	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887479	A	S316 alias; skuPage.KPRL4CKD (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for 100% rated CKD/CHKD/CKDC 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, prl4 connector kit (Eaton web product description)	A	S316 skuPage.KPRL4CKD (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec

	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	100% rated CKD/CHKD/CKDC 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	CKD, CHKD (100% rated)	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4CKD (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width; requires density rated bus in existing chassis	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4CKD (General/Product specifications); oem_spec
Installation requirements	Kit includes copper connectors; mounting brackets; covers; hardware an instructions for mounting breaker(s). Breakers are not included. Requires density rated bus in existing panel chassis. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics weight 5 lb (dimension attributes are placeholders 0.01 in/0.01 in/0.01 in) (Placeholder dimensions - do not use)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00324 KPRL4CND Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole)

OEM part number	KPRL4CND	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887493	A	S316 alias; skuPage.KPRL4CND (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for 100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, prl4 connector kit, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL4CND (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec

	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	CND, CHND (100% rated)	A	S16 p. 24 Table 37; oem_spec
	CND, CHND breakers breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4CND (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4CND (General/Product specifications); oem_spec
Current rating	1200A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4CND (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width; requires density rated bus	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4CND (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 44-inch box width required. Requires density rated bus in existing panel chassis. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00329	KPRL4ED	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)

OEM part number	KPRL4ED	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114798195	A	S316 alias; skuPage.KPRL4ED (General/Product specifications); oem_spec
	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4ED is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for ED, EDH, EDC 3-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec

	Eaton, panelboard connector kit, deadfront cover, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL4ED (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC 3-pole	A	S2, S3 s2 p.28; oem_spec
	ED, EDH, EDC	A	S16 p. 24 Table 37; oem_spec
	Two-pole ED, EDH, EDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4ED (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4ED (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL4ED (General/Product specifications); oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S16, S3 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4ED (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 3.44 in, height 3 in, width 10.4 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00327	KPRL4ED2	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)

OEM part number	KPRL4ED2	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114858820	A	S316 alias; skuPage.KPRL4ED2 (General/Product specifications); oem_spec
	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4ED2 is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference

Description	PRL4 breaker connector kit for ED, EDH, EDC 2-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, phase connectors, hardware and instructions, deadfront cover (Eaton web product description)	A	S316 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC 2-pole	A	S2, S3 s2 p.28; oem_spec
	ED, EDH, EDC	A	S16 p. 24 Table 37; oem_spec
	Three-pole ED, EDH, EDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Poles	2	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Phase connectors, deadfront cover, hardware and instructions	A	S316 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S16, S3 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4ED2 (General/Product specifications); oem_spec
Installation requirements	Order breakers separately when ordering connector kit. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00311	KPRL4FBP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)

OEM part number	KPRL4FBP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887509	A	S316 alias; skuPage.KPRL4FBP (General/Product specifications); oem_spec

Description	PRL4 breaker connector kit for FCL, FB-P, FD/LFD 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, for fcl, fb-p, fd/lfd breakers, 3-phase, 3-pole, 100a (Eaton web product description)	A	S316 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	FCL, FB-P, FD/LFD 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	FCL, FB-P, FD/LFD	A	S16 p. 24 Table 37; oem_spec
	FCL, FB-P, FD/LFD breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Current rating	100A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4FBP (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), TRI-PAC integrally fused (FB-P, LA-P, NB-P), Current-limiting FCL / LCL (and FDB+LFB), FD, Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00328	KPRL4FD	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)

OEM part number	KPRL4FD	A	S2, S3, S4, S10, S16 s2 p.28 Table 32; s3 p.24; oem_spec

Alternate / superseded numbers	UPC 782114795941	A	S316 alias; skuPage.KPRL4FD (General/Product specifications); oem_spec
	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4FD is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for ehd, fd, fdb, hfd, fdc breakers, three-phase, three-pole, 225a (Eaton web product description)	A	S316 skuPage.KPRL4FD (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S2, S3, S4 s2 p.28; oem_spec
	EHD, FD, FDB, HFD, FDC	A	S16 p. 24 Table 37; oem_spec
	EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4FD (General/Product specifications); oem_spec
Poles	3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4FD (General/Product specifications); oem_spec
Current rating	225 A	A	S4, S316 p.9 Table 15; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4FD (General/Product specifications); oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S16, S3 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Aftermarket / reproduction	Still stocked by Elliott Electric (UPC 782114795941, UL 67, 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR')	C	S10 distributor
	Distributors list as 3P twin mount 225 A for EHD/FD/FDB/HFD/FDC; Elliott Electric marks item inactive	C	S24 distributor
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4FD (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00325	KPRL4FD1	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)

OEM part number	KPRL4FD1	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114887516	A	S316 alias; skuPage.KPRL4FD1 (General/Product specifications); oem_spec
	KPRL4X12 (Same breaker frames/space listed under KPRL4X12 in May 2022 RP01400001E while KPRL4FD1 is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for ehd, fd, hfd, three-phase, three-pole, 225a (Eaton web product description)	A	S316 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S2, S3 s2 p.28; oem_spec
	EHD, FD, HFD	A	S16 p. 24 Table 37; oem_spec
	EHD, FD, HFD breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X12)	C	S16, S3 inference
Replacement / successor	KPRL4X12 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4FD1 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. Two sets of twin mounted 1-pole breakers. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00326	KPRL4FD2	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)

OEM part number	KPRL4FD2	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114887523	A	S316 alias; skuPage.KPRL4FD2 (General/Product specifications); oem_spec
	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4FD2 is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 2-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for two-pole ehd, fd, fdb, hfd, fdc breakers, three-phase, three-pole, 225a (Eaton web product description)	A	S316 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole	A	S2, S3 s2 p.28; oem_spec
	EHD, FD, FDB, HFD, FDC	A	S16 p. 24 Table 37; oem_spec
	Two-pole EHD, FD, FDB, HFD, FDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Poles	2	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Current rating	225 A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4FD2 (General/Product specifications); oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S16, S3 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4FD2 (General/Product specifications); oem_spec

Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00307	KPRL4FDCL	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)

OEM part number	KPRL4FDCL	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for FD current limiter, 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single only	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	FD current limiter, 3-pole	A	S1 s1 pp.32-33; oem_spec
	FD current limiter (single mounting only)	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	4.13 in (104.9 mm) = 3X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Current-limiting FCL / LCL (and FDB+LFB), FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00309	KPRL4JDS	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)

OEM part number	KPRL4JDS	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796030	A	S316 alias; skuPage.KPRL4JDS (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for single jd, jdb, hjd, jdc breakers, three-phase, three-pole, 250a (Eaton web product description)	A	S316 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference

Installation location	Mounting: Single	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	JD, JDB, HJD, JDC	A	S16 p. 24 Table 37; oem_spec
	Single JD, JDB, HJD, JDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4JDS (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C J-frame (JD/JDB/HJD/JDC), JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00310 **KPRL4JDT** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)

OEM part number	KPRL4JDT	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796115	A	S316 alias; skuPage.KPRL4JDT (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for twin jd, jdb, hjd, jdc breakers, three-phase, three-pole, 250 A (Eaton web product description)	A	S316 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec

	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	JD, JDB, HJD, JDC	A	S16 p. 24 Table 37; oem_spec
	Twin JD, JDB, HJD, JDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Current rating	250 A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4JDT (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3 in, width 1.5 in, weight 5 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C J-frame (JD/JDB/HJD/JDC), JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00312	KPRL4KDS	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)

OEM part number	KPRL4KDS	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114795996	A	S18, S316 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec

	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, for single dk, kd, kdb, hkd, kdc breakers, three-phase, three-pole, 400a (Eaton web product description)	A	S316 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	DK, KD, KDB, HKD, KDC	A	S16 p. 24 Table 37; oem_spec
	Single DK, KD, KDB, HKD, KDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X)	A	S18, S16 spec sheet; p. 24; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Sold as surplus/reconditioned on eBay titled 'POW-R-LINE C' single-mount kit 400A 3P	C	S23 surplus_listing
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4KDS (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.5 in, height 3.2 in, width 9.3 in, weight 9.25 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00313	KPRL4KDT	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)

OEM part number	KPRL4KDT	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec

Alternate / superseded numbers	UPC 782114796412	A	S19, S316 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton panelboard connector kit copper connectors, mounting brackets, covers, hardware and instructions, for twin dk, kd, kdb, hkd, kdc breakers, three-phase, three-pole, 400a (Eaton web product description)	A	S316 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 44 in box required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	DK, KD, KDB, HKD, KDC	A	S16 p. 24 Table 37; oem_spec
	Twin DK, KD, KDB, HKD, KDC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Finish / plating	Spec sheet weight 9.85 lb; certification UL 67	B	S19 spec sheet; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width required	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4KDT (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 44-inch box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 3.2 in, width 2 in, weight 9.85 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00317	KPRL4LAP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)

OEM part number	KPRL4LAP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887530	A	S316 alias; skuPage.KPRL4LAP (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for LA-P 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, , hardware and instructions, covers (Eaton web product description)	A	S316 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LA-P 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	LA-P	A	S16 p. 24 Table 37; oem_spec
	LA-P breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Current rating	400A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4LAP (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac		

Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00314	KPRL4LC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])

OEM part number	KPRL4LC	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796191	A	S316 alias; skuPage.KPRL4LC (General/Product specifications); oem_spec
	KPRL4LD (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, for ld, ldb, hld, ldc, lc, hlc, lcy breakers, three-phase, three-pole, 600a (Eaton web product description)	A	S316 skuPage.KPRL4LC (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box (44 in for 100% rated)	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S1 s1 pp.32-33; oem_spec
	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC	A	S3 pp. 32-33; oem_spec
	LD, LDB, HLD, LDC, LC, HLC, LCY breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4LC (General/Product specifications); oem_spec
Poles	3	A	S3 pp. 32-33; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4LC (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4LC (General/Product specifications); oem_spec
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), LA, LC, LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00318	KPRL4LCL	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)

OEM part number	KPRL4LCL	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887547	A	S316 alias; skuPage.KPRL4LCL (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for LCL 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton PRL4 CONNECTOR KIT FOR LCL BREAKERS (Eaton web product description)	A	S316 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LCL 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	LCL	A	S16 p. 24 Table 37; oem_spec
	LCL breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4LCL (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		

Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00330	KPRL4LD	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)

OEM part number	KPRL4LD	A	S2, S3, S4, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	UPC 782114858813	A	S316 alias; skuPage.KPRL4LD (General/Product specifications); oem_spec
	KPRL4LC (Same breaker frames/space listed under KPRL4LC in May 2022 RP01400001E while KPRL4LD is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton PB connector kit with copper connectors, mounting brackets, covers, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL4LD (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
Installation location	Mounting: Single; 36 in min box	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S2, S3, S4 s2 p.28; oem_spec
	LD, LDB, HLD, LDC, CLD, LC	A	S16 p. 24 Table 37; oem_spec
	LD, LDB, HLD, LDC, CLD, LC breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4LD (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4LD (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4LD (General/Product specifications); oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4LC)	C	S16, S3 inference
Replacement / successor	KPRL4LC covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec

Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4LD (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 4 in, width 2 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00315 KPRL4LG Cutler-Hammer breaker-mounting-kit LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)

OEM part number	KPRL4LG	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782116654130	A	S316 alias; skuPage.KPRL4LG (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for LHH 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton panelboard connector kit, prl4 connector kit for lge, lgh breakers (Eaton web product description)	A	S316 skuPage.KPRL4LG (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LHH 3-pole	A	S1 s1 pp.32-33; oem_spec
	LHH	A	S3 pp. 32-33; oem_spec
	LGE, LGH breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4LG (General/Product specifications); oem_spec
Poles	3	A	S3 pp. 32-33; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4LG (General/Product specifications); oem_spec
Current rating	600A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4LG (General/Product specifications); oem_spec

Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00316	KPRL4MC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])

OEM part number	KPRL4MC	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887554	A	S316 alias; skuPage.KPRL4MC (General/Product specifications); oem_spec
	KPRL4X34 (Same breaker frames/space listed under KPRL4X34 in May 2022 RP01400001E while KPRL4MC is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, cover with hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL4MC (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S1, S2, S3 s1 pp.32-33; oem_spec
	MDL, HMDL	A	S16 p. 24 Table 37; oem_spec
	MDL, HMDL breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4MC (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4MC (General/Product specifications); oem_spec
Current rating	800A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4MC (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X34)	C	S16, S3 inference
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec

Listing / approvals	UL Listed UL 67	A	S316 skuPage.KPRL4MC (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00323	KPRL4MD	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))

OEM part number	KPRL4MD	A	S1, S4, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for 100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S1, S4 s1 pp.32-33; oem_spec
	CMDL/CHMDL (100% rated; density rated bus)	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*2011 supplement lists KPRL4MD as standard 3-pole M-frame 800 A kit; 2021 lists it only for 100% rated CMDL/CHMDL (MDL/HMDL now KPRL4X34).*		

EDH-EAT-00319	KPRL4NBP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)

OEM part number	KPRL4NBP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114887561	A	S316 alias; skuPage.KPRL4NBP (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for NB-P 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec

	Eaton PRL4 CONNECTOR KIT FOR SINGLE MTD NBP BREAKER (Eaton web product description)	A	S316 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NB-P 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	NB-P	A	S16 p. 24 Table 37; oem_spec
	NB-P breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Current rating	800A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Installation constraint	44.00 in box width required	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4NBP (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 44-inch box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00320	KPRL4NC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)

OEM part number	KPRL4NC	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for NC/NCY/HNC [NB/HNB] 3-pole	A	S1 pp.32-33; oem_spec

	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	NC/NCY/HNC [NB/HNB] 3-pole	A	S1 s1 pp.32-33; oem_spec
	NC/NCY/HNC [NB/HNB]	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), NB, NC		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00321	KPRL4ND	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))

OEM part number	KPRL4ND	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796078	A	S316 alias; skuPage.KPRL4ND (General/Product specifications); oem_spec
	KPRL4X35 (Same breaker frames/space listed under KPRL4X35 in May 2022 RP01400001E while KPRL4ND is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, prl4 connector kit for nd,hnd breakers (Eaton web product description)	A	S316 skuPage.KPRL4ND (General/Product specifications); oem_spec
Application	branch	A	S16 p. 24; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	ND, HND	A	S16 p. 24 Table 37; oem_spec
	ND, HND breakers (Eaton web 'Used with' attribute)	A	S316 skuPage.KPRL4ND (General/Product specifications); oem_spec

Poles	2, 3	A	S16 p. 24 Table 37; oem_spec
	Three-phase (Eaton web 'Phase' attribute)	A	S316 skuPage.KPRL4ND (General/Product specifications); oem_spec
Current rating	1200A	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4ND (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X35)	C	S16, S3 inference
Installation constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4ND (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. 36-inch minimum box width required. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 9 in, height 5 in, width 3 in, weight 7 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00299	KPRL4X12	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted 1-pole))

OEM part number	KPRL4X12	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD1 (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S1 s1 pp.32-33; oem_spec
	EHD/FDB/FD/HFD/FDC (PD2)	A	S3 pp. 32-33; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec

Dimensions	Space required 2X (2.75 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (69.9 mm) = 2X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00300	KPRL4X22	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)

OEM part number	KPRL4X22	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242572	A	S316 alias; skuPage.KPRL4X22 (General/Product specifications); oem_spec
	KPRL4FD2 (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED2 [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4 breaker connector kit for PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers, hardware and instructions, prl4x conn kit twn mt 225a 2p 1ph pd2 bk (Eaton web product description)	A	S316 skuPage.KPRL4X22 (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S1 s1 pp.32-33; oem_spec
	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	A	S3 pp. 32-33; oem_spec
Poles	2	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X22 (General/Product specifications); oem_spec
Dimensions	Space required 2X (2.75 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (69.9 mm) = 2X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X22 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above

Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2), EHD, FD, ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00301	KPRL4X32	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)

OEM part number	KPRL4X32	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242589	A	S316 alias; skuPage.KPRL4X32 (General/Product specifications); oem_spec
	KPRL4FD (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4 breaker connector kit for PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, hardware and instructions, covers (Eaton web product description)	A	S316 skuPage.KPRL4X32 (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S1 s1 pp.32-33; oem_spec
	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X32 (General/Product specifications); oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	4.13 in (104.9 mm) = 3X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X32 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.7 in, height 4.6 in, width 9.3 in, weight 7.35 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2), FD, ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00302	KPRL4X334S	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mounting)

OEM part number	KPRL4X334S	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242596	A	S316 alias; skuPage.KPRL4X334S (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, single mounting	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, hardware and instructions mounting brackets, covers (Eaton web product description)	A	S316 skuPage.KPRL4X334S (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 400 A frame, 3-pole, single mounting	A	S1 s1 pp.32-33; oem_spec
	PD3 400 A frame	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X334S (General/Product specifications); oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X334S (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 25.8 in, height 4.7 in, width 9.4 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00303	KPRL4X334T	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin mounting)

OEM part number	KPRL4X334T	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242602	A	S316 alias; skuPage.KPRL4X334T (General/Product specifications); oem_spec

Description	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, twin mounting	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, hardware and instructions, copper connectors, mounting brackets, covers (Eaton web product description)	A	S316 skuPage.KPRL4X334T (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 44 in box required	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 400 A frame, 3-pole, twin mounting	A	S1 s1 pp.32-33; oem_spec
	PD3 400 A frame	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X334T (General/Product specifications); oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X334T (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00304	KPRL4X336	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)

OEM part number	KPRL4X336	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242619	A	S316 alias; skuPage.KPRL4X336 (General/Product specifications); oem_spec
Description	PRL4 breaker connector kit for PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, mounting brackets, covers (Eaton web product description)	A	S316 skuPage.KPRL4X336 (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference

Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X336 (General/Product specifications); oem_spec
Dimensions	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X336 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 4.5 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Table 46 gives 4X for PDG3 600 A but Table 47 gives 6X for LG-frame with the same kit number - confirm space requirement.*		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00305	KPRL4X34	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)

OEM part number	KPRL4X34	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242626	A	S316 alias; skuPage.KPRL4X34 (General/Product specifications); oem_spec
	KPRL4MC (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG4; MDL/HMDL 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, copper connectors, covers, mounting brackets, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL4X34 (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG4; MDL/HMDL 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD4; MDL/HMDL	A	S3 pp. 32-33; oem_spec

Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X34 (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X34 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00306	KPRL4X35	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)

OEM part number	KPRL4X35	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 786689242633	A	S316 alias; skuPage.KPRL4X35 (General/Product specifications); oem_spec
	KPRL4ND (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
	Eaton, panelboard connector kit, covers, copper connectors, mounting brackets, hardware and instructions (Eaton web product description)	A	S316 skuPage.KPRL4X35 (General/Product specifications); oem_spec
Application	branch	A	S3 p. 32; oem_spec
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD5; ND/HND/NDC/NGS/NGH/NGC	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec

	Copper connectors, mounting brackets, covers, hardware and instructions	A	S316 skuPage.KPRL4X35 (General/Product specifications); oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Listing / approvals	UL Listed	A	S316 skuPage.KPRL4X35 (General/Product specifications); oem_spec
Installation requirements	Breakers are not included. (Eaton web 'Catalog Notes')	A	same as above
Package data (not part dims)	Eaton logistics attributes: length/depth 24 in, height 6 in, width 8 in, weight 6 lb (Package/shipping data per Eaton web; NOT verified component dimensions)	A	same as above
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00238	**6572C746G01**	PRL4 standard ground bus	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00238 **6572C746G01** Cutler-Hammer ground-bar **LISTED AS STOCK RENEWA**

PRL4 standard ground bus

OEM part number	6572C746G01	A	S1, S2 s1 p.33; oem_spec
Description	Copper bus with (3) 6-300 kcmil lugs plus a 24-circuit terminal bar with #14-1/0 wire range	A	same as above
Material	Copper	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00298	**6574C74**	PRL4 vented cover assembly (side rails + top/bottom vented covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00298 **6574C74** Cutler-Hammer deadfront **LISTED AS STOCK RENEWA**

PRL4 vented cover assembly (side rails + top/bottom vented covers)

OEM part number	6574C74	A	S1, S2 s1 p.31 Table 44; oem_spec
Alternate / superseded numbers	BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	A	S1 style_number; p.31; oem_spec
Description	Vented cover assembly: two side rails, top and bottom vented covers; device covers and blanks ordered separately; covers add 0.90 in to 10.40 in box depth (11.30 in overall)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00294	**6554C01**	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00295	**6554C02**	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00296	**P41X25**	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	—	Distributor-listed

EDH-EAT-00294 **6554C01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL4/PRL4X blank cover for 24 in wide box (1X-20X)

OEM part number	6554C01	A	S1, S2, S4 s1 p.32 Table 45; s4 p.8 Table 13; oem_spec
Alternate / superseded numbers	1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	A	S1, S4 style_number; oem_spec
Description	Blank cover for unused chassis space, 24 in wide box	A	S1 oem_spec
Dimensions	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in	A	S4 p.8 Table 13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00295 **6554C02** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)

OEM part number	6554C02	A	S1, S2, S4 s1 p.32 Table 45; s4 p.8 Table 14; oem_spec
Alternate / superseded numbers	Same H scheme as 6554C01 (4X = H13, 5X = H14)	A	S1, S4 style_number; oem_spec
Description	Blank cover, 36.00 and 44.00 in wide boxes	A	S1 oem_spec
Dimensions	Width 25 in; height in X units (1X = 1.38 in)	A	S4 p.8 Table 14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00296 **P41X25** Cutler-Hammer filler-plate **DISTRIBUTOR-LISTED**

PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)

OEM part number	P41X25	A	S12 oem_spec
Description	SWBD/PRL4 1X filler 1.375 in H x 25 in W, fits 36, 44, 45 in enclosures ('Eaton, PRL4- 1X Blank Cover')	C	S12 distributor
Dimensions	1.375 in H x 25 in W	C	same as above
Status	Distributor-listed	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Relationship between P41X25 and OEM renewal part 6554C02H01 (both 1X, 25 in wide) - possibly switchboard-channel catalog equivalent; not confirmed.*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00404	**1A32258H03**	Standard trim lock for PRL4X and PRL4 lighting and power panels	—	Listed in renewal parts guide(s) s1, s2, s4

EDH-EAT-00404	1A32258H03	Eaton	trim	LISTED IN RENEWAL PART

Standard trim lock for PRL4X and PRL4 lighting and power panels

OEM part number	1A32258H03	A	S1, S2, S4 oem_spec
Description	Standard trim lock for PRL4X and PRL4 lighting and power panels	A	same as above
Status	Listed in renewal parts guide(s) s1, s2, s4	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00417	**5081A08G02**	PRL4 chassis mounting hardware	—	Listed in s4
EDH-EAT-00418	**5081A09G02**	PRL4 gutter cover mounting hardware	—	Listed in s4

EDH-EAT-00417	5081A08G02	Cutler-Hammer	fastener	LISTED IN S4

PRL4 chassis mounting hardware

OEM part number	5081A08G02	A	S4 oem_spec
Description	PRL4 chassis mounting hardware (nuts and washers)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00418	5081A09G02	Cutler-Hammer	fastener	LISTED IN S4

PRL4 gutter cover mounting hardware

OEM part number	5081A09G02	A	S4 oem_spec
Description	PRL4 gutter cover mounting hardware (screws and captive nuts)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00365	**TAD3**	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA A	Referenced Feb 2013

EDH-EAT-00365	TAD3	Westinghouse	conversion-kit	REFERENCED FEB 2013

TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors

OEM part number	TAD3	A	S5, S14, S13, S116 p.13 note; oem_spec
Description	Adapter kit required when mounting a Series C KD frame breaker onto existing LB frame connectors; included with KD retrofit or connector kits, may be purchased separately	A	S5 p.13; oem_spec
	Adapter kit required when mounting a Series C KD-frame breaker onto existing LB-frame connectors; included in orders for KD retrofit kits or connector kits, also sold separately	A	S14 p. 13 note; oem_spec
	K-frame terminal adapter for use in replacing LB/DA breakers	A	S116 p.12-244, Table 12-451; oem_spec
Application	branch (line-side adapter)	A	S13 p. V12-T4-7 note 6; oem_spec
	accessory	A	S116 p.12-244, Table 12-451; oem_spec
Installation location	Line side of K-frame breaker on CDP chassis existing LB connectors; allows KD opposite LB breakers	A	S13 p. V12-T4-7 note 6; oem_spec
Breaker compatibility	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA in panelboard applications	A	S14, S13 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
	K-frame (replacing Westinghouse LB/DA breakers)	A	S116 p.12-244, Table 12-451; oem_spec
Status	Referenced Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL4, CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, JA, LB, KD, Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Kit contents, Material, Torque values		
Open question	*Exact contents of TAD3 (spacer blocks vs. extended line straps)?*		
Open question	*Is TAD3 also used on WF/WRP switchboard LB provisions?*		
Open question	*Which legacy LB/DA conductor geometry does TAD3 adapt to; quantity per package?*		

3.31 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)

FAM-EAT-009 · panelboard · aka PRL4DX, PRL4x, Pow-R-Line 4X, Pow-R-Xpress PRL4X · markings: Eaton

Successor to PRL4B; renewal parts (blank covers, vented covers, KPRL4X/KPRL4* connector kits, retrofit kits) are listed jointly for PRL4X and PRL4 in RP01400001E (2021).

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 1200 A; main device 1200 A	A	same as above
Branch breakers accepted	Breakers 15-1200 A (Power Defense PDG2-PDG5 plus legacy Series C/G frames via KPRL4 kits); fusible switches 30-1200 A (PRL4F)	A	S1, S6 oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S315 DG014003EN Design Guide DG014003EN Pow-R-Line 4X panelboards (Effective March 2025)

Also fits this family (entry printed elsewhere): PRLSEBGHB, PRLSEBPD3, PRLSEBPD2, 6572C746G01, 6554C01, 6554C02, 6574C74, KPRL4X12, KPRL4X22, KPRL4X32, KPRL4X334S, KPRL4X334T, KPRL4X336, KPRL4X34, KPRL4X35, KPRL4FDCL, KPRL4CA, KPRL4JDS, KPRL4JDT, KPRL4FBP, KPRL4KDS, KPRL4KDT, KPRL4LC, KPRL4LG, KPRL4MC, KPRL4LAP, KPRL4LCL, KPRL4NBP, KPRL4NC, KPRL4ND, KPRL4CKD, KPRL4MD, KPRL4CND, KPRL4FD1, KPRL4FD2, KPRL4ED2, KPRL4FD, KPRL4ED, KPRL4LD, KPRL44X, KPRL45X1, KPRL45X, KPRL45XS, KPRL4B6XS, KPRL4B6XT, KPRL4W9X, KPRL4W11X, KPRL4W15X, 1A32258H03, PRLSEBPD5, PRLSEBPD4, PRLSEBBAB

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00297	**PRXP4PD2FILL1**	Pow-R-Xpress PRL4X PD2 1-pole filler	—	Distributor-listed (UPC 786689814915)

EDH-EAT-00297	PRXP4PD2FILL1	Eaton	filler-plate	DISTRIBUTOR-LISTED (UP

Pow-R-Xpress PRL4X PD2 1-pole filler

OEM part number	PRXP4PD2FILL1	A	S11 oem_spec
Description	PRL4X PD2 1 pole filler (Pow-R-Xpress unassembled PRL4X panelboard)	C	S11 distributor
Poles	1	C	same as above
Status	Distributor-listed (UPC 786689814915)	C	same as above
Cross-links	Families: PRL4X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.32 PRL5P — Pow-R-Line 5P plug-on distribution panelboard

FAM-EAT-015 · panelboard · aka 5P, Pow-R-Line 5P · markings: Cutler-Hammer, Eaton

Plug-on distribution panelboard with single-bus (30 in box) or double-bus (48 in box) chassis; breakers supplied as complete adapter units (catalog 5P...).

Attribute	Value	Cl.	Sources
Status	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	B	S1, S2, S3 inference
Era of manufacture	Introduced August 1995	A	S2 p.2 Table 1; oem_spec
Main ampacity	Up to 1200 A (lug units 400/600/800 A single bus, 1200 A double bus)	A	S2 p.38; oem_spec
Branch breakers accepted	Plug-on adapter units with EHD..FDC, ED, JD, DK/KD, LD, MDL, ND (no 100% rated)	A	S2 p.37; oem_spec

Breaker families associated: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S3 RP01400001E Renewal Parts RP01400001E - Current Eaton panelboards

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00377	**5PLUG31200TC**	PRL5P 600-1200 A lug unit, double-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00374	**5PLUG3400SC**	PRL5P 400 A main/through-feed lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00375	**5PLUG3600SC**	PRL5P 600 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00376	**5PLUG3800SC**	PRL5P 800 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition

EDH-EAT-00377	5PLUG31200TC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 600-1200 A lug unit, double-bus chassis

OEM part number	5PLUG31200TC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	600-1200 A lug unit, double-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (4) #4-750 kcmil	A	same as above
Dimensions	7X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00374	5PLUG3400SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 400 A main/through-feed lug unit, single-bus chassis

OEM part number	5PLUG3400SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	400 A main/through-feed lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (1) 1/0-500 or (2) 1/0-250 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00375	5PLUG3600SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 600 A lug unit, single-bus chassis

OEM part number	5PLUG3600SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	600 A lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) 1/0-500 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00376	5PLUG3800SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 800 A lug unit, single-bus chassis

OEM part number	5PLUG3800SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	800 A lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) #2-500 or (3) #2-400 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00380	**5PN1200A**	PRL5P 1200 A neutral assembly, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00381	**5PN1200C**	PRL5P 1200 A neutral assembly, copper	—	PRL5P dropped from 2021 edition
EDH-EAT-00378	**5PN800A**	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition
EDH-EAT-00379	**5PN800C**	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition

EDH-EAT-00380	5PN1200A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, Al/Cu

OEM part number	5PN1200A	A	S2 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, Al/Cu	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00381	5PN1200C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, copper

OEM part number	5PN1200C	A	S2 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, copper	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00378	5PN800A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil

OEM part number	5PN800A	A	S2 p.39 Table 48; oem_spec
Description	800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00379	5PN800C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil

OEM part number	5PN800C	A	S2 p.39 Table 48; oem_spec
Description	800 A neutral assembly, copper, (4) 250-500 kcmil	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00382	**5PG1200A**	PRL5P 1200 A ground bar, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00383	**5PG1200C**	PRL5P 1200 A ground bar, copper	—	PRL5P dropped from 2021 edition

EDH-EAT-00382	5PG1200A	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, Al/Cu

OEM part number	5PG1200A	A	S2 p.39 Table 48; oem_spec
Description	1200 A ground bar, Al/Cu	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00383	5PG1200C	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, copper

OEM part number	5PG1200C	A	S2 p.39 Table 48; oem_spec
Description	1200 A ground bar, copper	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00384	**5PFP1S**	PRL5P 1X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00385	**5PFP1T**	PRL5P 1X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00386	**5PFP2S**	PRL5P 2X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00387	**5PFP2T**	PRL5P 2X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00388	**5PFP3S**	PRL5P 3X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00389	**5PFP3T**	PRL5P 3X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00390	**5PFP4S**	PRL5P 4X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00391	**5PFP4T**	PRL5P 4X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00392	**5PFP5S**	PRL5P 5X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00393	**5PFP5T**	PRL5P 5X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00394	**5PFP6S**	PRL5P 6X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00395	**5PFP6T**	PRL5P 6X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition

EDH-EAT-00384	5PFP1S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, single-bus chassis

OEM part number	5PFP1S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00385	5PFP1T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, double-bus chassis

OEM part number	5PFP1T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00386	5PFP2S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, single-bus chassis

OEM part number	5PFP2S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00387	5PFP2T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, double-bus chassis

OEM part number	5PFP2T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00388	5PFP3S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, single-bus chassis

OEM part number	5PFP3S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00389	5PFP3T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, double-bus chassis

OEM part number	5PFP3T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00390	5PFP4S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, single-bus chassis

OEM part number	5PFP4S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00391	5PFP4T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, double-bus chassis

OEM part number	5PFP4T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00392	5PFP5S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, single-bus chassis

OEM part number	5PFP5S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00393	5PFP5T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, double-bus chassis

OEM part number	5PFP5T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00394	5PFP6S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, single-bus chassis

OEM part number	5PFP6S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00395	5PFP6T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, double-bus chassis

OEM part number	5PFP6T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00398	**5PCGBLD600S**	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00401	**5PCGBLUG1200T**	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00396	**5PCGBLUG400S**	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00397	**5PCGBLUG600S**	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00399	**5PCGBLUG800S**	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00400	**5PCGBMD800T**	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00402	**5PCGBND1200T**	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	—	PRL5P dropped from 2021 edition

EDH-EAT-00398	5PCGBLD600S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus

OEM part number	5PCGBLD600S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A LD main breaker, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00401	5PCGBLUG1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus

OEM part number	5PCGBLUG1200T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A main lugs, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00396	5PCGBLUG400S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus

OEM part number	5PCGBLUG400S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 400 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00397	5PCGBLUG600S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus

OEM part number	5PCGBLUG600S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00399	5PCGBLUG800S	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus

OEM part number	5PCGBLUG800S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00400	5PCGBMD800T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus

OEM part number	5PCGBMD800T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A MD main breaker, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00402	5PCGBND1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus

OEM part number	5PCGBND1200T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A ND main breaker, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.33 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards

FAM-EAT-023 · panelboard · aka WEB, WCA, WEHB, WFB, HWFB, WGB, WGHB · markings: Westinghouse

Westinghouse 1937-1988 era panelboards named for their branch breaker (E-frame, CA, F-frame, G-frame). PRL3 connector kits (KPRL3FD, KPRL3ED, KPRL3CA) fit WEB, WCA, WEHB, WFB and HWFB.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	A	S13 p. V12-T4-7; oem_spec
Branch breakers accepted	WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	A	same as above
Kit fit	The PRL3 connector kits will fit the following panelboards: WEB, WCA, WEHB, WFB, and HWFB	A	S14 p. 7 note; oem_spec

Breaker families associated: EB, EHB, FB, HFB

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): KPRL3FD, KPRL3ED, KPRL3CA

3.34 ES — Cutler-Hammer Type ES switchboard

FAM-EAT-019 · switchboard · aka ES switchboard, Type ES · markings: Cutler-Hammer

Cutler-Hammer branded service distribution switchboard using Westinghouse molded-case breakers under the 1960s supply agreement. Existing ES lineups can be extended with new Pow-R-Line C structures through a transition section.

Attribute	Value	Cl.	Sources
Status	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	A	S13 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	A	same as above
Voltage rating	120-600 V	A	same as above
Main ampacity	ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA	A	same as above

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.35 IFS — Integrated Facility System switchboard

FAM-EAT-022 · switchboard · aka Integrated Facility Switchboard, IFS switchboard · markings: Eaton

Free-standing front-access UL 891 switchboard that integrates standard panelboards, dry-type transformers and other equipment in 'cells'; used with Type 1 Pow-R-Line C switchboard sections.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S17 p. 21.6-1; oem_spec
Relationship	Used with Type 1 Pow-R-Line C switchboard sections; mains/feeders selected from Section 21.1 (PRLC)	A	same as above

Key documents: S17 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.36 MP2 — Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)

FAM-EAT-031 · switchboard · aka MP-2, MP-200, MP200 · markings: Cutler-Hammer

Cutler-Hammer group-mounted switchboard whose distribution sections accept the MP40 (breaker) and MP100 (fusible) chassis kits. Eaton documents call it both 'MP2' (Bid Manager help, RP01400003E snippets) and 'MP-200' (Vol 12 publication list, PL01400003E). Whether MP2 and MP-200 are the same product or two generations is not confirmed.

Attribute	Value	Cl.	Sources
Status	Out of production; renewal parts RP01400003E 'Renewal Parts Data for MP40 and MP-200'	A	S13 V12-T4-22; oem_spec
Designation	'MP2 group-mounted switchboards' (Eaton Bid Manager); 'MP-200' (Vol 12 Further Information); dealers list 'MP200' alongside MP40/MP50/MP100 (Equivalence of MP2 and MP-200 is inference)	B	S248, S13, S251 oem_spec

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S248 Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page; S249 RP01400003E Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40,; S250 PL01400003E Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it

Also fits this family (entry printed elsewhere): MP40KF100-3, MP40KC225-3, MP40ED225-3, MP40KJ225-3, MP40KK400-3, MP40KL400-3, MP40KL600-3, MP40KM800-3, MP40KN1200-3, MP40CHH, MPED1K

3.37 PRLC — Pow-R-Line C switchboard

FAM-EAT-017 · switchboard · aka POW-R-LINE C, PRL-C, Pow-R-Line C, Pow-R-Line C switchboard, Type 1 Pow-R-Line C · markings: Cutler-Hammer, Eaton, Westinghouse

Eaton (originally Westinghouse) Class II service-distribution switchboard, UL 891 / NEMA PB-2, front- or rear-access, with individually mounted mains and group-mounted feeder chassis. Evolved from the Westinghouse WF/WRP St. Louis switchboard when the design moved to Sumter SC and Visalia CA in 1988 with the introduction of Series C breakers. Distribution chassis are laid out in X units (1X = 1-3/8 in) on 38X or 50X vertical panel space in 36 in or 45 in wide structures; device X requirements (EHD 1-3X, FD 2-3X, JD 3X, KD 4X, LD/MDL/ND 6X) parallel the PRL4 panelboard chassis. Vol 12 states breaker provisions 'are available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', but no PRLC-specific provision kit catalog numbers were found in public documents (factory/Sumter quoted).

Attribute	Value	Cl.	Sources
Status	current (listed in April 2018 consulting guide)	A	S17 p. 21.0-8; oem_spec
Era of manufacture	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	A	S13 p. V12-T15-5 (Chronology); oem_spec
Voltage rating	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rating table)	A	S17, S13 p. 21.0-9 Table 21.0-2; p. V12-T15-5; oem_spec
Main ampacity	Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	A	same as above
Branch breakers accepted	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A), drawout MCCB 70-1200 A, fusible switches 30-1200 A. Uses Series C MCCBs (EHD, FD/HFD/FDC, ED, JD, DK/KD/HKD/KDC, LD/HLD/LDC, MDL/HMDL, NG/ND, LG, etc.)	A	S17 pp. 21.0-8, 21.0-9, 21.1-12 Fig 21.1-9; oem_spec
X unit	1X = 1-3/8 in (34.9 mm) in PRLC distribution layout	A	S17 p. 21.1-12 Fig 21.1-9; oem_spec
Distribution chassis	Distribution sections use 38X or 50X vertical panel space for devices (90 in high structures), widths 36 or 45 in	A	S17 p. 21.1-11 Fig 21.1-7; oem_spec
Device x space	Fig 21.1-9 (36 in structure): EHD 100 A 1P 1X / 2P 2X / 3P 3X; FDB/FD/HFD/FDC 150 A 1-3P 1-3X; EDB/EDS/ED/EDH/EDC & FD/HFD/FDC 225 A 2P 2X 3P 3X; JD/HJD/JDC 250 A 3X; DK/KD/HKD/KDC/CKD/CHKD 400 A 4X; ELKD earth leakage 4X; LGE/LGH/LGC/LGU 600 A 4X; LD/HLD/LDC/CLD 600 A 6X; FB-P 3X; NHH/LA-P 6X; MDL/HMDL/CMDL 800 A 6X; NG/NGH/NGC 1200 A 6X. 45 in structure: twin DK/KD/HKD/KDC 4X, NB-P 6X, NG 6X. Breaker-to-fusible transition 1X; SPD 7X or 10X; customer metering 11X	A	S17 p. 21.1-12 Fig 21.1-9; oem_spec
Main lug space	Main lugs only: 400/600 A 10X (2-#2-500) or 16X on 50X chassis (2-#250-750); 800 A 10X/16X; 1200-2000 A 12X/16X (38X chassis values 10-12X)	A	S17 p. 21.1-11 Table 21.1-11; oem_spec
Renewal parts	Eaton offers match-and-lineup PRLC structures, new breakers, breaker provisions/connectors 'available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', and switchboard structure parts	A	S13 p. V12-T15-5; oem_spec
Bus torque	Pow-R-Line CS (Canadian derivative) manual gives busbar torque #10 30 lb-in, 1/4 in 65, 5/16 in 130, 3/8 in 240, 1/2 in 600 lb-in; 70 lb-ft when two Belleville washers per bolt. Not verified for PRLC (IM01500001E not obtained)	C	S21 p. 17 Appendix A Table 2; oem_spec

Attribute	Value	Cl.	Sources
Branch kit relationship to prl4	A surplus listing titles the PRL4 connector kit KPRL4KDS as 'Pow-R-Line C'; the PRLC distribution X-space table matches PRL4 kit space requirements. Not OEM-confirmed that PRL4 KPRL4 kits are listed for PRLC switchboard chassis	D	S23, S17, S16 inference
Bus joint torque	Torque values for copper or aluminum bus bar connections: #10 = 30 lb-in (2.5 lb-ft); 1/4 in = 65 lb-in (5.4 lb-ft); 5/16 in = 130 lb-in (10.8 lb-ft); 3/8 in = 240 lb-in (20.0 lb-ft); 1/2 in = 600 lb-in (50.0 lb-ft). For other torque values refer to the instruction leaflet for the specific component. (IM01500001E covers Eaton Pow-R-Line switchboards generally (incl. Pow-R-Line C / i); not stated per sub-type.)	A	S22 p. 20, Appendix A Table 2; oem_spec
Installation doc	Pow-R-Line switchboards instruction manual IM01500001E (May 2021): splice plates installed with carriage bolts and hex nuts with captive Belleville washers, torqued per Appendix A Table 2 and switchboard labels; busway flange tie-bar hardware 0.375 in hex head bolt, flat washer and keps nut tightened to 20 lb-ft.	A	S22 pp. 9, 19, 20; oem_spec

Breaker families associated: ED, EHD, FD, JD, KD, LD, MDL, ND, RD

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S16 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S17 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S21 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual; S22 IM01500001E Pow-R-Line switchboards instruction manual; S23 eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P; S25 Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard

3.38 PRLCS — Pow-R-Line CS switchboard

FAM-EAT-021 · switchboard · aka Pow-R-Line CS, PRL CS · markings: Eaton

Eaton Canada switchboard line documented by instruction manual IB015002EN (Nov 2021). Manual gives bus-joint torque table (Appendix A). No branch kit catalog numbers found.

Attribute	Value	Cl.	Sources
Status	current (Canadian market; manual IB015002EN effective Nov 2021)	B	S21 cover; oem_spec
Bus torque	Busbar connections: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in; with two Belleville washers per bolt (convex side up) torque to 70 lb-ft	A	S21 p. 17 Appendix A Table 2; oem_spec

Key documents: S21 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual

3.39 PRLXD — Pow-R-Line XD switchboard

FAM-EAT-039 · switchboard · aka Pow-R-Line XD, PRL XD

Eaton Pow-R-Line XD low-voltage distribution switchboard; installation per instruction manual MN015002EN (July 2019).

Attribute	Value	Cl.	Sources
Bus joint torque	Torque values for copper or aluminum bus bar connections: #10 30 lb-in (2.5 lb-ft); 1/4 in 65 (5.4); 5/16 in 130 (10.8); 3/8 in 240 (20.0); 1/2 in 600 (50.0). Other torques: refer to the component instruction leaflet.	A	S310 Appendix A Table 1; oem_spec
Installation doc	MN015002EN; system ground fault instructions referenced as IB015002EN	A	S310 maintenance section; oem_spec

Key documents: S310 MN015002EN Pow-R-Line XD switchboards Instruction Manual MN015002EN (Effective July 2019)

3.40 PRLi — Pow-R-Line i switchboard

FAM-EAT-020 · switchboard · aka PRL i, Pow-R-Line I, Pow-R-Line i · markings: Cutler-Hammer, Eaton

Rear-access, front- and rear-aligned UL 891 switchboard with individually compartmentalized feeder devices (not group-mounted). Included here for lineage; branch hardware is device-specific compartments rather than group-mounted connector kits.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S17 p. 21.0-11; oem_spec
Era of manufacture	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	A	S13 p. V12-T15-2; oem_spec
Main ampacity	4000 A main bus maximum	A	S17 p. 21.0-11; oem_spec
Branch breakers accepted	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum SB/DS, NRX	A	same as above
Bus joint torque	Pow-R-Line switchboards bus bar connection torque table: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in (50 lb-ft). (Manual is for Pow-R-Line switchboards generally.)	A	S22 p. 20, Appendix A Table 2; oem_spec

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S17 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S22 IM01500001E Pow-R-Line switchboards instruction manual

3.41 WF/WRP — Westinghouse WF/WRP switchboard

FAM-EAT-018 · switchboard · aka WF, WRP, Type WF, Type WRP, WF/WRP switchboard · markings: Westinghouse

Westinghouse St. Louis Class II switchboard. Type WF = front access (rear flush), Type WRP = rear access (front and rear flush). Feeders were panel-mounted molded-case breakers or FDP fusible switches — the same device family used in CDP/FDP panelboards. Eaton's Sumter aftermarket center offers 'retrofit kits for WF and WRP distribution sections' and 'connector kits for WF and WRP distribution sections' (RP01400002E p.20), and Vol 12 says provisions/connectors are available for most ratings of WF/WRP; no catalog numbers published.

Attribute	Value	Cl.	Sources
Status	discontinued (superseded by Pow-R-Line C)	A	S13 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	A	same as above
Successor	Pow-R-Line C switchboard (new PRLC match/lineup structures can connect to existing WF/WRP)	A	same as above
Voltage rating	120-600 V	A	S13 p. V12-T15-5 ratings table; oem_spec
Main ampacity	Switchboard bus 600-4000 A; protective devices 15-4000 A; 10-200 kA	A	S13 p. V12-T15-5; oem_spec
Branch breakers accepted	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure switch (CBC) or MCCB	A	S13 pp. V12-T15-2, V12-T15-5; oem_spec
Aftermarket / reproduction	Sumter Plant Aftermarket Center offers retrofit kits and connector kits for WF and WRP distribution sections	A	S14 p. 20; oem_spec

Breaker families associated: FB, RD
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12

3.42 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00462	**3T100FB**	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); HFDDC 100 A A	unknown
EDH-EAT-00466	**3T150FB**	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); also FP definite-purpose 200 A (s7) A	unknown
EDH-EAT-00461	**3T20FB**	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) A	unknown
EDH-EAT-00468	**3T225FD**	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	F-frame C	unknown
EDH-EAT-00465	**3TA100FD**	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) A	unknown
EDH-EAT-00622	**3TA150F3K**	Series C F-frame multiwire connector, 3 wires/terminal	F-frame (225 A max) A	unknown
EDH-EAT-00623	**3TA150F6K**	Series C F-frame multiwire connector, 6 wires/terminal	F-frame (225 A max) A	unknown
EDH-EAT-00469	**3TA150FB**	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	—	unknown
EDH-EAT-00463	**3TA225FD**	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); also listed for JG-frame DC breakers A	unknown
EDH-EAT-00467	**3TA225FDK**	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) A	unknown
EDH-EAT-00464	**3TA50FB**	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) A	unknown

EDH-EAT-00462	3T100FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)

OEM part number	3T100FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); HFDDC 100 A	A	same as above
Current rating	100 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Wire range	14-1/0 AWG (2.5-50 mm2)	A	same as above
Material	terminal body steel	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00466	3T150FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)

OEM part number	3T150FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu only wire; package of 3 terminals	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); also FP definite-purpose 200 A (s7)	A	same as above
Current rating	200 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Wire range	4-4/0 AWG (25-95 mm2)	A	same as above
Material	terminal body stainless steel	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00461	3T20FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)

OEM part number	3T20FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Not for use with ED, EDH, EDC breakers	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	20 (EHD) A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Wire range	14-10 AWG (2.5-4 mm2)	A	same as above
Material	terminal body steel	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00468	3T225FD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)

OEM part number	3T225FD	C	S124 distributor
Description	Optional copper-body pressure terminal, Cu wire, 4-4/0 AWG (25-95 mm2), package of 3 (reseller reproduction of newer Eaton table; not in 2008 table)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	F-frame	C	same as above
Current rating	225 A	C	same as above
Kit contents	3 terminals per package	C	same as above
Wire range	4-4/0 AWG (25-95 mm2) Cu	C	same as above
Material	copper body	C	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00465	3TA100FD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)

OEM part number	3TA100FD	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	100 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Wire range	14-1/0 AWG (2.5-50 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00622	3TA150F3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame multiwire connector, 3 wires/terminal

OEM part number	3TA150F3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	F-frame (225 A max)	A	same as above
Current rating	225 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(3) 14-2 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00623	3TA150F6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame multiwire connector, 6 wires/terminal

OEM part number	3TA150F6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	F-frame (225 A max)	A	same as above
Current rating	225 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(6) 14-6 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00469	3TA150FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 150 A, Cu/Al, Q18

OEM part number	3TA150FB	C	S121 p.1; oem_spec
Description	Line and load terminals, 150 A, #4-4/0 AWG Cu/Al, pressure type (Eaton web spec; frame field 'Frame J-K' doubtful)	C	same as above
Application	accessory	C	same as above
Current rating	150 A	C	same as above
Kit contents	Quantity 18 (per web spec)	C	same as above
Wire range	#4-4/0 AWG Cu/Al	C	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	breaker compatibility, Dimensions, OEM instruction document, not found in 2008/2015 catalog tables, Status, Torque values		
Open question	*3TA150FB is absent from CA08101001E 2008 F-frame Table 12-163; is it a newer or regional (Canada) part, and which frame does it fit?*		

EDH-EAT-00463	3TA225FD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)

OEM part number	3TA225FD	A	S116 p.12-91, Table 12-163; oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Standard on 225 A F-frame; assemble collar enclosing conductor, clip snaps around collar	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); also listed for JG-frame DC breakers (JGEDC/JGSDC/JGHDC 225 A) and FG enclosed breakers	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Wire range	4-4/0 AWG (25-95 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE), Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00467	3TA225FDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)

OEM part number	3TA225FDK	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Includes terminal shield kit; adds approx. 3 in (76.2 mm) to breaker height; 3-pole only	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	3 terminals per package; includes terminal shield kit	A	same as above
Wire range	6 AWG-300 kcmil (16-150 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00464	3TA50FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)

OEM part number	3TA50FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Not for use with ED, EDH, EDC breakers	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	50 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Wire range	14-4 AWG (2.5-25 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00683	**1253C72G01**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00684	**1253C72G03**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00687	**1253C73G01**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00685	**1253C73G03**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00688	**1253C73G05**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00686	**1253C73G06**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00679	**673B142G02**	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing, 100 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00682	**673B142G03**	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00681	**673B142G04**	Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00680	**673B142G10**	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	F-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00683	1253C72G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A

OEM part number	1253C72G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 50 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00684	1253C72G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A

OEM part number	1253C72G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 50 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00687	1253C73G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A

OEM part number	1253C73G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00685	1253C73G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A

OEM part number	1253C73G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00688	1253C73G05	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A

OEM part number	1253C73G05	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00686	1253C73G06	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A

OEM part number	1253C73G06	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00679	673B142G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing, 100 A

OEM part number	673B142G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 2.75 in bus spacing, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reproduction lists 673B142G02 as center strap for both 50 A and 100 A at 2.75 in spacing; 2008 OEM table lists only 100 A and 150 A rows at 2.75 in.*		

EDH-EAT-00682	673B142G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A

OEM part number	673B142G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 2.75 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00681	673B142G04	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A

OEM part number	673B142G04	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 2.75 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00680	673B142G10	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A

OEM part number	673B142G10	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 2.75 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00702	**624B600H01**	Series C F-frame panelboard strap mounting bracket	F-frame **A**	unknown
EDH-EAT-00701	**624B600H02**	Series C F-frame panelboard strap mounting bracket	F-frame **A**	unknown

EDH-EAT-00702	624B600H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C F-frame panelboard strap mounting bracket

OEM part number	624B600H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00701	624B600H02	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C F-frame panelboard strap mounting bracket

OEM part number	624B600H02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	2	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00633	**4210B95G01**	Series C F-frame special terminal shield 3-pole for use with electrical operator	F-frame **A**	unknown
EDH-EAT-00634	**4210B95G02**	Series C F-frame special terminal shield 4-pole for use with electrical operator	F-frame **A**	unknown
EDH-EAT-00629	**625B229G06**	Series C F-frame terminal shield 1-pole, line	F-frame **A**	unknown
EDH-EAT-00630	**625B229G07**	Series C F-frame terminal shield 2-pole, line	F-frame **A**	unknown
EDH-EAT-00631	**625B229G08**	Series C F-frame terminal shield 3-pole, line	F-frame **A**	unknown
EDH-EAT-00632	**625B229G09**	Series C F-frame terminal shield 4-pole, line	F-frame **A**	unknown
EDH-EAT-00647	**IPB1**	Series C interphase barrier (F)	F **A**	unknown
EDH-EAT-00645	**TEC1**	Series C F-frame terminal end cover, 0.25 opening	F-frame 3-pole **A**	unknown
EDH-EAT-00646	**TEC2**	Series C F-frame terminal end cover, 0.41 opening	F-frame 3-pole **A**	unknown

EDH-EAT-00633 **4210B95G01** Eaton / Cutler-Hammer barrier **STATUS UNKNOWN**

Series C F-frame special terminal shield 3-pole for use with electrical operator

OEM part number	4210B95G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame special terminal shield 3-pole for use with electrical operator	**A**	same as above
Application	accessory	**A**	same as above
Installation location	terminal area	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Poles	3	**A**	same as above
Kit contents	individually packaged	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00634 **4210B95G02** Eaton / Cutler-Hammer barrier **STATUS UNKNOWN**

Series C F-frame special terminal shield 4-pole for use with electrical operator

OEM part number	4210B95G02	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame special terminal shield 4-pole for use with electrical operator	**A**	same as above
Application	accessory	**A**	same as above
Installation location	terminal area	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Poles	4	**A**	same as above
Kit contents	individually packaged	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00629	625B229G06	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 1-pole, line

OEM part number	625B229G06	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 1-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	1	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00630	625B229G07	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 2-pole, line

OEM part number	625B229G07	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 2-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	2	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00631	625B229G08	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 3-pole, line

OEM part number	625B229G08	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 3-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00632	625B229G09	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 4-pole, line

OEM part number	625B229G09	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 4-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00647	IPB1	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (F)

OEM part number	IPB1	A	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F	A	same as above
Kit contents	2 per package	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00645	TEC1	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal end cover, 0.25 opening

OEM part number	TEC1	A	S116 p.12-249, Table 12-468; oem_spec
Description	Molded glass-polyester terminal end cover sliding over line end of 3-pole F-frame, forming terminal compartments isolating ionized gases (MCC applications); UL File E7819	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame 3-pole	A	same as above
Kit contents	one per breaker	A	same as above
Material	glass-polyester	A	same as above
Dimensions	conductor opening diameter 0.25 in (6.35 mm)	A	S116 p.12-249; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00646	TEC2	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal end cover, 0.41 opening

OEM part number	TEC2	A	S116 p.12-249, Table 12-468; oem_spec
Description	Molded glass-polyester terminal end cover sliding over line end of 3-pole F-frame, forming terminal compartments isolating ionized gases (MCC applications); UL File E7819	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame 3-pole	A	same as above
Kit contents	one per breaker	A	same as above
Material	glass-polyester	A	same as above
Dimensions	conductor opening diameter 0.41 in (10.41 mm)	A	S116 p.12-249; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00609	**KPR1A**	Series C F-frame keeper nut (10-32, line or load end)	F-frame **A**	unknown
EDH-EAT-00610	**KPR1AM**	Series C F-frame keeper nut (M5, line or load end)	F-frame **A**	unknown

EDH-EAT-00609 **KPR1A** Eaton / Cutler-Hammer fastener **STATUS UNKNOWN**

Series C F-frame keeper nut (10-32, line or load end)

OEM part number	KPR1A	**A**	S116 p.12-243, Table 12-448; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line or load conductor	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Kit contents	package of 12	**A**	same as above
Fasteners	thread 10-32	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00610 **KPR1AM** Eaton / Cutler-Hammer fastener **STATUS UNKNOWN**

Series C F-frame keeper nut (M5, line or load end)

OEM part number	KPR1AM	**A**	S116 p.12-243, Table 12-448; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line or load conductor	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Kit contents	package of 12	**A**	same as above
Fasteners	thread M5	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00654	**374D883G01**	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	F-frame fixed-mounted **A**	unknown
EDH-EAT-00655	**374D883G02**	Series C F-frame rear connecting stud, 225 A long stud	F-frame fixed-mounted **A**	unknown
EDH-EAT-00652	**451D874G01**	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	F-frame fixed-mounted **A**	unknown
EDH-EAT-00653	**451D874G02**	Series C F-frame rear connecting stud, 100 A long stud	F-frame fixed-mounted **A**	unknown
EDH-EAT-00617	**FCWTK**	Series C F-frame control wire terminal kit	F-frame **A**	unknown
EDH-EAT-00618	**FCWTK225**	Series C F-frame control wire terminal kit	F-frame **A**	unknown
EDH-EAT-00593	**KPEK1**	Series C F-frame end cap kit, 3-pole, 10-32	F-frame 3-pole (225 A) **A**	unknown
EDH-EAT-00591	**KPEK12**	Series C F-frame end cap kit, 2-pole, 10-32	F-frame 2-pole (225 A) **A**	unknown
EDH-EAT-00595	**KPEK14**	Series C F-frame end cap kit, 4-pole, 10-32	F-frame 4-pole (225 A) **A**	unknown
EDH-EAT-00594	**KPEKM1**	Series C F-frame end cap kit, 3-pole, M5	F-frame 3-pole (225 A) **A**	unknown
EDH-EAT-00592	**KPEKM12**	Series C F-frame end cap kit, 2-pole, M5	F-frame 2-pole (225 A) **A**	unknown
EDH-EAT-00596	**KPEKM14**	Series C F-frame end cap kit, 4-pole, M5	F-frame 4-pole (225 A) **A**	unknown

EDH-EAT-00654	374D883G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)

OEM part number	374D883G01	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 225 A short stud (110-225 A breakers); tubes 374D883H06-H09	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 374D883H06/H07/H08/H09 ordered separately by panel thickness	A	same as above
Fasteners	.44-14 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00655	374D883G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 225 A long stud

OEM part number	374D883G02	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 225 A long stud; tubes 374D883H10-H13	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 374D883H10/H11/H12/H13 ordered separately by panel thickness	A	same as above
Fasteners	.44-14 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00652	451D874G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)

OEM part number	451D874G01	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 100 A short stud (15-100 A breakers); tubes 32B9446H20-H23 by panel thickness	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 32B9446H20/H21/H22/H23 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00653	451D874G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 100 A long stud

OEM part number	451D874G02	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 100 A long stud; tubes 32B9446H24-H27	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 32B9446H24/H25/H26/H27 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00617	FCWTK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame control wire terminal kit

OEM part number	FCWTK	A	S116 p.12-244, Tables 12-452..12-454; oem_spec
Description	F-frame control wire terminal kit, 150 A (12 tangs; terminals ordered separately); for steel or stainless steel terminals only; taps control power using male quick-disconnect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Requires	3T100FB (EDH-EAT-00462)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00618	FCWTK225	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame control wire terminal kit

OEM part number	FCWTK225	A	S116 p.12-244, Tables 12-452..12-454; oem_spec
Description	F-frame control wire terminal kit, 225 A (12 tangs); taps control power using male quick-disconnect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00593	KPEK1	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 3-pole, 10-32

OEM part number	KPEK1	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 3-pole (225 A)	A	same as above
Poles	3	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00591	KPEK12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 2-pole, 10-32

OEM part number	KPEK12	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 2-pole (225 A)	A	same as above
Poles	2	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00595	KPEK14	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 4-pole, 10-32

OEM part number	KPEK14	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 4-pole (225 A)	A	same as above
Poles	4	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00594	KPEKM1	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 3-pole, M5

OEM part number	KPEKM1	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 3-pole (225 A)	A	same as above
Poles	3	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00592	KPEKM12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 2-pole, M5

OEM part number	KPEKM12	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 2-pole (225 A)	A	same as above
Poles	2	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00596	KPEKM14	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 4-pole, M5

OEM part number	KPEKM14	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 4-pole (225 A)	A	same as above
Poles	4	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C G-Frame (GD/GHC/GHB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00620	**3TA100G3K**	Series C G-frame multiwire connector, 3 wires/terminal	G-frame (100 A max); GD breakers require special tapping and special t A	unknown
EDH-EAT-00621	**3TA100G6K**	Series C G-frame multiwire connector, 6 wires/terminal	G-frame (100 A max); GD breakers require special tapping and special t A	unknown

EDH-EAT-00620	3TA100G3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C G-frame multiwire connector, 3 wires/terminal

OEM part number	3TA100G3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	G-frame (100 A max); GD breakers require special tapping and special terminals	A	same as above
Current rating	100 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(3) 14-2 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00621	3TA100G6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C G-frame multiwire connector, 6 wires/terminal

OEM part number	3TA100G6K	**A**	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	G-frame (100 A max); GD breakers require special tapping and special terminals	**A**	same as above
Current rating	100 A	**A**	same as above
Kit contents	package of 3	**A**	same as above
Wire range	(6) 14-6 AWG Cu per terminal	**A**	same as above
Material	tin-plated aluminum connectors	**A**	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00628	**GTSK3**	Series C G-frame terminal shield	G-frame **A**	unknown

EDH-EAT-00628	GTSK3	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C G-frame terminal shield

OEM part number	GTSK3	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. G-frame terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Installation location	terminal area	**A**	same as above
Breaker compatibility	G-frame	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C J-Frame (JD/HJD/JDC/JDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00624	**3TA250J3K**	Series C J-frame multiwire connector, 3 wires/terminal	J-frame (250 A max) **A**	unknown
EDH-EAT-00625	**3TA250J6K**	Series C J-frame multiwire connector, 6 wires/terminal	J-frame (250 A max) **A**	unknown
EDH-EAT-00471	**T250KB**	Series C J-frame line/load terminal, 250 A, Cu only (optional)	J-frame JD/HJD/JDC/JDB **A**	unknown
EDH-EAT-00470	**TA250KB**	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	J-frame JD/HJD/JDC/JDB 70-250 A (standard); also HJDDC; JG enclosed 25 **A**	unknown

EDH-EAT-00624	3TA250J3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame multiwire connector, 3 wires/terminal

OEM part number	3TA250J3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	J-frame (250 A max)	A	same as above
Current rating	250 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(3) 14-2 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00625	3TA250J6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame multiwire connector, 6 wires/terminal

OEM part number	3TA250J6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	J-frame (250 A max)	A	same as above
Current rating	250 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(6) 14-6 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00471	T250KB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame line/load terminal, 250 A, Cu only (optional)

OEM part number	T250KB	A	S116 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Description	Optional Cu pressure terminal; stainless steel body; collar/slotted nut and screw	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame JD/HJD/JDC/JDB	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal	A	same as above
Wire range	4-350 kcmil (25-185 mm2) Cu only	A	same as above
Material	stainless steel body	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Some distributors list body material as copper - OEM says stainless steel.*		

EDH-EAT-00470	TA250KB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame line/load terminal, 250 A, Cu/Al (standard)

OEM part number	TA250KB	A	S116 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Description	Standard Cu/Al pressure terminal; bottom has recess positioned over J-frame terminal conductor; individually packed; no dual lugs	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame JD/HJD/JDC/JDB 70-250 A (standard); also HJDDC; JG enclosed 250 A (s7 V4-T2-345)	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	4-350 kcmil (25-185 mm2) Cu/Al	A	same as above
Material	aluminum body	A	same as above
Torque values	275 lb-in (31 N-m) per J-frame IL table (search snippet) (Torque value seen only in search-result snippet of Eaton IL29C402D; not verified from downloaded document)	C	S117 oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00689	**2600D26G01**	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	J-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00690	**2600D26G02**	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	J-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00689	2600D26G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A

OEM part number	2600D26G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 250 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	J-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00690	2600D26G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A

OEM part number	2600D26G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 250 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	J-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00635	**1266C07G01**	Series C J-frame terminal shield 2/3-pole, line end	J-frame A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00636	**6631C01G01**	Series C J-frame terminal shield 4-pole, line end	J-frame **A**	unknown
EDH-EAT-00637	**6641C16G01**	Series C J-frame terminal shield 2/3-pole, load end	J-frame **A**	unknown
EDH-EAT-00638	**6641C16G02**	Series C J-frame terminal shield 4-pole, load end	J-frame **A**	unknown
EDH-EAT-00651	**IPB2**	Series C interphase barrier (J, K per newer table)	J, K frames (per KM page) **C**	unknown
EDH-EAT-00648	**IPB3**	Series C interphase barrier (J, K)	J, K (2008 Table 12-469); LG (2008 Table 12-67); KM reproduction: L **A**	unknown

EDH-EAT-00635 — 1266C07G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 2/3-pole, line end

OEM part number	1266C07G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 2/3-pole, line end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	2,3	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00636 — 6631C01G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 4-pole, line end

OEM part number	6631C01G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 4-pole, line end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	4	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00637 — 6641C16G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 2/3-pole, load end

OEM part number	6641C16G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 2/3-pole, load end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	load end	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	2,3	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller reproduction lists 6641C16G01/G02 as 'Line End'; 2008 OEM table says Load End.*		

EDH-EAT-00638	6641C16G02	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C J-frame terminal shield 4-pole, load end

OEM part number	6641C16G02	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 4-pole, load end	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	J-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller reproduction lists 6641C16G01/G02 as 'Line End'; 2008 OEM table says Load End.*		

EDH-EAT-00651	IPB2	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (J, K per newer table)

OEM part number	IPB2	C	S123 distributor
Description	Interphase barriers, 2 per package (reseller reproduction of newer Eaton table)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	J, K frames (per KM page)	C	same as above
Kit contents	2 per package	C	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Not in 2008 OEM table (which assigns IPB3 to J/K) - confirm in current CA08100005E.*		

EDH-EAT-00648	IPB3	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (J, K)

OEM part number	IPB3	A	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package (Conflicting assignments between sources)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J, K (2008 Table 12-469); LG (2008 Table 12-67); KM reproduction: L	A	same as above
Kit contents	2 per package	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB), Series G LG-Frame (LGE/LGS/LGH/LGC), Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Which frames does IPB3 fit? 2008 Table 12-469 says J,K; KM reproduction of newer table says J,K = IPB2 and L = IPB3.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00615	**PLN2**	Series C J-frame plug nut (.250-20)	J-frame A	unknown
EDH-EAT-00616	**PLN2M**	Series C J-frame plug nut (M6)	J-frame A	unknown

EDH-EAT-00615	PLN2	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C J-frame plug nut (.250-20)

OEM part number	PLN2	A	S116 p.12-244, Table 12-450; oem_spec
Description	Plug nut press-fit into opening in J-frame terminal conductor for screw-connected ring-type terminals; screws and washers by customer	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame	A	same as above
Kit contents	package of 6	A	same as above
Fasteners	thread .250-20	A	S116 p.12-244; oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00616	PLN2M	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C J-frame plug nut (M6)

OEM part number	PLN2M	A	S116 p.12-244, Table 12-450; oem_spec
Description	Plug nut press-fit into opening in J-frame terminal conductor for screw-connected ring-type terminals; screws and washers by customer	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame	A	same as above
Kit contents	package of 6	A	same as above
Fasteners	thread M6	A	S116 p.12-244; oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00656	**5010D23G01**	Series C J-frame rear connecting stud, 250 A short stud	J-frame fixed-mounted A	unknown
EDH-EAT-00657	**5010D23G02**	Series C J-frame rear connecting stud, 250 A long stud	J-frame fixed-mounted A	unknown
EDH-EAT-00619	**KCWTK**	Series C J/K-frame control wire terminal kit	J/K-frame A	unknown
EDH-EAT-00597	**KPEK2**	Series C J-frame end cap kit, 3-pole, .312-18	J-frame 3-pole A	unknown
EDH-EAT-00599	**KPEK24**	Series C J-frame end cap kit, 4-pole, .312-18	J-frame 4-pole A	unknown
EDH-EAT-00598	**KPEKM2**	Series C J-frame end cap kit, 3-pole, M8	J-frame 3-pole A	unknown
EDH-EAT-00600	**KPEKM24**	Series C J-frame end cap kit, 4-pole, M8	J-frame 4-pole A	unknown

EDH-EAT-00656	5010D23G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame rear connecting stud, 250 A short stud

OEM part number	5010D23G01	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 250 A short stud; tubes 456D983H05-H07	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	J-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 456D983H05/H06/H07 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 / .50-13 thread	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00657	5010D23G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame rear connecting stud, 250 A long stud

OEM part number	5010D23G02	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 250 A long stud; tubes 5010D23H05-H07	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	J-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 5010D23H05/H06/H07 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 / .50-13 thread	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00619	KCWTK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J/K-frame control wire terminal kit

OEM part number	KCWTK	A	S116 p.12-244, Tables 12-452..12-454; oem_spec
Description	J- and K-frame control wire terminal kit (12 tangs); not for use with T250KB terminals; taps control power using male quick-disconnect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J/K-frame	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00597	KPEK2	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK2	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00599	KPEK24	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK24	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00598	KPEKM2	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 3-pole, M8

OEM part number	KPEKM2	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00600	KPEKM24	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 4-pole, M8

OEM part number	KPEKM24	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C K-Frame (KD/HKD/KDC/KDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00479	**2T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00494	**2T400KCW**	Series C K-frame terminal kit with control wire termination (2T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00488	**2T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00474	**2TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00491	**2TA400KCW**	Series C K-frame terminal kit with control wire termination (2TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00482	**2TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00497	**2TA401KCW**	Series C K-frame terminal kit with control wire termination (2TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00485	**2TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00480	**3T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00495	**3T400KCW**	Series C K-frame terminal kit with control wire termination (3T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00489	**3T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00475	**3TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; also KP definite purpose/KG/HKDDC 400 A **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00626	**3TA400K3K**	Series C K-frame multiwire connector, 3 wires/terminal	K-frame (400 A max) **A**	unknown
EDH-EAT-00627	**3TA400K6K**	Series C K-frame multiwire connector, 6 wires/terminal	K-frame (400 A max) **A**	unknown
EDH-EAT-00492	**3TA400KCW**	Series C K-frame terminal kit with control wire termination (3TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00483	**3TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00498	**3TA401KCW**	Series C K-frame terminal kit with control wire termination (3TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00486	**3TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00481	**4T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00496	**4T400KCW**	Series C K-frame terminal kit with control wire termination (4T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00490	**4T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00476	**4TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00493	**4TA400KCW**	Series C K-frame terminal kit with control wire termination (4TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00484	**4TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00499	**4TA401KCW**	Series C K-frame terminal kit with control wire termination (4TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00487	**4TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00477	**T300K**	Series C K-frame line/load terminal , 225 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00478	**T350K**	Series C K-frame line/load terminal , 350 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00472	**TA300K**	Series C K-frame line/load terminal , 225 A, Cu/Al	K-frame KD/HKD/KDC/KDB; TA300K: standard for KES electronic ratings to **A**	unknown
EDH-EAT-00473	**TA350K**	Series C K-frame line/load terminal , 350 A, Cu/Al	K-frame KD/HKD/KDC/KDB; also KG enclosed/KP definite purpose 400 A, HK **A**	unknown

EDH-EAT-00479 — 2T400K — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	2T400K	**A**	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	**A**	same as above
Poles	2	**A**	same as above
Current rating	400 A max breaker	**A**	same as above
Kit contents	2-pole kit	**A**	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	**A**	same as above
Material	terminal body copper	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00494	2T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2T400K)

OEM part number	2T400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 2T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00488	2T402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	2T402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	500-750 kcmil (1) (- mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00474	2TA400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00491	2TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2TA400K)

OEM part number	2TA400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 2TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00482	2TA401K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA401K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-120 / 70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00497	2TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2TA401K)

OEM part number	2TA401KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 2TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-120 / 70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00485	2TA402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Wire range	500-750 kcmil (1) (300-400 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00480	3T400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	3T400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00495	3T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3T400K)

OEM part number	3T400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 3T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00489	3T402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	3T402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	500-750 kcmil (1) (- mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00475	3TA400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB; also KP definite purpose/KG/HKDDC 400 A	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00626	3TA400K3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame multiwire connector, 3 wires/terminal

OEM part number	3TA400K3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	K-frame (400 A max)	A	same as above
Current rating	400 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(3) 14-2/0 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00627	3TA400K6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame multiwire connector, 6 wires/terminal

OEM part number	3TA400K6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	K-frame (400 A max)	A	same as above
Current rating	400 A	A	same as above
Kit contents	package of 3	A	same as above
Wire range	(6) 14-3 AWG Cu per terminal	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00492	3TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3TA400K)

OEM part number	3TA400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 3TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00483	3TA401K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA401K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00498	3TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3TA401K)

OEM part number	3TA401KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 3TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00486	3TA402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Wire range	500-750 kcmil (1) (300-400 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00481	4T400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	4T400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00496	4T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4T400K)

OEM part number	4T400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 4T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00490	4T402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	4T402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	500-750 kcmil (1) (- mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00476	4TA400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00493	4TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4TA400K)

OEM part number	4TA400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 4TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	3/0-250 kcmil (2) (95-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00484	4TA401K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA401K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00499	4TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4TA401K)

OEM part number	4TA401KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 4TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Wire range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00487	4TA402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit (KM: with three interphase barriers)	A	same as above
Wire range	500-750 kcmil (1) (300-400 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00477	T300K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 225 A, Cu

OEM part number	T300K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	1 terminal	A	same as above
Wire range	3 AWG-350 kcmil (1) (35-185 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00478	T350K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 350 A, Cu

OEM part number	T350K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Current rating	350 A max breaker	A	same as above
Kit contents	1 terminal	A	same as above
Wire range	250-500 kcmil (1) (120-240 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00472	TA300K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 225 A, Cu/Al

OEM part number	TA300K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB; TA300K: standard for KES electronic ratings to 225-300 A; HKDDC 225 A	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	3 AWG-350 kcmil (1) (35-185 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00473	TA350K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 350 A, Cu/Al

OEM part number	TA350K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB; also KG enclosed/KP definite purpose 400 A, HKDDC 350 A	A	same as above
Current rating	350 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	250-500 kcmil (1) (120-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*2008 table gives TA350K max 350 A; 2015 KP/KG tables and KM reproduction give 400 A - which is current?*		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00692	**4212B77G01**	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	K-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00691	**4212B78G02**	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	K-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00692	4212B77G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A

OEM part number	4212B77G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 400 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	K-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00691	4212B78G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A

OEM part number	4212B78G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 400 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	K-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00703	**208B264H01**	Series C K-frame panelboard strap mounting bracket	K-frame **A**	unknown

EDH-EAT-00703	208B264H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C K-frame panelboard strap mounting bracket

OEM part number	208B264H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	2,3	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00641	**TS33LD**	Series C K-frame terminal shield 3-pole, load	K-frame **A**	unknown
EDH-EAT-00639	**TS33LN**	Series C K-frame terminal shield 2/3-pole, line	K-frame **A**	unknown
EDH-EAT-00640	**TS34LN**	Series C K-frame terminal shield 4-pole, line	K-frame **A**	unknown

EDH-EAT-00641	TS33LD	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 3-pole, load

OEM part number	TS33LD	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 3-pole, load	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00639	TS33LN	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 2/3-pole, line

OEM part number	TS33LN	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 2/3-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	2,3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00640	TS34LN	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 4-pole, line

OEM part number	TS34LN	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 4-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00611	**KPR3A**	Series C K-frame keeper nut (.375-16, line end)	K-frame A	unknown
EDH-EAT-00613	**KPR3AM**	Series C K-frame keeper nut (M8, line end)	K-frame A	unknown
EDH-EAT-00612	**KPR3B**	Series C K-frame keeper nut (.375-16, load end)	K-frame A	unknown
EDH-EAT-00614	**KPR3BM**	Series C K-frame keeper nut (M8, load end)	K-frame A	unknown

EDH-EAT-00611	KPR3A	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (.375-16, line end)

OEM part number	KPR3A	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	line conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread .375-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00613	KPR3AM	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (M8, line end)

OEM part number	KPR3AM	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	line conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00612	KPR3B	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (.375-16, load end)

OEM part number	KPR3B	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	load conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread .375-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00614	KPR3BM	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (M8, load end)

OEM part number	KPR3BM	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	load conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00658	**6642C14G02**	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	K-frame fixed-mounted A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00661	**6642C14G03**	Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00659	**6642C14G04**	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00662	**6642C14G05**	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00660	**6642C14G06**	Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00663	**6642C14G07**	Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00601	**KPEK3**	Series C K-frame end cap kit, 3-pole, .312-18	K-frame 3-pole **A**	unknown
EDH-EAT-00603	**KPEK34**	Series C K-frame end cap kit, 4-pole, .312-18	K-frame 4-pole **A**	unknown
EDH-EAT-00602	**KPEKM3**	Series C K-frame end cap kit, 3-pole, M8	K-frame 3-pole **A**	unknown
EDH-EAT-00604	**KPEKM34**	Series C K-frame end cap kit, 4-pole, M8	K-frame 4-pole **A**	unknown

EDH-EAT-00658 **6642C14G02** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in

OEM part number	6642C14G02	**A**	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .75-1 in; tube 313C909H17	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	**A**	same as above
Breaker compatibility	K-frame fixed-mounted	**A**	same as above
Kit contents	stud only; tube(s) 313C909H17 ordered separately by panel thickness	**A**	same as above
Fasteners	.75-16 thread	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00661 **6642C14G03** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in

OEM part number	6642C14G03	**A**	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .75-1 in; tube 313C909H20	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	**A**	same as above
Breaker compatibility	K-frame fixed-mounted	**A**	same as above
Kit contents	stud only; tube(s) 313C909H20 ordered separately by panel thickness	**A**	same as above
Fasteners	.75-16	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00659	6642C14G04	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in

OEM part number	6642C14G04	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .50-.75 in; tube 313C909H18	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H18 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00662	6642C14G05	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in

OEM part number	6642C14G05	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .50-.75 in; tube 313C909H21	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H21 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00660	6642C14G06	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in

OEM part number	6642C14G06	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .25-.5 in; tube 313C909H19	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H19 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00663	6642C14G07	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in

OEM part number	6642C14G07	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .25-.5 in; tube 313C909H22	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H22 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00601	KPEK3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK3	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00603	KPEK34	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK34	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00602	KPEKM3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 3-pole, M8

OEM part number	KPEKM3	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00604	KPEKM34	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 4-pole, M8

OEM part number	KPEKM34	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C L-Frame (LD/HLD/LDC/LDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00500	**2TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00505	**2TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	unknown
EDH-EAT-00510	**2TA603LDKCW**	Series C L-frame terminal with control wire termination (2TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00501	**3TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00506	**3TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	unknown
EDH-EAT-00511	**3TA603LDKCW**	Series C L-frame terminal with control wire termination (3TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00502	**4TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00507	**4TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	unknown
EDH-EAT-00512	**4TA603LDKCW**	Series C L-frame terminal with control wire termination (4TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00508	**T602LD**	Series C L-frame line/load terminal, 600 A, Cu	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00513	**T602LDCW**	Series C L-frame terminal with control wire termination (T602LD)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00503	**TA450LD**	Series C L-frame line/load terminal, 450 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00504	**TA602LD**	Series C L-frame line/load terminal, 500 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 300-500 A LD/HLD/LDC; HLDDC; LP de **A**	unknown
EDH-EAT-00509	**TA602LDCW**	Series C L-frame terminal with control wire termination (TA602LD)	L-frame LD/HLD/LDC **A**	unknown

EDH-EAT-00500 — 2TA401LDK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA401LDK	**A**	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	**D**	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	**A**	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	**A**	same as above
Poles	2	**A**	same as above
Current rating	400 A max breaker	**A**	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	**A**	same as above
Wire range	4/0-600 kcmil (1) (120-300 mm2)	**A**	same as above
Material	terminal body aluminum	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00505 — 2TA603LDK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	2TA603LDK	**A**	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	**D**	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	**A**	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	**A**	same as above
Poles	2	**A**	same as above
Current rating	600 A max breaker	**A**	same as above
Kit contents	2-pole kit + one terminal cover	**A**	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	**A**	same as above
Material	terminal body aluminum	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00510	2TA603LDKCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (2TA603LDK)

OEM part number	2TA603LDKCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 2TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	2	A	same as above
Kit contents	2-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00501	3TA401LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA401LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	4/0-600 kcmil (1) (120-300 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00506	3TA603LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	3TA603LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
Poles	3	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	3-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00511	3TA603LDKCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (3TA603LDK)

OEM part number	3TA603LDKCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 3TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	3	A	same as above
Kit contents	3-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00502	4TA401LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA401LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Wire range	4/0-600 kcmil (1) (120-300 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00507	4TA603LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	4TA603LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
Poles	4	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	4-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00512	4TA603LDKCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (4TA603LDK)

OEM part number	4TA603LDKCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 4TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	4	A	same as above
Kit contents	4-pole kit + one terminal cover	A	same as above
Wire range	400-500 kcmil (2) (185-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00508	T602LD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal, 600 A, Cu

OEM part number	T602LD	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Description	Optional Cu pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	250-350 kcmil (2) (120-250 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00513	T602LDCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (T602LD)

OEM part number	T602LDCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as T602LD with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	250-350 kcmil (2) (120-250 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Table 12-455 lists T602LDCW range as (2) 250-350 kcmil Cu 120-150 mm2 and TA602LDCW as (2) 3/0-350 kcmil; KM page notes TA602LDCW 'not for use with T250KB terminals' - verify.*		

EDH-EAT-00503	TA450LD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal, 450 A, Cu/Al

OEM part number	TA450LD	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Current rating	450 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	4-4/0 AWG (2) (25-95 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00504	TA602LD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal, 500 A, Cu/Al

OEM part number	TA602LD	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 300-500 A LD/HLD/LDC; HLDDC; LP definite purpose 500 A	A	same as above
Current rating	500 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	3/0-350 kcmil (2) (95-150 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00509	TA602LDCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (TA602LD)

OEM part number	TA602LDCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as TA602LD with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	3/0-350 kcmil (2) (95-150 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Table 12-455 lists T602LDCW range as (2) 250-350 kcmil Cu 120-150 mm2 and TA602LDCW as (2) 3/0-350 kcmil; KM page notes TA602LDCW 'not for use with T250KB terminals' - verify.*		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00694	**506C052G01**	Series C L-frame panelboard connecting strap, outside pole, 600 A	L-frame in panelboards (bus spacing per description) **A**	unknown
EDH-EAT-00693	**624B609G01**	Series C L-frame panelboard connecting strap, center pole, 600 A	L-frame in panelboards (bus spacing per description) **A**	unknown

EDH-EAT-00694	506C052G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C L-frame panelboard connecting strap, outside pole, 600 A

OEM part number	506C052G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 600 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	L-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00693	624B609G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C L-frame panelboard connecting strap, center pole, 600 A

OEM part number	624B609G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 600 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	L-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00704	**208B297H01**	Series C L-frame panelboard strap mounting bracket	L-frame A	unknown

EDH-EAT-00704	208B297H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C L-frame panelboard strap mounting bracket

OEM part number	208B297H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	L-frame	A	same as above
Poles	2,3	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00642	**314C420G05**	Series C L-frame terminal shield	L-frame A	unknown
EDH-EAT-00649	**IPB4**	Series C interphase barrier (L, M)	L, M (2008); KM reproduction: M only A	unknown

EDH-EAT-00642	314C420G05	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C L-frame terminal shield

OEM part number	314C420G05	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. L-frame terminal shield	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	L-frame	A	same as above
Kit contents	package of 1	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00649	IPB4	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (L, M)

OEM part number	IPB4	A	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package (Conflicting assignments)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L, M (2008); KM reproduction: M only	A	same as above
Kit contents	2 per package	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Is IPB4 L+M or M only (newer edition)?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00664	**314C960G07**	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	L/M-frame A	unknown
EDH-EAT-00665	**314C960G08**	Series C L/M-frame rear connecting stud (L: 7.97 in)	L/M-frame A	unknown
EDH-EAT-00666	**314C960G09**	Series C L/M-frame rear connecting stud (L: 10.47 in)	L/M-frame A	unknown
EDH-EAT-00605	**KPEK4**	Series C L-frame end cap kit, 3-pole, .312-18	L-frame 3-pole A	unknown
EDH-EAT-00607	**KPEK44**	Series C L-frame end cap kit, 4-pole, .312-18	L-frame 4-pole A	unknown
EDH-EAT-00606	**KPEKM4**	Series C L-frame end cap kit, 3-pole, M8	L-frame 3-pole A	unknown
EDH-EAT-00608	**KPEKM44**	Series C L-frame end cap kit, 4-pole, M8	L-frame 4-pole A	unknown

EDH-EAT-00664	314C960G07	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L/M-frame rear connecting stud (L: stud length 5.47 in)

OEM part number	314C960G07	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: stud length 5.47 in; M: 600 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 5.47 in (L) / 5.91 in back of breaker (M)	A	S116 p.12-260; oem_spec
Fasteners	thread 1.00-12 (M 600 A)	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00665	314C960G08	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L/M-frame rear connecting stud (L: 7.97 in)

OEM part number	314C960G08	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: 7.97 in; M: 600 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 7.97 in (L) / 8.41 in (M)	A	S116 p.12-260; oem_spec
Fasteners	thread 1.00-12	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00666	314C960G09	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L/M-frame rear connecting stud (L: 10.47 in)

OEM part number	314C960G09	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: 10.47 in; M: 600 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.47 in (L) / 10.91 in (M)	A	S116 p.12-260; oem_spec
Fasteners	thread 1.00-12	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00605	KPEK4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK4	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00607	KPEK44	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK44	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00606	KPEKM4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 3-pole, M8

OEM part number	KPEKM4	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00608	KPEKM44	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 4-pole, M8

OEM part number	KPEKM44	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C M-Frame (MDL/HMDL/MDLB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00517	**T600MA1**	Series C M-frame line/load terminal, 600 A, Cu	M-frame MDL/HMDL/MDLB A	unknown
EDH-EAT-00518	**T800MA1**	Series C M-frame line/load terminal, 800 A, Cu	M-frame MDL/HMDL/MDLB A	unknown
EDH-EAT-00514	**TA700MA1**	Series C M-frame line/load terminal, 600 A, Cu/Al	M-frame MDL/HMDL/MDLB A	unknown
EDH-EAT-00519	**TA700MA1CWT**	Series C M-frame terminal with control wire termination (TA700MA1)	M-frame MDL/HMDL A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00515	**TA800MA2**	Series C M-frame line/load terminal, 800 A, Cu/Al	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC **A**	unknown
EDH-EAT-00520	**TA800MA2CWT**	Series C M-frame terminal with control wire termination (TA800MA2)	M-frame MDL/HMDL **A**	unknown
EDH-EAT-00516	**TA801MA**	Series C M-frame line/load terminal, 800 A, Cu/Al	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC **A**	unknown
EDH-EAT-00521	**TA801MACWT**	Series C M-frame terminal with control wire termination (TA801MA)	M-frame MDL/HMDL **A**	unknown

EDH-EAT-00517 **T600MA1** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame line/load terminal, 600 A, Cu

OEM part number	T600MA1	**A**	S116 p.12-140, Table 12-240; oem_spec
Description	Optional Cu pressure terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
Current rating	600 A max breaker	**A**	same as above
Wire range	(2) 2/0-500 kcmil	**A**	same as above
Material	terminal body copper	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00518 **T800MA1** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame line/load terminal, 800 A, Cu

OEM part number	T800MA1	**A**	S116 p.12-140, Table 12-240; oem_spec
Description	Optional Cu pressure terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
Current rating	800 A max breaker	**A**	same as above
Wire range	(3) 3/0-300 kcmil	**A**	same as above
Material	terminal body copper	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00514 **TA700MA1** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame line/load terminal, 600 A, Cu/Al

OEM part number	TA700MA1	**A**	S116 p.12-140, Table 12-240; oem_spec
Description	Standard Cu/Al pressure terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
Current rating	600 (700 per KM/DC table) A max breaker	**A**	same as above
Wire range	(2) 1-500 kcmil	**A**	same as above
Material	terminal body aluminum	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00519	TA700MA1CWT	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame terminal with control wire termination (TA700MA1)

OEM part number	TA700MA1CWT	A	S116 p.12-140, Table 12-240; oem_spec
Description	Same as TA700MA1 with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Wire range	(2) 1-500 kcmil	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00515	TA800MA2	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame line/load terminal, 800 A, Cu/Al

OEM part number	TA800MA2	A	S116 p.12-140, Table 12-240; oem_spec
Description	Standard Cu/Al pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC	A	same as above
Current rating	800 (std.) A max breaker	A	same as above
Wire range	(3) 3/0-400 kcmil	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00520	TA800MA2CWT	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame terminal with control wire termination (TA800MA2)

OEM part number	TA800MA2CWT	A	S116 p.12-140, Table 12-240; oem_spec
Description	Same as TA800MA2 with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Wire range	(3) 3/0-400 kcmil	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00516	TA801MA	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame line/load terminal, 800 A, Cu/Al

OEM part number	TA801MA	A	S116 p.12-140, Table 12-240; oem_spec
Description	Standard Cu/Al pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC	A	same as above
Current rating	800 A max breaker	A	same as above
Wire range	(2) 500-750 kcmil	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00521	TA801MACWT	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame terminal with control wire termination (TA801MA)

OEM part number	TA801MACWT	A	S116 p.12-140, Table 12-240; oem_spec
Description	Same as TA801MA with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Wire range	(2) 500-750 kcmil	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00695	**314C996G01**	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00696	**314C996G02**	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00697	**314C996G03**	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00695	314C996G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A

OEM part number	314C996G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. short, 3.50 in, 800 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00696	314C996G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A

OEM part number	314C996G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. medium, 3.50 in, 800 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00697	314C996G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A

OEM part number	314C996G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. long, 3.50 in, 800 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00705	**315C270H01**	Series C M/N-frame panelboard strap mounting bracket	M/N-frame A	unknown

EDH-EAT-00705	315C270H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C M/N-frame panelboard strap mounting bracket

OEM part number	315C270H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations); N-frame requires four	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	M/N-frame	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB), Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00643	**208B966G01**	Series C M-frame terminal shield	M-frame A	unknown

EDH-EAT-00643	208B966G01	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C M-frame terminal shield

OEM part number	208B966G01	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. M-frame terminal shield	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	M-frame	A	same as above
Kit contents	package of 1	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00667	**314C960G01**	Series C M-frame rear connecting stud (225 A)	M-frame A	unknown
EDH-EAT-00668	**314C960G04**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00669	**314C960G05**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00670	**314C960G06**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00671	**314C960G10**	Series C M-frame rear connecting stud (800 A)	M-frame A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00672	**314C960G11**	Series C M-frame rear connecting stud (800 A)	M-frame **A**	unknown
EDH-EAT-00673	**314C960G12**	Series C M-frame rear connecting stud (800 A)	M-frame **A**	unknown

EDH-EAT-00667 **314C960G01** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C M-frame rear connecting stud (225 A)

OEM part number	314C960G01	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 225 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 3.66 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread .50-13	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00668 **314C960G04** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G04	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 5.91 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread .75-16	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00669 **314C960G05** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G05	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 8.41 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread .75-16	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00670	314C960G06	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G06	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.91 in	A	S116 p.12-260; oem_spec
Fasteners	thread .75-16	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00671	314C960G10	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G10	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 5.91 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00672	314C960G11	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G11	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 8.41 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00673	314C960G12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G12	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.91 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker family Series C N-Frame (ND/HND/NDC/NB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00527	**T1000NB1**	Series C N-frame line/load terminal, 1000 A, Cu	N-frame ND/HND/NDC A	unknown
EDH-EAT-00528	**T1200NB3**	Series C N-frame line/load terminal, 1200 A, Cu	N-frame ND/HND/NDC A	unknown
EDH-EAT-00526	**T700NB1**	Series C N-frame line/load terminal, 700 A, Cu	N-frame ND/HND/NDC A	unknown
EDH-EAT-00523	**TA1000NB1**	Series C N-frame line/load terminal, 1000 A, Cu/Al	N-frame ND/HND/NDC; NBDC 700-1000 A DC; NG enclosed 1000 A A	unknown
EDH-EAT-00524	**TA1200NB1**	Series C N-frame line/load terminal, 1200 A, Cu/Al	N-frame ND/HND/NDC; NBDC 1200 A; NG enclosed 1200 A A	unknown
EDH-EAT-00525	**TA1201NB1**	Series C N-frame line/load terminal, 1200 A, Cu/Al	N-frame ND/HND/NDC A	unknown
EDH-EAT-00522	**TA700NB1**	Series C N-frame line/load terminal, 700 A, Cu/Al	N-frame ND/HND/NDC; NG enclosed 700 A A	unknown

EDH-EAT-00527	T1000NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1000 A, Cu

OEM part number	T1000NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Optional Cu pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	1000 A max breaker	A	same as above
Wire range	(3) 3/0-500 kcmil (95-240 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00528	T1200NB3	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1200 A, Cu

OEM part number	T1200NB3	A	S116 p.12-162, Table 12-266; oem_spec
Description	Optional Cu pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	1200 A max breaker	A	same as above
Wire range	(4) 3/0-400 kcmil (95-185 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00526	T700NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 700 A, Cu

OEM part number	T700NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Optional Cu pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	700 A max breaker	A	same as above
Wire range	(2) 2/0-500 kcmil (70-240 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00523	TA1000NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1000 A, Cu/Al

OEM part number	TA1000NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC; NBDC 700-1000 A DC; NG enclosed 1000 A	A	same as above
Current rating	1000 A max breaker	A	same as above
Wire range	(3) 3/0-400 kcmil (95-185 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00524	TA1200NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1200 A, Cu/Al

OEM part number	TA1200NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC; NBDC 1200 A; NG enclosed 1200 A	A	same as above
Current rating	1200 A max breaker	A	same as above
Wire range	(4) 4/0-500 kcmil (120-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00525	TA1201NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1200 A, Cu/Al

OEM part number	TA1201NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	1200 A max breaker	A	same as above
Wire range	(3) 500-750 kcmil (300-400 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00522	TA700NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 700 A, Cu/Al

OEM part number	TA700NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC; NG enclosed 700 A	A	same as above
Current rating	700 A max breaker	A	same as above
Wire range	(2) 1-500 kcmil (50-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00698	**505C606G04**	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00699	**505C606G05**	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00700	**505C606G06**	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00698	505C606G04	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A

OEM part number	505C606G04	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. short, 3.50 in, 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00699	505C606G05	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A

OEM part number	505C606G05	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. medium, 3.50 in, 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00700	505C606G06	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A

OEM part number	505C606G06	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. long, 3.50 in, 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00650	**IPB5**	Series C interphase barrier (N; NG)	N; NG (Table 12-87) A	unknown
EDH-EAT-00644	**NTS3K**	Series C N-frame terminal shield	N-frame A	unknown

EDH-EAT-00650	IPB5	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (N; NG)

OEM part number	IPB5	A	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N; NG (Table 12-87)	A	same as above
Kit contents	2 per package	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB), Series G NG-Frame		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00644	NTS3K	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C N-frame terminal shield

OEM part number	NTS3K	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. N-frame terminal shield	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	N-frame	A	same as above
Kit contents	package of 1	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00678	**373B375G03**	Series C N-frame rear connecting stud (1200 A)	N-frame **A**	unknown
EDH-EAT-00677	**373B375G04**	Series C N-frame rear connecting stud (1200 A)	N-frame **A**	unknown
EDH-EAT-00674	**623B222G01**	Series C N-frame rear connecting stud (800 A)	N-frame **A**	unknown
EDH-EAT-00675	**623B222G02**	Series C N-frame rear connecting stud (800 A)	N-frame **A**	unknown
EDH-EAT-00676	**623B222G03**	Series C N-frame rear connecting stud (800 A)	N-frame **A**	unknown

EDH-EAT-00678 **373B375G03** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C N-frame rear connecting stud (1200 A)

OEM part number	373B375G03	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 1200 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	N-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 10.5 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread 1.25-12	**A**	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00677 **373B375G04** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C N-frame rear connecting stud (1200 A)

OEM part number	373B375G04	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 1200 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	N-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 5.5 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread 1.25-12	**A**	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00674 **623B222G01** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G01	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	N-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 5.5 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	**A**	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00675	623B222G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G02	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 8.0 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00676	623B222G03	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G03	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.5 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker family Series C R-Frame (RD/RDC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00531	**T1600RD**	Series C R-frame line/load terminal, 1600 A, Cu	R-frame RD/RDC A	unknown
EDH-EAT-00530	**TA1600RD**	Series C R-frame line/load terminal, 1600 A, Cu/Al	R-frame RD/RDC A	unknown
EDH-EAT-00532	**TA2000RD**	Series C R-frame line/load terminal, 2000 A, Cu/Al	R-frame RD/RDC A	unknown

EDH-EAT-00531	T1600RD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C R-frame line/load terminal, 1600 A, Cu

OEM part number	T1600RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Wire terminal, English hardware	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Current rating	1600 A max breaker	A	same as above
Wire range	(4) 1-600 kcmil (50-300 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00530	TA1600RD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C R-frame line/load terminal, 1600 A, Cu/Al

OEM part number	TA1600RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Wire terminal, English hardware	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Current rating	1600 A max breaker	A	same as above
Wire range	(4) 500-1000 kcmil (300-500 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00532	TA2000RD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C R-frame line/load terminal, 2000 A, Cu/Al

OEM part number	TA2000RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Includes bus connection, terminals and hardware for either line or load side of 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Current rating	2000 A max breaker	A	same as above
Kit contents	one side (line or load) of 3-pole breaker	A	same as above
Wire range	(6) 2-600 kcmil (35-300 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00533	**B2016RD**	Series C R-frame copper rear connector	R-frame RD/RDC **A**	unknown
EDH-EAT-00534	**B2016RDL**	Series C R-frame copper rear connector	R-frame RD/RDC **A**	unknown
EDH-EAT-00535	**B2500RD**	Series C R-frame copper rear connector	R-frame RD/RDC **A**	unknown

EDH-EAT-00533	B2016RD	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C R-frame copper rear connector

OEM part number	B2016RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Rear connector (Cu), for 1600 A and 2000 A frames	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Material	copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00534	B2016RDL	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C R-frame copper rear connector

OEM part number	B2016RDL	A	S116 p.12-181, Table 12-299; oem_spec
Description	Rear connector (Cu) for 100% rated 1600 A and 2000 A frame; included in breaker carton when 100% rated device ordered	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Material	copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00535	B2500RD	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C R-frame copper rear connector

OEM part number	B2500RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Rear connector (Cu) for 2500 A frame; included in breaker carton with 2500 A breaker	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Material	copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00536	**3T125EF**	Series G EG-frame line/load terminals, 125 A, Cu	EG-frame **A**	unknown
EDH-EAT-00577	**3TA125E3K**	Series G EG-frame multiwire connector	EG-frame **A**	unknown
EDH-EAT-00578	**3TA125E6K**	Series G EG-frame multiwire connector	EG-frame **A**	unknown
EDH-EAT-00537	**3TA125EF**	Series G EG-frame line/load terminals, 125 A, Cu/Al	EG-frame (EGB/EGE/EGS/EGH); 3TA125EF also EGEDC/EGSDC/EGHDC DC breaker **A**	unknown
EDH-EAT-00538	**3TA150EF**	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EG-frame **A**	unknown
EDH-EAT-00539	**3TA160EFK**	Series G EG-frame line/load terminals, 160 A, Cu/Al	EG-frame **A**	unknown
EDH-EAT-00540	**4TA160EFK**	Series G EG-frame line/load terminals, 160 A, Cu/Al	EG-frame **A**	unknown

EDH-EAT-00536	3T125EF	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 125 A, Cu

OEM part number	3T125EF	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard line and load terminals	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	125 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Wire range	#14-3/0 AWG Cu (2.5-95 mm2); 2014 also lists #12-10 Al (4-6 mm2)	A	same as above
Material	terminal body steel	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00577	3TA125E3K	Eaton	lug-kit	STATUS UNKNOWN

Series G EG-frame multiwire connector

OEM part number	3TA125E3K	A	S119 V4-T2-25; oem_spec
Description	EG-frame multiwire connector, 3 wires per terminal, 14-2 AWG Cu, 125 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00578	3TA125E6K	Eaton	lug-kit	STATUS UNKNOWN

Series G EG-frame multiwire connector

OEM part number	3TA125E6K	A	S119 V4-T2-25; oem_spec
Description	EG-frame multiwire connector, 6 wires per terminal, 14-6 AWG Cu, 125 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00537	3TA125EF	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 125 A, Cu/Al

OEM part number	3TA125EF	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard 15-50 A EG	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame (EGB/EGE/EGS/EGH); 3TA125EF also EGEDC/EGSDC/EGHDC DC breakers	A	same as above
Current rating	125 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Wire range	#14-1/0 AWG (2.5-50 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00538	3TA150EF	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 125/160 A, Cu/Al

OEM part number	3TA150EF	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard 60-125 A EG	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	125/160 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Wire range	#6-3/0 AWG (16-70 mm2 per 2014; 16-95 mm2 per 2008)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Metric range conflict: 16-70 mm2 (2014) vs 16-95 mm2 (2008).*		

EDH-EAT-00539	3TA160EFK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 160 A, Cu/Al

OEM part number	3TA160EFK	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	160 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Wire range	#3-250 kcmil (35-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00540	4TA160EFK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 160 A, Cu/Al

OEM part number	4TA160EFK	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	160 A max breaker	A	same as above
Kit contents	4-pole kit with four terminals	A	same as above
Wire range	#3-250 kcmil (35-120 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00573	**EEC3K**	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EG-frame A	unknown
EDH-EAT-00574	**EEC4K**	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EG-frame A	unknown
EDH-EAT-00570	**EFTS3K**	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EG-frame A	unknown
EDH-EAT-00571	**EFTS4K**	Series G EG-frame terminal shield IP30 4-pole	EG-frame A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00572	**EIPBK**	Series G EG-frame interphase barriers (package of 12 priced individually)	EG-frame **A**	unknown

EDH-EAT-00573	**EEC3K**	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening

OEM part number	EEC3K	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame terminal end cover (gas barrier), 0.25 in conductor opening	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*V4-T2-25 prints '6.35 (0.25)' and '10.41 (0.41)' with inch/mm swapped; for use with steel/stainless standard terminals only?*		

EDH-EAT-00574	**EEC4K**	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening

OEM part number	EEC4K	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame terminal end cover (gas barrier), 0.41 in conductor opening	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00570	**EFTS3K**	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal shield IP30 3-pole (line terminal area)

OEM part number	EFTS3K	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame terminal shield IP30, 3-pole (line terminal area)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00571	**EFTS4K**	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal shield IP30 4-pole

OEM part number	EFTS4K	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame terminal shield IP30, 4-pole	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00572	**EIPBK**	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame interphase barriers (package of 12 priced individually)

OEM part number	EIPBK	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame interphase barriers (package of 12, priced individually)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00576	**5652B38G01**	Series G Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only	EG-frame **A**	unknown
EDH-EAT-00584	**EF2RTDK**	Series G EG end cap kit, 2-pole, imperial	EG-frame **A**	unknown
EDH-EAT-00581	**EF2RTWK**	Series G EG end cap kit, 2-pole, metric	EG-frame **A**	unknown
EDH-EAT-00585	**EF3RTDK**	Series G EG end cap kit, 3-pole, imperial	EG-frame **A**	unknown
EDH-EAT-00582	**EF3RTWK**	Series G EG end cap kit, 3-pole, metric	EG-frame **A**	unknown
EDH-EAT-00586	**EF4RTDK**	Series G EG end cap kit, 4-pole, imperial	EG-frame **A**	unknown
EDH-EAT-00583	**EF4RTWK**	Series G EG end cap kit, 4-pole, metric	EG-frame **A**	unknown

EDH-EAT-00576 — 5652B38G01 — Eaton — breaker-accessory — STATUS UNKNOWN

Series G Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only

OEM part number	5652B38G01	**A**	S119 V4-T2-25; p.12-244 Table 12-452; oem_spec
Alternate / superseded numbers	GCWTK (Table 12-452 (Series C G-frame control wire terminal, kit of 12) prints both 5652B38G01 and GCWTK; KM reproduction 'GCWTK (also 5652B38G01)'; EG table V4-T2-25 uses 5652B38G01)	**A**	S116 alias; p.12-244 Table 12-452; oem_spec
Description	Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only	**A**	S119 V4-T2-25; p.12-244 Table 12-452; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Kit contents	package of 12	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC), Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00584 — EF2RTDK — Eaton — breaker-accessory — STATUS UNKNOWN

Series G EG end cap kit, 2-pole, imperial

OEM part number	EF2RTDK	**A**	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line side terminal	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Poles	2	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00581 — EF2RTWK — Eaton — breaker-accessory — STATUS UNKNOWN

Series G EG end cap kit, 2-pole, metric

OEM part number	EF2RTWK	**A**	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line side terminal	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Poles	2	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00585	EF3RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 3-pole, imperial

OEM part number	EF3RTDK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00582	EF3RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 3-pole, metric

OEM part number	EF3RTWK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00586	EF4RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 4-pole, imperial

OEM part number	EF4RTDK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00583	EF4RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 4-pole, metric

OEM part number	EF4RTWK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G JG-Frame (JGE/JGS/JGH/JGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00579	**3TA250FJ3**	Series G JG-frame multiwire connector	JG-frame **A**	unknown
EDH-EAT-00580	**3TA250FJ6**	Series G JG-frame multiwire connector	JG-frame **A**	unknown
EDH-EAT-00541	**T250FJ**	Series G JG-frame line/load terminal, 250 A, Cu (standard)	JG-frame; also JGEDC/JGSDC/JGHDC 250 A DC (s7) **A**	unknown
EDH-EAT-00542	**TA250FJ**	Series G JG-frame line/load terminal, 250 A, Cu/Al	JG-frame **A**	unknown

EDH-EAT-00579 **3TA250FJ3** Eaton lug-kit **STATUS UNKNOWN**

Series G JG-frame multiwire connector

OEM part number	3TA250FJ3	**A**	S116 p.12-28, Table 12-39; oem_spec
Description	JG-frame multiwire connector, 3 wires per terminal, 14-2 AWG Cu, 250 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Kit contents	package of 3 (load side)	**A**	same as above
Material	tin-plated aluminum connectors	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00580 **3TA250FJ6** Eaton lug-kit **STATUS UNKNOWN**

Series G JG-frame multiwire connector

OEM part number	3TA250FJ6	**A**	S116 p.12-28, Table 12-39; oem_spec
Description	JG-frame multiwire connector, 6 wires per terminal, 14-6 AWG Cu, 250 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	load (OFF) end	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Kit contents	package of 3 (load side)	**A**	same as above
Material	tin-plated aluminum connectors	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00541 **T250FJ** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series G JG-frame line/load terminal, 250 A, Cu (standard)

OEM part number	T250FJ	**A**	S116 p.12-28, Table 12-36; oem_spec
Description	Standard pressure type terminal (standard line and load); individually packed	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	JG-frame; also JGEDC/JGSDC/JGHDC 250 A DC (s7)	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	1 terminal	**A**	same as above
Wire range	#4-350 kcmil (25-185 mm2) Cu	**A**	same as above
Material	stainless steel body	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00542	TA250FJ	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G JG-frame line/load terminal, 250 A, Cu/Al

OEM part number	TA250FJ	A	S116 p.12-28, Table 12-36; oem_spec
Description	Pressure type Cu/Al terminal (contact factory for availability per footnote)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal	A	same as above
Wire range	#4-350 kcmil (25-185 mm2) Cu/Al	A	same as above
Material	aluminum body	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote 'Contact factory for availability' attaches to which JG terminal?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00568	**FJIPBK**	Series G JG-frame interphase barriers 3-pole (package of 2)	JG-frame A	unknown
EDH-EAT-00569	**FJIPBK4**	Series G JG-frame interphase barriers 4-pole (package of 2)	JG-frame A	unknown
EDH-EAT-00566	**FJTS3K**	Series G JG-frame terminal shield IP30 2/3-pole	JG-frame A	unknown
EDH-EAT-00567	**FJTS4K**	Series G JG-frame terminal shield IP30 4-pole	JG-frame A	unknown

EDH-EAT-00568	FJIPBK	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame interphase barriers 3-pole (package of 2)

OEM part number	FJIPBK	A	S116 p.12-28, Table 12-41; oem_spec
Description	JG-frame interphase barriers, 3-pole (package of 2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00569	FJIPBK4	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame interphase barriers 4-pole (package of 2)

OEM part number	FJIPBK4	A	S116 p.12-28, Table 12-41; oem_spec
Description	JG-frame interphase barriers, 4-pole (package of 2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00566	FJTS3K	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame terminal shield IP30 2/3-pole

OEM part number	FJTS3K	A	S116 p.12-28, Table 12-40; oem_spec
Description	JG-frame terminal shield IP30, 2/3-pole, line or load	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00567	FJTS4K	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame terminal shield IP30 4-pole

OEM part number	FJTS4K	A	S116 p.12-28, Table 12-40; oem_spec
Description	JG-frame terminal shield IP30, 4-pole, line or load	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00589	**FJ3RTDK**	Series G JG end cap kit, 3-pole, imperial	JG-frame A	unknown
EDH-EAT-00587	**FJ3RTWK**	Series G JG end cap kit, 3-pole, metric	JG-frame A	unknown
EDH-EAT-00590	**FJ4RTDK**	Series G JG end cap kit, 4-pole, imperial	JG-frame A	unknown
EDH-EAT-00588	**FJ4RTWK**	Series G JG end cap kit, 4-pole, metric	JG-frame A	unknown
EDH-EAT-00575	**FJCWTK**	Series G JG-frame control wire terminal kit (package of 14	JG-frame A	unknown

EDH-EAT-00589	FJ3RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 3-pole, imperial

OEM part number	FJ3RTDK	A	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	JG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00587	FJ3RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 3-pole, metric

OEM part number	FJ3RTWK	A	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	JG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00590	FJ4RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 4-pole, imperial

OEM part number	FJ4RTDK	**A**	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line side terminal	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Poles	4	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00588	FJ4RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 4-pole, metric

OEM part number	FJ4RTWK	**A**	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line side terminal	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Poles	4	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00575	FJCWTK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG-frame control wire terminal kit (package of 14

OEM part number	FJCWTK	**A**	S116 p.12-28, Table 12-38; oem_spec
Description	JG-frame control wire terminal kit (package of 14, priced individually); for Al or Cu terminals	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Kit contents	package of 14	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G LG-Frame (LGE/LGS/LGH/LGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00545	**3T631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00549	**3T632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00556	**3T632LKW**	Series G LG-frame control wire terminal kit, 3P, copper	LG-frame **A**	unknown
EDH-EAT-00543	**3TA631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00547	**3TA632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00554	**3TA632LKW**	Series G LG-frame control wire terminal kit, 3P, aluminum	LG-frame **A**	unknown
EDH-EAT-00546	**4T631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00550	**4T632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00557	**4T632LKW**	Series G LG-frame control wire terminal kit, 4P, copper	LG-frame **A**	unknown
EDH-EAT-00544	**4TA631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00548	**4TA632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00555	**4TA632LKW**	Series G LG-frame control wire terminal kit, 4P, aluminum	LG-frame **A**	unknown
EDH-EAT-00552	**T350LK**	Series G LG-frame line/load terminal, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00551	**TA350LK**	Series G LG-frame line/load terminal, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00553	**TA632L**	Series G LG-frame single terminal, 630 A, Cu/Al	LGEDC/LGSDC/LGHDC 630 A **A**	unknown

EDH-EAT-00545 — 3T631LK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu

OEM part number	3T631LK	**A**	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	**A**	same as above
Poles	3	**A**	same as above
Current rating	400 A max breaker	**A**	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	**A**	same as above
Wire range	500-750 kcmil (1) (240-380 mm2)	**A**	same as above
Material	terminal body copper	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00549 — 3T632LK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu

OEM part number	3T632LK	**A**	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	**A**	same as above
Poles	3	**A**	same as above
Current rating	630 A max breaker	**A**	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	**A**	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	**A**	same as above
Material	terminal body copper	**A**	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00556	3T632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 3P, copper

OEM part number	3T632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body copper)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00543	3TA631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA631LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	500-750 kcmil (1) (240-380 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00547	3TA632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu/Al

OEM part number	3TA632LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame; standard on LGHDC 500-600 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	3	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00554	3TA632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 3P, aluminum

OEM part number	3TA632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body aluminum)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00546	4T631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu

OEM part number	4T631LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	500-750 kcmil (1) (240-380 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00550	4T632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu

OEM part number	4T632LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00557	4T632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 4P, copper

OEM part number	4T632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body copper)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00544	4TA631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA631LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	500-750 kcmil (1) (240-380 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00548	4TA632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu/Al

OEM part number	4TA632LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00555	4TA632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 4P, aluminum

OEM part number	4TA632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body aluminum)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00552	T350LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal, 400 A, Cu

OEM part number	T350LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	1 terminals included	A	same as above
Wire range	2 AWG-500 kcmil (1) (35-240 mm2)	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00551	TA350LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal, 400 A, Cu/Al

OEM part number	TA350LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame; standard terminal on LGHDC 250-400 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	1 terminals included	A	same as above
Wire range	2 AWG-500 kcmil (1) (35-240 mm2)	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00553	TA632L	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame single terminal, 630 A, Cu/Al

OEM part number	TA632L	A	S118 V4-T2-356; oem_spec
Description	Single Cu/Al terminal, 1 per package, 2-500 kcmil (2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LGEDC/LGSDC/LGHDC 630 A	A	same as above
Current rating	630 A	A	same as above
Kit contents	1 terminal	A	same as above
Wire range	2 AWG-500 kcmil (2) (35-240 mm2)	A	same as above
Material	aluminum body	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00558	**LTS3K**	Series G LG-frame terminal cover, 3-pole	LG-frame A	unknown
EDH-EAT-00559	**LTS4K**	Series G LG-frame terminal cover, 4-pole	LG-frame A	unknown

EDH-EAT-00558 **LTS3K** Eaton / Cutler-Hammer barrier **STATUS UNKNOWN**

Series G LG-frame terminal cover, 3-pole

OEM part number	LTS3K	A	S116 p.12-37, Table 12-61; oem_spec
Description	Terminal cover; included in TA631L/T631L/TA632L kits	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00559 **LTS4K** Eaton / Cutler-Hammer barrier **STATUS UNKNOWN**

Series G LG-frame terminal cover, 4-pole

OEM part number	LTS4K	A	S116 p.12-37, Table 12-61; oem_spec
Description	Terminal cover; included in TA631L/T631L/TA632L kits	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00560	**L3RTWK**	Series G LG-frame end cap kit (metric nuts), 3-pole	LG-frame A	unknown
EDH-EAT-00561	**L4RTWK**	Series G LG-frame end cap kit (metric nuts), 4-pole	LG-frame A	unknown
EDH-EAT-00564	**LGTES3**	Series G LG-frame terminal spreader, 3-pole	LG-frame A	unknown
EDH-EAT-00565	**LGTES4**	Series G LG-frame terminal spreader, 4-pole	LG-frame A	unknown
EDH-EAT-00562	**LGTEW3**	Series G LG-frame terminal extension, 3-pole	LG-frame A	unknown
EDH-EAT-00563	**LGTEW4**	Series G LG-frame terminal extension, 4-pole	LG-frame A	unknown

EDH-EAT-00560 **L3RTWK** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series G LG-frame end cap kit (metric nuts), 3-pole

OEM part number	L3RTWK	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	End cap kit (metric nuts)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00561	L4RTWK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame end cap kit (metric nuts), 4-pole

OEM part number	L4RTWK	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	End cap kit (metric nuts)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00564	LGTES3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal spreader, 3-pole

OEM part number	LGTES3	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal spreader	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00565	LGTES4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal spreader, 4-pole

OEM part number	LGTES4	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal spreader	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00562	LGTEW3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal extension, 3-pole

OEM part number	LGTEW3	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal extension	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00563	LGTEW4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal extension, 4-pole

OEM part number	LGTEW4	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal extension	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G NG-Frame

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00529	**T1200NB3M**	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	NG-frame 1250 A (not 1600 A) A	unknown

EDH-EAT-00529	T1200NB3M	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G NG-frame line/load terminal, 1250 A, Cu (metric)

OEM part number	T1200NB3M	A	S116 p.12-48, Table 12-82; oem_spec
Description	Optional copper pressure terminal for NG-frame; single terminals individually packed; not suitable with 1600 A frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NG-frame 1250 A (not 1600 A)	A	same as above
Current rating	1250 A	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Wire range	(4) 3/0-400 kcmil (95-185 mm2)	A	same as above
Material	copper body	A	same as above
Cross-links	Breakers: Series G NG-Frame		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

4 Square D / Schneider Electric

Lineage / brand markings: Square D, Schneider Electric, Federal Pioneer (Canada)

Family	Type	Status	Era	Entries	Pg
I-LINE I-Line Circuit Breaker Panelboard / I-Line distribution section	panelboard	current	Catalog copyright 1998-2019	111	434
MLN Square D MLN panelboards and switchboards (ML breakers)	panelboard	Obsolete; Schneider recommends replacing the complete panelboard (new I-Line); FAL/KAL/LAL/MAL adapter kits SK4515/SK4516/SK4517/SK4578 offered as of 1/1/2015 but now obsolete; PowerPact has no adapter kits	Sold in the USA from 1962 to 1968	12	463
NA1B Square D NA1B panelboard (E-frame bolted, AC/DC)	panelboard	unknown	Advertised by Square D in September 1960	8	467
NEHB NEHB panelboard	panelboard	obsolete (1995)	1983-1995	4	467
NF NF panelboard (Class 1670)	panelboard	current	Series 0: 1995-Oct 2008; Series E1: Oct 2008-present	77	468
NH1B Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	panelboard	Obsolete (inference; superseded by NEHB then NF)	Catalogued in Square D Digest 152 (1970); NEHB is not in the 1970 index (later successor - inference)	11	491
NQ NQ panelboard (Class 1640)	panelboard	current	2008-present (replaced NQOD in 2008)	83	492
NQO NQO / NQOB panelboard	panelboard	obsolete	late 1960s-1987	0	525
NQOB Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	panelboard	Obsolete; enclosure parts not available; QSFB switch/fuse unit obsolete; trim clamp PK1TC obsolete (search summaries)	Advertised by Square D in May and September 1960 (NQO plug-in, NQOB bolted connection); a Schneider timeline (search summary) says 'developed in late 1960s till obsolescence in 1987' - conflicts with the 1960 ads	22	525
NQOD NQOD panelboard (Class 1630)	panelboard	obsolete	1987-2008	4	531
QMB QMB Fusible Panelboard / QMB distribution (current design, Series E1)	panelboard	current	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	128	532
QMB-LEGACY Legacy QMB distribution (pre-October-1984 QM and QW interiors)	panelboard	obsolete; old-design blank fillers obsolete with no replacement	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches	37	580
QED-2 Power-Style QED-2 Switchboard	switchboard	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01)	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	148	590
SPEED-D Speed-D Merchandised Service Section Switchboard	switchboard	unknown	In 2700CT1101 (2012)	54	610

4.1 I-LINE — I-Line Circuit Breaker Panelboard / I-Line distribution section

FAM-SQD-004 · panelboard · aka Class 2110, HCJ, HCM, HCN, HCP, HCP-SU, HCR-U, HCW, HCWM, I Line, I-Line Combo (CP...), ILine · markings: Schneider Electric, Square D

Plug-on I-Line bus stack: breaker line-end jaws are integral to the breaker, shrouded in a molded insulator that keys into slots in the bus support base, are factory lubricated/preset and are 'blow-on'. The load end is held by an integral mounting bracket/foot screwed to the interior pan. The same interiors, fillers and extensions are used in QED switchboard I-Line distribution sections.

Square D 600 Vac / 250 Vdc distribution panelboard with plug-on I-Line breakers mounted on a bus-bar stack; breaker held by mounting bracket fingers in pan keyslots and a retaining screw into a 7/32 in. pan hole. Interior types HCJ/HCM (32 in. wide, 250 A max branch), HCP-SU (single row, 26 in.), HCP (42 in.), HCR-U (44 in.). Unused spaces must be closed with blank fillers (HNM1BL/HNM4BL) and blank extensions (HLW/HLN). Solid neutral, sub-feed lug and SE barrier kits are merchandised.

Evidence record from 1970 Digest: HCN 26 in W (FA/FY/Q2 to 100 A, 125-225 A KA; 600 A lugs / 400 A MB), HCM 32 in W x 8 in D (125/250 V AC-DC to 600 V AC; 800 A), HCW 41 in W (to LA 400 A branch; 800 A), HCWM 41 in W x 9-1/4 in D (to MA 800 A; 1200 A lugs). Solid neutral assemblies HC-xSN (HCN/HCM) and HCW-xSN (HCW/HCWM); blanks HNM-xBL; blank extensions HLW-xBL; sub-feed lugs SL-100/225/400/800 plug onto bus like a breaker. Q2 max 240 V AC; FY max 277 V AC.

Attribute	Value	Cl.	Sources
Status	current	A	S27, S177 oem_spec
Era of manufacture	Catalog copyright 1998-2019	A	S27 p. 6; oem_spec
	HCN, HCM, HCW and HCWM I-Line distribution panelboards catalogued in 1970 (unassembled interiors, boxes, fronts)	A	S270 Digest 152 (1970) p.55, 72-75; oem_spec
Voltage rating	Up to 600 Vac; AC or DC systems	A	S27 pp. 2, 8; oem_spec
	600 Vac, 250 Vdc	A	S177 Section 9 TOC; oem_spec
Main ampacity	400-1200 A (HCJ 400-800 A; HCP/HCR-U to 1200 A)	A	S177, S180 p. 9-51 to 9-57; oem_spec
Branch breakers accepted	I-Line plug-on breakers 15-1200 A frames: FA, FH, BD/BG/BJ/BK, HD/HG/HJ/HL/HR, QB/QD/QG/QJ, JD/JG/JJ/JL/JR, LA/LH, LD/LG/LJ/LL/LR, MG/MJ, PG/PJ/PK/PL, RG/RJ/RK/RL	A	S27 pp. 8-11; oem_spec
	I-Line plug-on: BD/BG/BJ, QB/QD/QG/QJ, HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR, LA/LH, LG/LJ/LL/LR, MG/MJ, PG/PJ/PL, RG/RJ/RL (by interior type)	A	S177 p. 9-51; oem_spec
Qed compat	I-Line panelboard fillers and extensions are the same for current I-Line distribution sections in QED switchboards	A	S36 oem_spec
Mounting	15-1200 A breakers require only a screwdriver; firmly attached to bus stack and mechanically attached to interior; load-end mounting bracket is integral to each breaker	A	S27 p. 6; oem_spec
Widths 1970	HCN 26 in W; HCM 32 in W x 8 in D; HCW 41 in W; HCWM 41 in W x 9-1/4 in D (Depths partly OCR-garbled)	B	S270 Digest 152 (1970) p.55; oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), LA / LH (L-frame, legacy thermal-magnetic), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT L-frame (LG/LJ/LL/LR), PowerPacT M / P / R frame (I-Line), PowerPacT Q-frame (QB/QD/QG/QJ), PowerPact B-frame BD/BG/BJ/BK (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), R-frame RG/RJ/RK/RL (I-Line)

Key documents: S27 2110CT9701R07/19 I-Line Circuit Breaker Panelboards Catalog, Class 2110; S29 80030-695-02 I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation; S36 FA108059 FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED; S177 0100CT2401-SEC-09 Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards); S178 Digest 0100CT2401 (online) Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard ; S180 2110CT9701 I-Line Circuit Breaker Panelboards Class 2110 Catalog; S181 80043-309-20 Rev. 10 I-Line Circuit Breaker Power Distribution Panelboards Information Manual, Class 2110; S270 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P; S305 48049-250-01 S33930 Sub-feed Lugs Instruction Bulletin; S306 48040-651-03 Rev. 01 SL400 Sub-feed Lugs Installation Instruction Bulletin

Also fits this family (entry printed elsewhere): AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, HNM1BL, HNM4BL, HLN1BL, HLN4BL, HLN4EBL, HLW1BL, HLW4BL, HLW4EBL, SL250, SL400, SL800M5, SL1200P5, SL1200P6, SL1200P7, S33930, HQO306, CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36, HPA-FK, HPA-FYQ

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00503	**HCM400VCA**	I-Line crimp lug adapter kit, HCJ, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00504	**HCM600VCA**	I-Line crimp lug adapter kit, HCJ, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00505	**HCM800VCA**	I-Line crimp lug adapter kit, HCJ, 800 A	—	current (listed in 2026 Digest)
EDH-SQD-00509	**HCW1200VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 1200 A	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00506	**HCW400VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00507	**HCW600VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00508	**HCW800VCA**	I-Line crimp lug adapter kit, HCP/HCR-U, 800 A	—	current (listed in 2026 Digest)

EDH-SQD-00503	HCM400VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCJ, 400 A

OEM part number	HCM400VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCJ main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00504	HCM600VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCJ, 600 A

OEM part number	HCM600VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCJ main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00505	HCM800VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCJ, 800 A

OEM part number	HCM800VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCJ main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00509	HCW1200VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 1200 A

OEM part number	HCW1200VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00506	HCW400VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 400 A

OEM part number	HCW400VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00507	HCW600VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 600 A

OEM part number	HCW600VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

EDH-SQD-00508	HCW800VCA	Square D	main-lug-kit	CURRENT (LISTED IN 202

I-Line crimp lug adapter kit, HCP/HCR-U, 800 A

OEM part number	HCW800VCA	A	S177 oem_spec
Description	Panelboard crimp lug adapter kit for HCP/HCR-U main-lug panel; order VCEL lugs separately; not for P/R-frame breakers or S33930/S33931 sub-feed kits	A	S177 p. 9-57; oem_spec
Application	main	A	S177 oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*VCEL compression lug numbers and adapter bolt pattern unknown*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00510	**S33931**	I-Line sub-feed lug kit, 1200 A	—	current (listed in 2026 Digest)
EDH-SQD-00153	**SL100**	I-Line plug-on sub-feed lug kit SL100	—	current (listed in 2026 Digest)
EDH-SQD-00572	**SL1200**	I-Line plug-on sub-feed lug SL1200	—	unknown
EDH-SQD-00556	**SL-225**	Square D I-Line sub-feed lugs 225 A	—	1970 catalog item; current status unknown
EDH-SQD-00154	**SL800**	I-Line plug-on sub-feed lug kit SL800	—	1970 catalog item; current status unknown
EDH-SQD-00571	**SL800FT**	I-Line plug-on sub-feed lug SL800FT	—	unknown

EDH-SQD-00510 S33931 Square D sub-feed-lug-kit CURRENT (LISTED IN 202

I-Line sub-feed lug kit, 1200 A

OEM part number	S33931	A	S177 oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed	A	S177 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	1200 A	A	same as above
Dimensions	lug wire (4) #3/0-600 kcmil Al/Cu	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00153 SL100 Square D sub-feed-lug-kit CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit SL100

OEM part number	SL100 (Listed in FAQ FAQ000269509 (via search summary); not in 2019 catalog table)	A	S50, S177, S270 oem_spec
Alternate / superseded numbers	SL-100 (1970 Digest spelling)	A	S270 alias; oem_spec
Description	I-Line plug-on 3-pole sub-feed lug kit, 100 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
	Sub-feed lugs 100 A; plug onto bus bars in same manner as branch circuit breaker	A	S270 Digest 152 (1970) p.73; oem_spec
Application	sub-feed	A	S177, S270 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	100 A	A	S50, S177, S270 p. 9-57; oem_spec
Dimensions	lug wire #14-1/0 Cu or #12-1/0 Al	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material, wire range		

EDH-SQD-00572	SL1200	Square D / Schneider Electric	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug SL1200

OEM part number	SL1200	A	S307 48040-651-03 (2006) p.1; oem_spec
Description	I-Line plug-on sub-feed lug (covered by 48040-651-03, 05/2006 edition)	A	S307 p.1; oem_spec
Torque values	Conductor strip length 1-1/8 in (29 mm); conductor torque per faceplate label	A	S307 p.3 strip-length table; oem_spec
OEM instruction document	48040-651-03 (05/2006); racked onto I-Line bus like SL400; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S307 pp.1-3; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Status, wire range		
Open question	*Is SL1200 (2006) the predecessor of SL1200P5/P6/P7?*		

EDH-SQD-00556	SL-225	Square D	sub-feed-lug-kit	1970 CATALOG ITEM; CUR

Square D I-Line sub-feed lugs 225 A

OEM part number	SL-225	A	S270 oem_spec
Alternate / superseded numbers	SL-225 [alias] (1970 Digest spelling)	A	same as above
Description	Sub-feed lugs 225 A; plug onto bus bars in same manner as branch circuit breaker	A	S270 Digest 152 (1970) p.73; oem_spec
Application	sub-feed	A	S270 oem_spec
Current rating	225 A	A	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00154	SL800	Square D	sub-feed-lug-kit	1970 CATALOG ITEM; CUR

I-Line plug-on sub-feed lug kit SL800

OEM part number	SL800 (Listed in FAQ FAQ000269509 (via search summary); 2019 catalog lists SL800M5 only - SL800 may be predecessor)	A	S50, S270, S307 oem_spec
Alternate / superseded numbers	SL-800 (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Sub-feed lugs 800 A; plug onto bus bars in same manner as branch circuit breaker	A	S270 Digest 152 (1970) p.73; oem_spec
	I-Line plug-on sub-feed lug (covered by 48040-651-03, 05/2006 edition)	A	S307 p.1; oem_spec
Application	sub-feed	A	S270 oem_spec
Current rating	800 A	A	S50, S270 oem_spec
Torque values	Conductor strip length 1-3/8 in (35 mm); conductor torque per faceplate label	A	S307 p.3 strip-length table; oem_spec
OEM instruction document	48040-651-03 (05/2006); racked onto I-Line bus like SL400; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S307 pp.1-3; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material, relation to SL800M5, wire range		

EDH-SQD-00571	SL800FT	Square D / Schneider Electric	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug SL800FT

OEM part number	SL800FT	A	S307 48040-651-03 (2006) p.1; oem_spec
Description	I-Line plug-on sub-feed lug, 800 A, "FT" variant (meaning not stated - possibly feed-through) (FT meaning inferred)	C	S307 p.1; oem_spec
Torque values	Conductor strip length 1-3/8 in (35 mm); conductor torque per faceplate label	A	S307 p.3 strip-length table; oem_spec
OEM instruction document	48040-651-03 (05/2006); racked onto I-Line bus like SL400; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S307 pp.1-3; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Status, wire range		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00573	**AL1200R53K**	Square D lug kit AL1200R53K (S33930 / R-frame)	—	unknown
EDH-SQD-00574	**CU1200R53K**	Square D lug kit CU1200R53K (S33930 / R-frame)	—	unknown

EDH-SQD-00573	AL1200R53K	Square D / Schneider Electric	lug-kit	STATUS UNKNOWN

Square D lug kit AL1200R53K (S33930 / R-frame)

OEM part number	AL1200R53K	A	S305 p.3; oem_spec
Description	Lug kit for S33930 sub-feed lugs: (4) #3/0-600 kcmil (98-300 mm2) Al/Cu per lug	A	same as above
Torque values	Wire binding screw 450 lb-in (50 N-m); lug mounting screw 180 lb-in (20 N-m); strip length 1-3/16 in (30 mm)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	kit_contents (lug count)		

EDH-SQD-00574	CU1200R53K	Square D / Schneider Electric	lug-kit	STATUS UNKNOWN

Square D lug kit CU1200R53K (S33930 / R-frame)

OEM part number	CU1200R53K	A	S305 p.3; oem_spec
Description	Lug kit for S33930 sub-feed lugs: (4) #3/0-600 kcmil (98-300 mm2) Cu per lug	A	same as above
Torque values	Wire binding screw 450 lb-in (50 N-m); lug mounting screw 180 lb-in (20 N-m); strip length 1-3/16 in (30 mm)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	kit_contents (lug count)		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00462	**HC2SN**	I-Line solid neutral assembly, HCJ, 225 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00463	**HC4SN**	I-Line solid neutral assembly, HCJ, 400 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00464	**HC6SN**	I-Line solid neutral assembly, HCJ, 600 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00472	**HC6SNALCU**	I-Line solid neutral assembly, HCJ, 600 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00480	**HC6SNCU**	I-Line solid neutral assembly, HCJ, 600 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00465	**HC8SN**	I-Line solid neutral assembly, HCJ, 800 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00473	**HC8SNALCU**	I-Line solid neutral assembly, HCJ, 800 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00481	**HC8SNCU**	I-Line solid neutral assembly, HCJ, 800 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00478	**HCP12SNALCU**	I-Line solid neutral assembly, HCP, 1200 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00486	**HCP12SNCU**	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00475	**HCP4SNALCU**	I-Line solid neutral assembly, HCP, 400 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00476	**HCP6SNALCU**	I-Line solid neutral assembly, HCP, 600 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00477	**HCP8SNALCU**	I-Line solid neutral assembly, HCP, 800 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00466	**HCPSU8SN**	I-Line solid neutral assembly, HCP-SU, 800 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00474	**HCPSU8SNALCU**	I-Line solid neutral assembly, HCP-SU, 800 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00482	**HCPSU8SNCU**	I-Line solid neutral assembly, HCP-SU, 800 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00479	**HCR12SNALCU**	I-Line solid neutral assembly, HCR-U, 1200 A, Al lugs/Cu plate	—	current (listed in 2026 Digest)
EDH-SQD-00489	**HCR12SNCT**	I-Line HCR-U 1200 A solid neutral with neutral current transformer	—	current (listed in 2026 Digest)
EDH-SQD-00488	**HCR12SNCU**	I-Line solid neutral assembly, HCR-U, 1200 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00470	**HCW12SN**	I-Line solid neutral assembly, HCP, 1200 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00487	**HCW12SNCU**	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00467	**HCW4SN**	I-Line solid neutral assembly, HCP, 400 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00483	**HCW4SNCU**	I-Line solid neutral assembly, HCP, 400 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00468	**HCW6SN**	I-Line solid neutral assembly, HCP, 600 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00484	**HCW6SNCU**	I-Line solid neutral assembly, HCP, 600 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00469	**HCW8SN**	I-Line solid neutral assembly, HCP, 800 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00485	**HCW8SNCU**	I-Line solid neutral assembly, HCP, 800 A, Cu/Cu	—	current (listed in 2026 Digest)
EDH-SQD-00471	**HCWM12SN**	I-Line solid neutral assembly, HCR-U, 1200 A, Al/Al	—	current (listed in 2026 Digest)
EDH-SQD-00491	**ILHCJ1ESN**	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum	—	unknown
EDH-SQD-00497	**ILHCJ1ESNC**	I-Line expanded neutral kit, HCJ, copper	—	unknown
EDH-SQD-00490	**ILHCJ27ESN**	I-Line expanded neutral kit, HCM/HCJ with 27 in. unit mounting space, aluminum	—	unknown
EDH-SQD-00492	**ILHCJ2ESN**	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum	—	unknown
EDH-SQD-00498	**ILHCJ2ESNC**	I-Line expanded neutral kit, HCJ, copper	—	unknown
EDH-SQD-00495	**ILHCPRU1ESN**	I-Line expanded neutral kit, HCP & HCR-U, aluminum	—	unknown
EDH-SQD-00501	**ILHCPRU1ESNC**	I-Line expanded neutral kit, HCP & HCR-U, copper	—	unknown
EDH-SQD-00496	**ILHCPRU2ESN**	I-Line expanded neutral kit, HCP & HCR-U, aluminum	—	unknown
EDH-SQD-00502	**ILHCPRU2ESNC**	I-Line expanded neutral kit, HCP & HCR-U, copper	—	unknown
EDH-SQD-00493	**ILHCPSU1ESN**	I-Line expanded neutral kit, HCP-SU, aluminum	—	unknown
EDH-SQD-00499	**ILHCPSU1ESNC**	I-Line expanded neutral kit, HCP-SU, copper	—	unknown
EDH-SQD-00494	**ILHCPSU2ESN**	I-Line expanded neutral kit, HCP-SU, aluminum	—	unknown
EDH-SQD-00500	**ILHCPSU2ESNC**	I-Line expanded neutral kit, HCP-SU, copper	—	unknown

EDH-SQD-00462	HC2SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 225 A, Al/Al

OEM part number	HC2SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HC-2SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 225 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	225 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (1) 6-300 kcmil; branch terminals (1) 6-300, (9) #1/0-14, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00463	HC4SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 400 A, Al/Al

OEM part number	HC4SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HC-4SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 400 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	400 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00464	HC6SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 600 A, Al/Al

OEM part number	HC6SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HC-6SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 600 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	600 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00472	HC6SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 600 A, Al lugs/Cu plate

OEM part number	HC6SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	600 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00480	HC6SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 600 A, Cu/Cu

OEM part number	HC6SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	600 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00465	HC8SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 800 A, Al/Al

OEM part number	HC8SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HC-8SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 800 A for Type HCN/HCM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	800 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00473	HC8SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 800 A, Al lugs/Cu plate

OEM part number	HC8SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00481	HC8SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCJ, 800 A, Cu/Cu

OEM part number	HC8SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCJ interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00478	HCP12SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Al lugs/Cu plate

OEM part number	HCP12SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00486	HCP12SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu

OEM part number	HCP12SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00475	HCP4SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 400 A, Al lugs/Cu plate

OEM part number	HCP4SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	400 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00476	HCP6SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 600 A, Al lugs/Cu plate

OEM part number	HCP6SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	600 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00477	HCP8SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 800 A, Al lugs/Cu plate

OEM part number	HCP8SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00466	HCPSU8SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP-SU, 800 A, Al/Al

OEM part number	HCPSU8SN	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP-SU interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00474	HCPSU8SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP-SU, 800 A, Al lugs/Cu plate

OEM part number	HCPSU8SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP-SU interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00482	HCPSU8SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP-SU, 800 A, Cu/Cu

OEM part number	HCPSU8SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP-SU interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00479	HCR12SNALCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCR-U, 1200 A, Al lugs/Cu plate

OEM part number	HCR12SNALCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCR-U interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00489	HCR12SNCT	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line HCR-U 1200 A solid neutral with neutral current transformer

OEM part number	HCR12SNCT	A	S177 oem_spec
Description	Solid neutral including neutral CT, to be ordered when RL main breakers with equipment ground fault are applied on 3-phase 4-wire systems	A	S177, S180 p. 9-54; oem_spec
Current rating	1200 A	B	S177 inference
OEM instruction document	CT neutral bonding: 80043-706-02 / 80043-789-01 (not downloaded to library)	C	inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-54; oem_spec
Cross-links	Families: I-LINE · Breakers: PowerPacT M / P / R frame (I-Line)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00488	HCR12SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCR-U, 1200 A, Cu/Cu

OEM part number	HCR12SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCR-U interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00470	HCW12SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Al/Al

OEM part number	HCW12SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HCW-12SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 1200 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	1200 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00487	HCW12SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu

OEM part number	HCW12SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (8) 250-500 kcmil (crimp); branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00467	HCW4SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 400 A, Al/Al

OEM part number	HCW4SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HCW-4SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 400 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	400 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00483	HCW4SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 400 A, Cu/Cu

OEM part number	HCW4SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	400 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00468	HCW6SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 600 A, Al/Al

OEM part number	HCW6SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HCW-6SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 600 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	600 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00484	HCW6SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 600 A, Cu/Cu

OEM part number	HCW6SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	600 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00469	HCW8SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 800 A, Al/Al

OEM part number	HCW8SN	A	S177, S270 oem_spec
Alternate / superseded numbers	HCW-8SN (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
	Solid neutral assembly 800 A for Type HCW/HCWM interior assemblies; mounted in main lug compartment, no additional height	A	S270 Digest 152 (1970) p.73; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
	Main lug compartment	A	S270 Digest 152 (1970) p.73; oem_spec
Current rating	800 A	A	S177, S270 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	S177 p. 9-57; oem_spec
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern		

EDH-SQD-00485	HCW8SNCU	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCP, 800 A, Cu/Cu

OEM part number	HCW8SNCU	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCP interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	800 A	A	S177 p. 9-57; oem_spec
Material	Copper lugs, copper neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00471	HCWM12SN	Square D	neutral-assembly	CURRENT (LISTED IN 202

I-Line solid neutral assembly, HCR-U, 1200 A, Al/Al

OEM part number	HCWM12SN	A	S177 oem_spec
Description	Solid neutral assembly for I-Line HCR-U interior	A	S177 p. 9-57; oem_spec
Installation location	I-Line panelboard neutral (ordered separately from merchandised interior)	A	S177 p. 9-51 fn; oem_spec
Current rating	1200 A	A	S177 p. 9-57; oem_spec
Material	Aluminum lugs, aluminum neutral plate	A	same as above
Dimensions	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00491	ILHCJ1ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum

OEM part number	ILHCJ1ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 45 in. or larger unit mounting space with 100% solid neutral (same as above)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +16 (#6-350)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00497	ILHCJ1ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ, copper

OEM part number	ILHCJ1ESNC	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 100% solid neutral (HC6SNCU, HC8SNCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350); not in 27 in. HCJ	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		
Open question	*Bulletin table prints a footnote digit directly after this number (e.g. 'ILHCJ2ESN4'); catalog number confirmed from kit list as ILHCJ1ESNC*		

EDH-SQD-00490	ILHCJ27ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCM/HCJ with 27 in. unit mounting space, aluminum

OEM part number	ILHCJ27ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCM/HCJ with 27 in. unit mounting space with 100% solid neutral (HC2SN, HC4SN, HC6SN, HC8SN, HC6SNALCU, HC8SNALCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +20 (#14-2/0), +10 (#6-350)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00492	ILHCJ2ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, aluminum

OEM part number	ILHCJ2ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 45 in. or larger unit mounting space with 100% solid neutral (same as above)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +32 (#6-350); not with PowerPacT L vertical main	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		
Open question	*Bulletin table prints a footnote digit directly after this number (e.g. 'ILHCJ2ESN4'); catalog number confirmed from kit list as ILHCJ2ESN*		

EDH-SQD-00498	ILHCJ2ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCJ, copper

OEM part number	ILHCJ2ESNC	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCJ with 100% solid neutral (HC6SNCU, HC8SNCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (#6-350); not in 27 in. HCJ; not with PowerPacT L vertical main	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		
Open question	*Bulletin table prints a footnote digit directly after this number (e.g. 'ILHCJ2ESN4'); catalog number confirmed from kit list as ILHCJ2ESNC*		

EDH-SQD-00495	ILHCPRU1ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, aluminum

OEM part number	ILHCPRU1ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (HCW4SN, HCP4SNALCU, HCW6SN, HCP6SNALCU, HCW8SN, HCP8SNALCU, HCW12SN, HCP12SNALCU, HCW12MSN, HCR12SNALCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +16 (#6-350), +8 (2/0-750)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00501	ILHCPRU1ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, copper

OEM part number	ILHCPRU1ESNC	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (HCW4SNCU, HCW6SNCU, HCW8SNCU, HCP12SNCU, HCW12SNCU, HCR12SNCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +14 (#6-350), +3 (#2-600)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00496	ILHCPRU2ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, aluminum

OEM part number	ILHCPRU2ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (same as above)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +16 (#6-350), +16 (2/0-750)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00502	ILHCPRU2ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP & HCR-U, copper

OEM part number	ILHCPRU2ESNC	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP & HCR-U with 100% solid neutral (same as above)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (#6-350)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00493	ILHCPSU1ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, aluminum

OEM part number	ILHCPSU1ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SN, HCPSU8SNALCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +30 (#14-2/0), +16 (#6-350), +7 (2/0-750)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00499	ILHCPSU1ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, copper

OEM part number	ILHCPSU1ESNC	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SNCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00494	ILHCPSU2ESN	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, aluminum

OEM part number	ILHCPSU2ESN	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SN, HCPSU8SNALCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Aluminum (only in AL/AL or AL/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (2/0-750)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

EDH-SQD-00500	ILHCPSU2ESNC	Square D	neutral-assembly	UNKNOWN

I-Line expanded neutral kit, HCP-SU, copper

OEM part number	ILHCPSU2ESNC	A	S224 oem_spec
Description	Expanded neutral assembly adding neutral terminations to I-Line HCP-SU with 100% solid neutral (HCPSU8SNCU)	A	S224 Expanded Neutral Kits table; oem_spec
Material	Copper (only in CU/CU main neutral without CTs)	A	S224 table notes 3, 6; oem_spec
Dimensions	Terminations added: +21 (#6-350)	A	S224 table; oem_spec
OEM instruction document	80043-845-01 (05/2020)	A	S224 oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00156	**PK32DGTA**	Equipment ground bar kit PK32DGTA (I-Line)	—	current (listed in 2026 Digest)

EDH-SQD-00156	PK32DGTA	Square D	ground-bar	CURRENT (LISTED IN 202

Equipment ground bar kit PK32DGTA (I-Line)

OEM part number	PK32DGTA	A	S27, S177, S270 p. 7; oem_spec
Alternate / superseded numbers	PK-32DGTA (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Equipment ground bar mounted in panelboard box (available Cu or Al)	A	S27 p. 7; oem_spec
	I-Line equipment ground bar kit for HCJ, HCP, HCP-SU (single row), HCR-U	A	S177 p. 9-56; oem_spec
	I-Line and QMB distribution panelboards, 1 thru 45 circuits, 1200 A max mains - PK-32DGTA $10.60	A	S270 Digest 152 (1970) p.84; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
OEM instruction document	I-Line ground bar mounting: 80043-312-03 (11/2006); terminal torque 40-45 lb-in (4.5-5 N-m) (Bulletin catalog number not printed; association by subject)	B	S232 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE, QMB-LEGACY		
Not yet documented	Aftermarket / reproduction, current_status, Dimensions, Finish / plating, Mounting-hole pattern, Material, material of this specific number, terminals		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00159	**4051749901**	I-Line deadfront (trim) support bracket 4051749901	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown **A**	unknown

EDH-SQD-00159	4051749901	Square D	mounting-bracket	STATUS UNKNOWN

I-Line deadfront (trim) support bracket 4051749901

OEM part number	4051749901	A	S42 oem_spec
Description	Single trim support bracket, deadfront bracket for I-Line HCN3254-2 panelboard	A	same as above
Breaker compatibility	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown	A	same as above
Cross-links	Families: I-LINE		
Requires	8011417101 (EDH-SQD-00160)		
Not yet documented	Dimensions, other HCN sizes		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00452	**ILBFMHCJHULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCJ (HCM) / H, J	—	current (listed in 2026 Digest)
EDH-SQD-00453	**ILBFMHCPHJULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / H, J	—	current (listed in 2026 Digest)
EDH-SQD-00454	**ILBFMHCPLULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / LA, LH, PowerPacT L	—	current (listed in 2026 Digest)
EDH-SQD-00455	**ILBFMHCPMPULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / M, P	—	current (listed in 2026 Digest)
EDH-SQD-00456	**ILBFMHCRLULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / LA, LH, PowerPacT L	—	current (listed in 2026 Digest)
EDH-SQD-00457	**ILBFMHCRMULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / M	—	current (listed in 2026 Digest)
EDH-SQD-00458	**ILBFMHCRPULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / P	—	current (listed in 2026 Digest)
EDH-SQD-00459	**ILBFMHCRRULC**	I-Line back-fed main breaker UL service entrance barrier kit, HCR / R	—	current (listed in 2026 Digest)
EDH-SQD-00460	**LALLC**	I-Line LA/LH vertical main line lug cover (US SE)	—	unknown
EDH-SQD-00461	**PPLLC**	I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P	—	unknown

EDH-SQD-00452 — ILBFMHCJHULC — Square D — barrier — CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCJ (HCM) / H, J

OEM part number	ILBFMHCJHULC	**A**	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCJ (HCM) with back-fed main breaker H, J; for panelboards built after 1 Jan 2017; US only	**A**	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	**A**	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	**A**	S222 oem_spec
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00453 — ILBFMHCPHJULC — Square D — barrier — CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / H, J

OEM part number	ILBFMHCPHJULC	**A**	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCP, HCP-SU with back-fed main breaker H, J; for panelboards built after 1 Jan 2017; US only	**A**	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	**A**	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	**A**	S222 oem_spec
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00454	ILBFMHCPLULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / LA, LH, PowerPacT L

OEM part number	ILBFMHCPLULC	A	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCP, HCP-SU with back-fed main breaker LA, LH, PowerPacT L; for panelboards built after 1 Jan 2017; US only	A	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00455	ILBFMHCPMPULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / M, P

OEM part number	ILBFMHCPMPULC	A	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCP, HCP-SU with back-fed main breaker M, P; for panelboards built after 1 Jan 2017; US only	A	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00456	ILBFMHCRLULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / LA, LH, PowerPacT L

OEM part number	ILBFMHCRLULC	A	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker LA, LH, PowerPacT L; for panelboards built after 1 Jan 2017; US only	A	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00457	ILBFMHCRMULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / M

OEM part number	ILBFMHCRMULC	A	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker M; for panelboards built after 1 Jan 2017; US only	A	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00458	ILBFMHCRPULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / P

OEM part number	ILBFMHCRPULC	A	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker P; for panelboards built after 1 Jan 2017; US only	A	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00459	ILBFMHCRRULC	Square D	barrier	CURRENT (LISTED IN 202

I-Line back-fed main breaker UL service entrance barrier kit, HCR / R

OEM part number	ILBFMHCRRULC	A	S177 oem_spec
Description	Complete UL service entrance barrier (line lug cover) kit for I-Line panelboard type HCR with back-fed main breaker R; for panelboards built after 1 Jan 2017; US only	A	S177, S222 p. 9-57; IB Table 3; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Replacement side-cover-only numbers (ILBFM...UL without C) listed in IB Table 2*		

EDH-SQD-00460	LALLC	Square D	barrier	UNKNOWN

I-Line LA/LH vertical main line lug cover (US SE)

OEM part number	LALLC	A	S222 oem_spec
Description	I-Line LA/LH vertical main line lug cover (US SE); vertical mains only, panels built after 1 Jan 2017	A	S222 Table 1; oem_spec
OEM instruction document	80043-839-01	A	S222 oem_spec
Status	unknown	D	 oem_spec
Cross-links	Families: I-LINE · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00461	PPLLC	Square D	barrier	UNKNOWN

I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P

OEM part number	PPLLC	A	S222 oem_spec
Description	I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P; vertical mains only, panels built after 1 Jan 2017	A	S222 Table 1; oem_spec
OEM instruction document	80043-839-01	A	S222 oem_spec
Status	unknown	D	 oem_spec
Cross-links	Families: I-LINE · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00555	**HLW-3BL**	Square D I-Line blank extension HLW-3BL	—	1970 catalog item; current status unknown
EDH-SQD-00554	**HNM-3BL**	Square D I-Line blank, 3 in high	—	1970 catalog item; current status unknown

EDH-SQD-00555	HLW-3BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D I-Line blank extension HLW-3BL

OEM part number	HLW-3BL	B	S270 oem_spec
Alternate / superseded numbers	HLW-3BL [alias] (1970 Digest spelling)	A	same as above
Description	Blank extension HLW-3BL listed with blanks (1970, $1.20)	B	S270 Digest 152 (1970) p.73; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00554	HNM-3BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D I-Line blank, 3 in high

OEM part number	HNM-3BL	A	S270 oem_spec
Alternate / superseded numbers	HNM-3BL [alias] (1970 Digest spelling)	A	same as above
Description	I-Line blank 3 in high (1970)	A	S270 Digest 152 (1970) p.73; oem_spec
Dimensions	3 in high (OCR table)	B	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Material		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00549	**HC-2609-EXF**	Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00550	**HC-3209-EXF**	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00552	**HC-4112-DEXF**	Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)	—	1970 catalog item; current status unknown
EDH-SQD-00551	**HC-4112-EXF**	Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)	—	1970 catalog item; current status unknown

EDH-SQD-00549	HC-2609-EXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (flush)

OEM part number	HC-2609-EXF	A	S270 oem_spec
Alternate / superseded numbers	HC-2609-EXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCN or NH1B 9 in high extension - HC-2609-EXF or S, $51.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00550	HC-3209-EXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)

OEM part number	HC-3209-EXF	A	S270 oem_spec
Alternate / superseded numbers	HC-3209-EXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCM 9 in high extension - HC-3209-EXF or S, $51.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00552	HC-4112-DEXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)

OEM part number	HC-4112-DEXF	A	S270 oem_spec
Alternate / superseded numbers	HC-4112-DEXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCWM 12 in high extension - HC-4112-DEXF or S, $51.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00551	HC-4112-EXF	Square D	box/enclosure	1970 CATALOG ITEM; CUR

Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)

OEM part number	HC-4112-EXF	A	S270 oem_spec
Alternate / superseded numbers	HC-4112-EXS [equivalent] ('F or S' suffix: S = surface version (inference: F=flush, S=surface, consistent with Digest front suffix convention))	A	same as above
Description	I-Line Panelboard Box Extension Kits: HCW 12 in high extension - HC-4112-EXF or S, $51.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00451	**PJC-7201**	I-Line plug-on connector joint compound, 2 oz	—	referenced in 2026 manual

EDH-SQD-00451	PJC-7201	Square D	hardware-kit	REFERENCED IN 2026 MAN

I-Line plug-on connector joint compound, 2 oz

OEM part number	PJC-7201	A	S181 oem_spec
Alternate / superseded numbers	PJC7201	A	S305, S306 alias; p.1-2; oem_spec
Description	Joint compound for I-Line plug-on connectors; must be reapplied whenever a breaker is removed and reinstalled	A	S181 p. 13; oem_spec
	Square D electric joint compound for I-Line plug-on connections (sub-feed lug jaws; QED-2 bus plug-on connections)	A	S305, S306, S304 48049-250-01 p.1; 48040-651-03 p.2; 80043-055-13 p.41; oem_spec
Status	referenced in 2026 manual	A	S181 oem_spec
Cross-links	Families: I-LINE		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00158	**2152620361**	FA/FH I-Line breaker mounting bracket screw 2152620361	FA, FH I-Line A	unknown
EDH-SQD-00157	**21590-20241**	PowerPact H/J I-Line mounting bracket screw 21590-20241	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to int A	unknown
EDH-SQD-00145	**21593-20100**	I-Line blank filler mounting screw 21593-20100	—	unknown
EDH-SQD-00160	**8011417101**	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	—	unknown
EDH-SQD-00161	**PKDFSCREW**	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	—	current (80025-067-01 obsolete)

EDH-SQD-00158	2152620361	Square D	fastener	STATUS UNKNOWN

FA/FH I-Line breaker mounting bracket screw 2152620361

OEM part number	2152620361	A	S39 oem_spec
Description	Mounting bracket (mounting foot) screw for FA or FH I-Line breaker	A	same as above
Breaker compatibility	FA, FH I-Line	A	same as above
Cross-links	Families: I-LINE, QED-2 · Breakers: FA / FH (I-Line)		
Not yet documented	length, thread		

EDH-SQD-00157	21590-20241	Square D	fastener	STATUS UNKNOWN

PowerPact H/J I-Line mounting bracket screw 21590-20241

OEM part number	21590-20241	A	S38 oem_spec
Description	Pan head steel thread-forming trilobe screw, combination slot / #3 square recess, ANSI B18.6.4, 1/4-20 x 0.75 in. (+.00/-.03)	A	same as above
Installation location	Load-end mounting bracket of I-Line breaker into interior mounting pan	A	S38, S27 oem_spec
Breaker compatibility	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to interior pan)	A	S38 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating		

EDH-SQD-00145	21593-20100	Square D	fastener	STATUS UNKNOWN

I-Line blank filler mounting screw 21593-20100

OEM part number	21593-20100	A	S33 oem_spec
Description	Screw securing HNM1BL/HNM4BL blank fillers to I-Line interior mounting pan	A	same as above
Application	accessory hardware	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	length, thread size		

EDH-SQD-00160	8011417101	Square D	fastener	STATUS UNKNOWN

Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket

OEM part number	8011417101	A	S42 oem_spec
Description	Slotted Roberts (square) head screw used with trim support bracket 4051749901 on HCN3254-2	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	length, thread		

EDH-SQD-00161	PKDFSCREW	Square D	fastener	CURRENT (80025-067-01

Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)

OEM part number	PKDFSCREW	A	S47 oem_spec
Alternate / superseded numbers	80025-067-01 [supersedes] (Obsolete original deadfront screw)	A	same as above
Description	Deadfront screw used on NF, I-Line, NQ and QMB panels; PKDFSCREW is a kit of 8	A	same as above
Status	current (80025-067-01 obsolete)	A	same as above
Cross-links	Families: I-LINE, QMB		
Not yet documented	length, thread size		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00541	**HPA-LM**	Square D padlock attachment for LA and MA (permanent trip) breakers	—	1970 catalog item; current status unknown

EDH-SQD-00541	HPA-LM	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for LA and MA (permanent trip) breakers

OEM part number	HPA-LM	A	S270 oem_spec
Description	LA and MA (Permanent trip type) - HPA-LM $2.70	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: I-LINE		
Not yet documented	current_status, Dimensions, Material		

4.2 MLN — Square D MLN panelboards and switchboards (ML breakers)

FAM-SQD-013 · panelboard · aka ML, ML-1, ML1, MLN, MLW · markings: Square D

Short-lived Square D panelboard and switchboard line (1962-1968) using ML breakers, superseded by I-Line. Adapter kits once allowed FAL/KAL/LAL/MAL breakers; these are now obsolete. Dealers sell 'ML1 PNL' twin and single mounting hardware for KAP, LAP, LA, MAP, FAP/FAL and 997-frame breakers.

1970 Digest ordering example: '1 - MAL26600, 600 A., 2 P., circuit breaker for use in 600V., 3 Ph., 3 W. panelboard catalog number MLW-5678-6 With mounting assembly for A-B phase connection' - shows an ML-family 'MLW' panel still being serviced in 1970 with MAL breakers and mounting assemblies.

Attribute	Value	Cl.	Sources
Status	Obsolete; Schneider recommends replacing the complete panelboard (new I-Line); FAL/KAL/LAL/MAL adapter kits SK4515/SK4516/SK4517/SK4578 offered as of 1/1/2015 but now obsolete; PowerPact has no adapter kits	A	S263 oem_web
Era of manufacture	Sold in the USA from 1962 to 1968	A	same as above
Successor	I-Line panelboard (complete replacement)	A	same as above
Branch breakers accepted	ML breakers (side label part number 999xxx per forum); later FAL, KAL, LAL, MAL via adapter kits; dealer 'ML1' kits for FAP/FAL, KAP, LA, LAP, MAP and 997 frame	B	S263, S267, S251 oem_web
Identification features	ML breakers carry a side label with a part number like 999xxx	C	S267 forum
Mlw	Panel catalog prefix MLW used with MAL breakers + mounting assembly (1970 replacement example)	A	S270 Digest 152 (1970) p.85; oem_spec

Breaker families associated: Square D ML breakers (MLN panels)

Key documents: S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S263 Schneider Electric FAQ FA130530 - MLN panelboards and replacement circuit breakers (MLN pa; S267 Mike Holt forum - 'Square D - Legacy Breaker Information' (ML line superseded by I-Line in; S270 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00532	**ML1997**	ML-1 panel unknown mounting hardware for 997 frame breaker	997 frame C	Traded by dealer; OEM origin unknown
EDH-SQD-00531	**ML1FAS**	ML-1 panel single mounting hardware for FAP/FAL breaker	FAP/FAL C	Traded by dealer; OEM origin unknown
EDH-SQD-00526	**ML1KAPT**	ML-1 panel twin mounting hardware for KAP breaker	KAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00528	**ML1LAPS**	ML-1 panel single mounting hardware for LAP breaker	LAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00527	**ML1LAPT**	ML-1 panel twin mounting hardware for LAP breaker	LAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00529	**ML1LAT**	ML-1 panel twin mounting hardware for LA breaker	LA C	Traded by dealer; OEM origin unknown
EDH-SQD-00530	**ML1MAPS**	ML-1 panel single mounting hardware for MAP breaker	MAP C	Traded by dealer; OEM origin unknown
EDH-SQD-00533	**ML-LAL-S**	ML-1 panel single? mounting hardware for LAP (title says single, spec says twin) breaker	LAP (title says single, spec says twin) C	Traded by dealer; OEM origin unknown

EDH-SQD-00532 **ML1997** Square D breaker-mounting-kit **TRADED BY DEALER; OEM**

ML-1 panel unknown mounting hardware for 997 frame breaker

OEM part number	ML1997	C	S251 surplus_listing
Description	ML1 PNL - unknown mounting hardware for 997 frame breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	997 frame	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00531	ML1FAS	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single mounting hardware for FAP/FAL breaker

OEM part number	ML1FAS	C	S251 surplus_listing
Description	ML1 PNL - single mounting hardware for FAP/FAL breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	FAP/FAL	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00526	ML1KAPT	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel twin mounting hardware for KAP breaker

OEM part number	ML1KAPT	C	S251 surplus_listing
Description	ML1 PNL - twin mounting hardware for KAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	KAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00528	ML1LAPS	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single mounting hardware for LAP breaker

OEM part number	ML1LAPS	C	S251 surplus_listing
Description	ML1 PNL - single mounting hardware for LAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00527	ML1LAPT	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel twin mounting hardware for LAP breaker

OEM part number	ML1LAPT	C	S251 surplus_listing
Description	ML1 PNL - twin mounting hardware for LAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00529	ML1LAT	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel twin mounting hardware for LA breaker

OEM part number	ML1LAT	C	S251 surplus_listing
Description	ML1 PNL - twin mounting hardware for LA breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LA	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00530	ML1MAPS	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single mounting hardware for MAP breaker

OEM part number	ML1MAPS	C	S251 surplus_listing
Description	ML1 PNL - single mounting hardware for MAP breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	MAP	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

EDH-SQD-00533	ML-LAL-S	Square D	breaker-mounting-kit	TRADED BY DEALER; OEM

ML-1 panel single? mounting hardware for LAP (title says single, spec says twin) breaker

OEM part number	ML-LAL-S	C	S251 surplus_listing
Description	ML1 PNL - single? mounting hardware for LAP (title says single, spec says twin) breaker	C	same as above
Installation location	Panel type ML1 (dealer spec block)	C	same as above
Breaker compatibility	LAP (title says single, spec says twin)	C	same as above
Status	Traded by dealer; OEM origin unknown	D	S251 inference
Cross-links	Families: MLN		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Dealer-assigned code or Square D/aftermarket part? (ML-1 vs MLN naming)*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00522	**SK4515**	Square D adapter kit for FAL breaker in obsolete MLN panelboard	FAL **A**	Offered as of 1/1/2015; now obsolete and no longer available
EDH-SQD-00523	**SK4516**	Square D adapter kit for KAL breaker in obsolete MLN panelboard	KAL **A**	Offered as of 1/1/2015; now obsolete and no longer available
EDH-SQD-00524	**SK4517**	Square D adapter kit for LAL breaker in obsolete MLN panelboard	LAL **A**	Offered as of 1/1/2015; now obsolete and no longer available
EDH-SQD-00525	**SK4578**	Square D adapter kit for MAL breaker in obsolete MLN panelboard	MAL **A**	Offered as of 1/1/2015; now obsolete and no longer available

EDH-SQD-00522	SK4515	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for FAL breaker in obsolete MLN panelboard

OEM part number	SK4515	A	S263 oem_web
Description	Adapter kit pairing: FAL with SK4515 (MLN panels)	A	same as above
Breaker compatibility	FAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00523	SK4516	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for KAL breaker in obsolete MLN panelboard

OEM part number	SK4516	A	S263 oem_web
Description	Adapter kit pairing: KAL with SK4516 (MLN panels)	A	same as above
Breaker compatibility	KAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00524	SK4517	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for LAL breaker in obsolete MLN panelboard

OEM part number	SK4517	A	S263 oem_web
Description	Adapter kit pairing: LAL with SK4517 (MLN panels)	A	same as above
Breaker compatibility	LAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00525	SK4578	Square D	conversion-kit	OFFERED AS OF 1/1/2015

Square D adapter kit for MAL breaker in obsolete MLN panelboard

OEM part number	SK4578	A	S263 oem_web
Description	Adapter kit pairing: MAL with SK4578 (MLN panels)	A	same as above
Breaker compatibility	MAL	A	same as above
Status	Offered as of 1/1/2015; now obsolete and no longer available (FAQ revision note)	A	same as above
Replacement / successor	Replace complete panelboard with new I-Line	A	same as above
Cross-links	Families: MLN · Breakers: Square D ML breakers (MLN panels)		
Not yet documented	Dimensions, Kit contents, Material		

4.3 NA1B — Square D NA1B panelboard (E-frame bolted, AC/DC)

FAM-SQD-012 · panelboard · aka A1B, NA-1B, NA1B-LX, NAIB · markings: Square D

Square D 250 V AC/DC bolted E-frame lighting panelboard of 1960. Schneider guidance (search summary) replaces it with NQ (AC or <=48 V DC) or I-Line (DC up to 250 V).

1970 Digest: NA1B uses distributed phase bussing, galvanized 20 in wide boxes, MONO-FLAT front with concealed trim clamps; top/bottom gutters 5 in min (225 A) and 8 in min (400/600 A). Meets Fed Spec W-P-115a Type I Class 1, UL listed.

Attribute	Value	Cl.	Sources
Era of manufacture	Advertised by Square D in September 1960	A	S246 oem_spec
Successor	NQ panelboard for 240 V AC or DC up to 48 V DC; I-Line for DC up to 250 V (search summary of Schneider FAQ)	C	S266 oem_web
Voltage rating	AC or DC (E frame bolted connection)	A	S246 oem_spec
	240 V max AC; 125 V or 125/250 V DC; 1-ph 2W/3W, 3-ph 3W/4W	A	S270 Digest 152 (1970) p.66; oem_spec
Main ampacity	Main lugs 225 A (300 MCM), 400 A and 600 A (2-500 MCM); main breaker 225 A KA, 400 A LA; NA1B-LX 225 A lugs / 100 A MB	A	S270 Digest 152 (1970) p.55, 66; oem_spec
Branch breakers accepted	Square D E-frame bolted breakers	A	S246 oem_spec
	Bolt-on A1B E frame, 10,000 A IC AC / 5,000 A IC DC; 15-100 A 1/2/3-pole (LX 15-50 A)	A	S270 Digest 152 (1970) p.66; oem_spec
Bus	Distributed phase bussing	A	same as above
Dimensions	Box 20 in W x 5-3/4 in D; gutters top/bottom 5 in min (225 A), 8 in min (400/600 A) (OCR)	B	S270 Digest 152 (1970) p.55, 66; oem_spec

Key documents: S246 sim_ecm_1960-09_59_9 Electrical Construction and Maintenance, Vol 59 No 9, September 1960 - Square D advertisem; S266 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S270 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): PK27GTA, PK23GTA, HLO-1, QO-1CP, PK-3SP, PK-49SP, PK-9GTA, PK-4FL

4.4 NEHB — NEHB panelboard

FAM-SQD-010 · panelboard · aka NEHB, NEHB lighting panelboard, NY1B, NYIB · markings: Schneider Electric, Square D, Square D Canada

Square D 480Y/277 V lighting panelboard using EH plug-on / EHB bolt-on breakers, manufactured 1983-1995 and replaced by NF. EH/EHB breakers reported no longer available. No NEHB kit part numbers were found in this batch.

Square D's pre-NF 480Y/277 V bolt-on lighting panelboards. NY1B: Schneider FAQ FA233845 says 1-pole Y1B breakers are obsolete; 2/3-pole FAL breakers can be replaced if hardware remains; new FAL cannot be added where ML-1/2/3-pole breakers were used (no connectors). NEHB used EH/EHB breakers and was obsoleted in 1995 in favour of NF.

Attribute	Value	Cl.	Sources
Status	obsolete (1995)	A	S236 oem_spec
	NEHB obsoleted 1995; EH/EHB breakers discontinued with no replacement; NY1B 1-pole Y1B breakers obsolete; NY1B mounting kit SK4529 discontinued (search summaries)	C	S266 oem_web
Era of manufacture	1983-1995	A	S236 oem_spec
Successor	NF (uses EDB/EGB/EJB) (Seen only as search snippet of OEM FAQ FA166748 (page blocked))	C	S240 oem_spec
	NF panelboard with EDB/EGB/EJB breakers (EDB cannot be used in NEHB)	C	S266 oem_web
Voltage rating	NY1B (Canada 1985): 240/416 V, 277/480 V, 346/600 V AC with bolt-on breakers, 70 and 100 A types listed	C	S247 distributor
Branch breakers accepted	EH (plug-on), EHB (bolt-on)	A	S236 oem_spec
	NEHB: EH/EHB; built-in rejection prevents 20/30 A EH/EHB opposite 70-100 A EHB; NY1B: Y1B 1-pole 15-50 A and 2/3-pole FAL 15-100 A, some with ML-1 breakers	C	S266, S264 oem_web
Ny1b fal	If NY1B supplied with 2 & 3-pole FAL 15-100 A breakers and hardware exists they can be replaced; no new connectors for positions that used ML-1/2/3-pole breakers	A	S264 oem_web

Breaker families associated: EH / EHB, Square D EH / EHB (NEHB), Square D ML breakers (MLN panels), Square D Y1B 1-pole (NY1B)
Key documents: S236 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /; S240 FA166748 Schneider Electric FAQ FA166748 (NEHB obsolescence / NF replacement); S247 bwb_P9-BJG-737 Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens, ; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S264 Schneider Electric FAQ FA233845 - Are NY1B panelboard replacement breakers still available; S266 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F
Also fits this family (entry printed elsewhere): SF-225LP, HLO-1

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00521	**SK4529**	Square D NY1B mounting kit (discontinued)	—	Discontinued

EDH-SQD-00521 **SK4529** Square D breaker-mounting-kit **DISCONTINUED**

Square D NY1B mounting kit (discontinued)

OEM part number	SK4529	C	S266 oem_web
Description	Required mounting kit SK4529 is discontinued and the entire panel will have to be replaced (NY1B) (Search-engine summary)	C	same as above
Status	Discontinued	C	same as above
Cross-links	Families: NEHB		
Not yet documented	Dimensions, Kit contents, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00520	**FP1**	Square D EHB filler plate, 1 in (NEHB)	EHB positions C	unknown

EDH-SQD-00520 **FP1** Square D filler-plate **STATUS UNKNOWN**

Square D EHB filler plate, 1 in (NEHB)

OEM part number	FP1	C	S251 surplus_listing
Description	EHB filler plates 1 in (also sold in packs FP1-6, FP1-12)	C	same as above
Breaker compatibility	EHB positions	C	same as above
Cross-links	Families: NEHB · Breakers: Square D EH / EHB (NEHB)		
Not yet documented	Dimensions, Kit contents, Material		

4.5 NF — NF panelboard (Class 1670)

FAM-SQD-009 · panelboard · aka NF Series 0, NF Series E1, NFOM · markings: Square D, Schneider Electric

Square D 480Y/277 Vac (600Y/347 Vac max) lighting panelboard using E-frame bolt-on branch breakers (EDB/EGB/EJB, 15-125 A). Series 0 introduced 1995 replacing NEHB; Series E1 from October 2008. Merchandised RTI interiors with field kits: main breaker adapter kits (N150MH, N250MJ, N400M, N600MPPL), sub-feed/feed-through lugs, neutral kits, branch connector kits SKNF250/SKNF600. Maximum branch breaker pair combination 170 A.

Attribute	Value	Cl.	Sources
Status	current	A	S177 p. 9-29 ff.; oem_spec
Era of manufacture	Series 0: 1995-Oct 2008; Series E1: Oct 2008-present	A	S236 oem_spec
Voltage rating	600Y/347 Vac max (480Y/277 Vac with EDB/EGB/EJB US breakers)	A	S177 p. 9-31, 9-32; oem_spec
Main ampacity	125, 250, 400, 600 A merchandised; 800 A factory assembled	A	S177 p. 9-31; oem_spec
Branch breakers accepted	EDB, EGB, EJB (E-frame bolt-on); EDB/EGB/EJB EPD	A	S177 p. 9-32; oem_spec

Breaker families associated: EDB / EGB / EJB (E-frame bolt-on), FI frame (legacy), KI / KC frame (legacy), LA / LH (L-frame, legacy thermal-magnetic), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT L-frame (LG/LJ/LL/LR), PowerPacT M / P / R frame (I-Line)
Key documents: S177 0100CT2401-SEC-09 Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards); S178 Digest 0100CT2401 (online) Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard ; S198 80043-741-03 NF/NFOM Panelboards Class 1670 Instruction Bulletin, Rev. 06; S236 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /
Also fits this family (entry printed elsewhere): S37444, S37445, QO70AN, PK27GTA, PK27GTACU, PK23GTAL, PKGTAB, PK12GTA, TBPANEL, MHBE20, MHKE20, MHCO20, MHBE26, MH62D9, MH68D9, MH74D9, MH80D9, MH86D9, MH92D9

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00379	**N100MFI**	NF FI-frame main circuit breaker adapter kit (legacy)	—	not in 2026 Digest; presumed discontinued
EDH-SQD-00375	**N150MH**	NF main circuit breaker adapter kit, H-frame, 150 A	HD, HG, HJ, HL, HR A	current (listed in 2026 Digest)
EDH-SQD-00376	**N250MJ**	NF main circuit breaker adapter kit, J-frame, 250 A	JD, JG, JJ, JL, JR A	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00380	**N250MKC**	NF KI-frame main circuit breaker adapter kit (legacy)	—	not in 2026 Digest; presumed discontinued
EDH-SQD-00377	**N400M**	NF main circuit breaker adapter kit, LA/LH, 400 A	LA/LH short-handle (e.g. LAL36400MB); also LI, LC per distributor B	current (listed in 2026 Digest)
EDH-SQD-00378	**N600MPPL**	NF main (400/600 A) or sub-feed (400 A) breaker kit, PowerPacT L	LG, LJ, LL, LR; requires MH..D9 8.75 in. deep boxes and 3-point latch A	current (listed in 2026 Digest)
EDH-SQD-00393	**NF250SFBH**	NF sub-feed circuit breaker kit, H-frame, 250 A mains	HDL, HGL, HJL, HLL, HRL A	current (listed in 2026 Digest)
EDH-SQD-00394	**NF250SFBJ**	NF sub-feed circuit breaker kit, J-frame, 250 A mains	JDL, JGL, JJL, JLL, JRL A	current (listed in 2026 Digest)
EDH-SQD-00395	**NF600SFBH**	NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains	HDL, HGL, HJL, HLL, HRL; not field-installable in NF with PowerPacT L A	current (listed in 2026 Digest)
EDH-SQD-00396	**NF600SFBJ**	NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains	JDL, JGL, JJL, JLL, JRL A	current (listed in 2026 Digest)
EDH-SQD-00397	**NF600SFBPPL**	NF sub-feed circuit breaker kit, PowerPacT L, 600 A	—	current (listed in 2026 Digest)

EDH-SQD-00379 N100MFI — Square D — main-breaker-kit — NOT IN 2026 DIGEST; PR

NF FI-frame main circuit breaker adapter kit (legacy)

OEM part number	N100MFI	A	S212 oem_spec
Description	NF panelboard FI-frame main circuit breaker adapter kit	A	same as above
Application	main	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets (2), 10-32x5/16 (10), 1/4-20x3/4, 10-32x7/16 (4), kit-specific main breaker connectors, rail extensions (2), rail splices (2), MAIN label	A	same as above
Torque values	Connector screws and hard-bus connector hardware 60-65 lb-in (6.8-7.3 N-m)	A	same as above
OEM instruction document	80043-765-02 (01/2009)	A	same as above
Status	not in 2026 Digest; presumed discontinued	C	S177 inference
Cross-links	Families: NF · Breakers: FI frame (legacy)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00375 N150MH — Square D — main-breaker-kit — CURRENT (LISTED IN 202

NF main circuit breaker adapter kit, H-frame, 150 A

OEM part number	N150MH	A	S177 oem_spec
Description	Vertical H-frame main breaker adapter kit for 125 A NF interiors (NF418L1..NF454L1C)	A	S177, S211 p. 9-31; oem_spec
Application	main	A	S177 oem_spec
Breaker compatibility	HD, HG, HJ, HL, HR	A	S177 p. 9-31; oem_spec
Current rating	15-125 A interiors (H-frame 150 A max)	A	S177, S211 p. 9-31; oem_spec
Kit contents	Three-terminal kit S37444, main breaker connectors (3), 10-32x5/16 (10), 1/4-20x3/4 (6), 10-32x7/16 (4), 8-32x3-1/4 (2), 10-32x7/8 (2), deadfront cover, mounting pan assembly, N150MH-only item M, MAIN label, support brackets (2), rail extensions (2), rail splices (2)	A	S211 Kit Contents; oem_spec
Torque values	Connector screws 60-65 lb-in (6.8-7.3 N-m)	A	S211 oem_spec
OEM instruction document	80043-764-03 Rev. 01 (09/2015)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Requires	NFHJLLC (EDH-SQD-00382), S37444 (EDH-SQD-00183)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00376	N250MJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main circuit breaker adapter kit, J-frame, 250 A

OEM part number	N250MJ	A	S177 oem_spec
Description	Vertical J-frame main breaker adapter kit for 250 A NF interiors	A	S177, S211 p. 9-31; oem_spec
Application	main	A	S177 oem_spec
Breaker compatibility	JD, JG, JJ, JL, JR	A	S177 p. 9-31; oem_spec
Current rating	125-250 A	A	same as above
Kit contents	Three-terminal kit S37445, main breaker connectors (3), screws, deadfront cover, mounting pan assembly, label, support brackets, rail extensions and splices	A	S211 oem_spec
Torque values	Connector screws 60-65 lb-in (6.8-7.3 N-m)	A	same as above
OEM instruction document	80043-764-03	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Requires	NFHJLLC (EDH-SQD-00382), S37445 (EDH-SQD-00186)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00380	N250MKC	Square D	main-breaker-kit	NOT IN 2026 DIGEST; PR

NF KI-frame main circuit breaker adapter kit (legacy)

OEM part number	N250MKC	A	S212 oem_spec
Description	NF panelboard KI-frame main circuit breaker adapter kit	A	same as above
Application	main	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets (2), 10-32x5/16 (10), 1/4-20x3/4, 10-32x7/16 (4), kit-specific main breaker connectors, rail extensions (2), rail splices (2), MAIN label	A	same as above
Torque values	Connector screws and hard-bus connector hardware 60-65 lb-in (6.8-7.3 N-m)	A	same as above
OEM instruction document	80043-765-02 (01/2009)	A	same as above
Status	not in 2026 Digest; presumed discontinued	C	S177 inference
Cross-links	Families: NF · Breakers: KI / KC frame (legacy)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00377	N400M	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main circuit breaker adapter kit, LA/LH, 400 A

OEM part number	N400M	A	S177 oem_spec
Description	LA/LH main circuit breaker adapter kit for 400 A NF interiors	A	S177 p. 9-31; oem_spec
Application	main	A	S177 oem_spec
Breaker compatibility	LA/LH short-handle (e.g. LAL36400MB); also LI, LC per distributor (LI/LC from distributor listing only)	B	S177 p. 9-31; oem_spec
Current rating	125-400 A	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets (2), 10-32x7/8 (2), 1/4-20x1-1/8 (6), 10-32x7/16 (4), main breaker connectors/assembly (3), 10-32x5/16 (6), 3/8 washers (3), 3/8-16x3/4 (3), 12-24x3-1/4 (4), rail extensions (2), rail splices (2), MAIN label (Bulletin 80043-766-03 (NF L-frame main adapter kit) does not print the catalog number in extracted text; association with N400M by Digest description)	B	S213 oem_spec
Torque values	Breaker-to-connector 3/8-16 screws 250-275 lb-in (28.2-31.1 N-m); connector hardware 60-65 lb-in (6.8-7.3 N-m)	B	same as above
OEM instruction document	80043-766-03 (08/2009) (association inferred)	B	S213 inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Requires	NFLALLC (EDH-SQD-00383)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00378	N600MPPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF main (400/600 A) or sub-feed (400 A) breaker kit, PowerPacT L

OEM part number	N600MPPL	A	S177 oem_spec
Description	PowerPacT L main circuit breaker 400/600 A or sub-feed 400 A kit for NF	A	S230 oem_spec
Application	main or sub-feed	A	S177 p. 9-38; oem_spec
Breaker compatibility	LG, LJ, LL, LR; requires MH..D9 8.75 in. deep boxes and 3-point latch trims	A	S177 p. 9-31; oem_spec
Current rating	125-600 A main; 400 A max as SFB	A	S177 p. 9-31, 9-38; oem_spec
Kit contents	L-frame screw bag (seismic), deadfront support brackets, terminal shield bag, escutcheon, deadfront extension, breaker deadfront cover, mounting pan, A/B/C phase connector assemblies, phase insulator, deadfront insulator, NF deadfront cover + insulator, 18 in. rail extensions (2), rail extension splices (2)	A	S230 oem_spec
Torque values	M10x25 mm screws 442 lb-in (50 N-m); 1/4-20x1-1/8 screws 60-65 lb-in (6.8-7.3 N-m)	A	S230 steps 12-13; oem_spec
OEM instruction document	80043-866-01 (10/2021)	A	S230 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-31; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Requires	NFPPLLLC (EDH-SQD-00384)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00393	NF250SFBH	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF sub-feed circuit breaker kit, H-frame, 250 A mains

OEM part number	NF250SFBH	A	S177 oem_spec
Description	NF sub-feed circuit breaker kit, H-frame, 250 A mains	A	S177 p. 9-38; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	HDL, HGL, HJL, HLL, HRL	A	S177 p. 9-38 note; oem_spec
Current rating	250 A mains	A	S177 p. 9-38; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00394	NF250SFBJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF sub-feed circuit breaker kit, J-frame, 250 A mains

OEM part number	NF250SFBJ	A	S177 oem_spec
Description	NF sub-feed circuit breaker kit, J-frame, 250 A mains	A	S177 p. 9-38; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	JDL, JGL, JJL, JLL, JRL	A	S177 p. 9-38 note; oem_spec
Current rating	250 A mains	A	S177 p. 9-38; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00395	NF600SFBH	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains

OEM part number	NF600SFBH	A	S177 oem_spec
Description	NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains	A	S177, S207 p. 9-38; oem_spec
Application	sub-feed	A	S177 p. 9-38; oem_spec
Breaker compatibility	HDL, HGL, HJL, HLL, HRL; not field-installable in NF with PowerPacT L main	A	same as above
Current rating	400 A mains	A	same as above
Kit contents	Neutral lugs (2), 10-32x7/16 (4), 10-32x5/16 (10), 1/4-20x3/4 (2), 1/4-20x1-1/8 (6), 8-32x3-1/4 (4), support brackets (2), closing plate, SFB deadfront cover, SFB mounting pan, rail extensions (2), rail splices (2), rivets (2), H load lug, H sub-feed cables	A	S207 Kit Contents; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m) and 60-65 lb-in (6.8-7.3 N-m) per step	A	S207 oem_spec
OEM instruction document	80043-760-03	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00396	NF600SFBJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains

OEM part number	NF600SFBJ	A	S177 oem_spec
Description	NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains	A	S177, S207 p. 9-38; oem_spec
Application	sub-feed	A	S177 p. 9-38; oem_spec
Breaker compatibility	JDL, JGL, JJL, JLL, JRL	A	same as above
Current rating	400 A mains	A	same as above
Kit contents	As NF600SFBH with J load lug and J sub-feed cables	A	S207 Kit Contents; oem_spec
Torque values	25-30 / 60-65 lb-in	A	S207 oem_spec
OEM instruction document	80043-760-03	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00397	NF600SFBPPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NF sub-feed circuit breaker kit, PowerPacT L, 600 A

OEM part number	NF600SFBPPL	A	S177 oem_spec
Description	NF sub-feed circuit breaker kit, PowerPacT L, 600 A	A	S177, S231 p. 9-38; oem_spec
Application	sub-feed	A	S177 p. 9-38; oem_spec
Current rating	600 A	A	same as above
Kit contents	600 A L-frame screw bag, support brackets, terminal shield bag, escutcheon, deadfront extension/cover/insulator, mounting pan, A/B/C phase connector assemblies, phase insulator, 6 in. rail extensions (2), neutral lug 2x1/0-750 left and right, 18 in. rail extensions (2), rail splices (4)	A	S231 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S231 oem_spec
OEM instruction document	80043-868-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00404	**NFALV1**	NF optional main lug kit, aluminum compression (crimp), 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00407	**NFALV2**	NF optional main lug kit, aluminum compression (crimp), 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00410	**NFALV4**	NF optional main lug kit, aluminum compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00413	**NFALV6**	NF optional main lug kit, aluminum compression (crimp), 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00405	**NFCUM1**	NF optional main lug kit, copper mechanical, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00408	**NFCUM2**	NF optional main lug kit, copper mechanical, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00411	**NFCUM4**	NF optional main lug kit, copper mechanical, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00414	**NFCUM6**	NF optional main lug kit, copper mechanical, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00406	**NFCUV1**	NF optional main lug kit, copper compression (crimp), 125 A	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00409	**NFCUV2**	NF optional main lug kit, copper compression (crimp), 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00412	**NFCUV4**	NF optional main lug kit, copper compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00415	**NFCUV6**	NF optional main lug kit, copper compression (crimp), 600 A	—	current (listed in 2026 Digest)

EDH-SQD-00404	NFALV1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 125 A

OEM part number	NFALV1	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 125 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	125 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range one #4-300 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFALV1 requires +6 in. box height for larger wire*		

EDH-SQD-00407	NFALV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 250 A

OEM part number	NFALV2	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 250 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	250 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range one 250-350 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00410	NFALV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 400 A

OEM part number	NFALV4	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 400 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range two 2/0-500 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00413	NFALV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, aluminum compression (crimp), 600 A

OEM part number	NFALV6	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 600 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range two 2/0-500 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00405	NFCUM1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 125 A

OEM part number	NFCUM1	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 125 A NF main-lug interior	A	S177, S208 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	125 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S208 oem_spec
Dimensions	Lug wire range #6-2/0	A	S177 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S208 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00408	NFCUM2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 250 A

OEM part number	NFCUM2	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 250 A NF main-lug interior	A	S177, S208 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	250 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S208 oem_spec
Dimensions	Lug wire range #6-250 kcmil	A	S177 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S208 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00411	NFCUM4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 400 A

OEM part number	NFCUM4	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 400 A NF main-lug interior	A	S177, S208 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S208 oem_spec
Dimensions	Lug wire range one 1/0-750 or two 1/0-350	A	S177 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S208 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00414	NFCUM6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper mechanical, 600 A

OEM part number	NFCUM6	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 600 A NF main-lug interior	A	S177, S208 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral lug(s), main lugs (3) (600 A: A/C lugs + B-phase lug assembly), 1/4-20 tapping screws	A	S208 oem_spec
Dimensions	Lug wire range two 1/0-750 kcmil	A	S177 p. 9-38; oem_spec
Torque values	Main lugs 60-65 lb-in (6.8-7.3 N-m); 125/250 A neutral 25-30 lb-in	A	S208 oem_spec
OEM instruction document	80043-761-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00406	NFCUV1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 125 A

OEM part number	NFCUV1	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 125 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	125 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range one #6-1/0	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

EDH-SQD-00409	NFCUV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 250 A

OEM part number	NFCUV2	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 250 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	250 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range one 2/0-300 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

EDH-SQD-00412	NFCUV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 400 A

OEM part number	NFCUV4	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 400 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range one 400-750 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

EDH-SQD-00415	NFCUV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NF optional main lug kit, copper compression (crimp), 600 A

OEM part number	NFCUV6	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 600 A NF main-lug interior	A	S177, S209 p. 9-38; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs, crimp lug pads (3), pad doublers (400 A+), Keps nuts (3), 1/4-20 screws; NFALV1 adds lug cover, rail extensions/splices, support brackets; NFCUV1 adds lug plate	A	S209 oem_spec
Dimensions	Lug wire range two 250-500 kcmil	A	S177 p. 9-38; oem_spec
Torque values	See bulletin	D	S209 oem_spec
OEM instruction document	80043-762-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*NFCUV*: use copper wire only; may need +6 in. box height*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00387	**NF125SFL**	NF sub-feed lug kit, 125 A	Not with 200% neutral kits (factory assembled only) A	current (listed in 2026 Digest)
EDH-SQD-00388	**NF250SFL**	NF sub-feed lug kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00389	**NF400SFL**	NF sub-feed lug kit, 400 A	Copper wire only; requires additional 6 in. box height A	current (listed in 2026 Digest)

EDH-SQD-00387	NF125SFL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NF sub-feed lug kit, 125 A

OEM part number	NF125SFL	A	S177 oem_spec
Description	NF sub-feed lug kit, 125 A	A	S177, S203 p. 9-38; oem_spec
Application	sub-feed	A	S177 p. 9-38; oem_spec
Breaker compatibility	Not with 200% neutral kits (factory assembled only)	A	S177 p. 9-38 fn; oem_spec
Current rating	125 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral lug (1), 125 A line lugs (3), 1/4-20x3/4 (kit-specific), 1/4-20x9/16 (1)	A	S203 Kit Contents; oem_spec
Torque values	Line lugs 60-65 lb-in (6.8-7.3 N-m); neutral lug 25-30 lb-in (2.8-3.4 N-m)	A	S203 oem_spec
OEM instruction document	80043-755-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00388	NF250SFL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NF sub-feed lug kit, 250 A

OEM part number	NF250SFL	A	S177 oem_spec
Description	NF sub-feed lug kit, 250 A	A	S177, S203 p. 9-38; oem_spec
Application	sub-feed	A	S177 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	Neutral lug (1), 250 A line lugs (3), 1/4-20x1-1/8 (kit-specific), 1/4-20x9/16 (1)	A	S203 Kit Contents; oem_spec
Torque values	Line lugs 60-65 lb-in; neutral 25-30 lb-in	A	S203 oem_spec
OEM instruction document	80043-755-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00389	NF400SFL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NF sub-feed lug kit, 400 A

OEM part number	NF400SFL	A	S177 oem_spec
Description	NF sub-feed lug kit, 400 A	A	S177, S204 p. 9-38; oem_spec
Application	sub-feed	A	S177 p. 9-38; oem_spec
Breaker compatibility	Copper wire only; requires additional 6 in. box height	A	S177 p. 9-38 fn; oem_spec
Current rating	400 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral lug (1), line lugs (2), line lug assembly with insulator (1), 1/4-20x1-1/8 (6), 1/4-20x7/8 (2)	A	S204 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S204 oem_spec
OEM instruction document	80043-756-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00390	**NF125FTL**	NF feed-through lug kit, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00391	**NF250FTL**	NF feed-through lug kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00392	**NF400FTL**	NF feed-through lug kit, 400 A	—	current (listed in 2026 Digest)

EDH-SQD-00390	NF125FTL	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NF feed-through lug kit, 125 A

OEM part number	NF125FTL	A	S177 oem_spec
Description	NF feed-through lug kit, 125 A	A	S177, S205 p. 9-38; oem_spec
Application	through-feed	A	S177 p. 9-38; oem_spec
Current rating	125 A	A	same as above
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (6), 1/4-20x9/16 (1), 1/4-20x3/4 (3), rail extensions (2), rail splices (2), cover extension (1)	A	S205 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S205 oem_spec
OEM instruction document	80043-757-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00391	NF250FTL	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NF feed-through lug kit, 250 A

OEM part number	NF250FTL	A	S177 oem_spec
Description	NF feed-through lug kit, 250 A	A	S177, S205 p. 9-38; oem_spec
Application	through-feed	A	S177 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	As NF125FTL plus 10-32x7/16 screws and deadfront support brackets (2)	A	S205 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S205 oem_spec
OEM instruction document	80043-757-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00392	NF400FTL	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NF feed-through lug kit, 400 A

OEM part number	NF400FTL	A	S177 oem_spec
Description	NF feed-through lug kit, 400 A	A	S177, S206 p. 9-38; oem_spec
Application	through-feed	A	S177 p. 9-38; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (4), 1/4-20x7/8 (2), 1/4-20x1-1/8 (6), 10-32x7/16 (2), barriers (4), rail extensions (2), rail splices (2), cover extension (1)	A	S206 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S206 oem_spec
OEM instruction document	80043-758-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00430	**AL100FD**	E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A)	—	current (listed in 2026 Digest)
EDH-SQD-00429	**AL30FD**	E-frame mechanical lug kit (3 lugs), 15-30 A	—	current (listed in 2026 Digest)
EDH-SQD-00431	**CU100FD**	E-frame copper mechanical lug kit (3 lugs), 15-125 A	—	current (listed in 2026 Digest)

EDH-SQD-00430	AL100FD	Square D	lug-kit	CURRENT (LISTED IN 202

E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A)

OEM part number	AL100FD	A	S177 oem_spec
Description	E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A) ; wire one #12-2/0 Al or #14-2/0 Cu for EDB/EGB/EJB load terminals	A	S177 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00429	AL30FD	Square D	lug-kit	CURRENT (LISTED IN 202

E-frame mechanical lug kit (3 lugs), 15-30 A

OEM part number	AL30FD	A	S177 oem_spec
Description	E-frame mechanical lug kit (3 lugs), 15-30 A ; wire one #12-#6 Al or #14-#6 Cu for EDB/EGB/EJB load terminals	A	S177 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00431	CU100FD	Square D	lug-kit	CURRENT (LISTED IN 202

E-frame copper mechanical lug kit (3 lugs), 15-125 A

OEM part number	CU100FD	A	S177 oem_spec
Description	E-frame copper mechanical lug kit (3 lugs), 15-125 A ; wire one #14-1/0 Cu for EDB/EGB/EJB load terminals	A	S177 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00423	**Q1100AN**	Add-on neutral/ground lug, 80-100 A	—	current (listed in 2026 Digest)

EDH-SQD-00423	Q1100AN	Square D	lug	CURRENT (LISTED IN 202

Add-on neutral/ground lug, 80-100 A

OEM part number	Q1100AN	A	S177 oem_spec
Description	Add-on lug for NF neutral or ground bars, #14-1/0 Al/Cu, 80-100 A wire; uses two standard termination spaces	A	S177 p. 9-39; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00416	**SKNF250**	NF branch connector kit, 125/250 A interiors	—	current (FAQ updated 2026)
EDH-SQD-00417	**SKNF600**	NF branch connector kit, 400-800 A interiors	—	listed by distributors

EDH-SQD-00416	SKNF250	Square D	branch-connector-kit	CURRENT (FAQ UPDATED 2

NF branch connector kit, 125/250 A interiors

OEM part number	SKNF250	A	S214 oem_spec
Description	Branch connector (bus finger) kit for 125 A and 250 A NF interiors; fits Series E1 and Series 0	A	S239 oem_spec
Application	branch	A	S214 oem_spec
Installation location	NF phase bus at branch positions	B	S214 inference
Current rating	125-250 A interiors	A	S239 oem_spec
Kit contents	Bulletin: 'A' and 'C' phase branch connectors (3), 'B' phase branch connector (1), 10-32 x 15/16 tapping screws (4). FAQ: three branch busbar fingers plus screws (Quantities differ between bulletin and FAQ)	A	S214, S239 oem_spec
Torque values	Connector screws 30-40 lb-in (bulletin prints 6.74-8.99 N-m, inconsistent - 30-40 lb-in = 3.4-4.5 N-m); EDB/EGB/EJB mounting screws 18-21 lb-in (2.03-2.37 N-m) (Unit inconsistency in OEM text)	A	S214 oem_spec
OEM instruction document	80043-767-01 (08/2008)	A	same as above
Status	current (FAQ updated 2026)	B	S239 inference
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm correct torque (lb-in vs N-m) with Schneider*		

EDH-SQD-00417	SKNF600	Square D	branch-connector-kit	LISTED BY DISTRIBUTORS

NF branch connector kit, 400-800 A interiors

OEM part number	SKNF600	A	S214 oem_spec
Description	Branch connector kit for higher-ampacity NF interiors (covered by same bulletin as SKNF250)	A	same as above
Application	branch	A	same as above
Current rating	400-800 A (distributor listing)	C	distributor
Kit contents	Same item list as SKNF250 in bulletin	A	S214 oem_spec
OEM instruction document	80043-767-01	A	same as above
Status	listed by distributors	C	distributor
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00401	**NFN1CU**	NF copper 100% neutral kit, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00402	**NFN2CU**	NF copper 100% neutral kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00428	**NFN6CR**	NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits	—	current (listed in 2026 Digest)
EDH-SQD-00403	**NFN6CU**	NF copper 100% neutral kit, 400/600 A	Not to be used with SFL/FTL/SFB (factory assembled only) A	current (listed in 2026 Digest)
EDH-SQD-00398	**NFNL1**	NF 200% neutral kit, 125 A	—	current (listed in 2026 Digest)
EDH-SQD-00399	**NFNL2**	NF 200% neutral kit, 250 A	—	current (listed in 2026 Digest)
EDH-SQD-00400	**NFNL4**	NF 200% neutral kit, 400 A	Not to be used with SFL/FTL/SFB (factory assembled only) A	current (listed in 2026 Digest)

EDH-SQD-00401	NFN1CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF copper 100% neutral kit, 125 A

OEM part number	NFN1CU	A	S177 oem_spec
Description	NF merchandised copper 100% neutral kit for 125 A mains	A	S177 p. 9-38; oem_spec
Current rating	125 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S202 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00402	NFN2CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF copper 100% neutral kit, 250 A

OEM part number	NFN2CU	A	S177 oem_spec
Description	NF merchandised copper 100% neutral kit for 250 A mains	A	S177 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S202 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00428	NFN6CR	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits

OEM part number	NFN6CR	A	S177 oem_spec
Alternate / superseded numbers	NFNL6CR (200% version)	A	S177 equivalent; p. 9-16; oem_spec
Description	Condo riser neutral assembly 100%, up to 72 branch circuits, 8.75 in. min enclosure depth	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF, NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00403	NFN6CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF copper 100% neutral kit, 400/600 A

OEM part number	NFN6CU	A	S177 oem_spec
Description	NF merchandised copper 100% neutral kit for 400/600 A mains	A	S177 p. 9-38; oem_spec
Breaker compatibility	Not to be used with SFL/FTL/SFB (factory assembled only)	A	S177 p. 9-38 fn 1; oem_spec
Current rating	400/600 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S202 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00398	NFNL1	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF 200% neutral kit, 125 A

OEM part number	NFNL1	A	S177 oem_spec
Description	NF merchandised 200% neutral kit for 125 A mains	A	S177 p. 9-38; oem_spec
Current rating	125 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S202 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00399	NFNL2	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF 200% neutral kit, 250 A

OEM part number	NFNL2	A	S177 oem_spec
Description	NF merchandised 200% neutral kit for 250 A mains	A	S177 p. 9-38; oem_spec
Current rating	250 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S202 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00400	NFNL4	Square D	neutral-assembly	CURRENT (LISTED IN 202

NF 200% neutral kit, 400 A

OEM part number	NFNL4	A	S177 oem_spec
Description	NF merchandised 200% neutral kit for 400 A mains	A	S177 p. 9-38; oem_spec
Breaker compatibility	Not to be used with SFL/FTL/SFB (factory assembled only)	A	S177 p. 9-38 fn 1; oem_spec
Current rating	400 A	A	S177 p. 9-38; oem_spec
Kit contents	Neutral assembly (1), 10-32x5/16 tapping screws (4)	A	S202 oem_spec
OEM instruction document	80043-754-02 (01/2009)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-38; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00422	**NFES18**	NF equipment space kit (18 in.)	—	unknown

EDH-SQD-00422	NFES18	Square D	mounting-bracket	UNKNOWN

NF equipment space kit (18 in.)

OEM part number	NFES18	A	S201 oem_spec
Description	Equipment space kit for NF interior	A	same as above
Kit contents	Mounting pan (1), barrier (1), rail splices (2), 10-32x7/8 (4)	A	same as above
OEM instruction document	80043-753-01	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Rail

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00419	**NF12RDE**	NF 12 in. rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00420	**NF18RDE**	NF 18 in. rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00418	**NF6RDE**	NF 6 in. rail and deadfront extension kit	—	current (listed in 2026 Digest)

EDH-SQD-00419	NF12RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NF 12 in. rail and deadfront extension kit

OEM part number	NF12RDE	A	S177 oem_spec
Description	12 in. rail and deadfront extension for NF interiors	A	S177 p. 9-39; oem_spec
Kit contents	10-32x5/16 (6), deadfront cover (1), rail extensions (2), rail splices (2), plus support brackets and 10-32x7/16	A	S210 oem_spec
OEM instruction document	80043-763-01 (06/2008)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-39; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00420	NF18RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NF 18 in. rail and deadfront extension kit

OEM part number	NF18RDE	A	S177 oem_spec
Description	18 in. rail and deadfront extension for NF interiors	A	S177 p. 9-39; oem_spec
Kit contents	10-32x5/16 (6), deadfront cover (1), rail extensions (2), rail splices (2), plus support brackets and 10-32x7/16	A	S210 oem_spec
OEM instruction document	80043-763-01 (06/2008)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-39; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00418	NF6RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NF 6 in. rail and deadfront extension kit

OEM part number	NF6RDE	A	S177 oem_spec
Description	6 in. rail and deadfront extension for NF interiors	A	S177 p. 9-39; oem_spec
Kit contents	10-32x5/16 (4), deadfront cover (1), rail extensions (2), rail splices (2)	A	S210 oem_spec
OEM instruction document	80043-763-01 (06/2008)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-39; oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00386	**NFBFMB20**	NF back-fed main circuit breaker barrier kit	—	unknown
EDH-SQD-00381	**NFEDBS**	NF U.S. service entrance barrier kit (E-frame main)	—	current (listed in 2026 Digest)
EDH-SQD-00382	**NFHJLLC**	NF U.S. service entrance barrier kit (H/J main)	—	current (listed in 2026 Digest)
EDH-SQD-00383	**NFLALLC**	NF U.S. service entrance barrier kit (LA/LH main)	—	current (listed in 2026 Digest)
EDH-SQD-00384	**NFPPLLLC**	NF U.S. service entrance barrier kit (PowerPacT L main)	Requires medium terminal shield LTSM3P (not included) A	current (listed in 2026 Digest)
EDH-SQD-00385	**NFPPPLLC**	NF U.S. service entrance barrier kit (PowerPacT P main)	—	current (listed in 2026 Digest)

EDH-SQD-00386	NFBFMB20	Square D	barrier	UNKNOWN

NF back-fed main circuit breaker barrier kit

OEM part number	NFBFMB20	A	S217 oem_spec
Description	Back-fed main circuit breaker barrier (adhesive) for NF panelboard	A	same as above
Kit contents	Back-fed main circuit breaker barrier (1)	A	same as above
OEM instruction document	80043-774-01 (04/2009)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00381	NFEDBS	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (E-frame main)

OEM part number	NFEDBS	A	S177 oem_spec
Description	NF E-frame (back-fed EDB/EGB/EJB 125 A 3P main) line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	A	S177 p. 9-39; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6 (NFEDBS footnoted)	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00382	NFHJLLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (H/J main)

OEM part number	NFHJLLC	A	S177 oem_spec
Description	NF H/J line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	A	S177 p. 9-39; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00383	NFLALLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (LA/LH main)

OEM part number	NFLALLC	A	S177 oem_spec
Description	NF LA/LH line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	A	S177 p. 9-39; oem_spec
Application	main (service entrance)	A	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00384	NFPPLLLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (PowerPacT L main)

OEM part number	NFPPLLLC	**A**	S177 oem_spec
Description	NF PowerPacT L line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	**A**	S177 p. 9-39; oem_spec
Application	main (service entrance)	**A**	S177 oem_spec
Breaker compatibility	Requires medium terminal shield LTSM3P (not included)	**A**	S222 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00385	NFPPPLLC	Square D	barrier	CURRENT (LISTED IN 202

NF U.S. service entrance barrier kit (PowerPacT P main)

OEM part number	NFPPPLLC	**A**	S177 oem_spec
Description	NF PowerPacT P line lug cover and neutral bonding strap (required by NEC 2017+ for service entrance)	**A**	S177 p. 9-39; oem_spec
Application	main (service entrance)	**A**	S177 oem_spec
OEM instruction document	80043-839-01 Rev. 04 Table 6	**A**	S222 oem_spec
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-39; oem_spec
Cross-links	Families: NF · Breakers: PowerPacT M / P / R frame (I-Line)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00424	**NFRPLMB6PPL**	NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	—	unknown
EDH-SQD-00425	**NFRPLMB8PPMP**	NF 800 A PowerPacT M/P main breaker deadfront replacement kit	—	unknown

EDH-SQD-00424	NFRPLMB6PPL	Square D	deadfront	UNKNOWN

NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A

OEM part number	NFRPLMB6PPL	**A**	S226 oem_spec
Alternate / superseded numbers	NFRPLMB63RPPL [equivalent] (600 A version for MH vented NEMA 3R)	**A**	same as above
Description	Replacement deadfront set for NF 400/600 A PowerPacT L main and sub-feed breaker	**A**	same as above
OEM instruction document	80043-848-01 (10/2020)	**A**	same as above
Status	unknown	**D**	oem_spec
Cross-links	Families: NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00425	NFRPLMB8PPMP	Square D	deadfront	UNKNOWN

NF 800 A PowerPacT M/P main breaker deadfront replacement kit

OEM part number	NFRPLMB8PPMP	A	S229 oem_spec
Description	NF 800 A PowerPacT M-frame and P-frame main circuit breaker deadfront replacement kit	A	same as above
Kit contents	Label bag, replacement screw bag, deadfront extension, deadfront cover, deadfront insulator	A	same as above
OEM instruction document	80043-861-01 (07/2021)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF · Breakers: PowerPacT M / P / R frame (I-Line)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00421	**NFFP15**	NF filler plates (15 per package)	—	current (listed in 2026 Digest)

EDH-SQD-00421	NFFP15	Square D	filler-plate	CURRENT (LISTED IN 202

NF filler plates (15 per package)

OEM part number	NFFP15	A	S177 oem_spec
Description	Filler plate, 15 per package	A	S177 p. 9-39; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00427	**NFCRBOND8**	NF 800 A U.S. condo riser neutral bonding strap kit	—	unknown
EDH-SQD-00426	**NFNQCRBOND46**	NQ/NF U.S. condo riser neutral bonding strap kit (400/600 A)	—	unknown
EDH-SQD-00432	**TIKFD**	E-frame terminal nut insert kit (3 per kit)	—	current (listed in 2026 Digest)

EDH-SQD-00427	NFCRBOND8	Square D	hardware-kit	UNKNOWN

NF 800 A U.S. condo riser neutral bonding strap kit

OEM part number	NFCRBOND8	A	S227 oem_spec
Description	NF 800 A condo riser neutral bonding strap (100% and 200%)	A	same as above
Kit contents	Bonding strap (1), 10-32 x .31 screws (2), bulletin	A	same as above
OEM instruction document	80043-853-01	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00426	NFNQCRBOND46	Square D	hardware-kit	UNKNOWN

NQ/NF U.S. condo riser neutral bonding strap kit (400/600 A)

OEM part number	NFNQCRBOND46	A	S227 oem_spec
Description	Neutral bonding strap kit for NQ/NF condo riser panelboards	A	same as above
Kit contents	Bonding strap condo riser 100% 1.4 in. high (1), 200% 1.7 in. high (1), 10-32 x .31 pan head square-slot screws (2), bulletin	A	same as above
Dimensions	Strap heights 1.4 in. (100%) and 1.7 in. (200%)	A	same as above
Torque values	20-25 lb-in (4.5-5.6 N-m) as printed	A	same as above
OEM instruction document	80043-853-01 (08/2020)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NF, NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00432	TIKFD	Square D	hardware-kit	CURRENT (LISTED IN 202

E-frame terminal nut insert kit (3 per kit)

OEM part number	TIKFD	A	S177 oem_spec
Description	E-frame terminal nut insert kit (3 per kit) for EDB/EGB/EJB load terminals	A	S177 p. 9-33; oem_spec
Installation location	Breaker load terminal (not panel bus)	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NF · Breakers: EDB / EGB / EJB (E-frame bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

4.6 NH1B — Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)

FAM-SQD-014 · panelboard · aka NH1B, NHIB, NH1B-LX, MH1B (OCR) · markings: Square D

Square D's 1970 480Y/277 V lighting panelboard (NH1B) with distributed phase bussing, FY single-pole and FA multi-pole branch breakers, galvanized boxes with MONO-FLAT front with door, gray baked enamel. Column-width NH1B-LX exists. I-Line box extension HC-2609-EXF/S serves 'HCN or NH1B'. Distinct from the Westinghouse and FPE NH1B designations.

Attribute	Value	Cl.	Sources
Status	Obsolete (inference; superseded by NEHB then NF)	D	inference
Era of manufacture	Catalogued in Square D Digest 152 (1970); NEHB is not in the 1970 index (later successor - inference)	A	S270 Digest 152 (1970) p.55, 68; oem_spec
Successor	NEHB, then NF (inference from Schneider NEHB->NF guidance)	D	S266 inference
Voltage rating	480 V AC max, AC only; 277/480 V 3-ph 4W, 480 V; 1-ph 2W/3W, 3-ph 3W/4W	A	S270 Digest 152 (1970) p.68; oem_spec
Main ampacity	Main lugs 100 A, 225 A (1-300 MCM), 400 A (2-600 MCM); main breakers 100/225/400 A; NH1B-LX 225 A	A	same as above
Branch breakers accepted	FY 1-pole 15-50 A (277 V AC max) and FA 2/3-pole 15-100 A, plug-on or bolt-on (LX bolt-on FA 15-50 A)	A	S270 Digest 152 (1970) p.55, 68; oem_spec
Finish / plating	MONO-FLAT fronts with door, gray baked enamel, flush lock	A	S270 Digest 152 (1970) p.68; oem_spec

Key documents: S266 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S270 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P

Also fits this family (entry printed elsewhere): PK27GTA, PK23GTA, HLO-1, QO-1CP, PK-3SP, PK-49SP, PK-9GTA, PK-4FL, HC-2609-EXF

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00539	**HPA-FK**	Square D padlock attachment for FA and KA breakers	—	1970 catalog item; current status unknown
EDH-SQD-00540	**HPA-FYQ**	Square D padlock attachment for Q2 and FY breakers	—	1970 catalog item; current status unknown

EDH-SQD-00539	HPA-FK	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for FA and KA breakers

OEM part number	HPA-FK	A	S270 oem_spec
Description	FA and KA - HPA-FK $2.30	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NH1B, I-LINE		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00540	HPA-FYQ	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for Q2 and FY breakers

OEM part number	HPA-FYQ	A	S270 oem_spec
Description	Q2 and FY - HPA-FYQ $2.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NH1B, I-LINE		
Not yet documented	current_status, Dimensions, Material		

4.7 NQ — NQ panelboard (Class 1640)

FAM-SQD-006 · panelboard · aka NQ lighting panelboard, NQ RTI, NQ14 (14-inch-wide) · markings: Square D, Schneider Electric

Current Square D 240 Vac / 48 Vdc lighting and appliance panelboard, 20 in. wide MH box (14 in. NQ14 variant), merchandised as ready-to-install (RTI) interiors plus field-installable kits (main breaker adapter kits NQMB*, sub-feed/feed-through lug kits, neutral kits, rail/deadfront extensions). Accepts QO plug-on and QOB bolt-on branch breakers; tandem breakers not allowed. Mains 100-600 A main lug or main breaker (QOB/QOB-VH back-fed, PowerPacT Q/H/J vertical, LA/LH, PowerPacT L).

Attribute	Value	Cl.	Sources
Status	current	A	S177 p. 9-7 ff.; oem_spec
Era of manufacture	2008-present (replaced NQOD in 2008)	A	S236 oem_spec
Voltage rating	240 Vac, 48 Vdc max	A	S177 p. 9-9; oem_spec
Main ampacity	100, 225, 400, 600 A merchandised (250 A main breaker interiors factory-assembled only)	A	S177, S179 p. 9-9/9-10; oem_spec
Branch breakers accepted	QO plug-on and QOB bolt-on (incl. -VH, -H, AFCI/GFI); 175/200 A QO only in single-phase 400/600 A interiors	A	S177 p. 9-9 footnotes; oem_spec

Breaker families associated: KI / KC frame (legacy), LA / LH (L-frame, legacy thermal-magnetic), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT L-frame (LG/LJ/LL/LR), PowerPacT Q-frame (QB/QD/QG/QJ), QO (plug-on), QOB (bolt-on)
Key documents: S177 0100CT2401-SEC-09 Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards); S178 Digest 0100CT2401 (online) Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard ; S179 1640CT0801 NQ Circuit Breaker Panelboards Catalog, Class 1640; S182 Square D NQ and NF Lighting Panelboards brochure; S236 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /
Also fits this family (entry printed elsewhere): S37444, S37445, NFNQCRBOND46, NFN6CR

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00315	**NQMB2HJ**	NQ main circuit breaker adapter kit, H/J-frame, 225 A	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR; 3-pole breaker used for single A	current (listed in 2026 Digest)
EDH-SQD-00316	**NQMB2HJ14**	NQ14 main circuit breaker adapter kit, H/J-frame (14-inch-wide interiors)	HD, HG, HJ, HL, HR, JD, JG, JJ, JL A	current (listed in 2026 Digest)
EDH-SQD-00317	**NQMB2KI**	NQ main circuit breaker adapter kit, KI-frame, 225 A (legacy)	—	not in 2026 Digest; presumed discontinued
EDH-SQD-00313	**NQMB2Q**	NQ main circuit breaker adapter kit, Q-frame, 225 A	PowerPacT Q-frame QB, QD, QG, QJ (225 A max); 225 A NQ interiors 30-84 A	current (listed in 2026 Digest)
EDH-SQD-00314	**NQMB2Q14**	NQ14 main circuit breaker adapter kit, Q-frame, 225 A (14-inch-wide interiors)	QB, QD, QG, QJ A	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00318	**NQMB4LA**	NQ main circuit breaker adapter kit, LA/LH, 400 A	LA/LH short-handle (e.g. LAL36400MB); NQ30L4/42L4/54L4/84L4 interiors **A**	current (listed in 2026 Digest)
EDH-SQD-00319	**NQMB6PPL**	NQ main / sub-feed circuit breaker kit, PowerPacT L-frame, 400/600 A	LG, LJ, LL **A**	current (listed in 2026 Digest)
EDH-SQD-00328	**NQSFB2HJ**	NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains	HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR (3-pole H for single-phase 110-150 A) **A**	current (listed in 2026 Digest)
EDH-SQD-00327	**NQSFB2Q**	NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains	QB/QD/QG/QJ **A**	current (listed in 2026 Digest)
EDH-SQD-00330	**NQSFB4HJ**	NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual)	H- and J-frame PowerPacT **A**	current (listed in 2026 Digest)
EDH-SQD-00329	**NQSFB4Q**	NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual)	QB/QD/QG/QJ **A**	current (listed in 2026 Digest)
EDH-SQD-00331	**NQSFB6PPL**	NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains	PowerPacT L (LG/LJ/LL) **A**	current (listed in 2026 Digest)

EDH-SQD-00315	NQMB2HJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main circuit breaker adapter kit, H/J-frame, 225 A

OEM part number	NQMB2HJ	**A**	S177 oem_spec
Alternate / superseded numbers	NQMB2HJ14 (14-inch-wide version)	**A**	S187, S179 equivalent; oem_spec
Description	Main circuit breaker adapter kit (less breaker) for vertical PowerPacT H (150 A max) or J (250 A max, 225 A interiors) main breaker	**A**	S177, S187 p. 9-9; oem_spec
Application	main	**A**	S177 oem_spec
Installation location	Main lug end of NQ interior; breaker connected by hard bus connectors replacing main lugs	**A**	S187 oem_spec
Breaker compatibility	HD, HG, HJ, HL, HR, JD, JG, JJ, JL, JR; 3-pole breaker used for single-phase (e.g. HDL36100)	**A**	S177 p. 9-9 and footnotes; oem_spec
Current rating	100 A interiors (H) and 225 A interiors (H or J)	**A**	S177 p. 9-9; oem_spec
Kit contents	Deadfront cover, mounting pan, deadfront support brackets (2), 10-32x7/16 (2), 10-32x5/16 (6), 8-32x3-1/4 (2), 1/4-20x7/8 (3), terminal kit S37444 (H) and S37445 (J), hard-bus breaker connectors (3), MAIN label	**A**	S187 Kit Contents; oem_spec
Fasteners	Hard-bus connectors bolt to panel bus with 3x 1/4-20x7/8 tapping screws; to breaker via terminal-kit screws; 'X' mark on connector = top surface; B-phase connector omitted for 1-phase	**A**	S187 oem_spec
Torque values	Connector-to-panel-bus screws 25-30 lb-in (2.8-3.4 N-m); breaker side per terminal kit instructions	**A**	same as above
OEM instruction document	80043-725-02 Rev. 01 (09/2015)	**A**	same as above
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-9; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Requires	NQHJQLLC (EDH-SQD-00358), S37444 (EDH-SQD-00183), S37445 (EDH-SQD-00186)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00316	NQMB2HJ14	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ14 main circuit breaker adapter kit, H/J-frame (14-inch-wide interiors)

OEM part number	NQMB2HJ14	A	S179 oem_spec
Description	H/J-frame main breaker adapter kit for NQ 14-inch interiors	A	S179 NQ main breaker notes; oem_spec
Application	main	A	S179 oem_spec
Breaker compatibility	HD, HG, HJ, HL, HR, JD, JG, JJ, JL	A	S177 p. 9-11; oem_spec
Kit contents	As NQMB2HJ but with NQMB2HJ14-specific deadfront support brackets	A	S187 oem_spec
OEM instruction document	80043-725-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-11; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Digest p. 9-11 prints 'NQMB2HJ14' split across lines as 'NQMB2H-J14' - confirm exact catalog string*		

EDH-SQD-00317	NQMB2KI	Square D	main-breaker-kit	NOT IN 2026 DIGEST; PR

NQ main circuit breaker adapter kit, KI-frame, 225 A (legacy)

OEM part number	NQMB2KI	A	S188 oem_spec
Description	KI-frame main circuit breaker (225 A max) adapter kit for NQ panelboard	A	S188 p. 1; oem_spec
Application	main	A	S188 oem_spec
Current rating	225 A max	A	same as above
Kit contents	Deadfront cover, mounting pan, deadfront support brackets, 10-32x7/16 (2), 10-32x5/16 (6), 10-32x3-1/4 (4), lug wires, label (Lettered items A-D partially garbled in extraction)	B	same as above
Torque values	Panel main lug wire binding screws 275 lb-in (31 N-m)	A	same as above
OEM instruction document	80043-726-01 (01/2008)	A	same as above
Status	not in 2026 Digest; presumed discontinued	C	S177 inference
Replacement / successor	NQMB2Q or NQMB2HJ with PowerPacT Q/H/J breaker	D	 inference
Cross-links	Families: NQ · Breakers: KI / KC frame (legacy)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00313	NQMB2Q	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main circuit breaker adapter kit, Q-frame, 225 A

OEM part number	NQMB2Q	A	S177 oem_spec
Alternate / superseded numbers	NQMB2Q14 (14-inch-wide NQ version; differs in deadfront support brackets)	A	S185 equivalent; oem_spec
Description	Main circuit breaker adapter kit (less breaker) converting 225 A NQ main-lug interior to vertical Q-frame main breaker	A	S177, S185 p. 9-9; oem_spec
Application	main	A	S177 oem_spec
Installation location	Main lug end of NQ interior; breaker connected to interior main lugs by short lug wires (not hard bus)	A	S185 oem_spec
Breaker compatibility	PowerPacT Q-frame QB, QD, QG, QJ (225 A max); 225 A NQ interiors 30-84 ckt	A	S177, S185 p. 9-9; oem_spec
Current rating	15-225 A (100-225 A per distributor)	A	S177 p. 9-9; oem_spec
Kit contents	Main breaker deadfront cover (1), mounting pan with insulator (1), deadfront support brackets (2), 10-32x7/16 tapping screws (2), 10-32x5/16 (6), 8-32x2-1/4 (2), 8-32x3-1/4 (2), main lug wires (4), MAIN label (Distributor (Crescent) describes: mounting pan, deadfront cover, support brackets, installation hardware; QBL/QDL/QGL/QJL 100-225 A)	A	S185, S242 p. 1; oem_spec

Fasteners	Pan to interior: 4x 10-32x5/16; breaker to pan: 8-32x3-1/4 and 8-32x2-1/4 (discard breaker-supplied screws); breaker mounted in holes marked B (bottom feed) or T (top feed), ON end toward top	A	S185 pp. 3-4; oem_spec
Torque values	Panel main lug wire binding screws 275 lb-in (31 N-m); breaker lugs per breaker label	A	S185 p. 5; oem_spec
OEM instruction document	80043-722-02	A	S185 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Identification features	Pan carries B/T hole marks; connection by 4 cable 'main lug wires' rather than bus straps	A	S185 p. 4; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ)		
Requires	NQHJQLLC (EDH-SQD-00358)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Lug wire size/length not stated*		

EDH-SQD-00314	NQMB2Q14	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ14 main circuit breaker adapter kit, Q-frame, 225 A (14-inch-wide interiors)

OEM part number	NQMB2Q14	A	S177 oem_spec
Description	Q-frame main breaker adapter kit for NQ 14-inch-wide 225 A interiors (NQ30L2C14, NQ42L2C14, NQ430L2C14, NQ442L2C14)	A	S177, S179 p. 9-11; oem_spec
Application	main	A	S177 oem_spec
Breaker compatibility	QB, QD, QG, QJ	A	S177 p. 9-11; oem_spec
Kit contents	As NQMB2Q but with NQMB2Q14-specific deadfront support brackets (mounted pointing inward)	A	S185 p. 1, 3; oem_spec
Torque values	Panel main lug binding screws 275 lb-in (31 N-m)	A	S185 oem_spec
OEM instruction document	80043-722-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-11; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00318	NQMB4LA	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main circuit breaker adapter kit, LA/LH, 400 A

OEM part number	NQMB4LA	A	S177 oem_spec
Description	LA/LH main circuit breaker (400 A max) adapter kit for 400 A NQ interiors	A	S177, S189 p. 9-9; oem_spec
Application	main	A	S177 oem_spec
Breaker compatibility	LA/LH short-handle (e.g. LAL36400MB); NQ30L4/42L4/54L4/84L4 interiors	A	S177 p. 9-9; oem_spec
Current rating	125-400 A	A	same as above
Kit contents	Deadfront cover, mounting pan, support brackets, 1/4-20x7/8 (6), 10-32x7/16 (2), 10-32x5/16 (6), 3/8-16x3/4 screws (3) + 3/8 washers, 12-24x3-1/4 (4), main breaker connectors (3), label	A	S189 oem_spec
Fasteners	Connectors to bus 6x 1/4-20x7/8; breaker slides onto connectors, 3x 3/8-16x3/4; breaker to pan 4x 12-24x3-1/4; breaker lugs removed and discarded	A	same as above
Torque values	Connector-to-bus 60-65 lb-in (6.8-7.3 N-m); breaker-to-connector 3/8-16 bolts 250-275 lb-in (28.2-31.0 N-m)	A	same as above
OEM instruction document	80043-727-02 (05/2010)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Requires	NQLALLC (EDH-SQD-00357)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00319	NQMB6PPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ main / sub-feed circuit breaker kit, PowerPacT L-frame, 400/600 A

OEM part number	NQMB6PPL	A	S177 oem_spec
Description	400/600 A NQ main circuit breaker and 400 A sub-feed breaker kit for PowerPacT L	A	S225 oem_spec
Application	main or sub-feed	A	S177, S225 p. 9-9, 9-18; oem_spec
Installation location	Requires 8.75 in. deep MH..D9 boxes (MH62D9-MH92D9); elevating brackets removed for some boxes	A	S225, S177 oem_spec
Breaker compatibility	LG, LJ, LL	A	S177 p. 9-9; oem_spec
Kit contents	Label bag, L-frame screw bag (incl. deadfront support brackets), M10x25 screw bag, terminal shield bag, escutcheon, deadfront extension, deadfront cover, mounting pan, A/B/C phase connector assemblies	A	S225 Kit Contents p. 8; oem_spec
OEM instruction document	80043-847-01 (11/2021)	A	S225 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Requires	NQPPLLLC (EDH-SQD-00359)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00328	NQSFB2HJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains

OEM part number	NQSFB2HJ	A	S177 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains (breaker not included)	A	S177 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	HD/HG/HJ/HL/HR, JD/JG/JJ/JL/JR (3-pole H for single-phase 110-150 A)	A	S177, S192 p. 9-18; oem_spec
Current rating	225 A interiors (one SFB)	A	S177 p. 9-18; oem_spec
Kit contents	As NQSFB2Q but main lug wires (6) and 8-32x3-1/4 screws only	A	S192 Kit Contents; oem_spec
Torque values	Bus screws 25-30 lb-in; panel lug wire binding screws 275 lb-in (31 N-m)	A	S192 oem_spec
OEM instruction document	80043-730-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00327	NQSFB2Q	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains

OEM part number	NQSFB2Q	A	S177 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains (breaker not included)	A	S177 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	QB/QD/QG/QJ	A	S177, S192 p. 9-18; oem_spec
Current rating	225 A interiors (one SFB)	A	S177 p. 9-18; oem_spec
Kit contents	Neutral lug, load lugs (3), 10-32x5/16 (8), 10-32x7/16 (4), 1/4-20x9/16 (1), 1/4-20x7/8 (3), 8-32x2-1/4 and 8-32x3-1/4, SFB mounting pan, SFB deadfront cover, main lug wires (4), rail splice (1), deadfront support brackets (2)	A	S192 Kit Contents; oem_spec
Torque values	Bus screws 25-30 lb-in (2.8-3.4 N-m); panel lug wire binding screws 275 lb-in (31 N-m)	A	S192 oem_spec
OEM instruction document	80043-730-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00330	NQSFB4HJ	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual)

OEM part number	NQSFB4HJ	A	S177 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual) (breaker not included)	A	S177 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	H- and J-frame PowerPacT	A	S177, S193 p. 9-18; oem_spec
Current rating	400 A interiors; one or two SFBs	A	S177 p. 9-18; oem_spec
Kit contents	As NQSFB4Q, H/J version of main lug wires (6)	A	S193 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m) bus screws	A	S193 oem_spec
OEM instruction document	80043-731-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00329	NQSFB4Q	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual)

OEM part number	NQSFB4Q	A	S177 oem_spec
Description	NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual) (breaker not included)	A	S177 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	QB/QD/QG/QJ	A	S177, S193 p. 9-18; oem_spec
Current rating	400 A interiors; one or two SFBs (225 A max each)	A	S177 p. 9-18; oem_spec
Kit contents	Neutral lug, load lugs (3), 10-32x5/16 (8), 10-32x7/16 (4), 1/4-20x11/16 (2), 1/4-20x7/8 (6), 8-32x2-1/4, 8-32x3-1/4 (4), 12-24x1/2 (2), mounting pan, deadfront cover, main lug wires (6), rail splice, support brackets (2), branch neutral lug + insulator, closing plate, lug barriers (2), rivets (2), wiring/torque diagram	A	S193 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m) bus screws; 40-45 lb-in (4.5-5.1 N-m) per bulletin step	A	S193 oem_spec
OEM instruction document	80043-731-02	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT Q-frame (QB/QD/QG/QJ), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00331	NQSFB6PPL	Square D	main-breaker-kit	CURRENT (LISTED IN 202

NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains

OEM part number	NQSFB6PPL	A	S177 oem_spec
Description	NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains (breaker not included)	A	S177 p. 9-18; oem_spec
Application	sub-feed	A	same as above
Breaker compatibility	PowerPacT L (LG/LJ/LL)	A	same as above
Current rating	600 A interiors (one SFB); PowerPacT L requires 8.75 in. deep enclosure	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00353	**NQALMA6**	NQ 600 A aluminum mechanical main lug kit	—	not in 2026 Digest lug table
EDH-SQD-00341	**NQALV1**	NQ optional main lug kit, aluminum compression (crimp), 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00344	**NQALV2**	NQ optional main lug kit, aluminum compression (crimp), 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00347	**NQALV4**	NQ optional main lug kit, aluminum compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00350	**NQALV6**	NQ optional main lug kit, aluminum compression (crimp), 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00342	**NQCUM1**	NQ optional main lug kit, copper mechanical, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00345	**NQCUM2**	NQ optional main lug kit, copper mechanical, 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00348	**NQCUM4**	NQ optional main lug kit, copper mechanical, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00351	**NQCUM6**	NQ optional main lug kit, copper mechanical, 600 A	—	current (listed in 2026 Digest)
EDH-SQD-00343	**NQCUV1**	NQ optional main lug kit, copper compression (crimp), 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00346	**NQCUV2**	NQ optional main lug kit, copper compression (crimp), 225 A	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00349	**NQCUV4**	NQ optional main lug kit, copper compression (crimp), 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00352	**NQCUV6**	NQ optional main lug kit, copper compression (crimp), 600 A	—	current (listed in 2026 Digest)

EDH-SQD-00353 NQALMA6 Square D main-lug-kit NOT IN 2026 DIGEST LUG

NQ 600 A aluminum mechanical main lug kit

OEM part number	NQALMA6	A	S186 oem_spec
Description	600 A main mechanical lug kit (covered with NQCUM6 in mechanical lug bulletin)	A	same as above
Kit contents	Main mechanical lugs (3), 1/4-20x7/8 (6), 1/4-20x11/16 (4)	A	S186 Kit Contents; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S186 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	not in 2026 Digest lug table	C	S177 inference
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00341 NQALV1 Square D main-lug-kit CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 100 A

OEM part number	NQALV1	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 100 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	100 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: one #8-1/0 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00344	NQALV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 225 A

OEM part number	NQALV2	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 225 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	225 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: one #4-300 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00347	NQALV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 400 A

OEM part number	NQALV4	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 400 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: two 2/0-500 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00350	NQALV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, aluminum compression (crimp), 600 A

OEM part number	NQALV6	A	S177 oem_spec
Description	Optional aluminum compression (crimp) main lug kit for 600 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: two 2/0-500 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00342	NQCUM1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 100 A

OEM part number	NQCUM1	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 100 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S186 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	100 A	A	S177 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S186 Kit Contents; oem_spec
Dimensions	Lug wire range: one #6-2/0 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S186 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00345	NQCUM2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 225 A

OEM part number	NQCUM2	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 225 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S186 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	225 A	A	S177 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S186 Kit Contents; oem_spec
Dimensions	Lug wire range: one #6-250 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S186 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00348	NQCUM4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 400 A

OEM part number	NQCUM4	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 400 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S186 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S186 Kit Contents; oem_spec
Dimensions	Lug wire range: one 1/0-750 or two 1/0-350 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S186 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00351	NQCUM6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper mechanical, 600 A

OEM part number	NQCUM6	A	S177 oem_spec
Description	Optional copper mechanical main lug kit for 600 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S186 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-18; oem_spec
Kit contents	Main mechanical lugs (3), neutral mechanical lug(s) (400 A: 1, 600 A: 2), 1/4-20 tapping screws	A	S186 Kit Contents; oem_spec
Dimensions	Lug wire range: (not printed) (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Lugs to bus with 1/4-20x7/8 tapping screws: 100/225 A 25-30 lb-in (2.8-3.4 N-m); 400/600 A 60-65 lb-in (6.8-7.3 N-m)	A	S186 oem_spec
OEM instruction document	80043-724-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00343	NQCUV1	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 100 A

OEM part number	NQCUV1	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 100 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	100 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: one #6-1/0 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00346	NQCUV2	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 225 A

OEM part number	NQCUV2	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 225 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	225 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: one 2/0-300 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00349	NQCUV4	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 400 A

OEM part number	NQCUV4	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 400 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	400 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: one 400-700 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

EDH-SQD-00352	NQCUV6	Square D	main-lug-kit	CURRENT (LISTED IN 202

NQ optional main lug kit, copper compression (crimp), 600 A

OEM part number	NQCUV6	A	S177 oem_spec
Description	Optional copper compression (crimp) main lug kit for 600 A NQ main-lug interior (replaces standard mechanical Al lugs)	A	S177, S195 p. 9-18; oem_spec
Application	main	A	S177 oem_spec
Current rating	600 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral crimp lug(s), main crimp lugs (3 or 6), crimp lug pads (3), pad doublers (400/600 A), Keps nuts (3), 1/4-20 tapping screws, lug barriers (100/225 A)	A	S195 Kit Contents; oem_spec
Dimensions	Lug wire range: two 250-500 (AWG-kcmil)	A	S177 p. 9-18; oem_spec
Torque values	Crimp lug pads mounted with Keps nuts and 1/4-20x7/8 screws; 1/2 in (100/225 A) or 3/4 in (400/600 A) hex/Allen drivers - values in bulletin	A	S195 oem_spec
OEM instruction document	80043-733-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Optional lugs not available on Q-frame main or QOB main (Digest p. 9-15/9-16 note)*		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00320	**NQSFL1**	NQ sub-feed lug kit, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00321	**NQSFL2**	NQ sub-feed lug kit, 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00322	**NQSFL4**	NQ sub-feed lug kit, 400 A	—	current (listed in 2026 Digest)
EDH-SQD-00368	**QOB2125SL**	2-pole QOB branch mounted sub-feed lug kit	—	current (listed in 2026 Digest)
EDH-SQD-00369	**QOB3125SL**	3-pole QOB branch mounted sub-feed lug kit	—	current (listed in 2026 Digest)

EDH-SQD-00320	NQSFL1	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NQ sub-feed lug kit, 100 A

OEM part number	NQSFL1	A	S177 oem_spec
Description	NQ sub-feed lug kit, 100 A	A	S177, S191 p. 9-18; oem_spec
Application	sub-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S191 oem_drawing
Current rating	100 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral lug (1), 100 A line lugs (3), 1/4-20x9/16 (1), 1/4-20x7/8 (6)	A	S191 Kit Contents; oem_spec
Dimensions	Wire range per phase one #6-2/0 Al/Cu in and out	A	S177 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S191 oem_spec
OEM instruction document	80043-729-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00321	NQSFL2	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NQ sub-feed lug kit, 225 A

OEM part number	NQSFL2	A	S177 oem_spec
Description	NQ sub-feed lug kit, 225 A	A	S177, S191 p. 9-18; oem_spec
Application	sub-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S191 oem_drawing
Current rating	225 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral lug (1), 225 A line lugs (3), 10-32x5/16, 1/4-20x9/16 (1), 1/4-20x7/8 (6), rail extensions (2), rail splices (2), main lug cover (1), lug barriers (2)	A	S191 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-350 kcmil Al/Cu	A	S177 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S191 oem_spec
OEM instruction document	80043-729-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00322	NQSFL4	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

NQ sub-feed lug kit, 400 A

OEM part number	NQSFL4	A	S177 oem_spec
Alternate / superseded numbers	NQSFL4L (Liebert-specific 400 A sub-feed lug kit for Liebert NQ panelboard (80043-792-01, 03/2012))	A	S220 equivalent; oem_spec
Description	NQ sub-feed lug kit, 400 A	A	S177, S199 p. 9-18; oem_spec
Application	sub-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S199 oem_drawing
Current rating	400 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral lug (1), line lugs (3), 1/4-20x11/16 (2), 1/4-20x7/8 (6), lug barrier (1)	A	S199 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-750 kcmil Cu only	A	S177 p. 9-16/9-18; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S199 oem_spec
OEM instruction document	80043-745-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00368	QOB2125SL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

2-pole QOB branch mounted sub-feed lug kit

OEM part number	QOB2125SL	A	S177 oem_spec
Description	2-pole QOB branch mounted sub-feed lug kit (bolt-on, occupies branch spaces)	A	S177 p. 9-19; oem_spec
Application	sub-feed	A	S177 oem_spec
Current rating	125 A (from catalog number; not stated)	C	S177 inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00369	QOB3125SL	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

3-pole QOB branch mounted sub-feed lug kit

OEM part number	QOB3125SL	A	S177 oem_spec
Description	3-pole QOB branch mounted sub-feed lug kit (bolt-on, occupies branch spaces)	A	S177 p. 9-19; oem_spec
Application	sub-feed	A	S177 oem_spec
Current rating	125 A (from catalog number; not stated)	C	S177 inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00324	**NQFTL2H**	NQ feed-through lug kit, 225 A, high circuit count (54/72/84)	54, 72, 84 circuit 225 A interiors ('H' = high count) A	current (listed in 2026 Digest)
EDH-SQD-00323	**NQFTL2L**	NQ feed-through lug kit, 225 A, low circuit count (30/42)	30 and 42 circuit 225 A interiors ('L' = low count) A	current (listed in 2026 Digest)
EDH-SQD-00326	**NQFTL4H**	NQ feed-through lug kit, 400 A, high circuit count	54/72/84 circuit 400 A interiors A	current (listed in 2026 Digest)
EDH-SQD-00325	**NQFTL4L**	NQ feed-through lug kit, 400 A, low circuit count	30/42 circuit 400 A interiors A	current (listed in 2026 Digest)

EDH-SQD-00324	NQFTL2H	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 225 A, high circuit count (54/72/84)

OEM part number	NQFTL2H	A	S177 oem_spec
Description	NQ feed-through lug kit, 225 A, high circuit count (54/72/84)	A	S177, S190 p. 9-18; oem_spec
Application	through-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S190 oem_drawing
Breaker compatibility	54, 72, 84 circuit 225 A interiors ('H' = high count)	A	S177 p. 9-18 fn 5; oem_spec
Current rating	225 A	A	S177 p. 9-18; oem_spec
Kit contents	As NQFTL2L plus short cover extension (1)	A	S190 Kit Contents; oem_spec
Dimensions	Wire range per phase one #6-350 Al/Cu	A	S177 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S190 oem_spec
OEM instruction document	80043-728-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00323	NQFTL2L	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 225 A, low circuit count (30/42)

OEM part number	NQFTL2L	A	S177 oem_spec
Description	NQ feed-through lug kit, 225 A, low circuit count (30/42)	A	S177, S190 p. 9-18; oem_spec
Application	through-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S190 oem_drawing
Breaker compatibility	30 and 42 circuit 225 A interiors ('L' = low count)	A	S177 p. 9-18 fn 3; oem_spec
Current rating	225 A	A	S177 p. 9-18; oem_spec
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (8), 1/4-20x9/16 (1), 1/4-20x7/8 (3), rail extensions (2), rail splices (2), long cover extension (1)	A	S190 Kit Contents; oem_spec
Dimensions	Wire range per phase one #6-350 Al/Cu	A	S177 p. 9-16/9-18; oem_spec
Torque values	25-30 lb-in (2.8-3.4 N-m)	A	S190 oem_spec
OEM instruction document	80043-728-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00326	NQFTL4H	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 400 A, high circuit count

OEM part number	NQFTL4H	A	S177 oem_spec
Description	NQ feed-through lug kit, 400 A, high circuit count	A	S177, S200 p. 9-18; oem_spec
Application	through-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S200 oem_drawing
Breaker compatibility	54/72/84 circuit 400 A interiors	A	S177 p. 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Same item list as NQFTL4L	A	S200 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu	A	S177 p. 9-16/9-18; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S200 oem_spec
OEM instruction document	80043-746-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00325	NQFTL4L	Square D	through-feed-lug-kit	CURRENT (LISTED IN 202

NQ feed-through lug kit, 400 A, low circuit count

OEM part number	NQFTL4L	A	S177 oem_spec
Description	NQ feed-through lug kit, 400 A, low circuit count	A	S177, S200 p. 9-18; oem_spec
Application	through-feed	A	S177 p. 9-18; oem_spec
Installation location	Load (opposite-mains) end of NQ interior bus	B	S200 oem_drawing
Breaker compatibility	30/42 circuit 400 A interiors	A	S177 p. 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral lug (1), feed-through lugs (3), 10-32x5/16 (8), 1/4-20x11/16 (2), 1/4-20x7/8 (6), lug barriers (2), rail extensions (2), rail splices (2), cover extension (1)	A	S200 Kit Contents; oem_spec
Dimensions	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu	A	S177 p. 9-16/9-18; oem_spec
Torque values	60-65 lb-in (6.8-7.3 N-m)	A	S200 oem_spec
OEM instruction document	80043-746-01	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00340	**NQALMN6**	NQ 600 A neutral lug kit (aluminum mechanical)	—	current (listed in 2026 Digest)

EDH-SQD-00340	NQALMN6	Square D	lug-kit	CURRENT (LISTED IN 202

NQ 600 A neutral lug kit (aluminum mechanical)

OEM part number	NQALMN6	A	S177 oem_spec
Alternate / superseded numbers	NQCUMN6 (Copper version (inferred from suffix))	A	S177 equivalent; p. 9-16; oem_spec
Description	600 A neutral used with NQALMN6 or NQCUMN6 to obtain (6) 1/0-750 kcmil or (4) 1/0-300 + (4) 1/0-750 kcmil neutral terminations, space factor 12	A	same as above
Current rating	600 A	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Exact content and material of NQALMN6 vs NQCUMN6 not stated*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00370	**NQ100AN**	NQ Add-on neutral/ground lug	—	current (listed in 2026 Digest)
EDH-SQD-00372	**NQ200AN**	NQ Add-on neutral terminal kit for 175-200 A QO(VH) breakers	One NQ200AN per two 175-200 A QO(VH) breakers; not allowed in 100 A NQ A	current (listed in 2026 Digest)
EDH-SQD-00371	**Q1150AN**	NQ Add-on neutral/ground lug	—	current (listed in 2026 Digest)
EDH-SQD-00373	**QO70AN**	NQ Add-on neutral lug for 70 A QO(B)	—	current (listed in 2026 Digest)

EDH-SQD-00370	NQ100AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral/ground lug

OEM part number	NQ100AN	A	S177 oem_spec
Description	Add-on neutral/ground lug for NQ neutral bar; wire #14-2/0 Al or Cu	A	S177 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S177 p. 9-18; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00372	NQ200AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral terminal kit for 175-200 A QO(VH) breakers

OEM part number	NQ200AN	A	S177 oem_spec
Description	Add-on neutral terminal kit for 175-200 A QO(VH) breakers for NQ neutral bar; wire (2) #4-300 kcmil Al or Cu	A	S177 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S177 p. 9-18; oem_spec
Breaker compatibility	One NQ200AN per two 175-200 A QO(VH) breakers; not allowed in 100 A NQ	A	S177 p. 9-18 fn; oem_spec
Torque values	40-45 lb-in (4.5-5.1 N-m) mounting	A	S228 oem_spec
OEM instruction document	80043-858-01 (08/2020)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00371	Q1150AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral/ground lug

OEM part number	Q1150AN	A	S177 oem_spec
Description	Add-on neutral/ground lug for NQ neutral bar; wire #1-4/0 Al or Cu	A	S177 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S177 p. 9-18; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00373	QO70AN	Square D	lug	CURRENT (LISTED IN 202

NQ Add-on neutral lug for 70 A QO(B)

OEM part number	QO70AN	A	S177 oem_spec
Description	Add-on neutral lug for 70 A QO(B) for NQ neutral bar; wire #10-#2 Al or #14-#4 Cu	A	S177 p. 9-18/9-19; oem_spec
Installation location	Branch neutral bar; consumes standard neutral terminations (see Digest add-on table)	A	S177 p. 9-18; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ, NF · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00354	**SKNQBC**	NQ branch connector replacement kit	—	listed by distributors; not in Digest tables

EDH-SQD-00354	SKNQBC	Square D	branch-connector-kit	LISTED BY DISTRIBUTORS

NQ branch connector replacement kit

OEM part number	SKNQBC	A	S197 oem_spec
Description	Replacement branch connectors (bus 'fingers' that QO plug-on jaws and QOB bolt-on terminals attach to) for NQ interiors	A	S197 p. 1; oem_spec
Application	branch	A	S197 oem_spec
Installation location	On NQ phase bus under snap-on bus cover in the rail	A	S197 steps 3-4; oem_spec
Kit contents	'A' and 'C' phase branch connectors (2), 'B' phase branch connector (1), 10-32 x 11/16 tapping screws (3)	A	S197 Kit Contents p. 1; oem_spec
Fasteners	10-32 x 11/16 tapping screw per connector, T20 Torx; installed in same orientation as removed; centre (B) connector omitted on single-phase	A	S197 p. 3; oem_spec
Torque values	100/225 A interiors: Al 18-22 lb-in (2.02-2.47 N-m), Cu 25-30 lb-in (2.81-3.38 N-m); 400/600 A: Al 25-30 lb-in, Cu 35-45 lb-in (3.95-5.08 N-m); QOB mounting screws 18-21 lb-in (2.03-2.37 N-m)	A	S197 Table 1; oem_spec
OEM instruction document	80043-735-01 (02/2008)	A	S197 oem_spec
Status	listed by distributors; not in Digest tables	C	inference
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Same connector for Al and Cu bus? Torque table differs by bus material only*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00336	**NQN1CU**	NQ copper 100% neutral kit, 100 A	—	current (listed in 2026 Digest)
EDH-SQD-00337	**NQN2CU**	NQ copper 100% neutral kit, 225 A	—	current (listed in 2026 Digest)
EDH-SQD-00339	**NQN6CRUS**	NQ condo riser 100% neutral assembly, 400/600 A	—	current (listed in 2026 Digest)
EDH-SQD-00338	**NQN6CU**	NQ copper 100% neutral kit, 400 A	Listed for 400 A mains A	current (listed in 2026 Digest)
EDH-SQD-00332	**NQNL1**	NQ 200% neutral kit, 100 A	200% neutral; not for use with SFL/FTL/SFB in 400 A (see NQNL4) A	current (listed in 2026 Digest)
EDH-SQD-00333	**NQNL2**	NQ 200% neutral kit, 225 A	225 A panels without SFL/FTL/SFB A	current (listed in 2026 Digest)
EDH-SQD-00334	**NQNL2ACCY**	NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB	For 225 A panel with sub-feed lugs, feed-through lugs or sub-feed brea A	current (listed in 2026 Digest)
EDH-SQD-00335	**NQNL4**	NQ 200% neutral kit, 400 A	Not to be used with SFL, FTL or SFB (those combinations factory assemb A	current (listed in 2026 Digest)

EDH-SQD-00336	NQN1CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ copper 100% neutral kit, 100 A

OEM part number	NQN1CU	A	S177 oem_spec
Description	NQ copper 100% neutral kit, 100 A	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Current rating	100 A	A	S177 p. 9-16, 9-18; oem_spec
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00337	NQN2CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ copper 100% neutral kit, 225 A

OEM part number	NQN2CU	A	S177 oem_spec
Description	NQ copper 100% neutral kit, 225 A	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Current rating	225 A	A	S177 p. 9-16, 9-18; oem_spec
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00339	NQN6CRUS	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ condo riser 100% neutral assembly, 400/600 A

OEM part number	NQN6CRUS	A	S177 oem_spec
Alternate / superseded numbers	NQNL6CRUS (200% neutral version)	A	S177 equivalent; p. 9-16; oem_spec
	NQN6CR / NQNL6CR (Designations used in 2009 bulletin 80043-778-01 (non-US-suffixed))	A	S218 alias; oem_spec
Description	Condo riser neutral assembly (100%) for 400/600 A NQ, max 42 branch circuits; requires 26 in. wide enclosure; space factor 12 in.	A	S177 p. 9-16; oem_spec
Current rating	400/600 A	A	same as above
OEM instruction document	80043-778-01 (01/2009); bonding strap NFNQCRBOND46 per 80043-853-01	A	S218, S227 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16; oem_spec
Cross-links	Families: NQ		
Requires	NFNQCRBOND46 (EDH-SQD-00426)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00338	NQN6CU	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ copper 100% neutral kit, 400 A

OEM part number	NQN6CU	A	S177 oem_spec
Description	NQ copper 100% neutral kit, 400 A	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Breaker compatibility	Listed for 400 A mains	A	S177 p. 9-16, 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00332	NQNL1	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 100 A

OEM part number	NQNL1	A	S177 oem_spec
Description	NQ 200% neutral kit, 100 A	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Breaker compatibility	200% neutral; not for use with SFL/FTL/SFB in 400 A (see NQNL4)	A	S177 p. 9-16, 9-18; oem_spec
Current rating	100 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
Dimensions	space factor 0	A	S177 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00333	NQNL2	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 225 A

OEM part number	NQNL2	A	S177 oem_spec
Description	NQ 200% neutral kit, 225 A	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Breaker compatibility	225 A panels without SFL/FTL/SFB	A	S177 p. 9-16, 9-18; oem_spec
Current rating	225 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
Dimensions	space factor 0	A	S177 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00334	NQNL2ACCY	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB

OEM part number	NQNL2ACCY	A	S177 oem_spec
Description	NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Breaker compatibility	For 225 A panel with sub-feed lugs, feed-through lugs or sub-feed breaker; requires 6 in. trim and rail extension for wire bending space	A	S177 p. 9-16, 9-18; oem_spec
Current rating	225 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
Dimensions	space factor 6 in.	A	S177 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00335	NQNL4	Square D	neutral-assembly	CURRENT (LISTED IN 202

NQ 200% neutral kit, 400 A

OEM part number	NQNL4	A	S177 oem_spec
Description	NQ 200% neutral kit, 400 A	A	S177, S196 p. 9-16, 9-18; oem_spec
Application	accessory (neutral)	A	S177 oem_spec
Installation location	Replaces/adds to NQ interior neutral assembly	B	S196 inference
Breaker compatibility	Not to be used with SFL, FTL or SFB (those combinations factory assembled only)	A	S177 p. 9-16, 9-18; oem_spec
Current rating	400 A	A	same as above
Kit contents	Neutral assembly (1), 10-32x7/16 tapping screws (2)	A	S196 Kit Contents; oem_spec
Dimensions	space factor 0	A	S177 p. 9-18; oem_spec
OEM instruction document	80043-734-01	A	S196 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-16, 9-18; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00437	**PK12GTA**	Aluminum equipment ground bar kit (12 terminations, inferred from number)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00438	**PK18GTA**	Aluminum equipment ground bar kit (18 terminations, inferred from number)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00439	**PK23GTA**	Aluminum equipment ground bar kit (23 terminations, inferred from number)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00435	**PK23GTAL**	PK23GTA ground bar with #1-4/0 Al/Cu lug	—	current (listed in 2026 Digest)
EDH-SQD-00433	**PK27GTA**	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug variant per NQ table)	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)
EDH-SQD-00434	**PK27GTACU**	Copper equipment ground bar kit, 27 terminations #14-#4 Cu	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu A	current (listed in 2026 Digest)

EDH-SQD-00437	PK12GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit (12 terminations, inferred from number)

OEM part number	PK12GTA	A	S177 oem_spec
Description	Aluminum equipment ground bar kit (12 terminations, inferred from number) (termination count inferred from catalog number)	B	S177 p. 9-17, 9-35; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S177 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-17, 9-35; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00438	PK18GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit (18 terminations, inferred from number)

OEM part number	PK18GTA	A	S177 oem_spec
Description	Aluminum equipment ground bar kit (18 terminations, inferred from number) (termination count inferred from catalog number)	B	S177 p. 9-17; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S177 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00439	PK23GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit (23 terminations, inferred from number)

OEM part number	PK23GTA	A	S177, S270 oem_spec
Alternate / superseded numbers	PK-23GTA (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Equipment ground bar kit 31 thru 54 circuits, 225 A max mains - PK-23GTA $2.00	A	S270 Digest 152 (1970) p.84; oem_spec
	Aluminum equipment ground bar kit (23 terminations, inferred from number) (termination count inferred from catalog number)	B	S177 p. 9-17; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S177 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQ, NQOB, NA1B, NH1B		
Not yet documented	Aftermarket / reproduction, current_status, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00435	PK23GTAL	Square D	ground-bar	CURRENT (LISTED IN 202

PK23GTA ground bar with #1-4/0 Al/Cu lug

OEM part number	PK23GTAL	A	S177 oem_spec
Description	PK23GTA ground bar with #1-4/0 Al/Cu lug	A	S177 p. 9-19, 9-39; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-19, 9-39; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00433	PK27GTA	Square D	ground-bar	CURRENT (LISTED IN 202

Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug variant per NQ table)

OEM part number	PK27GTA	A	S177, S270 oem_spec
Alternate / superseded numbers	PK-27GTA (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug variant per NQ table)	A	S177 p. 9-17, 9-19, 9-39; oem_spec
	Equipment ground bar kit 1 thru 54 circuits, 600 A max mains - PK-27GTA $2.10	A	S270 Digest 152 (1970) p.84; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S177 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-17, 9-19, 9-39; oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQ, NF, NQOB, NA1B, NH1B		
Not yet documented	Aftermarket / reproduction, current_status, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00434	PK27GTACU	Square D	ground-bar	CURRENT (LISTED IN 202

Copper equipment ground bar kit, 27 terminations #14-#4 Cu

OEM part number	PK27GTACU	A	S177 oem_spec
Description	Copper equipment ground bar kit, 27 terminations #14-#4 Cu	A	S177 p. 9-17, 9-19, 9-39; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Breaker compatibility	NQ 100/225 A: PK12GTA, PK18GTA, PK23GTA or PK27GTA (Al), PK27GTACU (Cu); NQ 400/600 A: PK12GTA, PK27GTA, PK27GTACU. One kit supplied when ground bar specified, two when extra ground bar ordered	A	S177 p. 9-17; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-17, 9-19, 9-39; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00367	**NQES18**	NQ equipment space kit (18 in.)	—	unknown

EDH-SQD-00367	NQES18	Square D	mounting-bracket	UNKNOWN

NQ equipment space kit (18 in.)

OEM part number	NQES18	A	S201 oem_spec
Description	Equipment space kit adding customer equipment space to NQ interior	A	same as above
Kit contents	Mounting pan (1), barrier (1), extension rails (2), rail splices (2), 10-32x5/16 (14)	A	same as above
OEM instruction document	80043-753-01 (03/2008)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Mounting Rail

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00363	**NQ12RDE**	NQ 12 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00364	**NQ18RDE**	NQ 18 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00365	**NQ24RDE**	NQ 24 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)
EDH-SQD-00361	**NQ3RDE**	NQ 3 in. trim/rail and deadfront extension kit	—	in 2012 bulletin; not in 2026 Digest list
EDH-SQD-00362	**NQ6RDE**	NQ 6 in. trim/rail and deadfront extension kit	—	current (listed in 2026 Digest)

EDH-SQD-00363	NQ12RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 12 in. trim/rail and deadfront extension kit

OEM part number	NQ12RDE	**A**	S177 oem_spec
Description	12 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	**A**	S194, S177 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	**A**	S194 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	**A**	S194 oem_spec
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00364	NQ18RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 18 in. trim/rail and deadfront extension kit

OEM part number	NQ18RDE	**A**	S177 oem_spec
Description	18 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	**A**	S194, S177 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	**A**	S194 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	**A**	S194 oem_spec
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00365	NQ24RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 24 in. trim/rail and deadfront extension kit

OEM part number	NQ24RDE	**A**	S177 oem_spec
Description	24 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	**A**	S194, S177 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	**A**	S194 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	**A**	S194 oem_spec
Status	current (listed in 2026 Digest)	**A**	S177 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00361	NQ3RDE	Square D	mounting-rail	IN 2012 BULLETIN; NOT

NQ 3 in. trim/rail and deadfront extension kit

OEM part number	NQ3RDE	A	S177 oem_spec
Description	3 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S194 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S194 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S194 oem_spec
Status	in 2012 bulletin; not in 2026 Digest list	C	S177 inference
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00362	NQ6RDE	Square D	mounting-rail	CURRENT (LISTED IN 202

NQ 6 in. trim/rail and deadfront extension kit

OEM part number	NQ6RDE	A	S177 oem_spec
Description	6 in. rail and deadfront extension for NQ interiors (used with SFL/FTL/neutral accessories needing extra length)	A	S194, S177 p. 9-19; oem_spec
Kit contents	10-32x5/16 (10), 10-32x7/16 (2), deadfront support brackets (2), rail extensions (2), rail splices (2), 100/225 A main lug cover, 400/600 A main lug cover	A	S194 Kit Contents; oem_spec
OEM instruction document	80043-732-02 (01/2012)	A	S194 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00436	**PKGTAB**	Equipment ground bar insulator kit	—	current (listed in 2026 Digest)

EDH-SQD-00436	PKGTAB	Square D	insulator	CURRENT (LISTED IN 202

Equipment ground bar insulator kit

OEM part number	PKGTAB	A	S177 oem_spec
Description	Equipment ground bar insulator kit	A	S177 p. 9-17, 9-19, 9-39; oem_spec
Installation location	Enclosure back / interior side, bonded to box	D	inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-17, 9-19, 9-39; oem_spec
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00358	**NQHJQLLC**	NQ U.S. service entrance barrier kit (H/J/Q main)	H/J/Q main circuit breaker in NQ **A**	current (listed in 2026 Digest)
EDH-SQD-00357	**NQLALLC**	NQ U.S. service entrance barrier kit (LA/LH main)	LA/LH main circuit breaker in NQ **A**	current (listed in 2026 Digest)
EDH-SQD-00360	**NQODBFMB20**	NQ/NQOD back-fed main circuit breaker barrier kit	—	unknown
EDH-SQD-00359	**NQPPLLLC**	NQ U.S. service entrance barrier kit (PowerPacT L main)	PowerPacT L main circuit breaker in NQ; requires medium terminal shiel **A**	current (listed in 2026 Digest)

EDH-SQD-00358	NQHJQLLC	Square D	barrier	CURRENT (LISTED IN 202

NQ U.S. service entrance barrier kit (H/J/Q main)

OEM part number	NQHJQLLC	A	S177 oem_spec
Description	NQ H/J/Q line lug cover and neutral bonding strap	A	S177 p. 9-21; oem_spec
Application	main (service entrance)	A	S177 oem_spec
Installation location	Over main breaker line terminals; bonding strap neutral-to-ground	A	same as above
Breaker compatibility	H/J/Q main circuit breaker in NQ	A	S177, S222 Table 5; oem_spec
OEM instruction document	80043-839-01 Rev. 04 (Table 5); replacement parts 80043-820-01	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-21; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR), PowerPacT Q-frame (QB/QD/QG/QJ)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00357	NQLALLC	Square D	barrier	CURRENT (LISTED IN 202

NQ U.S. service entrance barrier kit (LA/LH main)

OEM part number	NQLALLC	A	S177 oem_spec
Description	NQ LA/LH line lug cover, neutral bonding strap and lug	A	S177 p. 9-21; oem_spec
Application	main (service entrance)	A	S177 oem_spec
Installation location	Over main breaker line terminals; bonding strap neutral-to-ground	A	same as above
Breaker compatibility	LA/LH main circuit breaker in NQ	A	S177, S222 Table 5; oem_spec
OEM instruction document	80043-839-01 Rev. 04 (Table 5); replacement parts 80043-820-01	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-21; oem_spec
Cross-links	Families: NQ · Breakers: LA / LH (L-frame, legacy thermal-magnetic)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00360	NQODBFMB20	Square D	barrier	UNKNOWN

NQ/NQOD back-fed main circuit breaker barrier kit

OEM part number	NQODBFMB20	A	S217 oem_spec
Description	Back-fed main circuit breaker barrier for NQ panelboard (adhesive-backed)	A	same as above
Kit contents	Back-fed main circuit breaker barrier (1)	A	same as above
OEM instruction document	80043-774-01 (04/2009), replaces 80043-687-03	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NQ, NQOD · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Whether NQODBFMB20 fits NQOD as well as NQ (prefix suggests NQOD origin)*		

EDH-SQD-00359	NQPPLLLC	Square D	barrier	CURRENT (LISTED IN 202

NQ U.S. service entrance barrier kit (PowerPacT L main)

OEM part number	NQPPLLLC	A	S177 oem_spec
Description	PowerPacT L line lug cover, neutral bonding strap and lug	A	S177 p. 9-21; oem_spec
Application	main (service entrance)	A	S177 oem_spec
Installation location	Over main breaker line terminals; bonding strap neutral-to-ground	A	same as above
Breaker compatibility	PowerPacT L main circuit breaker in NQ; requires medium terminal shield LTSM3P (not included)	A	S177, S222 Table 5; oem_spec
OEM instruction document	80043-839-01 Rev. 04 (Table 5); replacement parts 80043-820-01	A	S222 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-21; oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00374	**NQRPLMB6PPL**	NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	—	unknown

EDH-SQD-00374	NQRPLMB6PPL	Square D	deadfront	UNKNOWN

NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A

OEM part number	NQRPLMB6PPL	A	S226 oem_spec
Alternate / superseded numbers	NQRPLMB63RPPL [equivalent] (600 A version for MH vented NEMA 3R enclosure)	A	same as above
Description	Replacement deadfront set for NQ 400/600 A PowerPacT L main circuit breaker and sub-feed breaker	A	same as above
Kit contents	Label bag, replacement screw bag, L-frame escutcheon, deadfront extension, deadfront cover, deadfront insulator	A	same as above
OEM instruction document	80043-848-01 (10/2020)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: NQ · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00366	**NQFP15**	NQ filler plates (15 per package)	—	current (listed in 2026 Digest)

EDH-SQD-00366	NQFP15	Square D	filler-plate	CURRENT (LISTED IN 202

NQ filler plates (15 per package)

OEM part number	NQFP15	A	S177 oem_spec
Description	Deadfront filler plates, 15 per package	A	S177 p. 9-19; oem_spec
Installation location	Deadfront openings of unused branch spaces	B	S177 inference
Status	current (listed in 2026 Digest)	A	S177 p. 9-19; oem_spec
Cross-links	Families: NQ · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00445	**MH62D9**	MH box, 20 in. W x 8.75 in. D x 62 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00446	**MH68D9**	MH box, 20 in. W x 8.75 in. D x 68 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00447	**MH74D9**	MH box, 20 in. W x 8.75 in. D x 74 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00448	**MH80D9**	MH box, 20 in. W x 8.75 in. D x 80 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00449	**MH86D9**	MH box, 20 in. W x 8.75 in. D x 86 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00450	**MH92D9**	MH box, 20 in. W x 8.75 in. D x 92 in. H (D9, for PowerPacT L)	—	current (listed in 2026 Digest)
EDH-SQD-00441	**MHBE20**	Blank endwall for 20 in. wide MH enclosure (one per package)	—	current (listed in 2026 Digest)
EDH-SQD-00444	**MHBE26**	Blank endwall, 26 in. wide MH enclosure (one per package)	—	current (listed in 2026 Digest)
EDH-SQD-00443	**MHCO20**	NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure	—	current (listed in 2026 Digest)
EDH-SQD-00442	**MHKE20**	Endwall with knockouts for 20 in. wide MH enclosure (one per package)	—	current (listed in 2026 Digest)

EDH-SQD-00445 MH62D9 — Square D — box/enclosure — CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 62 in. H (D9, for PowerPacT L)

OEM part number	MH62D9	A	S177 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S177 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 62 in. (box catalog number = height)	A	S177 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00446 MH68D9 — Square D — box/enclosure — CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 68 in. H (D9, for PowerPacT L)

OEM part number	MH68D9	A	S177 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S177 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 68 in. (box catalog number = height)	A	S177 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00447 MH74D9 — Square D — box/enclosure — CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 74 in. H (D9, for PowerPacT L)

OEM part number	MH74D9	A	S177 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S177 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 74 in. (box catalog number = height)	A	S177 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00448	MH80D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 80 in. H (D9, for PowerPacT L)

OEM part number	MH80D9	A	S177 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S177 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 80 in. (box catalog number = height)	A	S177 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00449	MH86D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 86 in. H (D9, for PowerPacT L)

OEM part number	MH86D9	A	S177 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S177 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 86 in. (box catalog number = height)	A	S177 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00450	MH92D9	Square D	box/enclosure	CURRENT (LISTED IN 202

MH box, 20 in. W x 8.75 in. D x 92 in. H (D9, for PowerPacT L)

OEM part number	MH92D9	A	S177 oem_spec
Description	NEMA 1 MH enclosure, 8.75 in. deep (D9 suffix) required for NQ/NF with PowerPacT L main, switch or sub-feed breaker; both endwalls blank	A	S177 p. 9-9 fn, 9-31 fn; oem_spec
Dimensions	20 in. W x 8.75 in. D; height 92 in. (box catalog number = height)	B	S177 p. 9-9/9-10; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-9; oem_spec
Cross-links	Families: NQ, NF · Breakers: PowerPacT L-frame (LG/LJ/LL/LR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00441	MHBE20	Square D	box/enclosure	CURRENT (LISTED IN 202

Blank endwall for 20 in. wide MH enclosure (one per package)

OEM part number	MHBE20	A	S177 oem_spec
Description	Blank endwall for 20 in. wide MH enclosure (one per package)	A	S177 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00444	MHBE26	Square D	box/enclosure	CURRENT (LISTED IN 202

Blank endwall, 26 in. wide MH enclosure (one per package)

OEM part number	MHBE26	A	S177 oem_spec
Description	Blank endwall, 26 in. wide MH enclosure (one per package)	A	S177 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00443	MHCO20	Square D	box/enclosure	CURRENT (LISTED IN 202

NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure

OEM part number	MHCO20	A	S177 oem_spec
Description	NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure	A	S177 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00442	MHKE20	Square D	box/enclosure	CURRENT (LISTED IN 202

Endwall with knockouts for 20 in. wide MH enclosure (one per package)

OEM part number	MHKE20	A	S177 oem_spec
Description	Endwall with knockouts for 20 in. wide MH enclosure (one per package)	A	S177 p. 9-19; oem_spec
Installation location	Top/bottom end of MH box	A	same as above
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00440	**TBPANEL**	NQ & NF tackle box spare parts kit	—	current (listed in 2026 Digest)

EDH-SQD-00440	TBPANEL	Square D	hardware-kit	CURRENT (LISTED IN 202

NQ & NF tackle box spare parts kit

OEM part number	TBPANEL	A	S177 oem_spec
Description	NQ & NF Tackle Box Spare Parts Kit (replacement part kit)	A	S177 p. 9-19; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: NQ, NF		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Contents of TBPANEL not listed in Digest - obtain*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00356	**QO1PJ15**	Jaw accessory kit for QOB breaker on NQ (fingersafe IP2X)	—	current (referenced in fingersafe bulletins)

EDH-SQD-00356	QO1PJ15	Square D	breaker-accessory	CURRENT (REFERENCED IN

Jaw accessory kit for QOB breaker on NQ (fingersafe IP2X)

OEM part number	QO1PJ15	A	S221 oem_spec
Description	Jaw accessory kit allowing QOB bolt-on breakers to plug onto NQ interiors with IP2X barriers	A	S221, S177 p. 9-20; oem_spec
Application	branch	A	S221 oem_spec
OEM instruction document	80043-809-01 (11/2013); also 80043-810-01	A	same as above
Status	current (referenced in fingersafe bulletins)	B	S221 inference
Cross-links	Families: NQ · Breakers: QOB (bolt-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		

4.8 NQO — NQO / NQOB panelboard

FAM-SQD-008 · panelboard · aka NQOB · markings: Square D, Schneider Electric

Early Square D three-phase lighting panelboards using Q1/Q1B plug-on and bolt-on breakers, developed late 1960s and obsoleted 1987 (replaced by NQOD). No kit data found in this batch.

Attribute	Value	Cl.	Sources
Status	obsolete	A	S236 oem_spec
Era of manufacture	late 1960s-1987	A	same as above
Successor	NQOD (1987), then NQ (2008) (Sequence inferred from FAQ timelines)	B	S236 inference
Branch breakers accepted	Q1 / Q1B	A	S236 oem_spec

Key documents: S236 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /

4.9 NQOB — Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)

FAM-SQD-011 · panelboard · aka NQ0, NQH, NQHB, NQO, NQO-LX, NQOB, NQOB column, NQOB-LX, NTFB (basic NQOB bus) · markings: Square D

Square D's 250 V AC lighting/appliance panelboards of the 1960s-1980s: NQO with plug-on QO breakers and NQOB with bolt-on QOB breakers, combinable lighting and power up to 100 A branches; mains 100-600 A. Square D advertised a non-interchangeability system (NEC 240-25(g)) common to NQO, NQOB, NA1B and loadcenters. Replacement-part data: QOB branch breakers, SK5668 branch kit (not SK5669), QOFP fillers, 100 A vs 60 A column-width branch limits per conflicting FAQs.

1970 Square D Digest data for NQO/NQOB: box sizes 14 in W x 4 in D, 14 in W x 5-3/4 in D, 20 in W x 5-3/4 in D (NQOB 14 in widths shown); column width (LX) about 6-3/4 in W x 5 in D; column-width NQOB available factory assembled only. Cabinets: MONO-FLAT fronts with concealed trim clamps, door with concealed hinges and flush lock, gray baked enamel. Catalog numbers of the form NQO-24-203-1, NQOB-35-424, NQO-20-3L (Canada) etc.

Attribute	Value	Cl.	Sources
Status	Obsolete; enclosure parts not available; QSFB switch/fuse unit obsolete; trim clamp PK1TC obsolete (search summaries)	B	S265, S266 oem_web
Era of manufacture	Advertised by Square D in May and September 1960 (NQO plug-in, NQOB bolted connection); a Schneider timeline (search summary) says 'developed in late 1960s till obsolescence in 1987' - conflicts with the 1960 ads (1960 ads are OEM-authored; the 'late 1960s' statement is unverified search text)	B	S245, S246, S266 oem_spec
Successor	NQ / NQOD panelboards (QO/QOB) - inference	D	inference
Voltage rating	250 V class AC only (1960: NQO and NQOB 'AC only'); 120/240 and 120/208 V	A	S246, S245 oem_spec
	NQO: 120/208, 120/240, 240 V AC; NQOB: 120/208, 120/240 V AC (NQOB-LX also 240 V AC)	A	S270 Digest 152 (1970) p.55; oem_spec
Main ampacity	NQO: 400 A lugs / 400 A main breaker; NQOB: 600 A lugs / 400 A main breaker; column-width NQO-LX / NQOB-LX: 225 A lugs / 100 A main breaker	A	same as above
Branch breakers accepted	1960 USA: QO plug-on / QOB bolt-on 1-pole 15-50 A, 2-pole 15-70 A and 70-100 A, 3-pole 15-50 A and 70-100 A; Canada 1985: Q1 plug-on / Q1B bolt-on (QO/QOB with Visi-trip), 22,000 A RMS sym rated types	A	S245, S247 oem_spec
	NQO: QO plug-on 15-100 A 1/2/3-pole (QO 70 A and 100 A frames), also Q1; NQOB: QOB / Q1B bolt-on 15-100 A; QO/QOB 5,000 A RMS UL interrupting, black handle; Q1/Q1B take 2 spaces per pole in 225 A max mains panels, 1 space per pole in 400/600 A basic devices; NQH/NQHB: QH/QHB 15-30 A	A	S270 Digest 152 (1970) p.55-56; oem_spec
Mains	100 A through 600 A mains (1960 ad)	A	S245 oem_spec
Non interchangeability	Square D non-interchangeable system standard on all 250 V 100 A branch circuit breaker panelboards (NQO, NQOB, NA1B) per NEC 240-25(g)	A	S246 oem_spec
Basic bus	NTFB is the basic NQOB panel bus (QSFB switch/fuse unit came from the NTFB panel)	A	S265 oem_web
Dimensions	Boxes 14 in W x 4 in D, 14 in W x 5-3/4 in D, 20 in W x 5-3/4 in D; LX column width ~6-3/4 in W x 5 in D (OCR) (Fractions partly garbled by OCR)	B	S270 Digest 152 (1970) p.55; oem_spec
Finish / plating	MONO-FLAT fronts, concealed trim clamps, concealed hinges, flush lock, gray baked enamel	A	S270 Digest 152 (1970) p.58-65; oem_spec
Column width	Column width type NQOB panelboards are available factory assembled only	A	S270 oem_spec

Breaker families associated: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB
Key documents: S245 sim_ecm_1960-05_59_5 Electrical Construction and Maintenance, Vol 59 No 5, May 1960 - Square D advertisement 'S; S246 sim_ecm_1960-09_59_9 Electrical Construction and Maintenance, Vol 59 No 9, September 1960 - Square D advertisem; S247 bwb_P9-BJG-737 Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens, ; S256 industrialelectr0000earl Industrial Electrical Wiring: Design and Application (1987), section 'Type NQOB Panelboard; S265 Schneider Electric FAQ FA96717 - What is the QSFB switch/fuse unit and is it available? (N; S266 Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, F; S270 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): PK27GTA, PK23GTA

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00542	**QO-100ASF**	Square D 100 A sub-feed lug kit for main-lug NQO panelboards	—	1970 catalog item; current status unknown
EDH-SQD-00543	**QO-225ASF**	Square D 225 A sub-feed lug kit for main-lug NQO panelboards	—	1970 catalog item; current status unknown
EDH-SQD-00513	**SF-100LP**	Square D 100 A sub-feed lug kit for NQO and NQOB panelboards	—	Unknown (1985 Canadian price book)
EDH-SQD-00514	**SF-225LP**	Square D 225 A sub-feed lug kit for NQO, NQOB and NY1B panelboards	—	Unknown (1985 Canadian price book)

EDH-SQD-00542 — QO-100ASF — Square D — sub-feed-lug-kit — 1970 CATALOG ITEM; CUR

Square D 100 A sub-feed lug kit for main-lug NQO panelboards

OEM part number	QO-100ASF	A	S270 oem_spec
Description	100 A sub-feed lug kit, for use with main lug NQO panelboards only; sub-feed lugs must be same rating as panelboard - $25.00	A	S270 Digest 152 (1970) p.84; oem_spec
Application	sub-feed	A	S270 oem_spec
Current rating	100 A	A	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB		
Not yet documented	current_status, Dimensions, Material		
Open question	*Canadian equivalent SF-100LP (1985 Electrozad)?*		

EDH-SQD-00543 — QO-225ASF — Square D — sub-feed-lug-kit — 1970 CATALOG ITEM; CUR

Square D 225 A sub-feed lug kit for main-lug NQO panelboards

OEM part number	QO-225ASF	A	S270 oem_spec
Description	225 A sub-feed lug kit, main lug NQO panelboards only; must match panelboard rating - $30.00	A	S270 Digest 152 (1970) p.84; oem_spec
Application	sub-feed	A	S270 oem_spec
Current rating	225 A	A	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00513 — SF-100LP — Square D — sub-feed-lug-kit — UNKNOWN (1985 CANADIAN

Square D 100 A sub-feed lug kit for NQO and NQOB panelboards

OEM part number	SF-100LP	C	S247 distributor
Description	100 Amp. sub-feed lug kit - (NQO & NQOB) ... SF-100LP $74.00	C	same as above
Application	sub-feed	C	same as above
Current rating	100 A	C	same as above
Status	Unknown (1985 Canadian price book)	D	S247 inference
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Kit contents, Material		

EDH-SQD-00514	SF-225LP	Square D	sub-feed-lug-kit	UNKNOWN (1985 CANADIAN

Square D 225 A sub-feed lug kit for NQO, NQOB and NY1B panelboards

OEM part number	SF-225LP	C	S247 distributor
Description	225 Amp. sub-feed lug kit (NQO, NQOB & NYIB) ... SF-225LP $80.00	C	same as above
Application	sub-feed	C	same as above
Current rating	225 A	C	same as above
Status	Unknown (1985 Canadian price book)	D	S247 inference
Cross-links	Families: NQOB, NEHB		
Not yet documented	Dimensions, Kit contents, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00516	**SK5668**	Square D branch connector kit for NQOB panelboards	—	Unknown

EDH-SQD-00516	SK5668	Square D	branch-connector-kit	UNKNOWN

Square D branch connector kit for NQOB panelboards

OEM part number	SK5668	C	S266 oem_web
Description	Correct branch kit for NQOB is SK5668, not SK5669 (SK5669 not designed for NQOB) (Search-engine summary of Schneider FAQ; FAQ number not mapped)	C	same as above
Status	Unknown	D	S266 inference
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Kit contents, Material		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00515	**SK-5666**	Square D Q1B panelboard mounting kit for NQOB	Q1B / QOB bolt-on C	Traded by dealer
EDH-SQD-00517	**SK5669**	Square D mounting assembly for QO2125 in NQO interior (not for NQOB)	QO2125 (2-pole 125 A QO) in NQO C	unknown

EDH-SQD-00515	SK-5666	Square D	breaker-mounting-kit	TRADED BY DEALER

Square D Q1B panelboard mounting kit for NQOB

OEM part number	SK-5666	C	S251 surplus_listing
Description	Q1B; Panel Board Mounting Kit for NQOB	C	same as above
Breaker compatibility	Q1B / QOB bolt-on	C	same as above
Status	Traded by dealer	C	same as above
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Relationship to SK5668 (stated by Schneider FAQ summaries as the correct NQOB branch kit)?*		

EDH-SQD-00517	SK5669	Square D	breaker-mounting-kit	STATUS UNKNOWN

Square D mounting assembly for QO2125 in NQO interior (not for NQOB)

OEM part number	SK5669	C	S266 oem_web
Description	A QO2125 can be used in an NQO interior with an SK5669 mounting assembly; SK5669 is not designed for the NQOB panel (Search-engine summary)	C	same as above
Breaker compatibility	QO2125 (2-pole 125 A QO) in NQO	C	same as above
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	Dimensions, Kit contents, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00547	**PK-9GTA**	Square D equipment ground bar kit, 1-12 circuits (NQO/NQOB/NA1B/NH1B/NTFB/NTHB)	—	1970 catalog item; current status unknown

EDH-SQD-00547 **PK-9GTA** Square D ground-bar **1970 CATALOG ITEM; CUR**

Square D equipment ground bar kit, 1-12 circuits (NQO/NQOB/NA1B/NH1B/NTFB/NTHB)

OEM part number	PK-9GTA	A	S270 oem_spec
Description	Equipment Ground Bar Kits NQO, NQOB, NA1B, NH1B, NTFB and NTHB: 1 thru 12 circuits - PK-9GTA $1.30	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00544	**QO-1CP**	Square D closure plate for twistout in NQO, NQOB and NA1B interior trims	—	1970 catalog item; current status unknown

EDH-SQD-00544 **QO-1CP** Square D filler-plate **1970 CATALOG ITEM; CUR**

Square D closure plate for twistout in NQO, NQOB and NA1B interior trims

OEM part number	QO-1CP	A	S270 oem_spec
Description	Closure Plate for Twistout in NQO, NQOB and NA1B Interior Trims - QO-1CP $0.50	A	S270 Digest 152 (1970) p.84; oem_spec
Installation location	Deadfront/interior trim twistout openings	A	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00518	**PK1TC**	Square D trim clamp (NQOB), obsolete	—	Obsolete, no replacement

EDH-SQD-00518 **PK1TC** Square D hardware-kit **OBSOLETE, NO REPLACEME**

Square D trim clamp (NQOB), obsolete

OEM part number	PK1TC	C	S266 oem_web
Description	Trim clamp is PK1TC, obsolete with no replacement (Search-engine summary)	C	same as above
Status	Obsolete, no replacement	C	same as above
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Kit contents, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00553	**739137**	Square D leveling nut (NQOB panelboard)	—	1970 catalog item; current status unknown

EDH-SQD-00553	739137	Square D	fastener	1970 CATALOG ITEM; CUR

Square D leveling nut (NQOB panelboard)

OEM part number	739137	B	S270 oem_spec
Description	Example replacement-part order: '4 - 739137 leveling nuts for use in 120/240 V., 1 Ph., 3 W., 225 A. main lug panelboard catalog number NQOB-3456-8'	B	S270 Digest 152 (1970) p.85; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Installation location, thread		
Open question	*OCR shows '7391 37' - confirm number*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00534	**QO-1HT**	Square D handle tie for QO / QOB (two 1-pole to 2-pole individual trip)	—	1970 catalog item; current status unknown

EDH-SQD-00534	QO-1HT	Square D	breaker-accessory	1970 CATALOG ITEM; CUR

Square D handle tie for QO / QOB (two 1-pole to 2-pole individual trip)

OEM part number	QO-1HT	A	S270 oem_spec
Description	Handle Tie (QO or QOB) - permits conversion of two single pole breakers to double pole, individual trip; $0.20	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	current_status, Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00535	**HLO-1**	Square D handle lockoff for QO, Q1, A1 and Y1B breakers	QO, Q1, A1(B), Y1B A	1970 catalog item; current status unknown

EDH-SQD-00535	HLO-1	Square D	handle-lock	1970 CATALOG ITEM; CUR

Square D handle lockoff for QO, Q1, A1 and Y1B breakers

OEM part number	HLO-1	A	S270 oem_spec
Description	Handle Lockoff QO, Q1, A1 and Y1B - HLO-1 $0.90	A	S270 Digest 152 (1970) p.84; oem_spec
Breaker compatibility	QO, Q1, A1(B), Y1B (Dealer Relectric lists HLO1 / HLO1-10 as padlock attachment (s10))	A	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB, NA1B, NH1B, NEHB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB, Square D Y1B 1-pole (NY1B)		
Not yet documented	current_status, Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00538	**HPA-2QFS**	Square D padlock attachment for QFSB switch, 2/3-pole	—	1970 catalog item; current status unknown
EDH-SQD-00536	**QO-1PA**	Square D handle padlock attachment, 1-pole QO/QOB/Q1/Q1B/QFSB/HFSB	—	1970 catalog item; current status unknown
EDH-SQD-00537	**QO-1PL**	Square D handle padlock attachment, 2/3-pole QO/QOB/Q1/Q1B	—	1970 catalog item; current status unknown

EDH-SQD-00538	HPA-2QFS	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D padlock attachment for QFSB switch, 2/3-pole

OEM part number	HPA-2QFS	A	S270 oem_spec
Description	QFSB (2 or 3 Pole) - HPA-2QFS $1.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00536	QO-1PA	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D handle padlock attachment, 1-pole QO/QOB/Q1/Q1B/QFSB/HFSB

OEM part number	QO-1PA	A	S270 oem_spec
Description	Handle Padlock Attachment QO, QOB, Q1, Q1B, QFSB and HFSB (1 Pole) - QO-1PA $1.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00537	QO-1PL	Square D	padlock-attachment	1970 CATALOG ITEM; CUR

Square D handle padlock attachment, 2/3-pole QO/QOB/Q1/Q1B

OEM part number	QO-1PL	A	S270 oem_spec
Description	QO, QOB, Q1 and Q1B (2 or 3 Pole) - QO-1PL $1.00	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB · Breakers: Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB		
Not yet documented	current_status, Dimensions, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00545	**PK-3SP**	Square D touch-up paint, blue-gray (aerosol)	—	1970 catalog item; current status unknown
EDH-SQD-00546	**PK-49SP**	Square D touch-up paint, ANSI 49 gray (aerosol)	—	1970 catalog item; current status unknown
EDH-SQD-00548	**PK-4FL**	Square D flush lock for MONO-FLAT trims	—	1970 catalog item; current status unknown
EDH-SQD-00519	**QSFB**	Square D QSFB switch/fuse unit from NTFB (basic NQOB) panel	—	Obsolete and no longer available

EDH-SQD-00545	PK-3SP	Square D	other	1970 CATALOG ITEM; CUR

Square D touch-up paint, blue-gray (aerosol)

OEM part number	PK-3SP	A	S270 oem_spec
Description	Touch-up Paint, Blue-Gray (Aerosol Can) - PK-3SP $3.80	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00546	PK-49SP	Square D	other	1970 CATALOG ITEM; CUR

Square D touch-up paint, ANSI 49 gray (aerosol)

OEM part number	PK-49SP	A	S270 oem_spec
Description	Touch-up Paint USAS #49 Gray (Aerosol Can) - PK-49SP $3.80	A	S270 Digest 152 (1970) p.84; oem_spec
Finish / plating	USAS/ANSI 49 gray	A	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00548	PK-4FL	Square D	other	1970 CATALOG ITEM; CUR

Square D flush lock for MONO-FLAT trims

OEM part number	PK-4FL	A	S270 oem_spec
Description	Flush Lock for Mono-Flat Trims - PK-4FL $7.50	A	S270 Digest 152 (1970) p.84; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: NQOB, NA1B, NH1B		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00519	QSFB	Square D	other	OBSOLETE AND NO LONGER

Square D QSFB switch/fuse unit from NTFB (basic NQOB) panel

OEM part number	QSFB	A	S265 oem_web
Description	Switch/fuse unit from the NTFB panel (basic NQOB panel bus)	A	same as above
Status	Obsolete and no longer available	A	same as above
Cross-links	Families: NQOB		
Not yet documented	Dimensions, Kit contents, Material		

4.10 NQOD — NQOD panelboard (Class 1630)

FAM-SQD-007 · panelboard · aka NQOD lighting panelboard · markings: Square D, Schneider Electric

Predecessor of NQ; accepted QO plug-on and QOB bolt-on breakers. Sold 1987-2008. Schneider states NQ is the replacement but not a direct one: interior, box and trim must be replaced (e.g. NQOD30L400CU -> NQ30L4C plus new box/trim). All NQOD main breaker kits obsolete as of April 2016; branch connector kit SKNQOD225 existed for <=225 A interiors.

Attribute	Value	Cl.	Sources
Status	obsolete	A	S236, S237 oem_spec
Era of manufacture	1987-2008	A	S236 oem_spec
Successor	NQ (not a direct replacement; replace interior, box and trim)	A	S238, S237 oem_spec
Branch breakers accepted	QO / QOB	A	S236 oem_spec

Breaker families associated: KI / KC frame (legacy), QO (plug-on), QOB (bolt-on)
Key documents: S184 80043-699-03 NQOD Panelboard Main Circuit Breaker (250 A Maximum) and Adapter Kit Installation, Class 1; S234 FA102748 Schneider Electric FAQ FA102748: What is the SKNQOD225 and where is it used?; S236 FA332061 Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO /; S237 FA123424 Schneider Electric FAQ FA123424: Will the main breaker adapter kits for NQ panelboards wor; S238 FA128003 Schneider Electric FAQ FA128003: What is the replacement for NQOD30L400CU?
Also fits this family (entry printed elsewhere): S37444, S37445, NQODBFMB20

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00355	**SKNQOD225**	NQOD branch connector kit, 225 A max, 3-phase	—	discontinued (distributor)

EDH-SQD-00355	SKNQOD225	Square D	branch-connector-kit	DISCONTINUED (DISTRIBU

NQOD branch connector kit, 225 A max, 3-phase

OEM part number	SKNQOD225	A	S234 oem_spec
Description	Connector kit containing branch connectors for NQOD panelboards rated 225 A or less; A, B, C phase connectors and mounting hardware	A	same as above
Application	branch	A	same as above
Kit contents	80110-005-01 A/C phase bus finger; 80110-006-01 B phase bus finger; 80025-068-01 screw (all phases)	A	S235 oem_spec
Status	discontinued (distributor)	C	S241 distributor
Replacement / successor	No OEM replacement kit identified; NQOD interiors to be replaced by NQ (interior+box+trim)	B	S237, S238 inference
Aftermarket / reproduction	Reproduction of 80110-005-01/-006-01 fingers is a candidate; no listed equivalent	D	inference
Cross-links	Families: NQOD · Breakers: QO (plug-on), QOB (bolt-on)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Was there a 400 A NQOD connector kit (e.g. SKNQOD400)? Not found*		
Open question	*Is SKNQBC physically interchangeable with NQOD fingers? Unverified - do not assume*		

4.11 QMB — QMB Fusible Panelboard / QMB distribution (current design, Series E1)

FAM-SQD-003 · panelboard · aka Class 4620, QMB fusible, QMB switchboard, QMB-QMJ · markings: Schneider Electric, Square D

Extruded-bus fusible distribution system used both as stand-alone panelboards and as the QMB distribution section of QED-2 / Speed-D switchboards. Branch units have permanently attached mounting brackets and blow-on plug-on jaws onto the QMB bus and mount with a screwdriver; glass-reinforced polyester bus supports. ISCR up to 200 kA at 600 Vac with Class R/J/L/T fuses.

Square D fusible-switch panelboard/switchboard; QMBHW and QMBJW adapter units allow H- and J-frame breakers to plug onto QMB bus (spring nuts in mounting rails, 1/4-20 unit mounting screws at 30 lb-in). Included only for breaker-adapter hardware.

Attribute	Value	Cl.	Sources
Status	current	A	S28 oem_spec
	unknown	D	inference
Era of manufacture	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	A	S28, S61 p. 1; oem_spec
Voltage rating	600 Vac / 250 Vdc max	A	S28 pp. 4, 7; oem_spec
Main ampacity	Main lug interiors 225-1200 A; main switch 200-800 A; QMJ only on 400, 600, 800, 1200 A interiors; QMB panelboards limited to 800 A main and branch switches (1200 A QMB368W only in QED-2)	A	S28, S26 pp. 6, 14; oem_spec
Branch breakers accepted	QMB twin and single fusible switch units 30-800 A (1200 A in QED-2 only), QMJ Class J switch units 30-600 A, QMB circuit breaker units (twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A and LA/LH 225-400 A), NEMA size 0-3 motor starter units, QMB Surgelogic TVSS	A	S28 pp. 6, 7, 14, 17-19; oem_spec
Standards	UL 67, UL 50, CSA C22.2 No. 29, NEMA PB 1, Fed Spec W-P115C; switch units UL 98 File E34358	A	S28 p. 4; oem_spec

Breaker families associated: QMB circuit breaker units (H-, J-, L-frame)
Key documents: S26 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S28 4620CT9601R07/15 QMB Fusible Panelboards Catalog, Class 4620; S61 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T; S233 80043-339-04 QMBHW and QMBJW Circuit Breaker Adapter Units Installation, Class 4620
Also fits this family (entry printed elsewhere): 40251-287-50, AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, QMB306LEX, QMB310LEX, QMB3400LA, QMB3300LA, QMB362T, QMB364, QMB323TD, PKDFSCREW

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00081	**QMB12CLA**	QMB main lug compression adaptor kit QMB12CLA (1200 A)	—	unknown
EDH-SQD-00080	**QMB8CLA**	QMB main lug compression adaptor kit QMB8CLA (800 A)	—	unknown

EDH-SQD-00081	QMB12CLA	Square D	main-lug-kit	STATUS UNKNOWN

QMB main lug compression adaptor kit QMB12CLA (1200 A)

OEM part number	QMB12CLA	**A**	S28 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 1200 A QMB main-lug interior (4 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	**A**	S28 Table 2; oem_spec
Application	main	**A**	S28 oem_spec
Current rating	1200 A	**A**	S28 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00080	QMB8CLA	Square D	main-lug-kit	STATUS UNKNOWN

QMB main lug compression adaptor kit QMB8CLA (800 A)

OEM part number	QMB8CLA	**A**	S28 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 800 A QMB main-lug interior (3 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	**A**	S28 Table 2; oem_spec
Application	main	**A**	S28 oem_spec
Current rating	800 A	**A**	S28 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00063	**40251-016-51**	QMB/QMJ switch terminal lug 40251-016-51	30 A and 60 A QMB switch units (std) **A**	unknown
EDH-SQD-00065	**40251-018-50**	QMB/QMJ switch terminal lug 40251-018-50	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T **A**	unknown
EDH-SQD-00124	**4025101851**	QMB363TW Series E1 renewal part: Lug assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00067	**40251-162-50**	QMB/QMJ switch terminal lug 40251-162-50	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W) **A**	unknown
EDH-SQD-00066	**40256-014-50**	QMB/QMJ switch terminal lug 40256-014-50	100 A 600 V QMB units; QMJ363T/H **A**	unknown
EDH-SQD-00064	**40256-034-50**	QMB/QMJ switch terminal lug 40256-034-50	30 A and 60 A QMB units; QMJ361T, QMJ362T **A**	unknown
EDH-SQD-00070	**40256-039-50**	QMB/QMJ switch terminal lug 40256-039-50	QMJ365 (400 A) **A**	unknown
EDH-SQD-00068	**40560-270-50**	QMB/QMJ switch terminal lug 40560-270-50	200 A QMB units; QMJ364T/H **A**	unknown
EDH-SQD-00074	**VCEL02114S1**	VERSA-CRIMP compression lug VCEL02114S1	100 A 600 V QMB units; QMJ363 **A**	unknown
EDH-SQD-00071	**VCEL030516H1**	VERSA-CRIMP compression lug VCEL030516H1	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QM **A**	unknown
EDH-SQD-00072	**VCEL05012H1**	VERSA-CRIMP compression lug VCEL05012H1	400-800 A QMB units optional; QMB main lug and main switch interiors (**A**	unknown
EDH-SQD-00079	**VCEL06012H1**	VERSA-CRIMP compression lug VCEL06012H1	400 A QMB main switch interior (Table 3) **A**	unknown
EDH-SQD-00073	**VCEL07512H1**	VERSA-CRIMP compression lug VCEL07512H1	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ3 **A**	unknown
EDH-SQD-00075	**VCELC02114S1**	VERSA-CRIMP compression lug VCELC02114S1	100 A 600 V QMB units; QMJ363 **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00076	**VCELC03038H1**	VERSA-CRIMP compression lug VCELC03038H1	200 A QMB units; QMJ364 **A**	unknown
EDH-SQD-00077	**VCELC05012H1**	VERSA-CRIMP compression lug VCELC05012H1	400-800 A QMB units **A**	unknown
EDH-SQD-00078	**VCELC07512H1**	VERSA-CRIMP compression lug VCELC07512H1	400-800 A QMB units **A**	unknown

EDH-SQD-00063	**40251-016-51**	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-016-51

OEM part number	40251-016-51	**A**	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-#2 AWG	**A**	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	**A**	S28 oem_spec
Installation location	Load-side terminals of switch unit	**C**	S28 inference
Breaker compatibility	30 A and 60 A QMB switch units (std)	**A**	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00065	**40251-018-50**	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-018-50

OEM part number	40251-018-50	**A**	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-1/0 AWG	**A**	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	**A**	S28 oem_spec
Installation location	Load-side terminals of switch unit	**C**	S28 inference
Breaker compatibility	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T31W/T32W)	**A**	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00124	**4025101851**	Square D	lug	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug assembly

OEM part number	4025101851	**A**	S62 oem_spec
Description	Lug assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per lug	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00067	40251-162-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-162-50

OEM part number	40251-162-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #6 AWG-300 kcmil	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00066	40256-014-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-014-50

OEM part number	40256-014-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-1/0 AWG	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	100 A 600 V QMB units; QMJ363T/H	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00064	40256-034-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-034-50

OEM part number	40256-034-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-#4 AWG (QMB); QMJ361T/362T Cu lug #14-#2	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	30 A and 60 A QMB units; QMJ361T, QMJ362T	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00070	40256-039-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-039-50

OEM part number	40256-039-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Cu mechanical lug, 1/0 AWG-750 kcmil	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	QMJ365 (400 A)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00068	40560-270-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40560-270-50

OEM part number	40560-270-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #6 AWG-250 kcmil (QMB); #6-300 (QMJ364)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	200 A QMB units; QMJ364T/H	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00074	VCEL02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL02114S1

OEM part number	VCEL02114S1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL021-14S1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #8-1/0 AWG	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00071	VCEL030516H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL030516H1

OEM part number	VCEL030516H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL030-516H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #4 AWG-300 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QMJ364 (VCEL-030-516H1)	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00072	VCEL05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL05012H1

OEM part number	VCEL05012H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL050-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 2/0 AWG-500 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug and main switch interiors (Tables 2, 3)	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00079	VCEL06012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL06012H1

OEM part number	VCEL06012H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL060-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP compression lug 400-600 kcmil Al or Cu	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400 A QMB main switch interior (Table 3)	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		
Open question	*VCEL060-12H1 appears only in Table 3 (no un-hyphenated catalog form printed) - confirm orderable number*		

EDH-SQD-00073	VCEL07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL07512H1

OEM part number	VCEL07512H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL075-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 500-750 kcmil Al	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ365	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00075	VCELC02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC02114S1

OEM part number	VCELC02114S1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC021-14S1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug #6-1/0 AWG	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00076	VCELC03038H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC03038H1

OEM part number	VCELC03038H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC030-38H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 2/0-300	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units; QMJ364	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00077	VCELC05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC05012H1

OEM part number	VCELC05012H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC050-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 250-500 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00078	VCELC07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC07512H1

OEM part number	VCELC07512H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC075-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 400-750 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00511	**QMBHW**	QMB circuit breaker adapter unit for H-frame breaker	—	unknown
EDH-SQD-00512	**QMBJW**	QMB circuit breaker adapter unit for J-frame breaker	—	unknown

EDH-SQD-00511 **QMBHW** Square D breaker-mounting-kit **UNKNOWN**

QMB circuit breaker adapter unit for H-frame breaker

OEM part number	QMBHW	A	S233 oem_spec
Description	Adapter unit with plug-on jaws allowing H-frame breaker to plug onto QMB panelboard/switchboard bus	A	same as above
Fasteners	Spring nuts (2 per side) in mounting rail slots; 1/4-20 unit mounting screws through unit mounting flange	A	S233 Fig. 1; oem_spec
Torque values	Unit mounting screws 30 lb-in (3 N-m)	A	S233 oem_spec
OEM instruction document	80043-339-04 (05/2005)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: QMB · Breakers: PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Uses terminal kit S37444/S37445 per bulletin text*		

EDH-SQD-00512 **QMBJW** Square D breaker-mounting-kit **UNKNOWN**

QMB circuit breaker adapter unit for J-frame breaker

OEM part number	QMBJW	A	S233 oem_spec
Description	Adapter unit with plug-on jaws allowing J-frame breaker to plug onto QMB panelboard/switchboard bus	A	same as above
Fasteners	Spring nuts (2 per side) in mounting rail slots; 1/4-20 unit mounting screws through unit mounting flange	A	S233 Fig. 1; oem_spec
Torque values	Unit mounting screws 30 lb-in (3 N-m)	A	S233 oem_spec
OEM instruction document	80043-339-04 (05/2005)	A	same as above
Status	unknown	D	oem_spec
Cross-links	Families: QMB · Breakers: PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Uses terminal kit S37444/S37445 per bulletin text*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00130	**4052098601**	QMB367W Series E1 renewal part: Load base side insulator	QMB367W, Series E1 (E01) A	unknown

EDH-SQD-00130 **4052098601** Square D insulator **STATUS UNKNOWN**

QMB367W Series E1 renewal part: Load base side insulator

OEM part number	4052098601	A	S63 oem_spec
Description	Load base side insulator	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00092	**QMB15BLW**	QMB blank filler plate QMB15BLW (15 in.)	—	current
EDH-SQD-00089	**QMB1BLW**	QMB blank filler plate QMB1BLW (1.5 in.)	—	current (Crescent lists QMB1BLW as discontinued - unverified

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00090	**QMB3BLW**	QMB blank filler plate QMB3BLW (3 in.)	—	current
EDH-SQD-00091	**QMB6BLW**	QMB blank filler plate QMB6BLW (6 in.)	—	current

EDH-SQD-00092 **QMB15BLW** Square D filler-plate **CURRENT**

QMB blank filler plate QMB15BLW (15 in.)

OEM part number	QMB15BLW	A	S71, S31, S32 oem_spec
Alternate / superseded numbers	GTIN 785901798019	A	S30 alias; oem_spec
Description	Panelboard blank filler plate, 15 in.; Speed-D switchboards with current-series QMB provisions ship with (2)	A	S30, S31 oem_spec
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) (Packaging dimensions, not part dimensions)	A	S30 oem_spec
Status	current	B	S71 oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00089 **QMB1BLW** Square D filler-plate **CURRENT (CRESCENT LIST**

QMB blank filler plate QMB1BLW (1.5 in.)

OEM part number	QMB1BLW	A	S71, S31, S32 oem_spec
Description	Blank filler (closing plate) 1.5 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Covers 1.5 in. of QMB mounting space	A	S71 oem_spec
Status	current (Crescent lists QMB1BLW as discontinued - unverified)	C	S52 distributor
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00090 **QMB3BLW** Square D filler-plate **CURRENT**

QMB blank filler plate QMB3BLW (3 in.)

OEM part number	QMB3BLW	A	S71, S31, S32 oem_spec
Description	Blank filler (closing plate) 3 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Covers 3 in. of QMB mounting space	A	S71 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00091	QMB6BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB6BLW (6 in.)

OEM part number	QMB6BLW	A	S71, S31, S32 oem_spec
Description	Blank filler (closing plate) 6 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Covers 6 in. of QMB mounting space	A	S71 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00133	**4028343250**	QMB367W Series E1 renewal part: Switch mounting hardware kit:	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00131	**4028343550**	QMB367W Series E1 renewal part: Handle knob kit	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00123	**4028343750**	QMB363TW Series E1 renewal part: Handle knob kit	QMB363TW, Series E1 (E01) A	unknown

EDH-SQD-00133	4028343250	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Switch mounting hardware kit:

OEM part number	4028343250	A	S63 oem_spec
Description	Switch mounting hardware kit: (6) spring nuts, (6) screws, (1) circuit ID card	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00131	4028343550	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Handle knob kit

OEM part number	4028343550	A	S63 oem_spec
Description	Handle knob kit	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00123	4028343750	Square D	hardware-kit	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Handle knob kit

OEM part number	4028343750	**A**	S62 oem_spec
Description	Handle knob kit	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00129	**2142720241**	QMB367W Series E1 renewal part: Load base mounting screw	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00120	**2330241601**	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00125	**2342702001**	QMB363TW Series E1 renewal part: Lug mounting nut	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00132	**2342702400**	QMB367W Series E1 renewal part: Lug mounting nut	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00122	**4020506501**	QMB363TW Series E1 renewal part: Load base mounting screw	QMB363TW, Series E1 (E01) **A**	unknown

EDH-SQD-00129	2142720241	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base mounting screw

OEM part number	2142720241	**A**	S63 oem_spec
Description	Load base mounting screw	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per load base	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00120	2330241601	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Push nut for arc suppression assembly

OEM part number	2330241601	**A**	S62 oem_spec
Description	Push nut for arc suppression assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 2 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00125	2342702001	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug mounting nut

OEM part number	2342702001	**A**	S62 oem_spec
Description	Lug mounting nut (also used as Keps nut in QO load centers per FA294947)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per lug	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00132	2342702400	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Lug mounting nut

OEM part number	2342702400	A	S63 oem_spec
Description	Lug mounting nut	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00122	4020506501	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base mounting screw

OEM part number	4020506501	A	S62 oem_spec
Description	Load base mounting screw	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 2 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00106	**QMB306EX**	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	—	1970 catalog item; current status unknown
EDH-SQD-00108	**QMB310EX**	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	—	1970 catalog item; current status unknown
EDH-SQD-00110	**QMB320EX**	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	—	1970 catalog item; current status unknown
EDH-SQD-00058	**QMB600T6**	QMB Class T fuse adapter kit QMB600T6	QMB366W A	unknown
EDH-SQD-00059	**QMB800T6**	QMB Class T fuse adapter kit QMB800T6	QMB367W A	unknown

EDH-SQD-00106	QMB306EX	Square D	conversion-kit	1970 CATALOG ITEM; CUR

QMB plug-on extension assembly QMB306EX (legacy QW retrofit)

OEM part number	QMB306EX	A	S66, S270 oem_spec
Alternate / superseded numbers	QMB-306-EX (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Plug-on extension assembly for QW (38 in.) interiors used with QMB362T replacing QMB3606T	A	S66 oem_spec
	Extension assembly, three pole, unit height 6 in, 600 V (1970: $10.50/$26.00)	A	S270 Digest 152 (1970) p.83; oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S66 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Era of manufacture	Listed in 1970 Digest 152	A	S270 Digest 152 (1970) p.83; oem_spec
Cross-links	Families: QMB, QMB-LEGACY		
Not yet documented	current_status, Dimensions, Kit contents, Material		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00108	QMB310EX	Square D	conversion-kit	1970 CATALOG ITEM; CUR

QMB plug-on extension assembly QMB310EX (legacy QW retrofit)

OEM part number	QMB310EX	A	S68, S270 oem_spec
Alternate / superseded numbers	QMB-310-EX (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Plug-on extension assembly for QW (38 in., flatwise bus) interiors; used with QMB3400LA and QMB3300LA breaker units	A	S68, S67, S69, S73 oem_spec
	Extension assembly, three pole, unit height 7-1/2 in, 600 V (1970: $10.50/$26.00)	A	S270 Digest 152 (1970) p.83; oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S68, S67, S69, S73 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Era of manufacture	Listed in 1970 Digest 152	A	S270 Digest 152 (1970) p.83; oem_spec
Cross-links	Families: QMB, QMB-LEGACY		
Not yet documented	current_status, Dimensions, Kit contents, Material		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00110	QMB320EX	Square D	conversion-kit	1970 CATALOG ITEM; CUR

QMB plug-on extension assembly QMB320EX (legacy QW retrofit)

OEM part number	QMB320EX	A	S65, S270 oem_spec
Alternate / superseded numbers	QMB-320-EX [alias]	A	same as above
Description	Plug-on extension kit for QW panelboards/switchboards used with QMB364 replacing QMB3620 (printed 'QMB-320-EX')	A	S65 oem_spec
	Extension assembly, three pole, unit height 9 in, 600 V (1970: $10.50/$26.00)	A	S270 Digest 152 (1970) p.83; oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S65 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Status	1970 catalog item; current status unknown	D	S270 inference
Era of manufacture	Listed in 1970 Digest 152	A	S270 Digest 152 (1970) p.83; oem_spec
Cross-links	Families: QMB, QMB-LEGACY		
Not yet documented	current_status, Dimensions, Kit contents, Material		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00058	QMB600T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB600T6

OEM part number	QMB600T6	A	S28 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB366W 600 A switch to 600 Vac Class T fuses (use T6 fuses with standard hp ratings only)	A	same as above
Application	accessory	A	S28 oem_spec
Breaker compatibility	QMB366W	A	S28 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

EDH-SQD-00059	QMB800T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB800T6

OEM part number	QMB800T6	A	S28 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB367W 800 A switch to 600 Vac Class T fuses (standard hp ratings only)	A	same as above
Application	accessory	A	S28 oem_spec
Breaker compatibility	QMB367W	A	S28 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00093	**QMB1IMA_**	QMB Surgelogic IMA TVSS unit QMB1IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00094	**QMB2IMA_**	QMB Surgelogic IMA TVSS unit QMB2IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00095	**QMB3IMA_**	QMB Surgelogic IMA TVSS unit QMB3IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00096	**QMB4IMA_**	QMB Surgelogic IMA TVSS unit QMB4IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00097	**QMB8IMA_**	QMB Surgelogic IMA TVSS unit QMB8IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00098	**TVS12RMU**	Surgelogic TVSS remote monitor TVS12RMU	—	unknown

EDH-SQD-00093	QMB1IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB1IMA

OEM part number	QMB1IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 120/240 Vac 1-phase; MCOV 150	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	120/240 Vac 1-phase; MCOV 150	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00094	QMB2IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB2IMA

OEM part number	QMB2IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00095	QMB3IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB3IMA

OEM part number	QMB3IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00096	QMB4IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB4IMA

OEM part number	QMB4IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00097	QMB8IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB8IMA

OEM part number	QMB8IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00098	TVS12RMU	Square D	spd-kit	STATUS UNKNOWN

Surgelogic TVSS remote monitor TVS12RMU

OEM part number	TVS12RMU	A	S28 Table 15, p. 20; oem_spec
Description	Remote monitor providing TVSS status up to 1000 ft from unit	A	S28 Table 15; oem_spec
Application	accessory	A	S28 oem_spec
Cross-links	Families: QMB		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00002	**QMB221HW**	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00001	**QMB221TW**	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00004	**QMB222HW**	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00003	**QMB222TW**	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00006	**QMB223HW**	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00005	**QMB223TW**	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00007	**QMB224W**	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00008	**QMB225W**	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00009	**QMB225WT3**	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00023	**QMB261HW**	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00022	**QMB261TW**	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00025	**QMB262HW**	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00024	**QMB262TW**	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00027	**QMB263HW**	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00026	**QMB263TW**	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00028	**QMB264W**	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00011	**QMB321HW**	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00010	**QMB321TW**	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00013	**QMB322HW**	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00012	**QMB322TW**	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00015	**QMB323HW**	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00014	**QMB323TW**	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00016	**QMB324W**	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00017	**QMB325W**	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00018	**QMB325WT3**	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00019	**QMB326W**	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00020	**QMB326WT3**	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00021	**QMB327WT3**	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00030	**QMB361HW**	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00029	**QMB361TW**	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00032	**QMB362HW**	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00033	**QMB362T21W**	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00031	**QMB362TW**	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00035	**QMB363HW**	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00036	**QMB363T31W**	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00037	**QMB363T32W**	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00034	**QMB363TW**	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00038	**QMB364W**	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00039	**QMB365W**	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00040	**QMB365WT6**	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	Use 600 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00041	**QMB366W**	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00042	**QMB367W**	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions n **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00044	**QMJ361T**	QMJ fusible switch unit QMJ361T (30-30 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300 **A**	current per 2015 catalog

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00045	**QMJ362T**	QMJ fusible switch unit QMJ362T (60-60 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00047	**QMJ363H**	QMJ fusible switch unit QMJ363H (100-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00046	**QMJ363T**	QMJ fusible switch unit QMJ363T (100-100 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00049	**QMJ364H**	QMJ fusible switch unit QMJ364H (200-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00048	**QMJ364T**	QMJ fusible switch unit QMJ364T (200-200 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00050	**QMJ365**	QMJ fusible switch unit QMJ365 (400 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200 **A**	current per 2015 catalog
EDH-SQD-00051	**QMJ366**	QMJ fusible switch unit QMJ366 (600 A)	600 V Class J fuses only; 200 kA SCCR **A**	current per 2015 catalog

EDH-SQD-00002	**QMB221HW**	Square D	switch-unit	**CURRENT PER 2015 CATAL**

QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)

OEM part number	QMB221HW	**A**	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-blank (single switch in twin frame) A; Blank units cannot be modified to accept a switch interior	**A**	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	**A**	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	**A**	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	**A**	S28 Table 4, pp. 10-11; oem_spec
Poles	2	**A**	same as above
Voltage rating	240 Vac / 250 Vdc	**A**	same as above
Current rating	30-blank (single switch in twin frame) A	**A**	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	**A**	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	**A**	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	**B**	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	**A**	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00001	QMB221TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)

OEM part number	QMB221TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00004	QMB222HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)

OEM part number	QMB222HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00003	QMB222TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)

OEM part number	QMB222TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00006	QMB223HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)

OEM part number	QMB223HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00005	QMB223TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)

OEM part number	QMB223TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00007	QMB224W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)

OEM part number	QMB224W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00008	QMB225W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)

OEM part number	QMB225W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	2	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00009	QMB225WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)

OEM part number	QMB225WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	2	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600); no optional lugs	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00023	QMB261HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)

OEM part number	QMB261HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00022	QMB261TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)

OEM part number	QMB261TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00025	QMB262HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)

OEM part number	QMB262HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00024	QMB262TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)

OEM part number	QMB262TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00027	QMB263HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)

OEM part number	QMB263HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00026	QMB263TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)

OEM part number	QMB263TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00028	QMB264W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)

OEM part number	QMB264W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00011	QMB321HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)

OEM part number	QMB321HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00010	QMB321TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)

OEM part number	QMB321TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00013	QMB322HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)

OEM part number	QMB322HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00012	QMB322TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)

OEM part number	QMB322TW	A	S28 Table 4, pp. 10-11; oem_spec

Alternate / superseded numbers	QMB322TD (Distributor-listed variant; FA119872/FA122651-family FAQs cite 'TD' units as replacements for legacy switches; relation of TD vs TW suffix unknown)	C	S55 alias; distributor
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-60 (twin) A	A	S28 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*What distinguishes QMB322TD from QMB322TW (suffix D vs W)? Is TD the legacy-interior-compatible version?*		

EDH-SQD-00015 QMB323HW Square D switch-unit CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)

OEM part number	QMB323HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00014 QMB323TW Square D switch-unit CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)

OEM part number	QMB323TW	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB323TD (QMB323TD is Schneider's stated replacement for legacy QMB310T; relation to QMB323TW unknown)	C	S55, S64 alias; distributor

Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-100 (twin) A	A	S28 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*Is QMB323TD a variant of QMB323TW for pre-1984 QM/QW interiors?*		

EDH-SQD-00016	**QMB324W**	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)

OEM part number	QMB324W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00017	QMB325W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)

OEM part number	QMB325W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00018	QMB325WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)

OEM part number	QMB325WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600)	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00019	QMB326W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)

OEM part number	QMB326W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00020	QMB326WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)

OEM part number	QMB326WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00021	QMB327WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)

OEM part number	QMB327WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 800 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	800 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00030	QMB361HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)

OEM part number	QMB361HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00029	QMB361TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)

OEM part number	QMB361TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00032	QMB362HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)

OEM part number	QMB362HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00033	QMB362T21W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)

OEM part number	QMB362T21W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R and QMB36R (1 each); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00031	QMB362TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)

OEM part number	QMB362TW	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB362T (FAQ FA88047 names 'QMB362T' (no W) as replacement for QMB3606T; relation to QMB362TW unverified)	C	S66 alias; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-60 (twin) A	A	S28 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00035	QMB363HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)

OEM part number	QMB363HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00036	QMB363T31W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)

OEM part number	QMB363T31W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB36R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 30 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00037	QMB363T32W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)

OEM part number	QMB363T32W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-60 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-60 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB60R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 60 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00034	QMB363TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)

OEM part number	QMB363TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A	S62 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00038	QMB364W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)

OEM part number	QMB364W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00039	QMB365W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)

OEM part number	QMB365W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00040	QMB365WT6	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)

OEM part number	QMB365WT6	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 400 (single, 600 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 600 Vac Class T fuses only	A	S28 Table 4 note h; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	400 (single, 600 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00041	QMB366W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)

OEM part number	QMB366W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings only)	A	S28 Table 4 note e; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1; Cu crimp (2) VCELC05012H1	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00042	QMB367W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)

OEM part number	QMB367W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 800 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions not available on 800 A	A	S28 Table 4 notes d, j; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	800 (single) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A	S63 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00044	QMJ361T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ361T (30-30 A)

OEM part number	QMJ361T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 30-30 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	30-30 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00045	QMJ362T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ362T (60-60 A)

OEM part number	QMJ362T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 60-60 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	60-60 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00047	QMJ363H	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363H (100-blank A)

OEM part number	QMJ363H	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	100-blank A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00046	QMJ363T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363T (100-100 A)

OEM part number	QMJ363T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-100 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	100-100 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VERSA-CRIMP VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00049	QMJ364H	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364H (200-blank A)

OEM part number	QMJ364H	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	200-blank A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00048	QMJ364T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364T (200-200 A)

OEM part number	QMJ364T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-200 (twin) A	A	same as above
Application	Tandem 200 A fusible arrangement uses QMJ364T (600 V, J clips); NEMA 1, 400-1200 A interiors (Tandem statement from Schneider FAQ FA280263 via search summary)	B	S28, S51 oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	200-200 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00050	QMJ365	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ365 (400 A)

OEM part number	QMJ365	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 400 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	400 (single) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-039-50; optional VCELC or VCEL-075-12H1; 1/0-750; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00051	QMJ366	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ366 (600 A)

OEM part number	QMJ366	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 600 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR	A	S28 p. 14; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	600 (single) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	(2) per phase 3/0-600; optional VCELC or VCEL-050-12HS1; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00056	**HRK1020**	QMB Class R fuse kit HRK1020	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, Q A	unknown
EDH-SQD-00052	**HRK30**	QMB Class R fuse kit HRK30	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW A	unknown
EDH-SQD-00055	**QMB100R**	QMB Class R fuse kit QMB100R	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW A	unknown
EDH-SQD-00062	**QMB200EK**	QMB electrical interlock kit QMB200EK	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB3 A	unknown
EDH-SQD-00060	**QMB300EK**	QMB electrical interlock kit QMB300EK	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB22 A	unknown
EDH-SQD-00053	**QMB36R**	QMB Class R fuse kit QMB36R	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW A	unknown
EDH-SQD-00057	**QMB4060R**	QMB Class R fuse kit QMB4060R	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W A	unknown
EDH-SQD-00054	**QMB60R**	QMB Class R fuse kit QMB60R	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363 A	unknown
EDH-SQD-00061	**QMB610EK**	QMB electrical interlock kit QMB610EK	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223T A	unknown
EDH-SQD-00183	**S37444**	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	HD/HG/HJ/HL A	unknown
EDH-SQD-00186	**S37445**	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	JD/JG/JJ/JL A	unknown

EDH-SQD-00056	HRK1020	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit HRK1020

OEM part number	HRK1020	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 600 V and 200 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00052	HRK30	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit HRK30

OEM part number	HRK30	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit (rejection kit), 30 A QMB switches; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00055	QMB100R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB100R

OEM part number	QMB100R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 240 V QMB twin units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00062	QMB200EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB200EK

OEM part number	QMB200EK	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB200EK-1	A	S28 alias; Table 4 note a; oem_spec
	QMB200EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S28 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S28 oem_spec
Breaker compatibility	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB364W, QMJ365	A	S28 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00060	QMB300EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB300EK

OEM part number	QMB300EK	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB300EK-1	A	S28 alias; Table 4 note a; oem_spec
	QMB300EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S28 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S28 oem_spec
Breaker compatibility	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMJ361T	A	S28 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00053	QMB36R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB36R

OEM part number	QMB36R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for QMB switch units (30 A 600 V / 60 A 240 V positions per Table 4); with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMB362T21W, QMB363T31W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00057	QMB4060R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB4060R

OEM part number	QMB4060R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 400 A and 600 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00054	QMB60R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB60R

OEM part number	QMB60R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 60 A 600 V QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363T32W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00061	QMB610EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB610EK

OEM part number	QMB610EK	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB610EK-1	A	S28 alias; Table 4 note a; oem_spec
	QMB610EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S28 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S28 oem_spec
Breaker compatibility	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223TW, QMB223HW, QMB323TW, QMB323HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H	A	S28 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00183	S37444	Square D	breaker-accessory	UNKNOWN

PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37444	A	S112, S187 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	S112 p.125, Table 124; oem_spec
	Terminal kit inserted into H-frame breaker to accept hard-bus connectors (replaces breaker lugs)	A	S187 oem_spec
Application	accessory	A	S112 p.125, Table 124; oem_spec
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	3 per kit	A	same as above
	Supplied inside NQMB2HJ/N150MH/N250MJ kits; also referenced by NQOD main kit and QMBHW/QMBJW	A	S187, S211, S184, S233 oem_spec
Fasteners	tap 1/4-20; screws not included	A	S112 p.125, Table 124; oem_spec
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
	Per terminal kit instruction sheet (not in parent bulletins)	D	oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: QMB, NQ, NQOD, NF · Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR), PowerPacT H-frame (HD/HG/HJ/HL/HR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SQD-00186	S37445	Square D	breaker-accessory	UNKNOWN

PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37445	A	S112, S187 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	S112 p.125, Table 124; oem_spec
	Terminal kit inserted into J-frame breaker to accept hard-bus connectors (replaces breaker lugs)	A	S187 oem_spec
Application	accessory	A	S112 p.125, Table 124; oem_spec
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	3 per kit	A	same as above
	Supplied inside NQMB2HJ/N150MH/N250MJ kits; also referenced by NQOD main kit and QMBHW/QMBJW	A	S187, S211, S184, S233 oem_spec
Fasteners	tap 1/4-20; screws not included	A	S112 p.125, Table 124; oem_spec
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
	Per terminal kit instruction sheet (not in parent bulletins)	D	oem_spec
Status	unknown	D	oem_spec
Cross-links	Families: QMB, NQ, NQOD, NF · Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00119	**4052017302**	QMB363TW Series E1 renewal part: Arc shield	QMB363TW, Series E1 (E01) A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00118	**4052021450**	QMB363TW Series E1 renewal part: Arc suppressor assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00121	**4052021650**	QMB363TW Series E1 renewal part: Load base assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00126	**4052031850**	QMB367W Series E1 renewal part: Arc suppressor assembly	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00128	**4052036750**	QMB367W Series E1 renewal part: Load base assembly	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00127	**4052085601**	QMB367W Series E1 renewal part: Arc shield	QMB367W, Series E1 (E01) **A**	unknown

EDH-SQD-00119	4052017302	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc shield

OEM part number	4052017302	**A**	S62 oem_spec
Description	Arc shield (top cover)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00118	4052021450	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc suppressor assembly

OEM part number	4052021450	**A**	S62 oem_spec
Description	Arc suppressor assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch (twin = per switch)	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00121	4052021650	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base assembly

OEM part number	4052021650	**A**	S62 oem_spec
Description	Load base assembly (includes lugs)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 1 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00126	4052031850	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc suppressor assembly

OEM part number	4052031850	**A**	S63 oem_spec
Description	Arc suppressor assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00128	4052036750	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base assembly

OEM part number	4052036750	**A**	S63 oem_spec
Description	Load base assembly (includes lugs)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00127	4052085601	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc shield

OEM part number	4052085601	**A**	S63 oem_spec
Description	Arc shield	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

4.12 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors)

FAM-SQD-005 · panelboard · aka QM, QM interior, QMB Saflex, QMB Series 1-4, QW, QW interior, Saflex, Saflex panelboard, old style QMB · markings: Square D

Older QMB fusible distribution used in panelboards and switchboards before the current (Series E1) design. Legacy switch catalog numbers had no 'W' suffix (e.g. QMB3606T, QMB310T, QMB3620, QMB3240, QMB2240, QMB3260). Current-design units are retrofitted using plug-on extension assemblies (QMB306EX, QMB306LEX, QMB310EX, QMB310LEX, QMB-320-EX) in QW interiors; QM interiors built 1961-1984 accept some current units directly.

Evidence record from 1970 Digest: QMB panelboards 120/208 V to 600 V AC, 125/250 V DC; units 30-200 A plug-on (31 in W box) and 400/600 A bolt-on (38 in W box); 1200 A lugs / 600 A main switch. Mounting assemblies not required in 31 in wide QMB panels; 'Extension Assemblies' (QMB-xxx-EX) required for 30-200 A units in 38 in wide panels (e.g. QW-6789-7). Blanks QM-1BL/3BL/6BL/9BL, solid neutrals QM-1SN..QM-6SN, 250 V adaptor kits QMB-63-AL, QMB-103-AL, QMB-106-AL.

Attribute	Value	Cl.	Sources
Status	obsolete; old-design blank fillers obsolete with no replacement	**A**	S61 oem_spec
Era of manufacture	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches (From several Schneider FAQs (FA119872, FA88047, FA127541, FA100372))	**A**	same as above
Saflex	Schneider FAQ refers to 'an old QMB Saflex Panelboard' (QW type 38 in. box with flatwise bus needs QMB310EX for current CB units); surplus listings label QMB3606T Series 2/4 units 'QMB Saflex' ('Saflex' = legacy QMB panelboard trade name per OEM FAQ; surplus label corroborates)	**A**	S73, S74 oem_spec
Ratings 1970	Units 30-200 A 2/3-pole plug-on; 400/600 A 2/3-pole bolt-on; mains 1200 A lugs / 600 A switch; boxes 31 in W x ~10-3/4 in D and 38 in W x ~14-3/4 in D (Depth fractions OCR)	**B**	S270 Digest 152 (1970) p.55; oem_spec

Key documents: S61 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T; S64 FA119872 FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch; S65 FA127541 FAQ FA127541: replacement for a QMB3620; S66 FA88047 FAQ FA88047: replacement for a QMB3606T; S67 FA100372 FAQ FA100372: replacement for a QMB3260 600 A QMB switch; S68 FA128647 FAQ FA128647: replacement parts for a QMB3240; S69 FA122651 FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch; S72 FA113960 FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4; S73 FA118445 FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex pane; S74 MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series ; S270 Digest 152 Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution P
Also fits this family (entry printed elsewhere): QMB306EX, QMB310EX, QMB320EX, PK32DGTA

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00568	**QMB-206-EX**	Square D QMB 2-pole extension assembly, 6 in unit (600 V, 38 in wide QMB)	—	1970 catalog item; current status unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00569	**QMB-210-EX**	Square D QMB 2-pole extension assembly, 7-1/2 in unit (600 V, 38 in wide QMB)	—	1970 catalog item; current status unknown
EDH-SQD-00570	**QMB-220-EX**	Square D QMB 2-pole extension assembly, 9 in unit (600 V, 38 in wide QMB)	—	1970 catalog item; current status unknown

EDH-SQD-00568	QMB-206-EX	Square D	branch-connector-kit	1970 CATALOG ITEM; CUR

Square D QMB 2-pole extension assembly, 6 in unit (600 V, 38 in wide QMB)

OEM part number	QMB-206-EX	A	S270 oem_spec
Description	Extension assembly, two pole, unit height 6 in, 600 V; required to mount 30-200 A QMB units in 38 in wide QMB panelboards	A	S270 Digest 152 (1970) p.83; oem_spec
Application	branch (30-200 A QMB unit in 38 in wide panel)	A	S270 Digest 152 (1970) p.83, 85; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*3-pole counterpart is QMB306EX (already catalogued)*		

EDH-SQD-00569	QMB-210-EX	Square D	branch-connector-kit	1970 CATALOG ITEM; CUR

Square D QMB 2-pole extension assembly, 7-1/2 in unit (600 V, 38 in wide QMB)

OEM part number	QMB-210-EX	A	S270 oem_spec
Description	Extension assembly, two pole, unit height 7-1/2 in, 600 V; required to mount 30-200 A QMB units in 38 in wide QMB panelboards	A	S270 Digest 152 (1970) p.83; oem_spec
Application	branch (30-200 A QMB unit in 38 in wide panel)	A	S270 Digest 152 (1970) p.83, 85; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*3-pole counterpart is QMB310EX (already catalogued)*		

EDH-SQD-00570	QMB-220-EX	Square D	branch-connector-kit	1970 CATALOG ITEM; CUR

Square D QMB 2-pole extension assembly, 9 in unit (600 V, 38 in wide QMB)

OEM part number	QMB-220-EX	A	S270 oem_spec
Description	Extension assembly, two pole, unit height 9 in, 600 V; required to mount 30-200 A QMB units in 38 in wide QMB panelboards	A	S270 Digest 152 (1970) p.83; oem_spec
Application	branch (30-200 A QMB unit in 38 in wide panel)	A	S270 Digest 152 (1970) p.83, 85; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*3-pole counterpart is QMB320EX (already catalogued)*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00112	**QMB3300LA**	QMB circuit breaker unit QMB3300LA	—	unknown
EDH-SQD-00111	**QMB3400LA**	QMB circuit breaker unit QMB3400LA	—	unknown

EDH-SQD-00112	QMB3300LA	Square D	breaker-mounting-kit	STATUS UNKNOWN

QMB circuit breaker unit QMB3300LA

OEM part number	QMB3300LA	A	S73 oem_spec
Description	QMB circuit breaker unit, 3P 300 A (LA frame) for old QMB Saflex panelboards; not for QM panelboards made before 1961; QMB310EX needed for QW 38 in. flatwise-bus panels	A	same as above
Application	branch	A	same as above
Breaker frame	LA (implied by 'LA' suffix)	C	S73 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

EDH-SQD-00111	QMB3400LA	Square D	breaker-mounting-kit	STATUS UNKNOWN

QMB circuit breaker unit QMB3400LA

OEM part number	QMB3400LA	A	S67 oem_spec
Description	QMB circuit breaker unit, 3P 400 A (LA frame), 7.5 in. mounting space; replacement for legacy QMB3240/QMB2240/QMB3260/QMB3640; fits QMB interiors 1961-Oct 1984 (QMB310EX needed in QW)	A	S67, S68, S69, S61 oem_spec
Application	branch	A	S67 oem_spec
Breaker frame	LA (implied by 'LA' suffix)	C	S67 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00561	**QM-1SN**	Square D QMB solid neutral assembly 200 A	—	1970 catalog item; current status unknown
EDH-SQD-00562	**QM-2SN**	Square D QMB solid neutral assembly 200 A	—	1970 catalog item; current status unknown
EDH-SQD-00563	**QM-4SN**	Square D QMB solid neutral assembly 400 A	—	1970 catalog item; current status unknown
EDH-SQD-00564	**QM-6SN**	Square D QMB solid neutral assembly 600 A	—	1970 catalog item; current status unknown

EDH-SQD-00561	QM-1SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 200 A

OEM part number	QM-1SN	A	S270 oem_spec
Description	QMB solid neutral assembly 200 A for interior QMB-1832-2 only; mounted in main lugs compartment	A	S270 Digest 152 (1970) p.80; oem_spec
Current rating	200 A	A	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		
Open question	*OCR reads 'COM-1 SN' for QM-1SN; confirm*		

EDH-SQD-00562	QM-2SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 200 A

OEM part number	QM-2SN	A	S270 oem_spec
Description	QMB solid neutral assembly 200 A ; mounted in main lugs compartment	A	S270 Digest 152 (1970) p.80; oem_spec
Current rating	200 A	A	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00563	QM-4SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 400 A

OEM part number	QM-4SN	A	S270 oem_spec
Description	QMB solid neutral assembly 400 A ; mounted in main lugs compartment	A	S270 Digest 152 (1970) p.80; oem_spec
Current rating	400 A	A	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00564	QM-6SN	Square D	neutral-assembly	1970 CATALOG ITEM; CUR

Square D QMB solid neutral assembly 600 A

OEM part number	QM-6SN	A	S270 oem_spec
Description	QMB solid neutral assembly 600 A ; mounted in main lugs compartment	A	S270 Digest 152 (1970) p.80; oem_spec
Current rating	600 A	A	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00557	**QM-1BL**	Square D QMB (QM interior) blank, 1-1/2 in	—	1970 catalog item; current status unknown
EDH-SQD-00558	**QM-3BL**	Square D QMB (QM interior) blank, 3 in	—	1970 catalog item; current status unknown
EDH-SQD-00559	**QM-6BL**	Square D QMB (QM interior) blank, 6 in	—	1970 catalog item; current status unknown
EDH-SQD-00560	**QM-9BL**	Square D QMB (QM interior) blank, 9 in	—	1970 catalog item; current status unknown
EDH-SQD-00113	**QW1BL**	Legacy QW interior blank filler QW1BL	—	obsolete, NLA, no replacement; Schneider suggests local shee
EDH-SQD-00114	**QW3BL**	Legacy QW interior blank filler QW3BL	—	obsolete, NLA, no replacement; Schneider suggests local shee

EDH-SQD-00557	QM-1BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 1-1/2 in

OEM part number	QM-1BL	A	S270 oem_spec
Description	QMB Table 3 blank 1-1/2 in high	A	S270 Digest 152 (1970) p.80; oem_spec
Dimensions	1-1/2 in high (OCR)	B	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00558	QM-3BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 3 in

OEM part number	QM-3BL	A	S270 oem_spec
Description	QMB Table 3 blank 3 in high	A	S270 Digest 152 (1970) p.80; oem_spec
Dimensions	3 in high (OCR)	B	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00559	QM-6BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 6 in

OEM part number	QM-6BL	A	S270 oem_spec
Description	QMB Table 3 blank 6 in high	A	S270 Digest 152 (1970) p.80; oem_spec
Dimensions	6 in high (OCR)	B	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00560	QM-9BL	Square D	filler-plate	1970 CATALOG ITEM; CUR

Square D QMB (QM interior) blank, 9 in

OEM part number	QM-9BL	A	S270 oem_spec
Description	QMB Table 3 blank 9 in high	A	S270 Digest 152 (1970) p.80; oem_spec
Dimensions	9 in high (OCR)	B	S270 oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Material		

EDH-SQD-00113	QW1BL	Square D	filler-plate	OBSOLETE, NLA, NO REPL

Legacy QW interior blank filler QW1BL

OEM part number	QW1BL	A	S68, S69 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 1.5 in. (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	B	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	A	S68, S69, S67 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S67 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

EDH-SQD-00114	QW3BL	Square D	filler-plate	OBSOLETE, NLA, NO REPL

Legacy QW interior blank filler QW3BL

OEM part number	QW3BL	A	S68, S69 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 3 in. (FAQ FA128647: one QW1BL + one QW3BL fill 4.5 in.) (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	B	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	A	S68, S69, S67 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	A	S67 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00566	**QMB-103-AL**	Square D QMB adaptor kit, convert one 100 A switch to 30 A (250 V units only)	—	1970 catalog item; current status unknown
EDH-SQD-00567	**QMB-106-AL**	Square D QMB adaptor kit, convert one 100 A switch to 60 A (250 V units only)	—	1970 catalog item; current status unknown
EDH-SQD-00107	**QMB306LEX**	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00109	**QMB310LEX**	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00565	**QMB-63-AL**	Square D QMB adaptor kit, convert one 60 A switch to 30 A (250 V units only)	—	1970 catalog item; current status unknown

EDH-SQD-00566	QMB-103-AL	Square D	conversion-kit	1970 CATALOG ITEM; CUR

Square D QMB adaptor kit, convert one 100 A switch to 30 A (250 V units only)

OEM part number	QMB-103-AL	A	S270 oem_spec
Description	Adaptor kit - 250 V units only - to convert one switch from 100 A to 30 A, $7.30	A	S270 Digest 152 (1970) p.80; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00567	QMB-106-AL	Square D	conversion-kit	1970 CATALOG ITEM; CUR

Square D QMB adaptor kit, convert one 100 A switch to 60 A (250 V units only)

OEM part number	QMB-106-AL	A	S270 oem_spec
Description	Adaptor kit - 250 V units only - to convert one switch from 100 A to 60 A, $7.30	A	S270 Digest 152 (1970) p.80; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

EDH-SQD-00107	QMB306LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)

OEM part number	QMB306LEX (Seen via search summary of Schneider FAQ only)	C	S61 oem_spec
Description	Plug-on extension kit for QW interiors (flat bus) used with QMB321T / QMB322TD replacing QMB303T / QMB306T	C	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S61 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00109	QMB310LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)

OEM part number	QMB310LEX	A	S64 oem_spec
Description	Plug-on extension assembly for QW interiors with flat bus bars; used with QMB323TD replacing QMB310T / QMB210T	A	S64, S72 oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S64, S72 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00565	QMB-63-AL	Square D	conversion-kit	1970 CATALOG ITEM; CUR

Square D QMB adaptor kit, convert one 60 A switch to 30 A (250 V units only)

OEM part number	QMB-63-AL	A	S270 oem_spec
Description	Adaptor kit - 250 V units only - to convert one switch from 60 A to 30 A, $7.30	A	S270 Digest 152 (1970) p.80; oem_spec
Status	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QMB-LEGACY		
Not yet documented	current_status, Dimensions, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00101	**QMB210T**	Legacy QMB switch QMB210T (obsolete)	—	obsolete
EDH-SQD-00104	**QMB2240**	Legacy QMB switch QMB2240 (obsolete)	—	obsolete
EDH-SQD-00135	**QMB303T**	Legacy QMB switch QMB303T (obsolete)	—	obsolete
EDH-SQD-00136	**QMB306T**	Legacy QMB switch QMB306T (obsolete)	—	obsolete
EDH-SQD-00100	**QMB310T**	Legacy QMB switch QMB310T (obsolete)	—	obsolete

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00117	**QMB323TD**	QMB replacement switch QMB323TD for legacy interiors	—	unknown
EDH-SQD-00103	**QMB3240**	Legacy QMB switch QMB3240 (obsolete)	—	obsolete
EDH-SQD-00105	**QMB3260**	Legacy QMB switch QMB3260 (obsolete)	—	obsolete
EDH-SQD-00099	**QMB3606T**	Legacy QMB switch QMB3606T (obsolete)	—	obsolete
EDH-SQD-00102	**QMB3620**	Legacy QMB switch QMB3620 (obsolete)	—	obsolete
EDH-SQD-00115	**QMB362T**	QMB replacement switch QMB362T for legacy interiors	—	unknown
EDH-SQD-00116	**QMB364**	QMB replacement switch QMB364 for legacy interiors	—	unknown
EDH-SQD-00134	**QMB3640**	Legacy QMB switch QMB3640 (obsolete)	—	obsolete

EDH-SQD-00101 **QMB210T** Square D other **OBSOLETE**

Legacy QMB switch QMB210T (obsolete)

OEM part number	QMB210T	**A**	S72 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	**A**	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	**A**	same as above
Status	obsolete	**A**	same as above
Replacement / successor	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	**A**	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00104 **QMB2240** Square D other **OBSOLETE**

Legacy QMB switch QMB2240 (obsolete)

OEM part number	QMB2240	**A**	S69 oem_spec
Description	Legacy QMB fusible switch 2P 400 A, Series 1-4	**A**	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	**A**	same as above
Status	obsolete	**A**	same as above
Replacement / successor	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	**A**	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00135 **QMB303T** Square D other **OBSOLETE**

Legacy QMB switch QMB303T (obsolete)

OEM part number	QMB303T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	**C**	S61 oem_spec
Description	Legacy QMB fusible switch	**D**	S61 inference
Status	obsolete	**C**	S61 oem_spec
Replacement / successor	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	**C**	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00136 **QMB306T** Square D other **OBSOLETE**

Legacy QMB switch QMB306T (obsolete)

OEM part number	QMB306T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	**C**	S61 oem_spec
Description	Legacy QMB fusible switch, Series 1	**D**	S61 inference
Status	obsolete	**C**	S61 oem_spec
Replacement / successor	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	**C**	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00100	QMB310T	Square D	other	OBSOLETE

Legacy QMB switch QMB310T (obsolete)

OEM part number	QMB310T	A	S64 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00117	QMB323TD	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB323TD for legacy interiors

OEM part number	QMB323TD	A	S64 oem_spec
Description	Replacement switch for QMB310T/QMB210T on QM (31 in.) 1961-Oct 1984 or QW pre-1984 interiors; use outside poles	A	S64, S72, S55 oem_spec
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB323TD a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00103	QMB3240	Square D	other	OBSOLETE

Legacy QMB switch QMB3240 (obsolete)

OEM part number	QMB3240	A	S68 oem_spec
Description	Legacy QMB branch switch, occupied 12 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00105	QMB3260	Square D	other	OBSOLETE

Legacy QMB switch QMB3260 (obsolete)

OEM part number	QMB3260	A	S67 oem_spec
Description	Legacy QMB fusible switch 600 A (pre-1984), occupied 15 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00099	QMB3606T	Square D	other	OBSOLETE

Legacy QMB switch QMB3606T (obsolete)

OEM part number	QMB3606T	A	S66 oem_spec
Description	Legacy QMB fusible twin switch unit, 3P 600 V 60 A (Series 1-4 'Saflex')	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		
Open question	*Surplus listings disagree on QMB3606T series (Series 2 vs Series 4)*		

EDH-SQD-00102	QMB3620	Square D	other	OBSOLETE

Legacy QMB switch QMB3620 (obsolete)

OEM part number	QMB3620	A	S65 oem_spec
Description	Legacy QMB fusible switch (pre-1984 panelboards)	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00115	QMB362T	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB362T for legacy interiors

OEM part number	QMB362T	A	S66 oem_spec
Description	Replacement QMB fusible switch named for QMB3606T (QM 1961-1984, or QW with QMB306EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB362T a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00116	QMB364	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB364 for legacy interiors

OEM part number	QMB364	A	S65 oem_spec
Description	Replacement switch named for QMB3620 (1961-1984; QW needs QMB-320-EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB364 a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00134	QMB3640	Square D	other	OBSOLETE

Legacy QMB switch QMB3640 (obsolete)

OEM part number	QMB3640 (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S61 oem_spec
Description	Legacy QMB fusible switch (3P 400 A implied by numbering - unverified)	D	S61 inference
Status	obsolete	C	S61 oem_spec
Replacement / successor	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

4.13 QED-2 — Power-Style QED-2 Switchboard

FAM-SQD-001 · switchboard · aka Power-Style QED-2, QED 2, QED-2 Series 2, QED-2/S, QED2 · markings: Schneider Electric, Square D

Free-standing UL 891 low-voltage switchboard, 91.5 in. high with base channels, front or front-and-rear accessible, NEMA 1 or 3R. Distribution is by group-mounted I-Line plug-on breaker sections (interiors up to 3000 A single-row / 2000 A double-row) or QMB/QMJ fusible switch sections, plus individually mounted PowerPact M/P/R, Masterpact NW or Bolt-Loc BP mains/feeders. Adding sections later requires the through-bus construction with splice-plate extensions; through bus sits at top, middle or bottom at 19.5, 27.5 or 36.0 in. from the front.

Attribute	Value	Cl.	Sources
Status	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01) (Status inferred from current document listings; documents themselves not retrieved)	B	S51, S57 oem_spec
Era of manufacture	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	A	S26 p. 1, p. 9; oem_spec
Voltage rating	600 Vac or 250 Vdc max	A	S26 p. 3; oem_spec
Main ampacity	Sections to 5000 A horizontal bus, 3000 A vertical bus; single mains to 5000 A; six subdivision mains to 4000 A; individually mounted feeders to 4000 A	A	same as above
Branch breakers accepted	Group-mounted I-Line: FA, FH, HD, HG, HJ, HL, QB, QD, QG, QJ, JD, JG, JJ, JL, LA, LH, LC, LI, FI, KI, MG, MJ, PG, PK, PJ, PL (and -C 100% variants), RG-C, RK-C, RJ-C, RL-C; group-mounted QMB/QMJ fusible switches 30-1200 A	A	S26 pp. 22, 29; oem_spec
Dimensions	Height 91.5 in. (2324 mm) with base channels; section widths 12, 24, 30, 36, 42, 48, 54 in.; frame depths 24, 36, 48, 54, 60 in.; NEMA 3R adds 11.50 in. front and 0.50 in. rear	A	S26 pp. 3, 24; oem_spec
I line interiors	Full-height I-Line distribution: 2000 A interiors (36/42/48 in. W; mounting space 54 or 72 in.) and 3000 A interior (54 in. W, L=72 in., R=40.5 in., min depth 36 in.)	A	S26 p. 23; oem_spec
I line section limits	Max I-Line interior 3000 A, single row only; double-row interiors 2000 A max; no 4000 A I-Line section (Schneider FAQ seen via search summary)	B	S51 oem_spec
Qmb sections	Group-mounted QMB switch sections: 36 in. W max switch 400 A; 42 in. W 1200 A; 48 in. W (2) 1200 A; interior 2000 A (36/42 in.) or 3000 A (48 in.); 42 in. main switch connector access space	A	S26 pp. 25, 29; oem_spec
Qmb mount height	QED-2 Series 2 eliminated the 72 in. QMB switch mounting height option; 63 in. is standard (Schneider FAQ via search summary)	B	S51 oem_spec
Through bus	Connect-to-existing data needed: factory order number, equipment type (QED-2/S, QED-2 Series 2, QED-3, QED-4, special), through-bus location top/middle/bottom, bus bar size 1.5 or 2.0 in. if <=2000 A, through-bus depth 19.5/27.5/36.0 in.	A	S26 p. 9; oem_spec
Splice	Stand-alone QED switchboards have no through-bus feature; only boards built with through-bus construction and splice-plate extensions can have sections added	A	S48 oem_spec
Bottom	All QED-2 switchboards (NEMA 1 or 3R) ship with bottom open; bottom closure plates are an order adder	A	S49 oem_spec
OEM instruction document	80043-055-13 Section 4: indoor shipping sections joined with six 3/8-16 x 1 in bolts (provided) through existing holes in front and rear vertical corner channels; formed base channels with 0.75 in (19 mm) clearance holes in each corner (anchor hardware not furnished); through-bus splice connectors and hardware shipped with each shipping split, torqued per Section 9; on bus mounted front and rear of an insulating tube the U-shaped copper splice connector is centred on the tube with its slot pointing DOWN (Fig.14); ground bus splice with 1/4-20 thread-forming hardware (supplied) torqued to 100 lb-in (11 N-m) (read through ManualsLib text rendering)	B	S304 printed pp.17, 24-25 (viewer 19, 26-27); oem_spec
Torque values	Section 9 (printed p.51) Table 6 Incoming, branch and neutral lugs by socket size across flats: 1/4 in 180 lb-in (20 N-m); 5/16 in 250 lb-in (28 N-m); 3/8 in 340 lb-in (38 N-m); 1/2 in 450 lb-in (51 N-m); lugs so marked require 620 lb-in (70 N-m). Printed p.52 bus/hardware tables: 1/4 in 50-75 lb-in (6-8 N-m); 5/16 in 80-125 (9-14); 3/8 in 175-225 (20-25); 1/2 in 250-350 (28-40); one 1/2 in hardware row 720-840 lb-in (81-95 N-m); square-head (tee) bolt and (2) conical-washer tables by across-flats size (e.g. 0.87 in 250-280 lb-in; 1.00 in 130-150 lb-in; 1.25 in 450-550 lb-in; 0.90 in 145-160 lb-in) (Row-to-hardware pairing (carriage bolt / hex bolt / Keps nut / conical washer) not legible in text rendering; FAQ FA272134 points to pp.53-54 of 80043-055-12 for the same tables)	B	S304 printed pp.51-52 (viewer 53-54); oem_spec
Maintenance	Bus bar joints need no maintenance and must not be retightened after pre-energizing checkout; do not sand or remove plating on bus, splice bars or lugs (replace damaged parts); clean with Lectra-Clean (CRC); switch blade/jaw grease BG20 (Dow Corning) cat. SWLUB for Bolt-Loc, QMB, QMJ and QMQB (Canada only) switches; I-Line plug-on connections electric joint compound PJC7201; Masterpact drawout connections compound S48899 only	B	S304 printed p.41 (viewer 43); oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), LC (I-Line, 600 A), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), QMB circuit breaker units (H-, J-, L-frame), R-frame RG/RJ/RK/RL (I-Line)

Key documents: S26 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S48 FA121592 FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections i; S49 FA308905 FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?; S51 FAQ000279508

/ FAQ000257217 Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line se; S57 2700CT1601 OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Ca; S58 80043-055-16 Power-Style QED-2 Switchboards Instruction Bulletin; S304 80043-055-13 Power-Style QED-2 Switchboards Instruction Bulletin (English section, (c)1988-2018)
Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMJ361T, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H, QMJ365, QMJ366, HRK30, QMB36R, QMB60R, QMB100R, HRK1020, QMB4060R, QMB600T6, QMB800T6, QMB300EK, QMB610EK, QMB200EK, 40251-016-51, 40256-034-50, 40251-018-50, 40256-014-50, 40251-162-50, 40560-270-50, 40256-039-50, VCEL030516H1, VCEL05012H1, VCEL07512H1, VCEL02114S1, VCELC02114S1, VCELC03038H1, VCELC05012H1, VCELC07512H1, VCEL06012H1, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, QMB1IMA_, QMB2IMA_, QMB3IMA_, QMB4IMA_, QMB8IMA_, 4052021450, 4052017302, 2330241601, 4052021650, 4020506501, 4028343750, 4025101851, 2342702001, 4052031850, 4052085601, 4052036750, 2142720241, 4052098601, 4028343550, 2342702400, 4028343250, 21593-20100, 21590-20241, 2152620361

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00152	**S33930**	I-Line plug-on sub-feed lug kit S33930	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU l A	current (listed in 2026 Digest)
EDH-SQD-00149	**SL1200P5**	I-Line plug-on sub-feed lug kit SL1200P5	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU 8 A	current (listed in 2026 Digest)
EDH-SQD-00150	**SL1200P6**	I-Line plug-on sub-feed lug kit SL1200P6	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A ma A	current (listed in 2026 Digest)
EDH-SQD-00151	**SL1200P7**	I-Line plug-on sub-feed lug kit SL1200P7	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A ma A	current (listed in 2026 Digest)
EDH-SQD-00146	**SL250**	I-Line plug-on sub-feed lug kit SL250	Protected by: HD/HG/HJ/HL, JD/JG/JJ/JL (HR/JR at reduced rating); pane A	current (listed in 2026 Digest)
EDH-SQD-00147	**SL400**	I-Line plug-on sub-feed lug kit SL400	Protected by: H, J, LA/LH, LG/LJ/LL/LR (L 400 A max); panel types HCP, A	current (listed in 2026 Digest)
EDH-SQD-00148	**SL800M5**	I-Line plug-on sub-feed lug kit SL800M5	Protected by: H, J, LA/LH, M, P, L; panel types HCJ, HCP, HCP-SU, HCR- A	current (listed in 2026 Digest)

EDH-SQD-00152	S33930	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit S33930

OEM part number	S33930	A	S27, S177 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A (100% rated, for R-frame applications), terminal wire range (4) 3/0-600 kcmil Al/Cu	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed for 100% rated ('R' frame) applications; also listed on HCR-U interior page	A	S27 pp. 10, 21; oem_spec
	sub-feed	A	S177 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU limited to 800 A)	A	S177 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	1200 A (100% rated, for R-frame applications)	A	S27 p. 10; oem_spec
	1200 A	A	S177 p. 9-57; oem_spec
Kit contents	Field-installable lug kits AL1200R53K (Al/Cu) or CU1200R53K (Cu) listed for S33930	A	S305 p.3; oem_spec
Dimensions	Mounting height 15 in. (381 mm); lug wire (4) #3/0-600 kcmil	A	S177 p. 9-57; oem_spec
Torque values	Optional lugs AL1200R53K / CU1200R53K: (4) #3/0-600 kcmil (Al/Cu resp. Cu), strip 1-3/16 in (30 mm), wire binding screw 450 lb-in (50 N-m), lug mounting screw 180 lb-in (20 N-m)	A	S305 p.3 Lug Information table; oem_spec

OEM instruction document	48049-250-01 (05/2001): place on I-Line pan with jaws pushed against bus; rack onto bus with long-shank screwdrivers alternately in top and bottom slots until jaws fully engage; tighten four screws (A) firmly without bending mounting bracket; Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201	A	S305 pp.1-2; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
Cross-links	Families: QED-2, I-LINE		
Requires	AL1200R53K (EDH-SQD-00573)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material, mounting height (except SL400)		

EDH-SQD-00149 SL1200P5 Square D sub-feed-lug-kit CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit SL1200P5

OEM part number	SL1200P5	A	S27, S177 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (4) 3/0 AWG-500 kcmil	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
	sub-feed	A	S177 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, M, P, R, L; panel types HCR-U (HCP/HCP-SU 800 A max)	A	S177 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	1200 A	A	S27, S177 p. 10; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (4) #3/0-500 kcmil	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00150	SL1200P6	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit SL1200P6

OEM part number	SL1200P6	A	S27, S177 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 350-600 kcmil	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
	sub-feed	A	S177 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A max)	A	S177 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	1200 A	A	S27, S177 p. 10; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (3) 350-600 kcmil	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00151	SL1200P7	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit SL1200P7

OEM part number	SL1200P7	A	S27, S177 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 3/0 AWG-750 kcmil (750 kcmil compact Al only)	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 1200 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
	sub-feed	A	S177 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: same as SL1200P5; panel types HCR-U (HCP/HCP-SU 800 A max)	A	S177 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	1200 A	A	S27, S177 p. 10; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (3) #3/0-750 kcmil	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00146	SL250	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit SL250

OEM part number	SL250	A	S27, S177 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 250 A, terminal wire range (1) #4-300 kcmil Al/Cu	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 250 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
	sub-feed	A	S177 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: HD/HG/HJ/HL, JD/JG/JJ/JL (HR/JR at reduced rating); panel types HCJ, HCP, HCP-SU, HCR-U	A	S177 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	250 A	A	S27, S177 p. 10; oem_spec
Dimensions	Mounting height 5 in. (114 mm); lug wire (1) #4 AWG-300 kcmil	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

EDH-SQD-00147	SL400	Square D	sub-feed-lug-kit	CURRENT (LISTED IN 202

I-Line plug-on sub-feed lug kit SL400

OEM part number	SL400	A	S27, S177, S270 Plug-On Lugs Terminal Data, p. 10; oem_spec
Alternate / superseded numbers	SL-400 (1970 Digest spelling)	A	S270 alias; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 400 A, terminal wire range (1) #1-600 kcmil or (2) #1-250 kcmil Al/Cu	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 400 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
	Sub-feed lugs 400 A; plug onto bus bars in same manner as branch circuit breaker	A	S270 Digest 152 (1970) p.73; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
	sub-feed	A	S177, S270 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, LG/LJ/LL/LR (L 400 A max); panel types HCP, HCP-SU, HCR-U wide side only (not HCJ - wire bending space)	A	S177 p. 9-57; oem_spec
	Distributor: for HCP/HCP-SU/HCR-U panelboards; LA/LH frame space	C	S56 distributor
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	400 A	A	S27, S177, S270 p. 10; oem_spec
Dimensions	Mounting height 6 in. (152 mm); lug wire (1) #1 AWG-600 kcmil or 2 #1-250 kcmil	A	S177 p. 9-57; oem_spec
	Bar length 6.0 in (152 mm); destination HCP 86.0 in x 42.008 in and HCP-SU 86.0 in x 26.0 in panelboards; package 14.7 x 7.5 x 6.8 in, 10.05 lb	A	S308 data sheet p.1; oem_spec
	Occupies 6 in. of mounting space	C	S56 distributor
Fasteners	Do not adjust jaws; do not remove joint compound; if necessary use Square D joint compound PJC7201; tools: torque wrench with Torx and hex bits	A	S306 p.2; oem_spec
Torque values	Wire size and conductor torque per faceplate label / optional lug instructions (not tabulated in IB); strip length 1-3/8 in (35 mm)	A	S306, S307 48040-651-03 p.4; 2006 ed. p.3; oem_spec

OEM instruction document	48040-651-03 Rev.01 (09/2025): sub-feed lug placed on I-Line pan with hold-down tabs fully inserted in pan slots, jaw end pushed against bus; racked onto bus with two long-shank screwdrivers (upper and bottom slots) until jaws fully engage and the retaining screw aligns with pan locking holes; retaining screws (A) tightened fully without bending the mounting bracket; lug cover (B) removed for cabling and reinstalled	A	S306 pp.2-4; oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-57; oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400)		

EDH-SQD-00148 **SL800M5** Square D sub-feed-lug-kit **CURRENT (LISTED IN 202**

I-Line plug-on sub-feed lug kit SL800M5

OEM part number	SL800M5	A	S27, S177 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 800 A, terminal wire range (3) 3/0 AWG-500 kcmil	A	S27 p. 10; oem_spec
	I-Line plug-on 3-pole sub-feed lug kit, 800 A (plugs on like a branch breaker)	A	S177 p. 9-57, 9-59; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
	sub-feed	A	S177 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Protected by: H, J, LA/LH, M, P, L; panel types HCJ, HCP, HCP-SU, HCR-U	A	S177 p. 9-57; oem_spec
	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Poles	3	A	S177 p. 9-57; oem_spec
Current rating	800 A	A	S27, S177 p. 10; oem_spec
Dimensions	Mounting height 9 in. (229 mm); lug wire (3) #3/0-500 kcmil	A	S177 p. 9-57; oem_spec
Status	current (listed in 2026 Digest)	A	same as above
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Kit contents, Material, mounting height (except SL400), Torque values		

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00082	**AL150HD**	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	HD/HG 15-150 A A	unknown
EDH-SQD-00083	**AL175JD**	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	JD/JG 150-175 A A	unknown
EDH-SQD-00084	**AL250JD**	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	JD/JG 200-250 A A	unknown
EDH-SQD-00085	**AL400LA**	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	LA 125-400 A A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00086	**CU150HD**	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	HD/HG 15-150 A A	unknown
EDH-SQD-00087	**CU250JD**	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	JD/JG 150-250 A A	unknown
EDH-SQD-00088	**CU400LA**	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	LA 125-400 A A	Still listed in 2016 Digest Table 3.70

EDH-SQD-00082 **AL150HD** Square D lug-kit **STATUS UNKNOWN**

Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)

OEM part number	AL150HD	A	S28, S112 Tables 10/11, p. 18; oem_spec

Description	Standard aluminum mechanical lug kit; wire range (1) #14-3/0 Al/Cu	A	S28 p. 18; oem_spec
	Al lugs for use with Al or Cu wire; standard lug for HD/HG/HJ/HL 15-150 A	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Installation location	line and/or load terminals (lay on top of breaker terminal, snap into insulating retainer)	A	same as above
Breaker compatibility	HD/HG 15-150 A	A	S28 p. 18; oem_spec
	HD, HG, HJ, HL 15-150 A (standard)	A	S112 p.124, Table 120; oem_spec
Current rating	15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28, S112 p. 18; oem_spec
Wire range	(1) 14-3/0 AWG Al or Cu	A	S112 p.124, Table 120; oem_spec
Material	tin-plated aluminum (catalog: Al/Cu lugs are tin-plated Al)	A	same as above
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37446 (EDH-SQD-00245), S37447 (EDH-SQD-00246)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		
Open question	*Which short lug shield (S37446 60 A / S37447 150 A) applies when AL150HD is used on 60 A HD frames?*		

EDH-SQD-00083	**AL175JD**	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)

OEM part number	AL175JD	A	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1/0-4/0 Al/Cu	A	S28 p. 18; oem_spec
	Al lugs for use with Al or Cu wire; standard for JD/JG/JJ/JL 150-175 A	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 150-175 A	A	S28 p. 18; oem_spec
	JD, JG, JJ, JL 150-175 A (standard)	A	S112 p.124, Table 120; oem_spec
Current rating	150-175 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28 p. 18; oem_spec
	3 lugs per kit (set of 3)	A	S112 p.124, Table 120; oem_spec
Wire range	(1) 4-4/0 AWG Al or Cu	A	same as above
Material	aluminum (data sheet: Material Aluminium)	A	same as above
Identification features	Data sheet: mounting by screws; line and load (upstream/downstream); GTIN 785901686569	A	S113 p.1; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37448 (EDH-SQD-00247)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00084	AL250JD	Square D	lug-kit	STATUS UNKNOWN

Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)

OEM part number	AL250JD	A	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #3/0-350 kcmil Al/Cu	A	S28 p. 18; oem_spec
	Al lugs for Al or Cu wire; standard for JD/JG/JJ/JL 200-250 A, optional for 150-175 A	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 200-250 A	A	S28 p. 18; oem_spec
	JD, JG, JJ, JL 200-250 A standard; 150-175 A optional	A	S112 p.124, Table 120; oem_spec
Current rating	150-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28, S112 p. 18; oem_spec
Wire range	(1) 3/0 AWG-350 kcmil Al or Cu	A	S112 p.124, Table 120; oem_spec
Material	tin-plated aluminum	A	same as above
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37448 (EDH-SQD-00247)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		
Open question	*Distributor (Stanion) lists AL250JD wire range as 8-1/0 AWG Al / 14-1/0 Cu, contradicting OEM 3/0-350 kcmil; distributor likely in error.*		

EDH-SQD-00085	AL400LA	Square D	lug-kit	STILL LISTED IN 2016 D

Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)

OEM part number	AL400LA	A	S28, S114 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Al/Cu	A	S28 p. 18; oem_spec
	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	S114 p.3-28, Table 3.88; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S114 p.3-28, Table 3.88; oem_spec
Breaker compatibility	LA 125-400 A	A	S28 p. 18; oem_spec
	Q4, LA, LH 125-400 A standard	A	S114 p.3-28, Table 3.88; oem_spec
Kit contents	1 lug(s) per kit	A	S28, S114 p. 18; oem_spec
Wire range	(1) 1 AWG-600 kcmil or (2) 1 AWG-250 kcmil	A	S114 p.3-28, Table 3.88; oem_spec
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: LA / LH (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00086	CU150HD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)

OEM part number	CU150HD	A	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #14-2/0 Cu	A	S28 p. 18; oem_spec
	Cu lugs for use with Cu wire only (optional)	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Breaker compatibility	HD/HG 15-150 A	A	S28 p. 18; oem_spec
	HD, HG, HJ, HL 15-150 A (optional)	A	S112 p.124, Table 120; oem_spec
Current rating	15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28, S112 p. 18; oem_spec
Wire range	(1) 14-2/0 AWG Cu	A	S112 p.124, Table 120; oem_spec
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00087	CU250JD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)

OEM part number	CU250JD	A	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1/0-300 kcmil Cu	A	S28 p. 18; oem_spec
	Cu lugs for use with Cu wire only (optional)	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 150-250 A	A	S28 p. 18; oem_spec
	JD, JG, JJ, JL 150-250 A (optional)	A	S112 p.124, Table 120; oem_spec
Current rating	150-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28, S112 p. 18; oem_spec
Wire range	(1) 1/0-300 kcmil Cu	A	S112 p.124, Table 120; oem_spec
Material	copper	A	same as above
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00088	CU400LA	Square D	lug-kit	STILL LISTED IN 2016 D

Optional copper mechanical lug kit CU400LA (LA 125-400 A)

OEM part number	CU400LA	A	S28, S114 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Cu	A	S28 p. 18; oem_spec
	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	S114 p.3-28, Table 3.88; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S114 p.3-28, Table 3.88; oem_spec
Breaker compatibility	LA 125-400 A	A	S28 p. 18; oem_spec
	Q4, LA, LH 125-400 A optional	A	S114 p.3-28, Table 3.88; oem_spec
Kit contents	1 lug(s) per kit	A	S28, S114 p. 18; oem_spec
Wire range	(1) 1 AWG-600 kcmil Cu or (2) 1 AWG-250 kcmil Cu	A	S114 p.3-28, Table 3.88; oem_spec
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: LA / LH (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values, use on I-Line versions of same frames not stated in this source		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00069	**40251-287-50**	QMB/QMJ switch terminal lug 40251-287-50	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W **A**	unknown

EDH-SQD-00069	40251-287-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-287-50

OEM part number	40251-287-50	A	S28, S63 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, 3/0 AWG-600 kcmil (2 per phase at 400/600 A, 3 per phase at 800 A)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
	Lug assembly	A	S63 oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
	renewal part (field replaceable)	A	S63 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
	QMB367W, Series E1 (E01)	A	S63 oem_spec
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QED-2, QMB		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material, quantity per package, Torque values		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00577	**CF16KF63C**	OEM QED-2 I-Line interior CF16KF63C	—	unknown
EDH-SQD-00176	**CF16RJ63C36**	OEM QED-2 I-Line switchboard interior CF16RJ63C36	—	unknown
EDH-SQD-00172	**CF20R63C**	OEM QED-2 I-Line switchboard interior CF20R63C	—	unknown
EDH-SQD-00174	**CF20RJ63C**	OEM QED-2 I-Line switchboard interior CF20RJ63C	—	unknown
EDH-SQD-00173	**CF25R63C**	OEM QED-2 I-Line switchboard interior CF25R63C	—	unknown
EDH-SQD-00175	**CF30RJ63C**	OEM QED-2 I-Line switchboard interior CF30RJ63C	—	unknown

EDH-SQD-00577 — CF16KF63C

Square D / Schneider Electric · interior · **STATUS UNKNOWN**

OEM QED-2 I-Line interior CF16KF63C

OEM part number	CF16KF63C	A	S309 document page; oem_spec
Description	Schneider title: "1600A 63H DR I-LINE CENTER FEED COPPER BUS OEM QED2 INTERIOR" (63 in height, double row, centre feed, copper bus)	A	same as above
OEM instruction document	3D STEP model CF16KF63C117UMS-03 (cf16kf63c.stp, 10 Mar 2017); IB 80235-597-09 (OEM interiors) not retrieved	A	same as above
Cross-links	Families: QED-2		
Not yet documented	breaker spaces, Dimensions		

EDH-SQD-00176 — CF16RJ63C36

Square D · interior · **STATUS UNKNOWN**

OEM QED-2 I-Line switchboard interior CF16RJ63C36

OEM part number	CF16RJ63C36	C	S54 distributor
Description	1600 A double-row center-fed copper interior, 63 in. high, 48 in. W	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00172 — CF20R63C

Square D · interior · **STATUS UNKNOWN**

OEM QED-2 I-Line switchboard interior CF20R63C

OEM part number	CF20R63C	C	S54 distributor
Description	2000 A single-row center-feed copper I-Line switchboard interior, 63 in.; listing as CF20R63C36: 36 in. W, 36 in. D, 1200 A left-side max frame	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00174	CF20RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20RJ63C

OEM part number	CF20RJ63C	C	S54 distributor
Description	2000 A double-row copper I-Line interior, 63 in. high, 24 in. D, 48 in. W; right side to 250 A, left side to 1200 A frames	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00173	CF25R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF25R63C

OEM part number	CF25R63C	C	S54 distributor
Description	2500 A single-row copper I-Line switchboard interior, 63 in., 24 in. depth (Rexel: 'SWITCHBOARD INT CU I-LINE SR 2500A')	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00175	CF30RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF30RJ63C

OEM part number	CF30RJ63C	C	S54 distributor
Description	Listed by Rexel as 'Panelboard interior QED-2 I-Line 63 height 3000A copper bus center feed', 54 in. W, 24 in. D (double-row per listing - conflicts with OEM FAQ that 3000 A is single-row only)	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00139	**HLN1BL**	I-Line blank extension HLN1BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current (listed in 2026 Digest)
EDH-SQD-00140	**HLN4BL**	I-Line blank extension HLN4BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current (listed in 2026 Digest)
EDH-SQD-00141	**HLN4EBL**	I-Line blank extension HLN4EBL	PowerPact H/J with Micrologic 5/6 trip unit only **A**	current (listed in 2026 Digest)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00142	**HLW1BL**	I-Line blank extension HLW1BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 A	current (listed in 2026 Digest)
EDH-SQD-00143	**HLW4BL**	I-Line blank extension HLW4BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 A	current (listed in 2026 Digest)
EDH-SQD-00144	**HLW4EBL**	I-Line blank extension HLW4EBL	PowerPact H/J with Micrologic 5/6 trip unit only A	current (listed in 2026 Digest)
EDH-SQD-00137	**HNM1BL**	I-Line blank filler HNM1BL	any I-Line interior unused space A	current (listed in 2026 Digest)
EDH-SQD-00138	**HNM4BL**	I-Line blank filler HNM4BL	any I-Line interior unused space A	current (listed in 2026 Digest)

EDH-SQD-00139	HLN1BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension HLN1BL

OEM part number	HLN1BL	A	S33, S29, S177 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-651-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, narrow side, 1.5 in. (all applications except PowerPact H/J with Micrologic 5/6)	A	S33, S29 oem_spec
	1.5 in. blank extension mounted on narrow side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 3	A	S177, S29 p. 9-56; oem_spec
Application	blank extension (snaps onto mounting rail on underside of trim/deadfront; no screws)	A	S33 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011	A	S29, S177 oem_spec
Dimensions	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S29 p. 2; oem_spec
	1.5 in. (38.1 mm) mounting height	A	S29 oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	same as above
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	same as above
	80030-695-02 Rev. 01 (02/2019)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00140	HLN4BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension HLN4BL

OEM part number	HLN4BL	A	S33, S29, S177 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-652-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, narrow side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S33, S29 oem_spec
	4.5 in. blank extension mounted on narrow side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 5	A	S177, S29 p. 9-56; oem_spec
Application	blank extension	A	S33 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec

	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011	A	S29, S177 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
	4.5 in. (114.3 mm) mounting height	A	S29 oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	same as above
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	same as above
	80030-695-02 Rev. 01 (02/2019)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00141	**HLN4EBL**	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension HLN4EBL

OEM part number	HLN4EBL	A	S33, S29, S177 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-752-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, narrow side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S33, S29 oem_spec
	4.5 in. blank extension mounted on narrow side of I-Line deadfront, used with HNM1BL/HNM4BL; for PowerPacT H/J with MicroLogic trip so trip unit is accessible; kit of 5	A	S177, S29 p. 9-56; oem_spec
Application	blank extension added to end of H/J breaker	A	S33 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	PowerPact H/J with Micrologic 5/6 trip unit only	A	S29, S33 oem_spec
	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011	A	S29, S177 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
	4.5 in. (114.3 mm) mounting height	A	S29 oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	same as above
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	same as above
	80030-695-02 Rev. 01 (02/2019)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
Cross-links	Families: QED-2, I-LINE · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00142	**HLW1BL**	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension HLW1BL

OEM part number	HLW1BL	A	S33, S29, S177, S270 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80034-187-02 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
	HLW-1BL (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Blank extension, wide side, 1.5 in. (all except H/J with Micrologic 5/6)	A	S33, S29 oem_spec

	1.5 in. blank extension mounted on wide side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 3	A	S177, S29 p. 9-56; oem_spec
	Blank extension HLW1BL listed with blanks (1970, $1.20)	B	S270 Digest 152 (1970) p.73; oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S33, S35, S34 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S33 oem_spec
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011; wide side used on HCP, HCP-SU, HCR-U	A	S29, S177 oem_spec
Kit contents	Kit of 3 per FA112712 and distributors (se.com product title says qty 5 - conflict)	C	S34, S53 distributor
Dimensions	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S29 p. 2; oem_spec
	1.5 in. (38.1 mm) mounting height	A	S29 oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	same as above
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	same as above
	80030-695-02 Rev. 01 (02/2019)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00143	**HLW4BL**	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension HLW4BL

OEM part number	HLW4BL	A	S33, S29, S177, S270 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80034-188-03 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
	HLW-4BL (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Blank extension, wide side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S33, S29 oem_spec
	4.5 in. blank extension mounted on wide side of I-Line deadfront, used with HNM1BL/HNM4BL; not for use where it would cover a MicroLogic trip unit; kit of 5	A	S177, S29 p. 9-56; oem_spec
	Blank extension HLW4BL listed with blanks (1970, $1.20)	B	S270 Digest 152 (1970) p.73; oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S33, S35, S34 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S33 oem_spec
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011; wide side used on HCP, HCP-SU, HCR-U	A	S29, S177 oem_spec
Kit contents	Qty 5 per distributors	C	S53 distributor
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
	4.5 in. (114.3 mm) mounting height	A	S29 oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	same as above
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	same as above
	80030-695-02 Rev. 01 (02/2019)	A	same as above

Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Identification features	Surface-mount plate approx. 6.35 in. W x 4.5 in. H	C	S53 distributor
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00144	**HLW4EBL**	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank extension HLW4EBL

OEM part number	HLW4EBL	A	S33, S29, S177 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-653-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, wide side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S33, S29 oem_spec
	4.5 in. blank extension mounted on wide side of I-Line deadfront, used with HNM1BL/HNM4BL; for PowerPacT H/J with MicroLogic trip so trip unit is accessible; kit of 5	A	S177, S29 p. 9-56; oem_spec
Application	blank extension added to end of H/J breaker	A	S33 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	same as above
Breaker compatibility	PowerPact H/J with Micrologic 5/6 trip unit only	A	S29, S33 oem_spec
	HCJ, HCP, HCP-SU, HCR-U panelboards and QED2 switchboards built after 2011; wide side used on HCP, HCP-SU, HCR-U	A	S29, S177 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
	4.5 in. (114.3 mm) mounting height	A	S29 oem_spec
Fasteners	Mounted over the mounting bracket in the deadfront; Phillips screwdriver	A	same as above
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	same as above
	80030-695-02 Rev. 01 (02/2019)	A	same as above
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
Cross-links	Families: QED-2, I-LINE · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), PowerPacT H-frame (HD/HG/HJ/HL/HR), PowerPacT J-frame (JD/JG/JJ/JL/JR)		
Not yet documented	Aftermarket / reproduction, Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00137	**HNM1BL**	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank filler HNM1BL

OEM part number	HNM1BL	A	S33, S27, S177, S270 s2 p. 7; oem_spec
Alternate / superseded numbers	40517-408-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
	HNM-1BL (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Blank filler 1.5 in.	A	S33 oem_spec
	Blank filler kit 1.5 in.; one kit contains 3 blank fillers	A	S177 p. 9-56; oem_spec
	I-Line blank 1-1/2 in high (1970)	A	S270 Digest 152 (1970) p.73; oem_spec
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan with screws 21593-20100)	A	S33 oem_spec

Installation location	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	same as above
	Unused I-Line branch mounting space on bus stack	A	S181 oem_spec
Breaker compatibility	any I-Line interior unused space	A	S29, S33 oem_spec
Kit contents	Kit of 3 (FA112712)	A	S34, S53 oem_spec
Dimensions	1.5 in. wide	A	S33 oem_spec
	1.5 in. mounting height	A	S177 p. 9-56; oem_spec
	1-1/2 in high (OCR table)	B	S270 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	S33 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00138	HNM4BL	Square D	filler-plate	CURRENT (LISTED IN 202

I-Line blank filler HNM4BL

OEM part number	HNM4BL	A	S33, S27, S177, S270 s2 p. 7; oem_spec
Alternate / superseded numbers	40517-407-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
	HNM-4BL (1970 Digest spelling)	A	S270 alias; oem_spec
Description	Blank filler 4.5 in.	A	S33 oem_spec
	Blank filler kit 4.5 in.; one kit contains 5 blank fillers	A	S177 p. 9-56; oem_spec
	I-Line blank 4-1/2 in high (1970)	A	S270 Digest 152 (1970) p.73; oem_spec
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan)	A	S33 oem_spec
Installation location	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	same as above
	Unused I-Line branch mounting space	A	S181 oem_spec
Breaker compatibility	any I-Line interior unused space	A	S29, S33 oem_spec
Dimensions	4.5 in. wide	A	S33 oem_spec
	4.5 in. mounting height	A	S177 p. 9-56; oem_spec
	4-1/2 in high (OCR table)	B	S270 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	S33 oem_spec
Status	current (listed in 2026 Digest)	A	S177 p. 9-56; oem_spec
	current	B	S33, S53 oem_spec
	1970 catalog item; current status unknown	D	S270 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	Aftermarket / reproduction, current_status, Finish / plating, Mounting-hole pattern, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00165	**8000602003**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00166	**8023317701**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as

EDH-SQD-00165 **8000602003** Square D hardware-kit **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf

OEM part number	8000602003	A	S46 oem_spec
Description	Hinge frame leaf; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00166 **8023317701** Square D hardware-kit **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf

OEM part number	8023317701	A	S46 oem_spec
Description	Hinge door leaf; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00163	**21427-20401**	QED cover screw 21427-20401	—	unknown
EDH-SQD-00169	**2150720200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00168	**2271020200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00170	**2300100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00171	**2370100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as
EDH-SQD-00167	**8000602001**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	NEMA 3R QED2, CMM and Speed-D switchboards A	orderable via distributor; some may need to be forced in as

EDH-SQD-00163 **21427-20401** Square D fastener **STATUS UNKNOWN**

QED cover screw 21427-20401

OEM part number	21427-20401 (OEM FAQ text seen only via search snippets)	B	S44 oem_spec
Description	1/4-20 x 1-1/4 in. self-tapping screw fastening cover plates to front of QED switchboard	B	same as above
Cross-links	Families: QED-2		
Not yet documented	Finish / plating, head style		

EDH-SQD-00169 **2150720200** Square D fastener **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)

OEM part number	2150720200	A	S46 oem_spec
Description	Door leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00168	2271020200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)

OEM part number	2271020200	**A**	S46 oem_spec
Description	Frame leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00170	2300100200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut

OEM part number	2300100200	**A**	S46 oem_spec
Description	Nut; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00171	2370100200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer

OEM part number	2370100200	**A**	S46 oem_spec
Description	Washer; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00167	8000602001	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin

OEM part number	8000602001	**A**	S46 oem_spec
Description	Hinge pin; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00043	**QMB368W**	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	1200 A branch switch or group-mounted six-disconnect main with Class L **A**	unknown

EDH-SQD-00043	QMB368W	Square D	switch-unit	STATUS UNKNOWN

QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)

OEM part number	QMB368W	A	S70 oem_spec
Description	1200 A QMB fusible switch; 3-pole, 600 Vac max, 24 in. unit (distributor) (Ratings/height from distributor; existence/restriction from OEM FAQ)	B	S70, S55 oem_spec
Application	Restricted to QED-2 switchboards with 42 in. (qty 1) and 48 in. (qty 2) wide QMB distribution sections; cannot be installed in QMB panelboards	A	S70 oem_spec
Breaker compatibility	1200 A branch switch or group-mounted six-disconnect main with Class L fuses, 100 kA at 600 Vac; a single 1200 A main switch must be Bolt-Loc	A	S26 p. 29 note c; oem_spec
Kit contents	(4) #3/0-600 kcmil per phase	A	S26 p. 29; oem_spec
Dimensions	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2	A	same as above
Cross-links	Families: QED-2		
Not yet documented	horsepower ratings, renewal parts		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00164	**50552-108-01**	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	—	unknown
EDH-SQD-00162	**80031-024-02**	QED plug-button for unused holes 80031-024-02	—	unknown
EDH-SQD-00155	**HQO306**	Plug-on QO distribution panel HQO306 for I-Line	—	listed in 2025 catalog
EDH-SQD-00576	**S48899**	Square D maintenance compound S48899	—	unknown
EDH-SQD-00575	**SWLUB**	Square D maintenance compound SWLUB	—	unknown

EDH-SQD-00164	50552-108-01	Square D	other	STATUS UNKNOWN

NEMA 3R QED-2 switchboard replacement door handle 50552-108-01

OEM part number	50552-108-01	A	S45 oem_spec
Description	Replacement handle for outdoor (NEMA 3R) QED-2 switchboard	A	same as above
Cross-links	Families: QED-2		
Not yet documented	Dimensions, lockable		

EDH-SQD-00162	80031-024-02	Square D	other	STATUS UNKNOWN

QED plug-button for unused holes 80031-024-02

OEM part number	80031-024-02	A	S43 oem_spec
Description	Plug-button that seals/plugs unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards, including Speed-D	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	hole diameter, Material		

EDH-SQD-00155	HQO306	Square D	other	LISTED IN 2025 CATALOG

Plug-on QO distribution panel HQO306 for I-Line

OEM part number	HQO306	A	S27, S180 p. 10; oem_spec
Description	Six-pole, 240 Vac max QO plug-on distribution panel that mounts in all I-Line panelboards; accepts QO, QO-H, QO-VH, QH and Qwik-Gard plug-on breakers through 30 A; max three GFI-suffix breakers	A	S27 p. 10; oem_spec
	Six-pole 240 Vac max plug-on QO distribution panel that mounts in all I-Line panelboards; accepts QO, QO-H, QO-VH, QH, Qwik-Gard plug-on breakers	A	S180 p. 19; oem_spec
Application	branch (small-circuit adapter in I-Line space)	A	S27 oem_spec
Voltage rating	240 Vac max	A	same as above
Status	listed in 2025 catalog	A	S180 oem_spec
Cross-links	Families: QED-2, I-LINE · Breakers: QO (plug-on)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Mounting-hole pattern, Material, mounting height		
Open question	*Is HQO306 listed for QED-2 I-Line sections?*		

EDH-SQD-00576	S48899	Square D / Schneider Electric	other	STATUS UNKNOWN

Square D maintenance compound S48899

OEM part number	S48899	B	S304 printed p.41; oem_spec
Description	Electric joint compound for Masterpact drawout connections (only compound permitted there)	B	same as above
Cross-links	Families: QED-2		

EDH-SQD-00575	SWLUB	Square D / Schneider Electric	other	STATUS UNKNOWN

Square D maintenance compound SWLUB

OEM part number	SWLUB	B	S304 printed p.41; oem_spec
Description	BG20 High Performance Synthetic Grease (Dow Corning) for switch blade/jaw components rated 600 V and below (Bolt-Loc, QMB, QMJ, QMQB)	B	same as above
Cross-links	Families: QED-2		

4.14 SPEED-D — Speed-D Merchandised Service Section Switchboard

FAM-SQD-002 · switchboard · aka Speed D, SpeedD · markings: Square D

Merchandised (quick-ship) service-section switchboard family covered in the same catalog as QED-2 (Class 2741/2742). Speed-D boards with provisions for current-series QMB branch devices ship with (2) 15 in. QMB15BLW closing plates.

Attribute	Value	Cl.	Sources
Era of manufacture	In 2700CT1101 (2012)	A	S26 p. 47; oem_spec
Qmb fillers	Furnished with (2) 15 in. closing plates QMB15BLW; other closing plates QMB1BLW, QMB3BLW, QMB6BLW	A	S31 oem_spec

Key documents: S26 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S31 FA225625 FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with b

Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, 80031-024-02, 8000602003, 8023317701, 8000602001, 2271020200, 2150720200, 2300100200, 2370100200

4.15 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family Square D FA/FH/FC/FI (F-frame 100/150 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00252	**AL100FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FI 35-100 A standard; 15-30 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00251	**AL100FA4**	Square D FA mechanical lug kit (Al lugs) - FC	FC 35-100 A standard; FC 15-30 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00253	**AL100TF**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00254	**AL150FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA (only) 150 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00250	**AL50FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FI 15-30 A standard; 35-100 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00262	**CU100FA**	Square D FA mechanical lug kit (Cu lugs) - FA	FA, FH, FC, FI 15-100 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00263	**CU100TF**	Square D FA mechanical lug kit (Cu lugs) - FA	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00261	**CU30FA4**	Square D FA mechanical lug kit (Cu lugs) - FC	FC 15-30 A standard **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00282	**CVC100FA**	Square D FA Cu compression lug kit	FA, FH, FC, FI **A**	unknown
EDH-SQD-00288	**PDC3FA2**	Square D FA power distribution connector (multi-wire load lug)	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end) **A**	unknown
EDH-SQD-00287	**PDC6FA6**	Square D FA power distribution connector (multi-wire load lug)	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end) **A**	unknown
EDH-SQD-00272	**VC100FA**	Square D FA Al compression lug kit	FA, FH, FC, FI **A**	unknown

EDH-SQD-00252	**AL100FA**	Square D	lug-kit	**STILL LISTED IN 2016 D**

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL100FA	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	FA, FH, FI 35-100 A standard; 15-30 A optional	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Wire range	(1) 14-1/0 AWG Cu or (1) 12-1/0 AWG Al	**A**	same as above
Material	aluminum lug body	**A**	same as above
Status	Still listed in 2016 Digest Table 3.70	**A**	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Digest Plus web table (search snippet) gives 12-1/0 AWG Al; another edition shows 12-1 AWG - confirm per edition.*		

EDH-SQD-00251	AL100FA4	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FC

OEM part number	AL100FA4	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 35-100 A standard; FC 15-30 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-3 AWG Cu or (1) 12-1 AWG Al	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00253	AL100TF	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL100TF	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 12-3 AWG Cu	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00254	AL150FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL150FA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA (only) 150 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 2-3/0 AWG	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00250	AL50FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL50FA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI 15-30 A standard; 35-100 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-4 AWG Cu or (1) 12-4 AWG Al	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00262	CU100FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FA

OEM part number	CU100FA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI 15-100 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-1 AWG Cu	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00263	CU100TF	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FA

OEM part number	CU100TF	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 12-3 AWG Cu	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00261	CU30FA4	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FC

OEM part number	CU30FA4	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 15-30 A standard	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Wire range	(1) 14-10 AWG Cu	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00282	CVC100FA	Square D	lug-kit	STATUS UNKNOWN

Square D FA Cu compression lug kit

OEM part number	CVC100FA	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	6-1/0 AWG Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.4 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00288	PDC3FA2	Square D	lug-kit	STATUS UNKNOWN

Square D FA power distribution connector (multi-wire load lug)

OEM part number	PDC3FA2	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end)	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(3) 14-2 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.2 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00287	PDC6FA6	Square D	lug-kit	STATUS UNKNOWN

Square D FA power distribution connector (multi-wire load lug)

OEM part number	PDC6FA6	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end)	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(6) 14-6 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.0 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00272	VC100FA	Square D	lug-kit	STATUS UNKNOWN

Square D FA Al compression lug kit

OEM part number	VC100FA	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	8-1/0 AWG	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.3 in	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00294	**FAT**	Square D control wire terminal / tapped lug (FA)	FA, FH, FI A	unknown

EDH-SQD-00294	FAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (FA)

OEM part number	FAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041; use fully insulated 0.250 in slip-on connectors	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D KA/KH/KC/KI (K-frame 250 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00255	**AL250KA**	Square D KA mechanical lug kit (Al lugs) - KI	KI 110-175 A standard (2012 table); distributors also list KA, KH, KC A	unknown
EDH-SQD-00256	**AL250KI**	Square D KA mechanical lug kit (Al lugs) - KI	KI 200-250 A standard; KI 110-175 A optional A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00264	**CU250KA**	Square D KA mechanical lug kit (Cu lugs) - KI	KI 110-250 A optional **A**	unknown
EDH-SQD-00283	**CVC250KA3**	Square D KA Cu compression lug kit	KI **A**	unknown
EDH-SQD-00273	**VC250KA3**	Square D KA Al compression lug kit	KI **A**	unknown
EDH-SQD-00274	**VC250KA35**	Square D KA Al compression lug kit	KI **A**	unknown

EDH-SQD-00255	AL250KA	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Al lugs) - KI

OEM part number	AL250KA	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI 110-175 A standard (2012 table); distributors also list KA, KH, KC	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Wire range	(1) 4 AWG-350 kcmil	**A**	same as above
Material	aluminum lug body	**A**	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*AL250KA: OEM 2012 Digest lists only KI application; confirm KA/KH/KC applicability from KA-era Digest or instruction bulletin.*		

EDH-SQD-00256	AL250KI	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Al lugs) - KI

OEM part number	AL250KI	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI 200-250 A standard; KI 110-175 A optional	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Wire range	(1) 1/0 AWG-350 kcmil	**A**	same as above
Material	aluminum lug body	**A**	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00264	CU250KA	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Cu lugs) - KI

OEM part number	CU250KA	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI 110-250 A optional	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Wire range	(1) 4 AWG-250 kcmil Cu	**A**	same as above
Material	copper lug body	**A**	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00283	CVC250KA3	Square D	lug-kit	STATUS UNKNOWN

Square D KA Cu compression lug kit

OEM part number	CVC250KA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-300 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00273	VC250KA3	Square D	lug-kit	STATUS UNKNOWN

Square D KA Al compression lug kit

OEM part number	VC250KA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	4 AWG-300 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00274	VC250KA35	Square D	lug-kit	STATUS UNKNOWN

Square D KA Al compression lug kit

OEM part number	VC250KA35	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	250-350 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00295	**AL250KIT**	Square D control wire terminal / tapped lug (KI)	KI **A**	unknown

EDH-SQD-00295	AL250KIT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (KI)

OEM part number	AL250KIT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Digest 2016 shows 'AL250KAT' in the control-wire illustration while 2012 table lists AL250KIT for KI - verify which number is current for KA/KI.*		

Breaker family Square D LA/LH (L-frame 400 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00257	**AL400LH7**	Square D LA mechanical lug kit (Al lugs) - Q4	Q4, LA, LH 125-400 A optional A	Still listed in 2016 Digest Table 3.70
EDH-SQD-00284	**CVC400LA3**	Square D LA Cu compression lug kit	LA, LH, Q4 A	unknown
EDH-SQD-00285	**CVC400LA5**	Square D LA Cu compression lug kit	LA, LH, Q4 A	unknown
EDH-SQD-00290	**PDC12LA4**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A A	unknown
EDH-SQD-00291	**PDC4LA250**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A A	unknown
EDH-SQD-00289	**PDC6LA20**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A A	unknown
EDH-SQD-00276	**VC400LA3**	Square D LA Al compression lug kit	LA, LH, Q4 A	unknown
EDH-SQD-00275	**VC400LA35**	Square D LA Al compression lug kit	LA, LH, Q4 A	unknown
EDH-SQD-00277	**VC400LA5**	Square D LA Al compression lug kit	LA, LH, Q4 A	unknown
EDH-SQD-00278	**VC400LA7**	Square D LA Al compression lug kit	LA, LH, Q4 A	unknown

EDH-SQD-00257	AL400LH7	Square D	lug-kit	STILL LISTED IN 2016 D

Square D LA mechanical lug kit (Al lugs) - Q4

OEM part number	AL400LH7	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4, LA, LH 125-400 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(1) 350-750 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00284	CVC400LA3	Square D	lug-kit	STATUS UNKNOWN

Square D LA Cu compression lug kit

OEM part number	CVC400LA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-300 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.3 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00285	CVC400LA5	Square D	lug-kit	STATUS UNKNOWN

Square D LA Cu compression lug kit

OEM part number	CVC400LA5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	250-500 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.3 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00290	PDC12LA4	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC12LA4	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Wire range	(12) 14-4 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.25 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00291	PDC4LA250	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC4LA250	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Wire range	(3) 14-2 AWG + (1) 2 AWG-250 kcmil Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 2.0 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00289	PDC6LA20	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC6LA20	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Wire range	(6) 12-2/0 AWG Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 2.25 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00276	VC400LA3	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	4 AWG-300 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.0 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00275	VC400LA35	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA35	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	250-350 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.25 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00277	VC400LA5	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-500 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.2 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00278	VC400LA7	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA7	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	500-750 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.5 in	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00296	**AL400LAT**	Square D control wire terminal / tapped lug (Q4)	Q4, LA, LH A	unknown

EDH-SQD-00296	AL400LAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (Q4)

OEM part number	AL400LAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4, LA, LH	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D LC/LI/LE/LX/LXI (L-frame 600 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00258	**AL600LI35**	Square D LI mechanical lug kit (Al lugs) - LE	LE, LX, LXI 100-250 A standard; LC, LI, LE, LX, LXI 300-600 A optional A	unknown
EDH-SQD-00259	**AL600LI5**	Square D LI mechanical lug kit (Al lugs) - LI	LI, LE, LX, LXI 300-600 A standard; LE, LX, LXI 100-250 A optional A	unknown
EDH-SQD-00260	**AL600LI7**	Square D LI mechanical lug kit (Al lugs) - LC	LC, LI, LE, LX, LXI optional A	unknown
EDH-SQD-00265	**CU600LI35**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00266	**CU600LI5**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00267	**CU600LI7**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00286	**CVC600LI5**	Square D LI Cu compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00279	**VC600LI3**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00280	**VC600LI5**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00281	**VC600LI7**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown

EDH-SQD-00258	AL600LI35	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LE

OEM part number	AL600LI35	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LE, LX, LXI 100-250 A standard; LC, LI, LE, LX, LXI 300-600 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 1 AWG-350 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00259	AL600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LI

OEM part number	AL600LI5	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI 300-600 A standard; LE, LX, LXI 100-250 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 4/0 AWG-500 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00260	AL600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LC

OEM part number	AL600LI7	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(1) 500-750 kcmil	A	same as above
Material	aluminum lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00265	CU600LI35	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI35	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 1 AWG-350 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00266	CU600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI5	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(2) 4/0 AWG-500 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00267	CU600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI7	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Wire range	(1) 500-750 kcmil Cu	A	same as above
Material	copper lug body	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00286	CVC600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI Cu compression lug kit

OEM part number	CVC600LI5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	250-500 kcmil Cu	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.20 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00279	VC600LI3	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	4 AWG-300 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.05 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00280	VC600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Wire range	2/0 AWG-500 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.20 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00281	VC600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI7	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Wire range	500-750 kcmil	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.45 in	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00310	**AL600IN**	Square D LC/LI/LE/LX/LXI threaded terminal clip kit	LC, LI, LE, LX, LXI A	unknown
EDH-SQD-00297	**AL600LI35T**	Square D control wire terminal / tapped lug (LC)	LC, LI, LXI, LX, LE A	unknown
EDH-SQD-00298	**AL600LI5T**	Square D control wire terminal / tapped lug (LC)	LC, LI, LXI, LX, LE A	unknown

EDH-SQD-00310	AL600IN	Square D	breaker-accessory	STATUS UNKNOWN

Square D LC/LI/LE/LX/LXI threaded terminal clip kit

OEM part number	AL600IN	A	S114 p.3-20, Table 3.71; oem_spec
Description	Threaded terminal clip kit; snaps onto bottom of terminal to allow bolted connection when the standard lug is removed (P-MT configuration)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LE, LX, LXI	A	same as above
Kit contents	3 clips per kit	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00297	AL600LI35T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (LC)

OEM part number	AL600LI35T	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LXI, LX, LE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00298	AL600LI5T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (LC)

OEM part number	AL600LI5T	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LXI, LX, LE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D MA/MH/MX/ME (M-frame 1000 A)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00300	**AL1000MAT**	Square D control wire terminal / tapped lug (MA)	MA, MH, MX, ME A	unknown
EDH-SQD-00299	**AL900MAT**	Square D control wire terminal / tapped lug (MA)	MA, MH, MX, ME A	unknown

EDH-SQD-00300	AL1000MAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (MA)

OEM part number	AL1000MAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MA, MH, MX, ME	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D MA/MH/MX/ME (M-frame 1000 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00299	AL900MAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (MA)

OEM part number	AL900MAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MA, MH, MX, ME	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D MA/MH/MX/ME (M-frame 1000 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D NA/NC/NX/NE (N-frame 1200 A)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00301	**AL1200NE6T**	Square D control wire terminal / tapped lug (NA)	NA, NC, NX, NE A	unknown

EDH-SQD-00301	AL1200NE6T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (NA)

OEM part number	AL1200NE6T	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NA, NC, NX, NE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D NA/NC/NX/NE (N-frame 1200 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact D-Frame (DG/DJ/DL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00268	**32508**	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	D-frame 3P 400 A A	unknown
EDH-SQD-00269	**32510**	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	D-frame 3P 600 A A	unknown
EDH-SQD-00293	**PDC12DG4**	PowerPact D-frame power distribution connector	DG, DJ, DL 150-600 A A	unknown
EDH-SQD-00292	**PDC5DG20**	PowerPact D-frame power distribution connector	DG, DJ, DL 150-600 A A	unknown

EDH-SQD-00268	32508	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame 400 A field-installable lug kit (with terminal cover)

OEM part number	32508	A	S114 p.3-28, Table 3.89; oem_spec
Alternate / superseded numbers	S32508 (Printed without S prefix)	D	S114 alias; p.3-28; inference
Description	Field-installable lug kit, terminal cover included, 400 A	A	S114 p.3-28, Table 3.89; oem_spec
Application	accessory	A	same as above
Breaker compatibility	D-frame 3P 400 A	A	same as above
Poles	3	A	same as above
Kit contents	kit for 3 poles incl. terminal cover	A	same as above
Wire range	(1) 2 AWG-600 kcmil stranded Cu or (1) 2 AWG-500 kcmil stranded Al	A	same as above
Material	not stated	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Requires	29348 (EDH-SQD-00181)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00269	32510	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame 600 A field-installable lug kit (with terminal cover)

OEM part number	32510	A	S114 p.3-28, Table 3.89; oem_spec
Alternate / superseded numbers	S32510 (Printed without S prefix)	D	S114 alias; p.3-28; inference
Description	Field-installable lug kit, terminal cover included, 600 A	A	S114 p.3-28, Table 3.89; oem_spec
Application	accessory	A	same as above
Breaker compatibility	D-frame 3P 600 A	A	same as above
Poles	3	A	same as above
Kit contents	kit for 3 poles incl. terminal cover	A	same as above
Wire range	(2) 2/0 AWG-350 kcmil stranded Cu or (2) 2/0 AWG-500 kcmil stranded Al	A	same as above
Material	not stated	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00293	PDC12DG4	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame power distribution connector

OEM part number	PDC12DG4	A	S114 p.3-29, Table 3.93; oem_spec
Description	Power distribution connector for D-frame; kit includes long terminal shield (adds 1.65 in vs standard lug with short shield)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	DG, DJ, DL 150-600 A	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(12) 14-4 AWG	A	same as above
Material	not stated	A	same as above
Dimensions	Dimension A 1.28-1.31 in	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00292	PDC5DG20	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame power distribution connector

OEM part number	PDC5DG20	A	S114 p.3-29, Table 3.93; oem_spec
Description	Power distribution connector for D-frame; kit includes long terminal shield (adds 1.65 in vs standard lug with short shield)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	DG, DJ, DL 150-600 A	A	same as above
Kit contents	3 per kit	A	same as above
Wire range	(3) 14-2 AWG and (2) 14-2/0 AWG	A	same as above
Material	not stated	A	same as above
Dimensions	Dimension A 1.28-1.31 in	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00270	**36965**	PowerPact D-frame terminal shield 3P	D-frame (3P) A	unknown

EDH-SQD-00270	36965	Square D	barrier	STATUS UNKNOWN

PowerPact D-frame terminal shield 3P

OEM part number	36965	A	S114 p.3-28, Table 3.90; oem_spec
Description	Terminal shield for D-frame 3P	A	same as above
Application	accessory	A	same as above
Breaker compatibility	D-frame (3P)	A	same as above
Kit contents	1 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00208	**CYA060HD**	PowerPact H-frame Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00209	**CYA150HD**	PowerPact H-frame Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00190	**PDC3HD2**	PowerPact H-Frame power distribution connector (multi-wire load lug)	PowerPact H-Frame A	unknown
EDH-SQD-00189	**PDC6HD6**	PowerPact H-Frame power distribution connector (multi-wire load lug)	PowerPact H-Frame A	unknown
EDH-SQD-00195	**YA060HD**	PowerPact H-frame Al/Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00196	**YA150HD**	PowerPact H-frame Al/Cu compression lug kit	PowerPact H-frame A	unknown

EDH-SQD-00208	CYA060HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Cu compression lug kit

OEM part number	CYA060HD	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=60 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	6-1/0 AWG Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00209	CYA150HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Cu compression lug kit

OEM part number	CYA150HD	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	4-2/0 AWG Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00190	PDC3HD2	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC3HD2	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact H-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(3) 2 AWG or 14-3 AWG Cu	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00189	PDC6HD6	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC6HD6	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact H-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(6) 8-6 AWG or 14-10 AWG Cu per terminal; 1 terminal per kit... (6 wires)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00195	YA060HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Al/Cu compression lug kit

OEM part number	YA060HD	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=60 A Al/Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	6-2 AWG Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00196	YA150HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Al/Cu compression lug kit

OEM part number	YA150HD	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	1/0-4/0 AWG Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00231	**S37432**	PowerPact H-frame mixed rear connection kit	PowerPact H-frame **A**	unknown
EDH-SQD-00234	**S37436**	PowerPact H-frame short terminal cover 3p	PowerPact H-frame **A**	unknown
EDH-SQD-00245	**S37446**	PowerPact H-frame 60 A short lug shield	PowerPact H-frame **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00246	**S37447**	PowerPact H-frame 150 A short lug shield	PowerPact H-frame **A**	unknown
EDH-SQD-00248	**S37449**	PowerPact H-frame long lug shield	PowerPact H-frame **A**	unknown

EDH-SQD-00231	S37432	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame mixed rear connection kit

OEM part number	S37432	**A**	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, H-frame 3P (4 short + 2 long rear connections, hardware, 2 terminal covers)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	over breaker terminals	**A**	same as above
Breaker compatibility	PowerPact H-frame	**A**	same as above
Poles	3	**A**	same as above
Kit contents	Mixed rear connection kit, H-frame 3P (4 short + 2 long rear connections, hardware, 2 terminal covers)	**A**	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00234	S37436	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame short terminal cover 3p

OEM part number	S37436	**A**	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, H-frame	**A**	same as above
Application	accessory	**A**	same as above
Installation location	over breaker terminals	**A**	same as above
Breaker compatibility	PowerPact H-frame	**A**	same as above
Poles	3	**A**	same as above
Kit contents	Short terminal cover 3P, H-frame	**A**	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00245	S37446	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame 60 A short lug shield

OEM part number	S37446	**A**	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame 60 A short lug shield (mechanical lugs); extension 'B' past end of breaker 0.50 in; max wire size 3 AWG	**A**	same as above
Application	accessory	**A**	same as above
Installation location	over line/load terminals	**A**	same as above
Breaker compatibility	PowerPact H-frame	**A**	same as above
Kit contents	1 per kit	**A**	same as above
Dimensions	dimension B (extension past breaker end) = 0.50 in	**A**	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00246	S37447	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame 150 A short lug shield

OEM part number	S37447	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame 150 A short lug shield (mechanical lugs); extension 'B' past end of breaker 0.50 in; max wire size 3/0 AWG	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.50 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00248	S37449	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame long lug shield

OEM part number	S37449	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame long lug shield (PDC and compression lugs: PDC6HD6, PDC3HD2, YA060HD, YA150HD, CYA060HD, CYA150HD); extension 'B' past end of breaker 2.24 in	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 2.24 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00177	**S37423**	PowerPact H-frame control wire terminal for mechanical lugs	H-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable) A	unknown
EDH-SQD-00182	**S37425**	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	HD/HG/HJ/HL A	unknown
EDH-SQD-00184	**S37426**	PowerPact H-frame terminal nut insert (M6) for bus bar connection	HD/HG/HJ/HL A	unknown
EDH-SQD-00179	**S37429**	PowerPact H-frame control wire terminal for terminal nut (busbar connection)	H-frame with terminal nut inserts A	unknown
EDH-SQD-00232	**S37433**	PowerPact H-frame short rear connections (set of 2)	PowerPact H-frame A	unknown
EDH-SQD-00233	**S37434**	PowerPact H-frame long rear connections (set of 2)	PowerPact H-frame A	unknown

EDH-SQD-00177	S37423	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame control wire terminal for mechanical lugs

OEM part number	S37423	A	S112 p.124, Tables 120 & 122; oem_spec
Description	Voltage takeoff (control wire terminal) secured under the mechanical lug, tab for 0.250 in slip-on connector; field or factory installed	A	same as above
Application	accessory	A	same as above
Installation location	under mechanical lug at breaker terminal	A	same as above
Breaker compatibility	H-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00182	S37425	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37425	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00184	S37426	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (M6) for bus bar connection

OEM part number	S37426	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap M6; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00179	S37429	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame control wire terminal for terminal nut (busbar connection)

OEM part number	S37429	A	S112 p.124, Table 122; oem_spec
Description	Control wire terminal for busbar connection using terminal nut insert	A	same as above
Application	accessory	A	same as above
Breaker compatibility	H-frame with terminal nut inserts	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00232	S37433	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame short rear connections (set of 2)

OEM part number	S37433	A	S112 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), H-frame; order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Short rear connections (set of 2), H-frame; order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00233	S37434	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame long rear connections (set of 2)

OEM part number	S37434	**A**	S112 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), H-frame	**A**	same as above
Application	accessory	**A**	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	**A**	same as above
Breaker compatibility	PowerPact H-frame	**A**	same as above
Poles	2/3	**A**	same as above
Kit contents	Long rear connections (set of 2), H-frame	**A**	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00210	**CYA150JD**	PowerPact J-frame Cu compression lug kit	PowerPact J-frame **A**	unknown
EDH-SQD-00211	**CYA250J3**	PowerPact J-frame Cu compression lug kit	PowerPact J-frame **A**	unknown
EDH-SQD-00192	**PDC3JD20**	PowerPact J-Frame power distribution connector (multi-wire load lug)	PowerPact J-Frame **A**	unknown
EDH-SQD-00191	**PDC6JD4**	PowerPact J-Frame power distribution connector (multi-wire load lug)	PowerPact J-Frame **A**	unknown
EDH-SQD-00197	**YA150JD**	PowerPact J-frame Al/Cu compression lug kit	PowerPact J-frame **A**	unknown
EDH-SQD-00198	**YA250J35**	PowerPact J-frame Al/Cu compression lug kit	PowerPact J-frame **A**	unknown

EDH-SQD-00210	CYA150JD	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Cu compression lug kit

OEM part number	CYA150JD	**A**	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PowerPact J-frame	**A**	same as above
Poles	3	**A**	same as above
Current rating	<=150 A Cu (rating at 75 C)	**A**	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	**A**	same as above
Wire range	4-2/0 AWG Cu; 1 wire(s) per lug	**A**	same as above
Material	copper compression lugs	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00211	CYA250J3	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Cu compression lug kit

OEM part number	CYA250J3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=250 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0 AWG-300 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00192	PDC3JD20	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC3JD20	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact J-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	3 total: (2) 14-6 AWG or 4-1 AWG Cu and (1) 3-2/0 AWG Cu	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		
Open question	*Table 130 lists 'PDC3JD2' for long lug shield compatibility while Table 127 lists PDC3JD20 - same part?*		

EDH-SQD-00191	PDC6JD4	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC6JD4	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact J-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(6) 8-4 AWG or 14-10 AWG Cu	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00197	YA150JD	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Al/Cu compression lug kit

OEM part number	YA150JD	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=200 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	1-3/0 AWG Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00198	YA250J35	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Al/Cu compression lug kit

OEM part number	YA250J35	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=250 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	3/0 AWG-350 kcmil Cu or Al; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00238	**S37440**	PowerPact J-frame short terminal cover 3p	PowerPact J-frame A	unknown
EDH-SQD-00247	**S37448**	PowerPact J-frame short lug shield	PowerPact J-frame A	unknown
EDH-SQD-00249	**S37450**	PowerPact J-frame long lug shield	PowerPact J-frame A	unknown

EDH-SQD-00238	S37440	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame short terminal cover 3p

OEM part number	S37440	A	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, J-frame	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, J-frame	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00247	S37448	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame short lug shield

OEM part number	S37448	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: J-frame short lug shield (mechanical lugs); extension 'B' past end of breaker 0.24 in; max wire size 350 kcmil	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.24 in	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00249	S37450	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame long lug shield

OEM part number	S37450	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: J-frame long lug shield (PDC and compression lugs: PDC6JD4, PDC3JD2(0), YA150JD, CYA150JD, CYA250J3); extension 'B' past end of breaker 1.68 in	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 1.68 in	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00178	**S37424**	PowerPact J-frame control wire terminal for mechanical lugs	J-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable) **A**	unknown
EDH-SQD-00185	**S37427**	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	JD/JG/JJ/JL **A**	unknown
EDH-SQD-00187	**S37428**	PowerPact J-frame terminal nut insert (M8) for bus bar connection	JD/JG/JJ/JL **A**	unknown
EDH-SQD-00180	**S37430**	PowerPact J-frame control wire terminal for terminal nut (busbar connection)	J-frame with terminal nut inserts **A**	unknown
EDH-SQD-00235	**S37437**	PowerPact J-frame mixed rear connection kit	PowerPact J-frame **A**	unknown
EDH-SQD-00236	**S37438**	PowerPact J-frame short rear connections (set of 2)	PowerPact J-frame **A**	unknown
EDH-SQD-00237	**S37439**	PowerPact J-frame long rear connections (set of 2)	PowerPact J-frame **A**	unknown

EDH-SQD-00178	S37424	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame control wire terminal for mechanical lugs

OEM part number	S37424	A	S112 p.124, Tables 120 & 122; oem_spec
Description	Voltage takeoff (control wire terminal) secured under the mechanical lug, tab for 0.250 in slip-on connector; field or factory installed	A	same as above
Application	accessory	A	same as above
Installation location	under mechanical lug at breaker terminal	A	same as above
Breaker compatibility	J-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00185	S37427	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37427	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00187	S37428	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame terminal nut insert (M8) for bus bar connection

OEM part number	S37428	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap M8; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00180	S37430	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame control wire terminal for terminal nut (busbar connection)

OEM part number	S37430	A	S112 p.124, Table 122; oem_spec
Description	Control wire terminal for busbar connection using terminal nut insert	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame with terminal nut inserts	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00235	S37437	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame mixed rear connection kit

OEM part number	S37437	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, J-frame 3P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, J-frame 3P	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00236	S37438	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame short rear connections (set of 2)

OEM part number	S37438	A	S112 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), J-frame; order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Short rear connections (set of 2), J-frame; order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00237	S37439	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame long rear connections (set of 2)

OEM part number	S37439	A	S112 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), J-frame (3P breakers only)	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Long rear connections (set of 2), J-frame (3P breakers only)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00221	**AL400L61K3**	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	PowerPact L 250 A, 3P, unit-mount and I-Line; FAQ: also optional on 40 A	unknown
EDH-SQD-00222	**AL400L61K4**	PowerPact L-frame 250 A mechanical lug kit, Al, 4P	PowerPact L 250 A, 4P unit mount A	unknown
EDH-SQD-00225	**AL600LF52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)	PowerPact L 400/600 A, 3P unit mount and I-Line A	unknown
EDH-SQD-00223	**AL600LS52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)	PowerPact L 400/600 A, 3P unit mount A	unknown
EDH-SQD-00224	**AL600LS52K4**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)	PowerPact L 400/600 A, 4P unit mount A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00226	**CU400L61K3**	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P	PowerPact L 250/400 A, 3P, unit mount and I-Line **A**	unknown
EDH-SQD-00227	**CU400L61K4**	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P	PowerPact L 250/400 A, 4P, unit mount **A**	unknown
EDH-SQD-00230	**CU600LF52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	PowerPact L 400/600 A, 3P, unit mount and I-Line **A**	unknown
EDH-SQD-00228	**CU600LS52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	PowerPact L 400/600 A, 3P, unit mount **A**	unknown
EDH-SQD-00229	**CU600LS52K4**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P	PowerPact L 400/600 A, 4P, unit mount **A**	unknown
EDH-SQD-00212	**CYA400L31K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00217	**CYA400L31K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00214	**CYA400L51K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00219	**CYA400L51K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00216	**CYA400L71K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00213	**CYA600L32K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00218	**CYA600L32K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00215	**CYA600L52K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00220	**CYA600L52K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00194	**PDC12DG4L3**	PowerPact L-Frame power distribution connector (multi-wire load lug)	PowerPact L-Frame **A**	unknown
EDH-SQD-00193	**PDC5DG20L3**	PowerPact L-Frame power distribution connector (multi-wire load lug)	PowerPact L-Frame **A**	unknown
EDH-SQD-00199	**YA400L31K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00201	**YA400L51K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00205	**YA400L51K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00203	**YA400L71K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00207	**YA400L71K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00200	**YA600L32K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00204	**YA600L32K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00202	**YA600L52K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00206	**YA600L52K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown

EDH-SQD-00221	**AL400L61K3**	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250 A mechanical lug kit, Al, 3P

OEM part number	AL400L61K3	**A**	S112 p.124, Table 121; oem_spec
Alternate / superseded numbers	AL400L6IK3 [alias] (Typographical variant printed under lug illustration in Table 121)	**A**	same as above
Description	Al lugs for Al or Cu wire, 250 A; unit mount and I-Line; short terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PowerPact L 250 A, 3P, unit-mount and I-Line; FAQ: also optional on 400/600 A L-frame within wire-size/rating limits	**A**	same as above
Poles	3	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs per kit; short terminal shield	**A**	same as above
Wire range	(1) 2 AWG-500 kcmil Al or (1) 2 AWG-600 kcmil Cu	**A**	same as above
Material	tin-plated aluminum	**A**	same as above
Identification features	L-frame lugs are pre-tapped for control wire: 8-32 x 1/4 in screw (not provided) into tapped hole in lower left corner of lug	**A**	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00222	AL400L61K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250 A mechanical lug kit, Al, 4P

OEM part number	AL400L61K4	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 250 A, 4-pole, unit mount only; short terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250 A, 4P unit mount	A	same as above
Poles	4	A	same as above
Current rating	250 A	A	same as above
Kit contents	4 lugs per kit; short terminal shield	A	same as above
Wire range	(1) 2 AWG-500 kcmil Al or (1) 2 AWG-600 kcmil Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00225	AL600LF52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)

OEM part number	AL600LF52K3	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, unit mount and I-Line; short terminal shield; standard on I-Line LGA/LLA/LRA 400 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Wire range	(2) 3/0 AWG-500 kcmil Al or Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00223	AL600LS52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)

OEM part number	AL600LS52K3	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, unit mount; medium terminal shield; standard lug on 400/600 A unit-mount L-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P unit mount	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; medium terminal shield	A	same as above
Wire range	(2) 2/0 AWG-500 kcmil Al or Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Digest 2012/2016 lists 'AL600S52K3' - typo for AL600LS52K3 or distinct part?*		

EDH-SQD-00224	AL600LS52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)

OEM part number	AL600LS52K4	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, 4P unit mount; medium terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 4P unit mount	A	same as above
Poles	4	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	4 lugs per kit; medium terminal shield	A	same as above
Wire range	(2) 2/0 AWG-500 kcmil Al or Cu	A	same as above
Material	tin-plated aluminum	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00226	CU400L61K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P

OEM part number	CU400L61K3	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount and I-Line	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250/400 A, 3P, unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	250/400 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Wire range	as printed: (1) 2 AWG-500 kcmil Al / (1) 2 AWG-600 kcmil Cu (row layout garbled) (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00227	CU400L61K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P

OEM part number	CU400L61K4	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250/400 A, 4P, unit mount	A	same as above
Poles	4	A	same as above
Current rating	250/400 A	A	same as above
Kit contents	4 lugs per kit; short terminal shield	A	same as above
Wire range	as printed: (1) 2 AWG-600 kcmil Cu (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00230	CU600LF52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P

OEM part number	CU600LF52K3	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount and I-Line	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P, unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Wire range	as printed: (1) 3/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00228	CU600LS52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P

OEM part number	CU600LS52K3	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; medium terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P, unit mount	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; medium terminal shield	A	same as above
Wire range	as printed: (1) 2/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00229	CU600LS52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P

OEM part number	CU600LS52K4	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; medium terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 4P, unit mount	A	same as above
Poles	4	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	4 lugs per kit; medium terminal shield	A	same as above
Wire range	as printed: (1) 2/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00212	CYA400L31K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L31K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	285 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00217	CYA400L31K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L31K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	285 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00214	CYA400L51K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L51K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	380 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00219	CYA400L51K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L51K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	380 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00216	CYA400L71K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L71K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	475 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	500-750 kcmil Al / 500 kcmil Cu (as printed); 1 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00213	CYA600L32K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L32K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	570 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00218	CYA600L32K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L32K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	570 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0-300 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00215	CYA600L52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L52K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	760 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00220	CYA600L52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L52K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	760 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	250-500 kcmil Cu; 2 wire(s) per lug	A	same as above
Material	copper compression lugs	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00194	PDC12DG4L3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC12DG4L3	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact L-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	(12) 8-4 AWG or 14-10 AWG	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00193	PDC5DG20L3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC5DG20L3	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact L-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Wire range	5 total: (3) 4-1 AWG or 14-6 AWG and (2) 3-2/0 AWG	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00199	YA400L31K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L31K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	230 A Al / 285 A Cu @75C (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	4-300 kcmil Al/Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00201	YA400L51K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L51K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	310 A Al / 380 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00205	YA400L51K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L51K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	310 A Al / 380 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 2 (as printed) lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00203	YA400L71K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L71K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	385 A Al / 475 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Wire range	500-750 kcmil Al or 500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00207	YA400L71K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L71K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	385 A Al / 475 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 2 (as printed) lugs per terminal	A	same as above
Wire range	500-750 kcmil Al or 500 kcmil Cu; 1 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00200	YA600L32K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L32K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	460 A Al / 570 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	4-300 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00204	YA600L32K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L32K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	460 A Al / 570 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 1 (as printed) lugs per terminal	A	same as above
Wire range	4-300 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00202	YA600L52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L52K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	620 A Al / 760 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00206	YA600L52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L52K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	620 A Al / 760 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 1 (as printed) lugs per terminal	A	same as above
Wire range	2/0-500 kcmil Al/Cu; 2 wire(s) per lug	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00243	**S32562**	PowerPact L-frame short terminal cover 3p	PowerPact L-frame **A**	unknown
EDH-SQD-00244	**S32563**	PowerPact L-frame short terminal cover 4p	PowerPact L-frame **A**	unknown

EDH-SQD-00243	S32562	Square D	barrier	STATUS UNKNOWN

PowerPact L-frame short terminal cover 3p

OEM part number	S32562	A	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, L-frame (kit has one cover; order two)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, L-frame (kit has one cover; order two)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00244	S32563	Square D	barrier	STATUS UNKNOWN

PowerPact L-frame short terminal cover 4p

OEM part number	S32563	A	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 4P, L-frame (order two)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Kit contents	Short terminal cover 4P, L-frame (order two)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00188	**S36967**	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	PowerPact L-frame; D-frame (4P) A	unknown

EDH-SQD-00188	S36967	Square D	fastener	STATUS UNKNOWN

PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)

OEM part number	S36967	A	S112 p.123 Table 119; p.125 Table 126; oem_spec
Alternate / superseded numbers	36967	A	S114 alias; p.3-29 Table 3.94; oem_spec
Description	Set of 4 M10 x 25 terminal screws and washers for one side; L-frame rear connection and bus bar hardware; D-frame 4P bus bar hardware (Digest 36967)	A	S112 p.123 Table 119; p.125 Table 126; oem_spec
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame; D-frame (4P)	A	same as above
Kit contents	4 screws + washers	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR), Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00181	**29348**	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	L-frame (s1); D-frame 400/600 A lugs (s3) A	unknown
EDH-SQD-00239	**S32477**	PowerPact L-frame mixed rear connection kit	PowerPact L-frame A	unknown
EDH-SQD-00240	**S32478**	PowerPact L-frame mixed rear connection kit	PowerPact L-frame A	unknown
EDH-SQD-00241	**S432475**	PowerPact L-frame short rear connections (set of 2)	PowerPact L-frame A	unknown
EDH-SQD-00242	**S432476**	PowerPact L-frame long rear connections (set of 2)	PowerPact L-frame A	unknown

EDH-SQD-00181	29348	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)

OEM part number	29348	A	S112 p.124, Table 122; oem_spec
Alternate / superseded numbers	S29348 (Printed '29348' without S prefix; other PowerPact kits use S prefix - unverified)	D	S112 alias; p.124; inference
Description	Control tap takeoff, L-frame; also listed as 'Voltage Takeoffs (set of two)' for D-frame lugs in Digest	A	S112 p.124, Table 122; oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame (s1); D-frame 400/600 A lugs (s3)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR), Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00239	S32477	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame mixed rear connection kit

OEM part number	S32477	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, L-frame 3P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, L-frame 3P	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00240	S32478	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame mixed rear connection kit

OEM part number	S32478	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, L-frame 4P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Kit contents	Mixed rear connection kit, L-frame 4P	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00241	S432475	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame short rear connections (set of 2)

OEM part number	S432475	A	S112 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), L-frame; parts only, no hardware (see S36967); order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short rear connections (set of 2), L-frame; parts only, no hardware (see S36967); order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Requires	S36967 (EDH-SQD-00188)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00242	S432476	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame long rear connections (set of 2)

OEM part number	S432476	A	S112 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), L-frame; parts only, no hardware	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Long rear connections (set of 2), L-frame; parts only, no hardware	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Requires	S36967 (EDH-SQD-00188)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact M-Frame (MG/MJ)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00311	**AL800M23K**	PowerPact M/P-frame 800 A mechanical lug kit, Al	PowerPact M and P frame 800 A (distributor) C	unknown
EDH-SQD-00302	**AL800M23TK**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00304	**AL800M23TK4**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00303	**AL800P6TK**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00305	**AL800P6TK4**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00312	**AL800P7K**	PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)	PowerPact M and P frame 800 A unit mount (distributor) C	unknown

EDH-SQD-00311	AL800M23K	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P-frame 800 A mechanical lug kit, Al

OEM part number	AL800M23K	C	S128 distributor
Description	Mechanical lug kit, 800 A, aluminum, for PowerPact M- and P-frame (distributor description)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	PowerPact M and P frame 800 A (distributor)	C	same as above
Kit contents	3-piece set (distributor)	C	same as above
Wire range	3/0 AWG-500 kcmil Al/Cu (distributor)	C	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	OEM table reference, conductors per lug, Dimensions, OEM instruction document, Status, Torque values		
Open question	*Obtain 0612CT0101 (PowerPact M/P/R catalog) lug table to confirm (likely (2) or (3) conductors per lug).*		

EDH-SQD-00302	AL800M23TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800M23TK	A	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	3 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00304	AL800M23TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800M23TK4	A	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	4 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00303	AL800P6TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800P6TK	A	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	3 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00305	AL800P6TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800P6TK4	A	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	4 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00312	AL800P7K	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)

OEM part number	AL800P7K	C	S128 distributor
Description	Mechanical lug kit for 800 A M/P frame unit-mount breakers (distributor description)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	PowerPact M and P frame 800 A unit mount (distributor)	C	same as above
Wire range	3/0 AWG-750 kcmil Al/Cu; 750 kcmil compact Al only (distributor)	C	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	conductors per lug, Dimensions, OEM instruction document, kit quantity, Status, Torque values		

Breaker family Square D PowerPact P-Frame (PG/PJ/PL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00306	**AL1200P24TK**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown
EDH-SQD-00307	**AL1200P25TK**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown
EDH-SQD-00308	**AL1200P25TK4**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown

EDH-SQD-00306	AL1200P24TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P24TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

EDH-SQD-00307	AL1200P25TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P25TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	3 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

EDH-SQD-00308	AL1200P25TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P25TK4	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	4 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

Breaker family Square D PowerPact R-Frame (RG/RJ/RL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00309	**AL1200R53TK**	PowerPact R tapped (control-wire) lug kit 1200 A	RG, RJ, RL 1200 A (I-Line only) **A**	unknown

EDH-SQD-00309	AL1200R53TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact R tapped (control-wire) lug kit 1200 A

OEM part number	AL1200R53TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact (I-Line only)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	RG, RJ, RL 1200 A (I-Line only)	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact R-Frame (RG/RJ/RL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

4.16 General / family not yet assigned

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00271	**GYT**	Square D G-frame terminal shield 3P	Square D G-frame 3P **A**	unknown

EDH-SQD-00271	GYT	Square D	barrier	STATUS UNKNOWN

Square D G-frame terminal shield 3P

OEM part number	GYT	**A**	S115 p.3-25, Table 3.69; oem_spec
Description	Terminal shield, G-frame (3P)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Square D G-frame 3P	**A**	same as above
Kit contents	1 per kit	**A**	same as above
Not yet documented	breaker family record not created for Square D G-frame, Dimensions, OEM instruction document, Status, Torque values		

5 GE / ABB lineage

Lineage / brand markings: General Electric Industrial Solutions; ABB from 2018; ReliaGear

Family	Type	Status	Era	Entries	Pg
A-SERIES A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	panelboard	current as of BuyLog 07/2014	—	62	660
A-SERIES-COL A-Series Column Panelboards (ALC, AQC, AEC)	panelboard	unknown	—	6	678
A-SERIES-PWR A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	panelboard	current as of BuyLog 07/2014	—	35	678
CCB-QMR Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	panelboard	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	Types NCB and CCB listed as GE power distribution panelboards in March 1955; 1951 Trumbull 'Convertible Circuit Breaker Panelboards' (likely origin of the CCB letters)	36	691
CONVERTI-FUSE Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	panelboard	Obsolete	Safe-Converti-Fuse introduced by Trumbull c.1930; Converti-Fuse and Swing-Wa catalogued 1951 and listed by GE in 1955 (registered GE trade-marks)	0	701
NHB NAB / NHB bolt-on panelboards (legacy)	panelboard	discontinued (legacy); hardware sold as new-surplus	NAB catalogued 1951 (Trumbull, Type AT breakers); 'Types NAB, NHB' listed in GE March 1955 advertisement; GE 1949 hospital handbook lists 'Type NAB, NA, Multi-Breaker' panels	1	701
NLAB GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	panelboard	Obsolete (superseded by GE A-Series lighting panelboards - inference from GE line chronology; no GE supersession statement found)	NLAB (formerly NTQ) and NLTQ catalogued 1951; NLTQ introduced c.1951 as 'Trumbull's new NLTQ panelboard' with first plug-in quick-make quick-break breaker; NAB, NHB, NLAB, NLTQ, NLTQX listed in 1955 GE ad; renewal parts GEG-13610B 'Types DB, NLTQ and NLAB, Style 5' with GEJ-3006A (1969)	23	702
RG-NEXT ReliaGear neXT Power Panelboards	panelboard	unknown	—	3	710
SCP-PLUS Spectra Series Type SCP Plus panelboards	panelboard	unknown	—	15	711
SPECTRA-PP Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	panelboard	ABB guide: "Please note that Spectra, TED, FE, and FG breakers are obsolete"; Spectra bolt-on additions are served by Tmax XT retrofit kits (SRFB...)	—	315	716
TRUMBULL Trumbull Electric (Plainville CT) panelboards and switches	panelboard	Obsolete; forum states GE and Trumbull breakers share part numbers (e.g., TQL/THQL)	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; split-bus panels into early 1960s	0	865
AV-LINE AV-Line switchboards (legacy)	switchboard	unknown	—	13	866

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)

FAM-GEA-001 · panelboard · aka A Series, A-Series II, AQ, AE, AS, AL, AD, AD Plus, AQF, AEF, Pro-Stock · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's lighting/appliance panelboard platform. Symmetrical 20 in wide x 5.81 in deep galvanized boxes with removable endwalls, branch-bus direct connection and captive branch hardware. Type letter indicates breaker family: AL = plug-in Q-line, AQ = bolt-on Q-line (THQB), AE = bolt-on E-frame (TEY) 480Y/277 V, AD = 600 V TED/SE/FB. Pro-Stock unassembled interiors (AQU/AEU) are completed with MB main breaker kits, ML main lug kits and NK neutral kits. Pages in the 2014 BuyLog are headed 'A-Series II' on the column-panel kit page.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S75 p.11-1; oem_spec
Voltage rating	AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 Vac	A	S75 p.11-4 to 11-6; oem_spec
Main ampacity	Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A (SK)	A	S75 p.11-4, 11-5, 11-6; oem_spec
Branch breakers accepted	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THED/SE/FB; subfeeds TQD/THQD (AQ) or TED/TFJ/SE/SF (AE/AD)	A	S75 p.11-4 to 11-6; oem_spec
Dimensions	Box width 20 in, depth 5.81 in; lengths 25.5-88.5 in	A	S75 p.11-4; oem_spec
Seismic	IBC Zone 3/4 and CBC Zone 4 certified	A	S75 p.11-3; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, THQL / THHQL / TXQL, TJD / TJJ / TJK / THJK, TQD / THQD

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S76 BuyLog p.11-10 Rev. 11/13 GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Pa

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00059	**MB133**	A-Series Pro-Stock main/sub-feed breaker kit MB133	TED (18k) / THED (22k); SEHA/SELA/SEPA A	unknown
EDH-GEA-00060	**MB133WB**	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	SEHA + kit (breaker included) A	unknown
EDH-GEA-00051	**MB233**	A-Series Pro-Stock main/sub-feed breaker kit MB233	SFHA, SFLA, SFPA A	unknown
EDH-GEA-00053	**MB2332**	A-Series Pro-Stock main/sub-feed breaker kit MB2332	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only) A	unknown
EDH-GEA-00054	**MB2332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	2nd SFHA + kit (breaker included) A	unknown
EDH-GEA-00052	**MB233WB**	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	SFHA + kit (breaker included) A	unknown
EDH-GEA-00045	**MB332**	A-Series Pro-Stock main/sub-feed breaker kit MB332	SGHA (65k), SGLA (100k), SGPA (200k) A	unknown
EDH-GEA-00046	**MB332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	SGHA + kit (breaker included) A	unknown
EDH-GEA-00055	**MB333**	A-Series Pro-Stock main/sub-feed breaker kit MB333	SGHA, SGLA, SGPA A	unknown
EDH-GEA-00056	**MB333WB**	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	SGHA + kit (breaker included) A	unknown
EDH-GEA-00057	**MB423**	A-Series Pro-Stock main/sub-feed breaker kit MB423	TEY (14k) A	unknown
EDH-GEA-00058	**MB426**	A-Series Pro-Stock main/sub-feed breaker kit MB426	(2) TEY A	unknown
EDH-GEA-00044	**MB512**	A-Series Pro-Stock main/sub-feed breaker kit MB512	TQD (10k) / THQD (22k) A	unknown
EDH-GEA-00049	**MB513**	A-Series Pro-Stock main/sub-feed breaker kit MB513	TQD / THQD A	unknown
EDH-GEA-00050	**MB516**	A-Series Pro-Stock main/sub-feed breaker kit MB516	(2) TQD / (2) THQD A	unknown
EDH-GEA-00042	**MB612**	A-Series Pro-Stock main/sub-feed breaker kit MB612	THQB (10k) / THHQB (22k) A	unknown
EDH-GEA-00047	**MB613**	A-Series Pro-Stock main/sub-feed breaker kit MB613	THQB / THHQB A	unknown
EDH-GEA-00043	**MB614**	A-Series Pro-Stock main/sub-feed breaker kit MB614	(2) THQB / (2) THHQB A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00048	**MB616**	A-Series Pro-Stock main/sub-feed breaker kit MB616	(2) THQB / (2) THHQB **A**	unknown

EDH-GEA-00059	**MB133**	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133

OEM part number	MB133	**A**	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S75 p.11-15 note; oem_spec
Breaker compatibility	TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	S75 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	Breaker not included	**A**	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00060	**MB133WB**	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133WB

OEM part number	MB133WB	**A**	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: SEHA + kit (breaker included)	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S75 p.11-15 note; oem_spec
Breaker compatibility	SEHA + kit (breaker included)	**A**	S75 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	**A**	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00051	**MB233**	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233

OEM part number	MB233	**A**	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V and AEU3 480/277V 3ph interior, 225 A, 3 poles; breakers: SFHA, SFLA, SFPA	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S75 p.11-15 note; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	**A**	S75 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Breaker not included	**A**	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00053	MB2332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332

OEM part number	MB2332 (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00054	MB2332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332WB

OEM part number	MB2332WB (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00052	MB233WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233WB

OEM part number	MB233WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 225 A, 3 poles; breakers: SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SFHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00045	MB332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332

OEM part number	MB332	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 400/600 A, 2 poles; breakers: SGHA (65k), SGLA (100k), SGPA (200k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA (65k), SGLA (100k), SGPA (200k)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00046	MB332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332WB

OEM part number	MB332WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 600 A, 2 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00055	MB333	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333

OEM part number	MB333	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400/600 A, 3 poles; breakers: SGHA, SGLA, SGPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA, SGLA, SGPA	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00056	MB333WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333WB

OEM part number	MB333WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 600 A, 3 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00057	MB423	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB423

OEM part number	MB423	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 3 poles; breakers: TEY (14k)	A	same as above
	empower: "PRO-STK M BRK KIT 480Y/277V 3PH" (UPC 783175408399)	A	S301 empower page MB423; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	TEY (14k)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00058	MB426	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB426

OEM part number	MB426	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 6 poles; breakers: (2) TEY	A	same as above
	empower: "BREAKER KITS: TEY: 6P" (UPC 783175121120)	A	S301 empower page MB426; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) TEY	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00044	MB512	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB512

OEM part number	MB512	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 225 A, 2 poles; breakers: TQD (10k) / THQD (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	TQD (10k) / THQD (22k)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00049	MB513	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB513

OEM part number	MB513	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 225 A, 3 poles; breakers: TQD / THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	TQD / THQD	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00050	MB516	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB516

OEM part number	MB516	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 400 A, 6 poles; breakers: (2) TQD / (2) THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) TQD / (2) THQD	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00042	MB612	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB612

OEM part number	MB612	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 2 poles; breakers: THQB (10k) / THHQB (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	THQB (10k) / THHQB (22k)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00047	MB613	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB613

OEM part number	MB613	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 3 poles; breakers: THQB / THHQB	A	same as above
	empower: "PRO-STK M BRK KIT 240V 3PH" (UPC 783175408467)	A	S301 empower page MB613; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	THQB / THHQB	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00043	MB614	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB614

OEM part number	MB614	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 4 poles; breakers: (2) THQB / (2) THHQB	A	same as above
	empower: "BREAKER KITS: THQB: 4P" (UPC 783175120376)	A	S301 empower page MB614; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S75 p.11-15; oem_spec
Poles	4	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00048	MB616	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB616

OEM part number	MB616	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 6 poles; breakers: (2) THQB / (2) THHQB	A	same as above
	empower: "BREAKER KITS: THQB: 6P" (UPC 783175120383)	A	S301 empower page MB616; oem_spec
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00061	**MLA1**	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	—	unknown
EDH-GEA-00062	**MLA2**	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	—	unknown
EDH-GEA-00063	**MLA41**	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	—	unknown
EDH-GEA-00064	**MLA61**	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	—	unknown
EDH-GEA-00065	**MLA62**	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	—	unknown
EDH-GEA-00066	**MLR1**	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	—	unknown
EDH-GEA-00067	**MLR2**	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	—	unknown
EDH-GEA-00068	**MLR41**	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	—	unknown
EDH-GEA-00069	**MLR61**	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	—	unknown
EDH-GEA-00070	**MLT1**	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	—	unknown
EDH-GEA-00071	**MLT2**	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	—	unknown
EDH-GEA-00073	**MLT41**	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	—	unknown
EDH-GEA-00072	**MLT42**	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	—	unknown

EDH-GEA-00061	MLA1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)

OEM part number	MLA1	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure (mechanical), 225 A, standard	A	same as above
	empower: "RGLP MERCH LUG KIT STANDARD PRESSURE" (UPC 783175408313)	A	S301 empower page MLA1; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 6-350 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00062	MLA2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)

OEM part number	MLA2	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 225 A, oversized 225 A; also 225 A dual main	A	same as above
	empower: "PRO-STK LUG KIT OVERSIZED PRESSURE" (UPC 783175408320)	A	S301 empower page MLA2; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 1-600 MCM or (2) 1/0-250 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00063	MLA41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)

OEM part number	MLA41	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400 A, standard	A	same as above
	empower: "MAIN LUG KITS: 400A" (UPC 783175121205)	A	S301 empower page MLA41; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 2-600 MCM or (2) 1/0-250 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00064	MLA61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)

OEM part number	MLA61	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 600 A, standard 600 A; also 400 A dual main	A	same as above
	empower: "MAIN LUG KITS: 600A" (UPC 783175121229)	A	S301 empower page MLA61; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00065	MLA62	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)

OEM part number	MLA62	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400/600 A, oversized	A	same as above
	empower: "MAIN LUG KITS: 600A OVERSIZE" (UPC 783175121236)	A	S301 empower page MLA62; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	400/600 A	A	same as above
Kit contents	Wire range 3/0-800 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00066	MLR1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)

OEM part number	MLR1	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, standard	A	same as above
	empower: "PRO-STK LUG KIT STANDARD COPPER" (UPC 783175408351)	A	S301 empower page MLR1; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 4-350 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00067	MLR2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)

OEM part number	MLR2	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, oversized	A	same as above
	empower: "PRO-STK LUG KIT OVERSIZE COPPER" (UPC 783175408368)	A	S301 empower page MLR2; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00068	MLR41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)

OEM part number	MLR41	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400 A, standard	A	same as above
	empower: "MAIN LUG KITS: 400A CU" (UPC 783175121250)	A	S301 empower page MLR41; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00069	MLR61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)

OEM part number	MLR61	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400/600 A, standard 600 A; oversized 400 A	A	same as above
	empower: "MAIN LUG KITS: 600A CU" (UPC 783175121274)	A	S301 empower page MLR61; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	400/600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00070	MLT1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)

OEM part number	MLT1	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, standard	A	same as above
	empower: "PRO-STK LUG KIT STANDARD COMPRES" (UPC 783175408337)	A	S301 empower page MLT1; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 2/0-300 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00071	MLT2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)

OEM part number	MLT2	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, oversized	A	same as above
	empower: "PRO-STK LUG KIT OVERSIZE COMPRES" (UPC 783175408344)	A	S301 empower page MLT2; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	225 A	A	same as above
Kit contents	Wire range 4/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00073	MLT41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)

OEM part number	MLT41	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, oversized	A	same as above
	empower: "MAIN LUG KITS: 400A COMPRESSION" (UPC 783175121243)	A	S301 empower page MLT41; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 500-750 MCM (500 MCM Cu, 750 MCM Al)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00072	MLT42	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)

OEM part number	MLT42	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, standard	A	same as above
	empower: "MAIN LUG KITS: 400A COMPRESSION" (UPC 783164608052)	A	S301 empower page MLT42; oem_spec
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	S75 p.11-17; oem_spec
Current rating	400 A	A	same as above
Kit contents	Wire range 250-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00038	**ASPFB12P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	—	listed 07/2014
EDH-GEA-00039	**ASPFB3P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	—	listed 07/2014
EDH-GEA-00036	**ASPTED3P**	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	—	listed 07/2014
EDH-GEA-00037	**ASPTQD3P**	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	—	listed 07/2014

EDH-GEA-00038	ASPFB12P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles

OEM part number	ASPFB12P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	A	same as above
Application	branch (to mount breaker in existing space - footnote 1)	A	same as above
Kit contents	Mounting screws and washers only (footnote 2)	A	same as above
Status	listed 07/2014	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00039	ASPFB3P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles

OEM part number	ASPFB3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	A	same as above
Application	branch (to mount breaker in existing space - footnote 1)	A	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	A	same as above
Status	listed 07/2014	A	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00036	ASPTED3P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE

OEM part number	ASPTED3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TED/THED4/SE	A	same as above
	empower: "TED HARDWARE KIT" (UPC 783175131259)	A	S301 empower page ASPTED3P; oem_spec
Application	branch (to mount breaker in existing space - footnote 1)	A	S75 p.11-19; oem_spec
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	A	same as above
Status	listed 07/2014	A	same as above
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00037	ASPTQD3P	GE	breaker-mounting-kit	LISTED 07/2014

A-Series Breaker mounting hardware kit, breaker type TQD/THQD

OEM part number	ASPTQD3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	A	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TQD/THQD	A	same as above
Application	branch (to mount breaker in existing space - footnote 1)	A	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	A	same as above
Status	listed 07/2014	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00074	**NKA**	A-Series 200% neutral kit NKA (225 A)	—	unknown
EDH-GEA-00075	**NKA42**	A-Series 200% neutral kit NKA42 (400 A)	—	unknown
EDH-GEA-00080	**NKA4FT**	A-Series 200% neutral kit NKA4FT (400 A)	—	unknown
EDH-GEA-00076	**NKR**	A-Series 200% neutral kit NKR (225 A)	—	unknown
EDH-GEA-00077	**NKR4**	A-Series 200% neutral kit NKR4 (400 A)	—	unknown
EDH-GEA-00078	**NKT**	A-Series 200% neutral kit NKT (225 A)	—	unknown
EDH-GEA-00079	**NKT4**	A-Series 200% neutral kit NKT4 (400 A)	—	unknown

EDH-GEA-00074	NKA	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA (225 A)

OEM part number	NKA	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 225 A	A	same as above
	empower: "RLP MERCH 200% NEUT KIT STD PRES L" (UPC 783175408474)	A	S301 empower page NKA; oem_spec
Current rating	225 A	A	S75 p.11-17; oem_spec
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00075	NKA42	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA42 (400 A)

OEM part number	NKA42	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00080	NKA4FT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA4FT (400 A)

OEM part number	NKA4FT	A	S75 p.11-17 footnote 2; oem_spec
Description	200% neutral kit, Pressure, 200% neutral feed-thru lugs, 400 A; wire range (2) 2/0-600 MCM or (4) 4-250 MCM; ref. GO-101P	A	S75 p.11-17; oem_spec
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00076	NKR	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR (225 A)

OEM part number	NKR	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00077	NKR4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR4 (400 A)

OEM part number	NKR4	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00078	NKT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT (225 A)

OEM part number	NKT	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00079	NKT4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT4 (400 A)

OEM part number	NKT4	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00097	**EGS12**	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	—	unknown
EDH-GEA-00096	**TGL2**	A-Series Equipment ground, standard bonded to box, per 12 branch positions	—	unknown
EDH-GEA-00095	**TGL20**	A-Series Main lug for equipment ground terminal kits	—	unknown

EDH-GEA-00097	EGS12	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard isolated/insulated, per 12 branch positions

OEM part number	EGS12	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard isolated/insulated, per 12 branch positions	A	same as above
	empower: "EQUIPMENT GROUND KIT" (UPC 783175811700)	A	S301 empower page EGS12; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00096	TGL2	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard bonded to box, per 12 branch positions

OEM part number	TGL2	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard bonded to box, per 12 branch positions ((11) 14-8 Cu/12-8 Al, (3) 14-4 Cu/6-4 Al)	A	same as above
	empower: "EQUIPMENT GROUND KIT" (UPC 783164008746)	A	S301 empower page TGL2; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00095	TGL20	GE	ground-bar	STATUS UNKNOWN

A-Series Main lug for equipment ground terminal kits

OEM part number	TGL20	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	Main lug for equipment ground terminal kits (6-2/0 Cu/Al)	A	same as above
	empower: "EQUIPMENT GROUND KIT" (UPC 783164087581)	A	S301 empower page TGL20; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00089	**ASPAQLEBKT**	A-Series AQ/AL/AE rail bracket	—	unknown

EDH-GEA-00089	ASPAQLEBKT	GE	mounting-bracket	STATUS UNKNOWN

A-Series AQ/AL/AE rail bracket

OEM part number	ASPAQLEBKT	A	S75 p.11-20; oem_spec
Description	AQ/AL/AE rail bracket	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00087	**ASP25AD65KA**	A-Series AD 25 to 65 kAIC barrier kit	—	unknown

EDH-GEA-00087	ASP25AD65KA	GE	barrier	STATUS UNKNOWN

A-Series AD 25 to 65 kAIC barrier kit

OEM part number	ASP25AD65KA	A	S75 p.11-20; oem_spec
Description	AD 25 to 65 kAIC barrier kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00040	**TEDFP1**	A-Series filler plate for TQD/THQD/TED4/SE/FB	—	unknown
EDH-GEA-00041	**TQLFP1**	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	—	unknown

EDH-GEA-00040	TEDFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for TQD/THQD/TED4/SE/FB

OEM part number	TEDFP1	A	S75 p.11-19; oem_spec
Description	TQD/THQD/TED4/SE/FB Filler Plates	A	same as above
	empower: "TED FILLER PLATE" (UPC 783175166701)	A	S301 empower page TEDFP1; oem_spec
Installation location	A-Series deadfront	B	S75 inference
Cross-links	Families: A-SERIES · Breakers: TQD / THQD, TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA), Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

EDH-GEA-00041	TQLFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY

OEM part number	TQLFP1	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	THQB/THHQB/THQL/THHQL/TEY Filler Plates; 'Filler Plate for Q Line and TEY Breakers'	A	same as above
	empower: "1" FRONT FILLER PLATE - QTY 1" (UPC 783164140156)	A	S301 empower page TQLFP1; oem_spec
Cross-links	Families: A-SERIES, A-SERIES-COL · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00090	**139C5720G3**	A-Series AE front mounting kit	—	unknown
EDH-GEA-00091	**139C5720G6**	A-Series AQ/AL front mounting kit	—	unknown
EDH-GEA-00092	**139C5720G9**	A-Series AD front mounting kit	—	unknown
EDH-GEA-00081	**BNDKT**	A-Series Service entrance kit 225 A	—	unknown
EDH-GEA-00082	**BNDKT6**	A-Series Service entrance kit 400/600 A	—	unknown

EDH-GEA-00090	139C5720G3	GE	hardware-kit	STATUS UNKNOWN

A-Series AE front mounting kit

OEM part number	139C5720G3	A	S75 p.11-20; oem_spec
Description	AE front mounting kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00091	139C5720G6	GE	hardware-kit	STATUS UNKNOWN

A-Series AQ/AL front mounting kit

OEM part number	139C5720G6	A	S75 p.11-20; oem_spec
Description	AQ/AL front mounting kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00092	139C5720G9	GE	hardware-kit	STATUS UNKNOWN

A-Series AD front mounting kit

OEM part number	139C5720G9	A	S75 p.11-20; oem_spec
Description	AD front mounting kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00081	BNDKT	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 225 A

OEM part number	BNDKT	A	S75 p.11-17; oem_spec
Description	Service entrance kit 225 A (bonding strap with hardware and service entrance label)	A	same as above
	empower: "PRO-STK BONDING STRAP KIT SERV ENTR" (UPC 783175408771)	A	S301 empower page BNDKT; oem_spec
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00082	BNDKT6	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 400/600 A

OEM part number	BNDKT6	A	S75 p.11-17; oem_spec
Description	Service entrance kit 400/600 A (bonding strap with hardware and SE label)	A	same as above
	empower: "BONDING KIT" (UPC 783175121311)	A	S301 empower page BNDKT6; oem_spec
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00084	**APHBL**	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	—	unknown
EDH-GEA-00083	**APHBQ**	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	—	unknown
EDH-GEA-00086	**ASP2PTFJ3P**	A-Series 2P to 3P SF conversion kit for horizontal subfeed	—	unknown
EDH-GEA-00085	**ASP2PTQD3P**	A-Series 2P to 3P TQD conversion kit	—	unknown

EDH-GEA-00084	APHBL	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels

OEM part number	APHBL	A	S75 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00083	APHBQ	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels

OEM part number	APHBQ	A	S75 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00086	ASP2PTFJ3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P SF conversion kit for horizontal subfeed

OEM part number	ASP2PTFJ3P	A	S75 p.11-20; oem_spec
Description	2P to 3P SF conversion kit for horizontal subfeed	A	same as above
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00085	ASP2PTQD3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P TQD conversion kit

OEM part number	ASP2PTQD3P	A	S75 p.11-20; oem_spec
Description	2P to 3P TQD conversion kit	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00088	**TQDFM1**	A-Series 2-3 pole TQD mechanical interlock	—	unknown

EDH-GEA-00088	TQDFM1	GE	breaker-accessory	STATUS UNKNOWN

A-Series 2-3 pole TQD mechanical interlock

OEM part number	TQDFM1	A	S75 p.11-20; oem_spec
Description	2-3 pole TQD mechanical interlock	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00093	**APN48**	A-Series Permanent circuit number kit, Nos 1-48	—	unknown
EDH-GEA-00094	**APN84**	A-Series Permanent circuit number kit, Nos 43-84	—	unknown

EDH-GEA-00093	APN48	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 1-48

OEM part number	APN48	A	S75, S76 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 1-48 (AQ, AL, AE; AD version APN48AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00094	APN84	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 43-84

OEM part number	APN84	A	S75, S76 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 43-84 (AQ, AL, AE; AD version APN84AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC)

FAM-GEA-003 · panelboard · aka ALC, AQC, AEC · markings: GE

Narrow column-type A-Series panels (8.62 in wide x 5.81 in deep). ALC plug-in Q-line, AQC bolt-on THQB, AEC bolt-on TEY 15-80 A.

Attribute	Value	Cl.	Sources
Main ampacity	Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/SF 225 A	A	S75 p.11-9; oem_spec
Dimensions	Width 8.62 in, depth 5.81 in; lengths 37.5-76.5 in	A	same as above

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;
Also fits this family (entry printed elsewhere): TQLFP1, APN48, APN84, TGL20, TGL2, EGS12

5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')

FAM-GEA-002 · panelboard · aka AQP, AEP, ADP, A-Series II Powerpanel, AD/AE/AQ Type P & N Power Panel · markings: GE, GE Industrial Solutions, ABB

Power-panel version of the A-Series: 30 in wide x 8 in deep box, single-piece deadfront (no filler plates needed per catalog), up to 600 A branch device, staggered center-mounted SF/SG breakers. Field breaker kits ASPP6xxxx (DEH40150-DEH40158) are installed into 'Un-Specified Space' on the interior, bolting branch bases/straps to the main bus next to the crossbar and replacing a blank shield insert on the deadfront with a breaker-specific filler plate.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S75 p.11-21; oem_spec
Main ampacity	Mains 125-800 A SG/SK breakers; main lug 600-800 A	A	S75 p.11-22; oem_spec
Branch breakers accepted	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/SG. ADP: FB, THED, double branch TED/SE, center SF/SG	A	same as above
Dimensions	Width 30 in, depth 8 in; lengths 25.5-88.5 in	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, THQB / THHQB / TXQB, TQD / THQD
Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S77 DEH40150 Rev.No.03 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Break; S78 DEH40151 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Break; S79 DEH40152 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Brea; S80 DEH40153 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit B; S81 DEH40154 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K; S82 DEH40155 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S83 DEH40156 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Break; S84 DEH40157 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S85 DEH40158 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00009	**ASPP6EY12D**	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	TEY frame per kit title A	unknown
EDH-GEA-00008	**ASPP6EY6D**	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	TEY frame per kit title A	unknown
EDH-GEA-00005	**ASPP6FB6D**	A-Series II power panel FB three-phase circuit breaker kit, six-pole	FB frame per kit title A	unknown
EDH-GEA-00007	**ASPP6QB12D**	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	QB frame per kit title A	unknown
EDH-GEA-00006	**ASPP6QB6D**	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	QB frame per kit title A	unknown
EDH-GEA-00001	**ASPP6QD6D**	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)	TQD frame per kit title A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00002	**ASPP6SE6D**	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	SE frame per kit title **A**	unknown
EDH-GEA-00003	**ASPP6SF3S**	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	SF frame per kit title **A**	unknown
EDH-GEA-00004	**ASPP6SG3S**	A-Series II power panel SG three-phase circuit breaker kit, three-pole	SG frame per kit title **A**	unknown

EDH-GEA-00009 — ASPP6EY12D — GE — branch-connector-kit — STATUS UNKNOWN

A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6EY12D	**A**	S82 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S82 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S82 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S82 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S82 steps 4-11; oem_spec
OEM instruction document	DEH40155 Rev.No.02	**A**	S82 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc).	**A**	S82 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00008 — ASPP6EY6D — GE — branch-connector-kit — STATUS UNKNOWN

A-Series II power panel TEY three-phase circuit breaker kit, six-pole

OEM part number	ASPP6EY6D	**A**	S84 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S84 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S84 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S84 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S84 steps 4-11; oem_spec
OEM instruction document	DEH40157 Rev.No.01	**A**	S84 header; oem_spec
Identification features	Crossbar gap 0.06 in	**A**	S84 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00005	ASPP6FB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel FB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6FB6D	A	S83 p.1; oem_spec
Description	FB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S83 steps 4-13; oem_spec
Breaker compatibility	FB frame per kit title	A	S83 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1 (same as SE kit); (6) spool 10093207P2; (6) spool screw 10093208P2; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5700P86; (8) screw N667P16008B6; (4) screw N80P15046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S83 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler & deadfront 27-36 in-lb	A	S83 steps 4-11; oem_spec
OEM instruction document	DEH40156 Rev.No.01	A	S83 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in	A	S83 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5700P86 (EDH-GEA-00026), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00007	ASPP6QB12D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6QB12D	A	S81 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S81 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S81 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S81 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S81 steps 4-11; oem_spec
OEM instruction document	DEH40154 Rev.No.02	A	S81 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in.	A	S81 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00006	ASPP6QB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6QB6D	A	S85 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S85 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S85 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S85 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; breaker terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S85 steps 4-11; oem_spec
OEM instruction document	DEH40158 Rev.No.01	A	S85 header; oem_spec
Identification features	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in	A	S85 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00001	ASPP6QD6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)

OEM part number	ASPP6QD6D	A	S79 p.1; oem_spec
Description	TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD); for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S79 steps 4-13; oem_spec
Breaker compatibility	TQD frame per kit title	A	S79 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CQDG1; (6) spool 315A7036P19; (6) spool screw 315A7037P4; (6) spool washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P81; (8) bracket-to-rail screw N667P16008B6; (4) C/B-to-bracket screw N80P150046B6; (1) filler plate TQD 139C5503P64; (4) #10-32x3/8 screw N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S79 p.1 Table 1; oem_spec
Torque values	Branch bases to main bus 60 in-lb max; bracket to rail 27-36 in-lb; 1/4-28 x 1-3/8 spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler plate & deadfront 27-36 in-lb	A	S79 steps 4-11; oem_spec
OEM instruction document	DEH40152 Rev.No.02	A	S79 header; oem_spec
Identification features	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in	A	S79 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Requires	139C5702AQDG1 (EDH-GEA-00010), 139C5702BQDG1 (EDH-GEA-00013), 139C5702CQDG1 (EDH-GEA-00016), 139C5500P81 (EDH-GEA-00022), 139C5503P64 (EDH-GEA-00030)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00002	ASPP6SE6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole

OEM part number	ASPP6SE6D	A	S80 p.1; oem_spec
Description	SE/TED three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S80 steps 4-13; oem_spec
Breaker compatibility	SE frame per kit title	A	S80 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1; (6) spool 315A7036P18; (6) spool screw 315A7037P3; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P82; (8) screw N667P16008B6; (4) screw N80P150046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S80 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 in-lb; breaker to bracket 18-22 in-lb; filler/deadfront 27-36 in-lb	A	S80 steps 4-11; oem_spec
OEM instruction document	DEH40153 Rev.No.02	A	S80 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in	A	S80 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5500P82 (EDH-GEA-00023), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00003	ASPP6SF3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SF three-phase circuit breaker kit, three-pole single

OEM part number	ASPP6SF3S	A	S78 p.1; oem_spec
Description	SF three-phase circuit breaker kit, three-pole single; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S78 steps 4-13; oem_spec
Breaker compatibility	SF frame per kit title	A	S78 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSFG1; (3) spool 315A7036P20; (3) spool screw 315A7037P1; (3) washer 75A105503P111; (3) bus screw 315A7034P6; (1) 3P bracket 139C5500P84; (2) screw N37P16060B6; (2) cup washer N405P40B6; (1) filler plate SF/TFJ 139C5503P90; (4) N722P16006B6	A	S78 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max (left) / 50-70 in-lb (right side text); bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler 27-36 in-lb	A	S78 steps 4-11; oem_spec
OEM instruction document	DEH40151 Rev.No.02	A	S78 header; oem_spec
Identification features	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting.	A	S78 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	139C5702ASFG1 (EDH-GEA-00012), 139C5702BSFG1 (EDH-GEA-00015), 139C5702CSFG1 (EDH-GEA-00018), 139C5500P84 (EDH-GEA-00025), 139C5503P90 (EDH-GEA-00032)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00004	ASPP6SG3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SG three-phase circuit breaker kit, three-pole

OEM part number	ASPP6SG3S	A	S77 p.1; oem_spec
Description	SG three-phase circuit breaker kit, three-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S77 steps 4-13; oem_spec
Breaker compatibility	SG frame per kit title	A	S77 p.1, title; oem_spec
Kit contents	(3) straps A/B/C 315A7046P7/P8/P9; (3) spool 315A7036P22; (3) spool screw 315A7037P5; (3) washer 75A105503P111; (3) bus screw 315A7034P7; (1) 3P bracket 139C5500P83; (2) screw N667P16008B6; (3) xmas tree 315A7077P1; (1) filler plate SG/TFG 139C5503P103; (4) N722P16006B6; (1) bracket insulation 10086929P11; insulators B/A/C 10086929P5/P7/P6; (2) breaker mounting screws N37P16060B6; (2) spring lock washer #12 N405P40B6	A	S77 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 lb-in; breaker to bracket 18-22 lb-in; filler/deadfront 27-36 lb-in	A	S77 steps 4-11; oem_spec
OEM instruction document	DEH40150 Rev.No.03	A	S77 header; oem_spec
Identification features	Crossbar gap 0.002 in	A	S77 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	315A7046P7 (EDH-GEA-00019), 315A7046P8 (EDH-GEA-00020), 315A7046P9 (EDH-GEA-00021), 139C5500P83 (EDH-GEA-00024), 139C5503P103 (EDH-GEA-00033)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00010	**139C5702AQDG1**	Branch base, A phase, TQD (A-Series II)	—	unknown
EDH-GEA-00011	**139C5702ASEG1**	Branch base, A phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00012	**139C5702ASFG1**	Branch base, A phase, SF (A-Series II)	—	unknown
EDH-GEA-00013	**139C5702BQDG1**	Branch base, B phase, TQD (A-Series II)	—	unknown
EDH-GEA-00014	**139C5702BSEG1**	Branch base, B phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00015	**139C5702BSFG1**	Branch base, B phase, SF (A-Series II)	—	unknown
EDH-GEA-00016	**139C5702CQDG1**	Branch base, C phase, TQD (A-Series II)	—	unknown
EDH-GEA-00017	**139C5702CSEG1**	Branch base, C phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00018	**139C5702CSFG1**	Branch base, C phase, SF (A-Series II)	—	unknown
EDH-GEA-00019	**315A7046P7**	SG breaker strap, A phase (A-Series II)	—	unknown
EDH-GEA-00020	**315A7046P8**	SG breaker strap, B phase (A-Series II)	—	unknown
EDH-GEA-00021	**315A7046P9**	SG breaker strap, C phase (A-Series II)	—	unknown
EDH-GEA-00028	**315A7048P20**	Center (B phase) strap (THQB/TEY, A-Series II)	—	unknown
EDH-GEA-00027	**315A7049P10**	A & C phase 200A strap (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00010	139C5702AQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, TQD (A-Series II)

OEM part number	139C5702AQDG1	A	S79 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00011	139C5702ASEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SE/TED/FB (A-Series II)

OEM part number	139C5702ASEG1	A	S80, S83 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar, 60 in-lb max	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00012	139C5702ASFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SF (A-Series II)

OEM part number	139C5702ASFG1	A	S78 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P6	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00013	139C5702BQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, TQD (A-Series II)

OEM part number	139C5702BQDG1	A	S79 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00014	139C5702BSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SE/TED/FB (A-Series II)

OEM part number	139C5702BSEG1	A	S80, S83 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar, 60 in-lb max	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00015	139C5702BSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SF (A-Series II)

OEM part number	139C5702BSFG1	A	S78 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P6	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00016	139C5702CQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, TQD (A-Series II)

OEM part number	139C5702CQDG1	A	S79 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00017	139C5702CSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SE/TED/FB (A-Series II)

OEM part number	139C5702CSEG1	A	S80, S83 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar, 60 in-lb max	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00018	139C5702CSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SF (A-Series II)

OEM part number	139C5702CSFG1	A	S78 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P6	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00019	315A7046P7	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, A phase (A-Series II)

OEM part number	315A7046P7	A	S77 Table 1; oem_spec
Description	STRAP FOR A PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00020	315A7046P8	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, B phase (A-Series II)

OEM part number	315A7046P8	A	S77 Table 1; oem_spec
Description	STRAP FOR B PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00021	315A7046P9	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, C phase (A-Series II)

OEM part number	315A7046P9	A	S77 Table 1; oem_spec
Description	STRAP FOR C PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00028	315A7048P20	GE	connector-strap	STATUS UNKNOWN

Center (B phase) strap (THQB/TEY, A-Series II)

OEM part number	315A7048P20	A	S81, S82, S84, S85 Table 1; oem_spec
Description	STRAP, CENTER	A	same as above
Application	branch	A	same as above
Installation location	B phase main bus; located using 3X branch base placed against crossbar	A	S81, S82, S84, S85 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S81, S82, S84, S85 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00027	315A7049P10	GE	connector-strap	STATUS UNKNOWN

A & C phase 200A strap (THQB/TEY, A-Series II)

OEM part number	315A7049P10	A	S81, S82, S84, S85 Table 1; oem_spec
Description	A & C PHASE 200A STRAP	A	same as above
Application	branch	A	same as above
Installation location	Screwed to main bus with thread rolling screw & washer 315A7034P6, 60 in-lb max	A	S81, S82, S84, S85 installation steps; oem_spec
Current rating	200 A (per description)	A	S81 Table 1; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S81, S82, S84, S85 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00022	**139C5500P81**	3P breaker support bracket (ASPP6QD6D)	—	unknown
EDH-GEA-00023	**139C5500P82**	3P breaker support bracket (ASPP6SE6D)	—	unknown
EDH-GEA-00024	**139C5500P83**	3P breaker support bracket (ASPP6SG3S)	—	unknown
EDH-GEA-00025	**139C5500P84**	3P breaker support bracket (ASPP6SF3S)	—	unknown
EDH-GEA-00026	**139C5700P86**	3P breaker support bracket (ASPP6FB6D)	—	unknown

EDH-GEA-00022	139C5500P81	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6QD6D)

OEM part number	139C5500P81	A	S79 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00023	139C5500P82	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SE6D)

OEM part number	139C5500P82	A	S80 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S80 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D	A	S80 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00024	139C5500P83	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SG3S)

OEM part number	139C5500P83	A	S77 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00025	139C5500P84	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SF3S)

OEM part number	139C5500P84	A	S78 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00026	139C5700P86	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6FB6D)

OEM part number	139C5700P86	A	S83 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6FB6D	A	S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00029	**911E347P3**	3X branch base (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00029 **911E347P3** GE insulator **STATUS UNKNOWN**

3X branch base (THQB/TEY, A-Series II)

OEM part number	911E347P3	A	S81, S82, S84, S85 Table 1; oem_spec
Description	3X BRANCH BASE; load end of breaker snaps into base lancing slot	A	same as above
Application	branch	A	same as above
Installation location	Interior, adjacent to crossbar; supports load end of THQB/TEY	A	S81, S82, S84, S85 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S81, S82, S84, S85 Table 1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in per GE convention)	B	S81, S75 Table 1; BuyLog p.11-40; inference
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00035	**139C5362P2**	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	—	unknown
EDH-GEA-00033	**139C5503P103**	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	—	unknown
EDH-GEA-00034	**139C5503P129**	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	—	unknown
EDH-GEA-00030	**139C5503P64**	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	—	unknown
EDH-GEA-00031	**139C5503P77**	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	—	unknown
EDH-GEA-00032	**139C5503P90**	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	—	unknown

EDH-GEA-00035 **139C5362P2** GE filler-plate **STATUS UNKNOWN**

Deadfront filler plate (shield insert) - QB (A-Series II power panel)

OEM part number	139C5362P2	A	S81, S85 Table 1; oem_spec
Description	FILLER PLATE, QB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S81, S85 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D	A	S81, S85 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S81 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00033	139C5503P103	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)

OEM part number	139C5503P103	A	S77 Table 1; oem_spec
Description	FILLER PLATE, SG/TFG	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00034	139C5503P129	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TEY (A-Series II power panel)

OEM part number	139C5503P129	A	S82, S84 Table 1; oem_spec
Description	FILLER PLATE, TEY	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S82, S84 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6EY6D, ASPP6EY12D	A	S82, S84 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S82 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00030	139C5503P64	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TQD (A-Series II power panel)

OEM part number	139C5503P64	A	S79 Table 1; oem_spec
Description	FILLER PLATE, TQD	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00031	139C5503P77	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)

OEM part number	139C5503P77	A	S80, S83 Table 1; oem_spec
Description	FILLER PLATE, SE/TED/FB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S80 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00032	139C5503P90	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)

OEM part number	139C5503P90	A	S78 Table 1; oem_spec
Description	FILLER PLATE, SF/TFJ	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)

FAM-GEA-006 · panelboard · aka CCB, CDP?, Convertible Circuit Breaker panelboard, NCB, QMR · markings: GE, General Electric, Trumbull

Older GE power panelboards. Breakers mount with copper strap kits suffixed DPK (dual/twin mount) or SPK (single mount) usable on Cu or Al main bus; device product number + suffix ordered as a unit. Replacement CCB fronts CBAxxxxS/F and boxes DASW/DACB; filler plates CCBFPx/QMRFPx. QMR used THFP fusible switches. CDP is named in the batch scope but no CDP-specific data was found.

Evidence record for the existing GE CCB/QMR family: earliest dated GE mention of CCB (1955) and the 1951 Trumbull convertible circuit breaker panelboard description (sectionalized, breakers on steel back plates, removable trip units above 100 A frame). Dealer data shows CCB DPK/SPK strap kits also listed for AV1/AV2 switchboards and QMR.

Attribute	Value	Cl.	Sources
Status	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	A	S75 p.11-49 to 11-51; oem_spec
Era of manufacture	Types NCB and CCB listed as GE power distribution panelboards in March 1955; 1951 Trumbull 'Convertible Circuit Breaker Panelboards' (likely origin of the CCB letters) (CCB = 'Convertible Circuit Breaker' is an inference from the 1951 catalog heading)	B	S244, S259 oem_spec
Voltage rating	1951 Convertible CB panelboards: max 250 V DC, 600 V AC; mains 1200 A lugs or 600 A breaker; branches 15-600 A 1/2/3-pole	A	S259 GE Supply 1951 p.446; oem_spec
Kit family	Dealer 'Panel Type' for TB1DPK, TB4SBK, TB8SPK, TJ6SPK, THJV6DPK, TP8SPK, TED1DPK2: 'AV1, AV2, CCB, QMR'	C	S251 surplus_listing

Breaker families associated: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV), Spectra SF (SFHA/SFLA/SFPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TFJ / TFK / THFK / TFL, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S244 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S259 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00262	**SF2DPK**	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	SFH/SFL **A**	unknown
EDH-GEA-00266	**SK12SPK**	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	SKH12 **A**	unknown
EDH-GEA-00265	**SK8SPK**	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	SKH8 **A**	unknown
EDH-GEA-00419	**TB1DPK**	GE CCB panelboard twin mounting hardware, TB1, 15-150 A	TB1 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00421	**TB4SBK**	GE hardware kit for TB4 frame (single)	TB4 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00420	**TB4SPK**	GE CCB panelboard single mounting kit, TB4, 125-400 A	TB4 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00422	**TB8SPK**	GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A	TB6, TB8 **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00256	**TED1DPK**	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	TEB/TED **A**	unknown
EDH-GEA-00426	**TED1DPK2**	GE CCB panelboard twin mounting hardware, E-frame 150 A (variant 2)	TEB, TED, TEC, THED, SEDA, SEHA, SELA, SEPA **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00261	**TEL1DPK**	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	TEL **A**	unknown
EDH-GEA-00257	**TF2DPK**	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	TFJ/TFK/TFL **A**	unknown
EDH-GEA-00428	**THFP63DPK**	GE QMR panelboard twin mounting hardware for THFP fusible switch, 100 A	THFP fusible switch **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00429	**THFP63SPK**	GE QMR panelboard single mounting hardware for THFP fusible switch, 100 A	THFP fusible switch **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00430	**THFP64SPK**	GE QMR panelboard single mounting hardware for THFP fusible switch, 200 A	THFP fusible switch **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00431	**THFP65SPK**	GE QMR panelboard single mounting hardware for THFP fusible switch, 400 A	THFP fusible switch **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00425	**THJV6DPK**	GE CCB panelboard mounting hardware for THJV (listed 'twin mounted')	THJV **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00259	**TJ4DPK**	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	TJD/TJJ/TJK **A**	unknown
EDH-GEA-00260	**TJ6DPK**	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	TJK **A**	unknown
EDH-GEA-00424	**TJ6SPK**	GE CCB panelboard single-mounted strap kit, 600 A J-frame	TJD, TJJ, TJK, THJK, TJ4V, TJL4V **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00264	**TK12SPK**	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	TKM12/THKM12 **A**	unknown
EDH-GEA-00263	**TK8SPK**	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	TKM8/THKM8 **A**	unknown
EDH-GEA-00427	**TK9SPK**	GE QMR panel mount for TKL/TKH breakers, 1200 A 600 V	TKL, TKH **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00423	**TP8SPK**	GE mounting hardware for Tri-Pac 800 A breaker (CCB/AV)	TB6, TB8 (spec block) / Tri-Pac 800 A (title) **C**	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00258	**TQ2DPK**	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	TQD **A**	unknown

EDH-GEA-00262	SF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)

OEM part number	SF2DPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, SFH/SFL, 225 A kit. Footnotes: if mounting hardware exists must order SFCARE for additional insulators; 225 A max	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	SFH/SFL	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00266	SK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)

OEM part number	SK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH12, 1200 A kit. Deep mounted interior required	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	SKH12	A	same as above
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00265	SK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)

OEM part number	SK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH8, 800 A kit. Deep mounted interior required	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	SKH8	A	same as above
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00419	TB1DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard twin mounting hardware, TB1, 15-150 A

OEM part number	TB1DPK	C	S251 surplus_listing
Description	Mounting hardware/CCB panelboard - twin mounted 15-150 A	C	same as above
Application	branch (twin)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB1	C	same as above
Current rating	100 A max (spec) / 15-150 A (title)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00421	TB4SBK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE hardware kit for TB4 frame (single)

OEM part number	TB4SBK	C	S251 surplus_listing
Description	GEN; Hardware Kit for TB4 Frame	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB4	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00420	TB4SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard single mounting kit, TB4, 125-400 A

OEM part number	TB4SPK	C	S251 surplus_listing
Description	Mounting hardware/CCB panelboard - single 125-400A TB4 mounting kit	C	same as above
Application	branch (single)	C	same as above
Installation location	AV Line (spec block)	C	same as above
Breaker compatibility	TB4	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00422	TB8SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A

OEM part number	TB8SPK	C	S251 surplus_listing
Description	Mounting hardware/CCB panelboard - single 600-800A	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB6, TB8	C	same as above
Current rating	800 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE · Breakers: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00256	TED1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)

OEM part number	TED1DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEB/TED, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEB/TED	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00426	TED1DPK2	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard twin mounting hardware, E-frame 150 A (variant 2)

OEM part number	TED1DPK2	C	S251 surplus_listing
Description	MTG HRDWRE/CCB panelboard, twin mounted	C	same as above
Application	branch (twin)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TEB, TED, TEC, THED, SEDA, SEHA, SELA, SEPA	C	same as above
Current rating	150 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*How does TED1DPK2 differ from TED1DPK (already catalogued)?*		

EDH-GEA-00261	TEL1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)

OEM part number	TEL1DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEL, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEL	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00257	TF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)

OEM part number	TF2DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TFJ/TFK/TFL, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TFJ/TFK/TFL	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00428	THFP63DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard twin mounting hardware for THFP fusible switch, 100 A

OEM part number	THFP63DPK	C	S251 surplus_listing
Description	MTG HRDWRE/QMR panelboard - twin mount 100 A	C	same as above
Application	branch (twin)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	100 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00429	THFP63SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard single mounting hardware for THFP fusible switch, 100 A

OEM part number	THFP63SPK	C	S251 surplus_listing
Description	MTG HRDWRE/QMR panelboard - single mount 100 A	C	same as above
Application	branch (single)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	100 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00430	THFP64SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard single mounting hardware for THFP fusible switch, 200 A

OEM part number	THFP64SPK	C	S251 surplus_listing
Description	MTG HRDWRE/QMR panelboard - single mount 200 A	C	same as above
Application	branch (single)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	200 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00431	THFP65SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panelboard single mounting hardware for THFP fusible switch, 400 A

OEM part number	THFP65SPK	C	S251 surplus_listing
Description	MTG HRDWRE/QMR panelboard - single mount 400 A	C	same as above
Application	branch (single)	C	same as above
Installation location	QMR fusible power panelboard	C	same as above
Breaker compatibility	THFP fusible switch	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00425	THJV6DPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard mounting hardware for THJV (listed 'twin mounted')

OEM part number	THJV6DPK	C	S251 surplus_listing
Description	MTG HRDWRE/CCB panelboard - twin mounted	C	same as above
Application	branch (title twin; spec block single - conflict)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	THJV	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00259	TJ4DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)

OEM part number	TJ4DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJD/TJJ/TJK, 400 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJD/TJJ/TJK	A	same as above
Current rating	400 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00260	TJ6DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)

OEM part number	TJ6DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJK, 600 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJK	A	same as above
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00424	TJ6SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE CCB panelboard single-mounted strap kit, 600 A J-frame

OEM part number	TJ6SPK	C	S251 surplus_listing
Description	MTG HRDWRE/CCB panelboard - single mounted 600A strap kit	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TJD, TJJ, TJK, THJK, TJ4V, TJL4V	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00264	TK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)

OEM part number	TK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM12/THKM12, 1200 A kit. Deep mounted interior required; requires 7X at extreme end or 8X if mounted in center of interior	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM12/THKM12	A	same as above
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00263	TK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)

OEM part number	TK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM8/THKM8, 800 A kit. Deep mounted interior required	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM8/THKM8	A	same as above
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00427	TK9SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE QMR panel mount for TKL/TKH breakers, 1200 A 600 V

OEM part number	TK9SPK	C	S251 surplus_listing
Description	1200A 600V QMR panel mount for TKL/TKH breakers	C	same as above
Installation location	QMR	C	same as above
Breaker compatibility	TKL, TKH	C	same as above
Current rating	1200 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00423	TP8SPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE mounting hardware for Tri-Pac 800 A breaker (CCB/AV)

OEM part number	TP8SPK	C	S251 surplus_listing
Description	Mounting hardware for Tri Pac 800A breaker	C	same as above
Application	branch (single)	C	same as above
Installation location	AV1, AV2, CCB, QMR	C	same as above
Breaker compatibility	TB6, TB8 (spec block) / Tri-Pac 800 A (title)	C	same as above
Current rating	800 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00258	TQ2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)

OEM part number	TQ2DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TQD, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TQD	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Distributor listings (e.g. Stanion 'tq2dpkge') describe TQ2DPK as 'For Use With: TQD Frame 125 to 225 A Circuit Breaker and Spectra Series CCB, QMR Panelboard' (Stanion page seen only via search summary; returned 404 on fetch)	C	S95 distributor
Cross-links	Families: CCB-QMR · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00275	**75C145005G703**	QMR panelboard filler plate 3X	—	unknown
EDH-GEA-00270	**75C145005G711**	CCB panelboard filler plate 2X	—	unknown
EDH-GEA-00271	**75C145005G715**	CCB panelboard filler plate 6X	—	unknown
EDH-GEA-00437	**CCBBLANK**	GE CCB 3-pole blanks	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00267	**CCBFP1**	CCB panelboard filler plate 1X	—	unknown
EDH-GEA-00268	**CCBFP3**	CCB panelboard filler plate 3X	—	unknown
EDH-GEA-00269	**CCBFP5**	CCB panelboard filler plate 5X	—	unknown
EDH-GEA-00436	**GAVFP2**	GE blank filler plate 4.125 in x 17 in (AV1/AV2/CCB)	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00272	**QMRFP1**	QMR panelboard filler plate 1X	—	unknown
EDH-GEA-00273	**QMRFP2**	QMR panelboard filler plate 2X	—	unknown
EDH-GEA-00438	**QMRFP3**	GE QMR full-width filler, 3X, 4.125 in x 24 in	—	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00274	**QMRFP5**	QMR panelboard filler plate 5X	—	unknown

EDH-GEA-00275 — 75C145005G703 — GE — filler-plate — STATUS UNKNOWN

QMR panelboard filler plate 3X

OEM part number	75C145005G703	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 3X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00270 — 75C145005G711 — GE — filler-plate — STATUS UNKNOWN

CCB panelboard filler plate 2X

OEM part number	75C145005G711	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00271 — 75C145005G715 — GE — filler-plate — STATUS UNKNOWN

CCB panelboard filler plate 6X

OEM part number	75C145005G715	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 6X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00437 — CCBBLANK — General Electric — filler-plate — DISCONTINUED OEM ITEM

GE CCB 3-pole blanks

OEM part number	CCBBLANK	C	S251 surplus_listing
Description	CCB 3P blanks	C	same as above
Installation location	CCB power panelboard	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Dealer code - OEM catalog number unknown*		

EDH-GEA-00267	CCBFP1	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 1X

OEM part number	CCBFP1	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00268	CCBFP3	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 3X

OEM part number	CCBFP3	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 3X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00269	CCBFP5	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 5X

OEM part number	CCBFP5	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00436	GAVFP2	General Electric	filler-plate	DISCONTINUED OEM ITEM

GE blank filler plate 4.125 in x 17 in (AV1/AV2/CCB)

OEM part number	GAVFP2	C	S251 surplus_listing
Description	4.125in x 17in blank filler plate	C	same as above
Installation location	AV1, AV2, CCB	C	same as above
Dimensions	4.125 in H x 17 in W	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR, AV-LINE		
Not yet documented	OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00272	QMRFP1	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 1X

OEM part number	QMRFP1	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00273	QMRFP2	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 2X

OEM part number	QMRFP2	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00438	QMRFP3	General Electric	filler-plate	DISCONTINUED OEM ITEM

GE QMR full-width filler, 3X, 4.125 in x 24 in

OEM part number	QMRFP3	C	S251 surplus_listing
Description	Full width QMR filler-3X panelboard full width filler; 4.125 in H x 24 in W	C	same as above
Installation location	QMR	C	same as above
Dimensions	4.125 in H x 24 in W (3X at 1.375 in)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00274	QMRFP5	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 5X

OEM part number	QMRFP5	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 5X height (order from local sales office or equipment plant)	A	same as above
	empower: "FULL WIDTH QMR FILLER-5X" (UPC 783164228939)	A	S301 empower page QMRFP5; oem_spec
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

5.5 CONVERTI-FUSE — Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards

FAM-GEA-012 · panelboard · aka Converti-Fuse, Safe-Converti-Fuse, Swing-Wa, Swing-WA · markings: Trumbull, General Electric

Trumbull Electric (GE subsidiary) fusible power distribution panelboards. Converti-Fuse: dead-front assembly of phenolic unit sections on a steel back plate whose removable caps hold the fuses and act as pull-out disconnects. Swing-Wa: individually enclosed steel switch units with switching built into the cover. GE bulletin numbers GEC-1253 (Converti-Fuse) and GEC-1255 appear in 1955 trade literature.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	inference
Era of manufacture	Safe-Converti-Fuse introduced by Trumbull c.1930; Converti-Fuse and Swing-Wa catalogued 1951 and listed by GE in 1955 (registered GE trade-marks)	A	S259, S244 oem_spec
Voltage rating	Converti-Fuse: max 250 V DC, 575 V AC, mains 1200 A lugs or 400 A switch, branches 30-400 A; Swing-Wa: max 250 V DC, 575 V AC, mains 1200 A lugs or 600 A switch, branches 30-600 A 2/3-pole	A	S259 GE Supply 1951 p.446; oem_spec
Bulletins	GEC-1253 Converti-Fuse type distribution; GEC-1255 (Swing-Wa / breaker distribution) (From a garbled 1955 Paper Trade Journal snippet; mapping uncertain)	C	S244 inference

Key documents: S244 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S259 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright

5.6 NHB — NAB / NHB bolt-on panelboards (legacy)

FAM-GEA-007 · panelboard · aka ABH, NA, NAB, NHB, NLAB? · markings: General Electric, Trumbull

Legacy GE bolt-on panelboard line. Only distributor evidence found (NHB150PK twin-mount hardware). No OEM document for NHB or NLAB located in this batch.

Evidence record for the existing GE NAB/NHB family. 1951 GE Supply catalog: NAB breakers assembled on a heavy black enamel steel back plate accepting 1, 2 or 3-pole AT breakers; boxes 4-3/4 in deep except 100/225 A main frame which need 5-3/4 in; Type ABH power/lighting panel with AT breakers. NHB appears in the 1955 GE type list; no GE technical description of NHB found yet. ITE/Siemens also used NAB/NHB designations (Canada).

Attribute	Value	Cl.	Sources
Status	discontinued (legacy); hardware sold as new-surplus	C	S91 surplus_listing
Era of manufacture	NAB catalogued 1951 (Trumbull, Type AT breakers); 'Types NAB, NHB' listed in GE March 1955 advertisement; GE 1949 hospital handbook lists 'Type NAB, NA, Multi-Breaker' panels	A	S259, S244 GE Supply 1951 p.441; ECM Mar 1955; oem_spec

Attribute	Value	Cl.	Sources
Voltage rating	NAB: 125 V DC, 125-250 V or 250 V AC; ABH: max 250 V AC, 125/250 V DC	A	S259 GE Supply 1951 pp.441, 446; oem_spec
Main ampacity	ABH: max 400 A lugs or 225 A circuit breaker mains	A	S259 GE Supply 1951 p.446; oem_spec
Branch breakers accepted	NAB: Type AT, 1/2/3-pole 15, 20, 25, 35, 50 A, one sub-feed up to 225 A; ABH: AT 15-50 A 1/2/3-pole on back plate drilled for universal mounting of 50 A frame breakers; later NAB/NHB twin kits NHB150PK (dealer)	A	S259, S252 oem_spec
	E-frame bolt-on TEB/TED/TEC/THED and SEDA (per distributor)	C	S91 surplus_listing
Dimensions	NAB boxes 4-3/4 in deep (OCR '4%'), 5-3/4 in for 100 or 225 A frame main breakers (Fraction OCR uncertain)	B	S259 p.441; oem_spec

Breaker families associated: GE / Trumbull Type AT and ATB breakers, TEB / TED / THED / TED4 / TED6
Key documents: S91 NHB150PK General Electric / GE Mounting Hardware (product page); S92 General Electric NHB150PK Twin Mount Mounting Hardware (product page); S244 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S252 Superbreakers - Mounting Kits, Panels & Accessories collection (Shopify products.json,; S259 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00280	**NHB150PK**	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SE C	discontinued; new-surplus stock

EDH-GEA-00280 **NHB150PK** GE branch-connector-kit **DISCONTINUED; NEW-SURP**

NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole

OEM part number	NHB150PK	B	S91, S92 distributor
Description	Direct replacement mounting hardware for GE NHB bolt-on style panelboards; dual/twin branch mounting; copper; 150 A, 600 V max	C	S91 surplus_listing
Breaker compatibility	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SEPA (Distributor lists disagree)	C	same as above
Kit contents	Screws, a panel cover and brackets (SuperBreakers)	C	S92 distributor
Material	Copper	C	S91 surplus_listing
Status	discontinued; new-surplus stock	C	same as above
Cross-links	Families: NHB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM confirmation, Dimensions, OEM instruction document		
Open question	*Does NHB150PK also fit NLAB panels? No evidence found.*		

5.7 NLAB — GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)

FAM-GEA-011 · panelboard · aka NLAB, NTQ, NLTQ, NLTQX, DB, TQLA, TQLP, GE NLAB · markings: General Electric, G-E, Trumbull

GE/Trumbull lighting panelboards of the 1950s-1960s. 1951 GE Supply catalog: NLAB 'formerly called NTQ' uses TQ quick-make quick-break thermal-magnetic breakers, 4-42 circuits, standard and column type for mounting in the web of H beams; NLTQ is 'a Trumbull development' with busbars encased in a PLASTISOL interior (said to run 10% cooler) and plug-in TQL breakers; NLTQX is the column type. Fronts are dual-purpose (flush or surface). Finish medium light grey. GE renewal parts list GEG-13610B (Style 5) covers DB, NLTQ and NLAB with bus supports, insulators, lugs, trim clamps, locks and handle-lock devices. Do not confuse with the Westinghouse NLAB (Quicklag breakers).

Attribute	Value	Cl.	Sources
Status	Obsolete (superseded by GE A-Series lighting panelboards - inference from GE line chronology; no GE supersession statement found)	D	inference
Era of manufacture	NLAB (formerly NTQ) and NLTQ catalogued 1951; NLTQ introduced c.1951 as 'Trumbull's new NLTQ panelboard' with first plug-in quick-make quick-break breaker; NAB, NHB, NLAB, NLTQ, NLTQX listed in 1955 GE ad; renewal parts GEG-13610B 'Types DB, NLTQ and NLAB, Style 5' with GEJ-3006A (1969)	A	S259, S268, S244, S260 GE Supply 1951 pp.441-443; ECM Mar 1955; GEJ-3006A; oem_spec
Successor	Probably GE A-Series (AQ) lighting panelboards with THQB/TQD breakers (1984 schedules show NLAB panels with THQB branch breakers)	D	S257 inference

Attribute	Value	Cl.	Sources
Voltage rating	3-wire 120/240 V AC or 4-wire 3-phase 120/208 V AC; branches 2-wire 120 V; mains lugs only or AT/ATB breakers (50 A AT, 100 A ATB, 200 A AT)	A	S259 GE Supply 1951 pp.441-443; oem_spec
Main ampacity	Lugs and neutral 100, 225, 400, 600 A (lug table in GEG-13610B); 1951 NLTQ boxes 4-12, 14-20, 22-30, 32-42 circuits	A	S260, S259 oem_spec
Branch breakers accepted	NLAB: GE Type TQ (1951), later TQC (handle lock/padlock list); NLTQ: plug-in Type TQL; TQB and TBQ also listed in renewal parts; standard ratings 15-100 A	A	S259, S260 oem_spec
Finish / plating	Trumbull lighting panelboards finish 'Medium Light Grey'	A	S259 GE Supply 1951 p.441; oem_spec
Construction	NLTQ busbars completely encased in PLASTISOL interior; interiors readily removable	A	S259, S268 oem_spec
Identification features	Breaker family on interior: TQ/TQC/TQB/TQL (GE) vs QC/Quicklag (Westinghouse NLAB); renewal parts card behind directory card in door card holder (GEJ-3006A)	B	S259, S260, S13 oem_spec
Listing / approvals	UL listed as panelboards under file E2366 (Trumbull NLTQ)	A	S259 GE Supply 1951 p.442; oem_spec
Related types	1957: GE plug-in combination lighting and power panel for TQL 15-50 A 1-pole and common-trip 2/3-pole breakers, up to 54 poles, 240 V AC, mains to 600 A: panel-base assembly Type TQLP or assembled panel Type TQLA	A	S261 ECM June 1957 new products; oem_spec

Breaker families associated: GE / Trumbull Type AT and ATB breakers, GE TQ / TQL / TQC / TQB / TBQ lighting breakers

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S244 sim_ecm_1955-03_54_3 Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'Syste; S257 standardapplicat0000muel Standard Application of Electrical Details (1984) - panel schedules showing 'NLAB 100 THQB; S259 wiringmaterialsp00unse Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright; S260 GEJ-3006A / GEG-13610B GE Installation and Maintenance Instructions GEJ-3006A 'Circuit Breaker Panelboards' with ; S261 sim_ecm_1957-06_56_6 Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distributio; S268 sim_electrical-wholesaling_1953-10_34_10; sim_plant-engineering_1951-07_5_7 Electrical Wholesaling Oct 1953 / Plant Engineering Jul 1951 - Trumbull advertisements for

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00405	**75C140045G705**	GE main lug assembly for phase bars and neutral (100/225 A row), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00405 **75C140045G705** General Electric lug-kit **OBSOLETE (1969 RENEWAL**

GE main lug assembly for phase bars and neutral (100/225 A row), NLAB/NLTQ/DB

OEM part number	75C140045G705	C	S260 oem_spec
Description	Main lugs for phase bars and neutral: 100 A #14-2/0 Cu or Al; 225 A #6-350 MCM Cu or Al - 75C140045G705 (row assignment ambiguous) (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	C	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Main lugs (phase bars and neutral)	C	S260 oem_spec
Current rating	100 A or 225 A row (ambiguous)	C	same as above
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00408	**121B7147P1**	GE main lug 250-600 MCM, 400 A (1 per phase) / 600 A (2 per phase), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00406	**763B795P8**	GE main lug (with 763B795P9), 225 A row, NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00407	**763B795P9**	GE main lug (with 763B795P8), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00408	121B7147P1	General Electric	lug	OBSOLETE (1969 RENEWAL

GE main lug 250-600 MCM, 400 A (1 per phase) / 600 A (2 per phase), NLAB/NLTQ/DB

OEM part number	121B7147P1	B	S260 oem_spec
Description	400 amp: 1 (250-600 MCM) or 2 (250 MCM) Cu or Al - (1) 121B7147P1; 600 amp: 1 (250-600 MCM) or 2 (250 MCM) Cu or Al per lug, 2 lugs required - (2) 121B7147P1 (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S260 GEG-13610B renewal parts list; oem_spec
Current rating	Used singly for 400 A mains and in pairs for 600 A mains	B	S260 oem_spec
Material	Suitable for Al or Cu conductors	A	same as above
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions		

EDH-GEA-00406	763B795P8	General Electric	lug	OBSOLETE (1969 RENEWAL

GE main lug (with 763B795P9), 225 A row, NLAB/NLTQ/DB

OEM part number	763B795P8	C	S260 oem_spec
Description	Lug listed '(1) 763B795P8 (1) 763B795P9' in main-lug table between 225 A and 400 A rows (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	C	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00407	763B795P9	General Electric	lug	OBSOLETE (1969 RENEWAL

GE main lug (with 763B795P8), NLAB/NLTQ/DB

OEM part number	763B795P9	C	S260 oem_spec
Description	Lug listed '(1) 763B795P8 (1) 763B795P9' in main-lug table (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	C	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00418	**NLAB-TQC3**	GE NLAB 3-pole TQC hardware kit	TQC 3-pole C	Discontinued OEM item traded new-surplus / recertified by de

EDH-GEA-00418	NLAB-TQC3	General Electric	breaker-mounting-kit	DISCONTINUED OEM ITEM

GE NLAB 3-pole TQC hardware kit

OEM part number	NLAB-TQC3	C	S251 surplus_listing
Description	GEN; NLAB; 3P; TQC; Hardware Kit; Accessory	C	same as above
Installation location	GE NLAB panelboard	C	same as above
Breaker compatibility	TQC 3-pole	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Dealer-made code (not a GE catalog format) - what is the GE part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00398	**75C140025P104**	GE NLAB/NLTQ/DB neutral and bus support, 100-225 A	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00396	**75C140025P105**	GE NLAB/NLTQ/DB main bus support, 100-600 A copper bus and 100-225 A aluminum bus	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00397	**75C140025P106**	GE NLAB/NLTQ/DB main bus support, 400-600 A aluminum bus	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00399	**75C140032P134**	GE NLAB/NLTQ/DB neutral support, 400-600 A (2 required)	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00400	**75D165029P101T**	GE branch circuit insulator for TBQ and TQL breakers	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00398 **75C140025P104** General Electric insulator **OBSOLETE (1969 RENEWAL**

GE NLAB/NLTQ/DB neutral and bus support, 100-225 A

OEM part number	75C140025P104	B	S260 oem_spec
Description	Neutral and bus support, 100-225 amp (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Panel interior, neutral/bus support	B	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00396 **75C140025P105** General Electric insulator **OBSOLETE (1969 RENEWAL**

GE NLAB/NLTQ/DB main bus support, 100-600 A copper bus and 100-225 A aluminum bus

OEM part number	75C140025P105	B	S260 oem_spec
Description	Main bus support, 100-600A copper bus and 100-225A alum. bus (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Panel interior, supporting main bus	B	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00397 **75C140025P106** General Electric insulator **OBSOLETE (1969 RENEWAL**

GE NLAB/NLTQ/DB main bus support, 400-600 A aluminum bus

OEM part number	75C140025P106	B	S260 oem_spec
Description	Main bus support, 400-600A alum. bus (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Panel interior, supporting main bus	B	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00399	75C140032P134	General Electric	insulator	OBSOLETE (1969 RENEWAL

GE NLAB/NLTQ/DB neutral support, 400-600 A (2 required)

OEM part number	75C140032P134	B	S260 oem_spec
Description	Neutral support 400-600 amp (requires 2 supports) (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00400	75D165029P101T	General Electric	insulator	OBSOLETE (1969 RENEWAL

GE branch circuit insulator for TBQ and TQL breakers

OEM part number	75D165029P101T	B	S260 oem_spec
Description	Branch circuit insulator for TBQ and TQL breakers (Part-number-to-row mapping inferred from OCR line order in search snippets; verify against the scanned page)	B	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00413	**359L481G1**	GE panelboard trim clamps, package of 4	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00413	359L481G1	General Electric	hardware-kit	OBSOLETE (1969 RENEWAL

GE panelboard trim clamps, package of 4

OEM part number	359L481G1	A	S260 oem_spec
Description	Trim clamps, package of 4	A	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Front (trim) to box attachment; standard fronts use trim clamps, concealed-trim-clamp fronts use 3/16 hex socket screws	A	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00404	**75C140485P103**	GE screw assembly for bolt-in branch breakers (one per hole), NLAB/NLTQ/DB	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00404	75C140485P103	General Electric	fastener	OBSOLETE (1969 RENEWAL

GE screw assembly for bolt-in branch breakers (one per hole), NLAB/NLTQ/DB

OEM part number	75C140485P103	A	S260 oem_spec
Description	Screw assembly; 'when ordering these breakers, also order one Cat. No. 75C140485P103 screw assembly per hole' (follows breaker rating list 15-100 A)	A	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		
Open question	*Which breaker type in the list requires the screw assembly (likely bolt-on TQB)?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00417	**HT-100**	GE/Trumbull handle extension for 2-pole operation (lighting panel breakers)	Single-pole breakers in NLTQ / NLAB panels tied for 2-pole operation **B**	Obsolete

EDH-GEA-00417 **HT-100** Trumbull breaker-accessory **OBSOLETE**

GE/Trumbull handle extension for 2-pole operation (lighting panel breakers)

OEM part number	HT-100	**A**	S259 oem_spec
Description	HT-100 Handle Extensions for 2 Pole operation - when ordered individually list price $0.40	**A**	S259 GE Supply 1951 pp.442-443; oem_spec
Breaker compatibility	Single-pole breakers in NLTQ / NLAB panels tied for 2-pole operation	**B**	S259 oem_spec
Status	Obsolete	**D**	inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00401	**THL103**	GE breaker handle locking device (non-padlocking) for TQB, TQC and TQL breakers, Model 5	TQB, TQC, TQL **A**	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00401 **THL103** General Electric handle-lock **OBSOLETE (1969 RENEWAL**

GE breaker handle locking device (non-padlocking) for TQB, TQC and TQL breakers, Model 5

OEM part number	THL103	**A**	S260 oem_spec
Description	Breaker handle locking device, non padlocking type for TQB, TQC and TQL breaker - THL103 Model 5	**A**	S260 GEG-13610B renewal parts list; oem_spec
Breaker compatibility	TQB, TQC, TQL	**A**	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	**D**	S260 inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00403	**THP100**	GE breaker handle padlocking device for TQB and TQL breakers, Model 3	TQB, TQL **A**	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00402	**TQPLD1**	GE breaker handle padlocking device for TQC breakers	TQC **A**	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00403 **THP100** General Electric padlock-attachment **OBSOLETE (1969 RENEWAL**

GE breaker handle padlocking device for TQB and TQL breakers, Model 3

OEM part number	THP100	**A**	S260 oem_spec
Description	Breaker handle padlocking device for TQB and TQL breakers - THP100 Model 3	**A**	S260 GEG-13610B renewal parts list; oem_spec
Breaker compatibility	TQB, TQL	**A**	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	**D**	S260 inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00402	TQPLD1	General Electric	padlock-attachment	OBSOLETE (1969 RENEWAL

GE breaker handle padlocking device for TQC breakers

OEM part number	TQPLD1	A	S260 oem_spec
Description	Breaker handle padlocking device for TQC breakers - TQPLD1	A	S260 GEG-13610B renewal parts list; oem_spec
Breaker compatibility	TQC	A	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB · Breakers: GE TQ / TQL / TQC / TQB / TBQ lighting breakers		
Not yet documented	current_availability, Dimensions, Material		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00409	**113A5356P1**	GE circuit numbering tabs, circuits 1-24	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00410	**113A5357P1**	GE circuit numbering tabs, circuits 1-42	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00412	**75A105457**	GE panelboard directory card holder	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00411	**75B125198P101**	GE panelboard directory card	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00414	**75V100083P101**	GE panelboard door lock, single-point lever handle type with key	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00415	**DPJ2185**	GE panelboard door lock, 3-point vault handle type with key	—	Obsolete (1969 renewal parts list; no current availability f
EDH-GEA-00416	**TEU-1**	GE extra key for panelboard door locks	—	Obsolete (1969 renewal parts list; no current availability f

EDH-GEA-00409	113A5356P1	General Electric	other	OBSOLETE (1969 RENEWAL

GE circuit numbering tabs, circuits 1-24

OEM part number	113A5356P1	A	S260 oem_spec
Description	Circuit numbering tabs, circuit numbers 1 thru 24	A	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00410	113A5357P1	General Electric	other	OBSOLETE (1969 RENEWAL

GE circuit numbering tabs, circuits 1-42

OEM part number	113A5357P1	A	S260 oem_spec
Description	Circuit numbering tabs, circuit numbers 1 thru 42	A	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00412	75A105457	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard directory card holder

OEM part number	75A105457	A	S260 oem_spec
Description	Directory card holder	A	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Inside of door	A	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00411	75B125198P101	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard directory card

OEM part number	75B125198P101	A	S260 oem_spec
Description	Directory card	A	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Inside of door	A	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00414	75V100083P101	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard door lock, single-point lever handle type with key

OEM part number	75V100083P101	A	S260 oem_spec
Description	Door locks: single point lever handle type with key	A	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Panelboard front door	A	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00415	DPJ2185	General Electric	other	OBSOLETE (1969 RENEWAL

GE panelboard door lock, 3-point vault handle type with key

OEM part number	DPJ2185	A	S260 oem_spec
Description	Door locks: 3-point vault handle type with key	A	S260 GEG-13610B renewal parts list; oem_spec
Installation location	Panelboard front door	A	S260 oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

EDH-GEA-00416	TEU-1	General Electric	other	OBSOLETE (1969 RENEWAL

GE extra key for panelboard door locks

OEM part number	TEU-1	A	S260 oem_spec
Description	Extra key for above locks	A	S260 GEG-13610B renewal parts list; oem_spec
Status	Obsolete (1969 renewal parts list; no current availability found)	D	S260 inference
Cross-links	Families: NLAB		
Not yet documented	current_availability, Dimensions, Material		

5.8 RG-NEXT — ReliaGear neXT Power Panelboards

FAM-GEA-008 · panelboard · aka ReliaGear OEM neXT, ReliaGear neXT · markings: ABB, GE

ABB's post-2018 power panelboard (doc 1SXU900191B0201, 2022). ABB states there is a single catalog number for all circuit breaker installation kits; that number was not found in accessible sources.

Attribute	Value	Cl.	Sources
Voltage rating	up to 600 Vac 3ph3w / 600Y/347 V	A	S90 oem_spec
Main ampacity	Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) or feed-through lug pads	A	same as above
Branch breakers accepted	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	A	same as above
Dimensions	One X-space for ReliaGear neXT = 1.385 in; standard interior heights 16X, 24X, 32X, 40X; interiors double sided; enclosure widths 30 in (center), 40 in (offset), 45 in (offset or center)	A	S302 guide p.20; oem_spec
Material	Interiors: tin- and silver-plated aluminum (heat rated) or tin- and silver-plated copper (heat rated or 1000 A/sq in density rated)	A	same as above
X space	Single XT1 3X; two XT1 5X; five XT1 11X; XT4 3X; XT5 4X; XT6 6X; XT7 6X; FB/TEY 1P 1X, 2P 2X; SPD 10X; RELT 3X; AMP1 main meter 4X	A	S302 guide p.21; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), TEY / TEYF / TEYD / TEYH / TEYL

Key documents: S90 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S93 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o; S302 ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. T; S303 ReliaGear neXT power panelboards - typical layouts / X-space brochure

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00607	**SR1XBF**	ReliaGear neXT XT1 mounting bracket SR1XBF	ABB Tmax XT1 (125 A, 3P) A	unknown
EDH-GEA-00608	**SR2XBF**	ReliaGear neXT XT1 mounting bracket SR2XBF	ABB Tmax XT1 (125 A, 3P) A	unknown
EDH-GEA-00609	**SR5XBF**	ReliaGear neXT XT1 mounting bracket SR5XBF	ABB Tmax XT1 (125 A, 3P) A	unknown

EDH-GEA-00607	SR1XBF	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

ReliaGear neXT XT1 mounting bracket SR1XBF

OEM part number	SR1XBF	A	S302, S303 guide p.21; oem_spec
Description	ReliaGear neXT XT1 group mounting bracket (Single XT1), 3X space; included in factory panel orders, sold separately when adding XT1 breakers to an existing installation	A	S302, S303 guide p.21; typicals p.3-4; oem_spec
Breaker compatibility	ABB Tmax XT1 (125 A, 3P)	A	S302 guide p.21; oem_spec
Dimensions	3X (1X = 1.385 in)	A	S302 guide pp.20-21; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Kit contents, Material, Torque values		

EDH-GEA-00608	SR2XBF	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

ReliaGear neXT XT1 mounting bracket SR2XBF

OEM part number	SR2XBF	**A**	S302, S303 guide p.21; oem_spec
Description	ReliaGear neXT XT1 group mounting bracket (Two XT1), 5X space; included in factory panel orders, sold separately when adding XT1 breakers to an existing installation	**A**	S302, S303 guide p.21; typicals p.3-4; oem_spec
Breaker compatibility	ABB Tmax XT1 (125 A, 3P)	**A**	S302 guide p.21; oem_spec
Dimensions	5X (1X = 1.385 in)	**A**	S302 guide pp.20-21; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Kit contents, Material, Torque values		

EDH-GEA-00609	SR5XBF	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

ReliaGear neXT XT1 mounting bracket SR5XBF

OEM part number	SR5XBF	**A**	S302, S303 guide p.21; oem_spec
Description	ReliaGear neXT XT1 group mounting bracket (Five XT1), 11X space; included in factory panel orders, sold separately when adding XT1 breakers to an existing installation	**A**	S302, S303 guide p.21; typicals p.3-4; oem_spec
Breaker compatibility	ABB Tmax XT1 (125 A, 3P)	**A**	S302 guide p.21; oem_spec
Dimensions	11X (1X = 1.385 in)	**A**	S302 guide pp.20-21; oem_spec
Cross-links	Families: RG-NEXT		
Not yet documented	Kit contents, Material, Torque values		

5.9 SCP-PLUS — Spectra Series Type SCP Plus panelboards

FAM-GEA-005 · panelboard · aka SCP+, SCP · markings: GE

Spectra-family power panel variant with its own ACB boxes (31 and 40 in wide x 11.5 in deep), ACF fronts, ACTMK/ACSMK mounting hardware kits (hardware + straps), ACTFPK/ACSFPK filler kits and ACTHK/ACSHK single-breaker hardware. Filler plates for SCP+ are to be ordered from the Houston equipment plant.

Attribute	Value	Cl.	Sources
Box	ACB31xxxx 31 in W x 11.5 in D; ACB40xxxx 40 in W x 11.5 in D; X heights 15-42	**A**	S75 p.11-48; oem_spec

Breaker families associated: Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TJD / TJJ / TJK / THJK
Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00254	**ACSMKSG**	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)	SGD, SGH, SGL, SGP **A**	unknown
EDH-GEA-00255	**ACSMKSK**	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	SKH, SKL **A**	unknown
EDH-GEA-00246	**ACTMKEB1P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)	TEB, TED, THED **A**	unknown
EDH-GEA-00247	**ACTMKEB2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)	TEB, TED, THED **A**	unknown
EDH-GEA-00248	**ACTMKEB3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)	TEB, TED, THED **A**	unknown
EDH-GEA-00252	**ACTMKJD**	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	TJD, TJJ, TJK **A**	unknown
EDH-GEA-00250	**ACTMKQD2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00251	**ACTMKQD3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00245	**ACTMKSE**	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)	SHE (SEH), SEL, SED, SEP **A**	unknown
EDH-GEA-00249	**ACTMKSF**	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)	TFK, SFH, SFL, SFP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00253	**ACTMKSG**	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)	SGD, SGH, SGL, SGP **A**	unknown

EDH-GEA-00254	**ACSMKSG**	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)

OEM part number	ACSMKSG	**A**	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSG [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SGD, SGH, SGL, SGP, 400/800 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400/800 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00255	**ACSMKSK**	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)

OEM part number	ACSMKSK	**A**	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSK [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSK [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SKH, SKL, 800/1200 A	**A**	same as above
Breaker compatibility	SKH, SKL	**A**	same as above
Current rating	800/1200 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSK listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00246	**ACTMKEB1P**	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)

OEM part number	ACTMKEB1P	**A**	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB1P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB1P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 1-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB1P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00247	ACTMKEB2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)

OEM part number	ACTMKEB2P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKEB2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 2-pole	A	same as above
Breaker compatibility	TEB, TED, THED	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00248	ACTMKEB3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)

OEM part number	ACTMKEB3P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKEB3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 3-pole	A	same as above
Breaker compatibility	TEB, TED, THED	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00252	ACTMKJD	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)

OEM part number	ACTMKJD	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKJD [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKJD [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TJD, TJJ, TJK, 400 A	A	same as above
Breaker compatibility	TJD, TJJ, TJK	A	same as above
Current rating	400 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKJD listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00250	ACTMKQD2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)

OEM part number	ACTMKQD2P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 2-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00251	ACTMKQD3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)

OEM part number	ACTMKQD3P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 3-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00245	ACTMKSE	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)

OEM part number	ACTMKSE	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSE [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSE [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SHE (SEH), SEL, SED, SEP, 150 A	A	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSE listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00249	ACTMKSF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)

OEM part number	ACTMKSF	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSF [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSF [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TFK, SFH, SFL, SFP, 250 A	A	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	A	same as above
Current rating	250 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSF listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00253	ACTMKSG	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)

OEM part number	ACTMKSG	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSG [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SGD, SGH, SGL, SGP, 400/600 A	A	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	A	same as above
Current rating	400/600 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00276	**SCPFP1**	SCP+ panelboard filler plate 1X	—	unknown
EDH-GEA-00277	**SCPFP2**	SCP+ panelboard filler plate 2X	—	unknown
EDH-GEA-00278	**SCPFP3**	SCP+ panelboard filler plate 3X	—	unknown
EDH-GEA-00279	**SCPFP5**	SCP+ panelboard filler plate 5X	—	unknown

EDH-GEA-00276	SCPFP1	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 1X

OEM part number	SCPFP1	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00277	SCPFP2	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 2X

OEM part number	SCPFP2	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00278	SCPFP3	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 3X

OEM part number	SCPFP3	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 3X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00279	SCPFP5	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 5X

OEM part number	SCPFP5	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

5.10 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)

FAM-GEA-004 · panelboard · aka APN, APNB, Spectra, Spectra Bolt-On (SBO), Spectra Plug-In, Spectra Series, SpectraRMS · markings: ABB, GE, GE Industrial Solutions, General Electric

GE's power distribution panelboard. Two interior styles: APN plug-in (breakers bolt to AMC circuit breaker mounting modules that latch onto the interior rail and clip onto the bus; ADS fusible switch modules) and APNB bolt-on (breakers bolt to copper straps AMCB kits fastened with carriage bolts/antiturn clips to the vertical bus). Vertical space measured in X units (1X = 1-3/8 in). Box widths 27/31/36/40/44 in, APB boxes and APF fronts, AML main-lug modules, ANK/ANKN neutral kits, AEG ground kits. NOTE on 'APN': in GE nomenclature APN is the Spectra plug-in interior type code (APNB = bolt-on), while APN48/APN84/APN126 (A-Series) and APN49/APN99 (Spectra) are permanent circuit-number tab kits; no 'A-Series power panel' code APN was found.

Attribute	Value	Cl.	Sources
Status	ABB guide: "Please note that Spectra, TED, FE, and FG breakers are obsolete"; Spectra bolt-on additions are served by Tmax XT retrofit kits (SRFB...)	A	S302 guide pp.27-32; oem_spec
	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted' (Obsolescence wording seen only in a search-engine summary of the blocked ABB BuyLog.)	C	S75, S93 inference
Successor	ReliaGear neXT power panelboards (ABB) - inferred from ABB BuyLog placing 'Retrofit kit for Spectra panelboards' alongside ReliaGear neXT	D	S93, S90 inference
Voltage rating	600 Vac / 250 Vdc max	A	S75 p.11-24; oem_spec
Main ampacity	Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, breaker (SF/SG/SK/FG) or fusible switch	A	same as above
Branch breakers accepted	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusible switches 30-1200 A	A	same as above
X unit	1X = 1 3/8 in vertical panel space	A	S75 p.11-40 note; oem_spec
Box widths	27, 31, 36, 40, 44 in	A	S75 p.11-34, 11-35; oem_spec
Apn meaning	APN = Panelboard Interior Type (plug-in); APNB = Panelboard Interior Type bolt-on; structure APN<X-height><amps>U[B4]	A	S75 p.11-37; oem_spec
Plug in vs bolt on	Main lug kits bolt directly to interior bus bars (either APN Plug-In Style or APNB Bolt-On Style)	A	S75 p.11-28; oem_spec
OEM instruction document	GEH5589 R07: APN/APNB interiors mount on four 3/8 in interior mounting studs on the APB enclosure back wall, secured with wing nuts and washers; line end of interior toward LINE end of box; deadfront ends fastened to mounting posts with 1/4-20 hex-head screws 50-60 in-lb (27-44 in wide panels use 1/4-turn fasteners between end fillers and side plates)	A	S285 pp.1-2; oem_spec
Reference dimension	Bolt-on (APNB) straps and AMB lug kits mount on the side of the interior where the distance from the nearest vertical bus face to the inner face of the bus-support rail is 2.75 in; 1X = 1.38 in (1-3/8 in) vertical space	A	S272, S293 DEH047 p.1; DEH070 p.1; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Record Plus FC (FCS/FCV/FCN/FCH/FCL), Record Plus FG (FGV/FGN/FGH/FGL/FGP), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S86 DEH065 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD); S87 GEH5674 R03 Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM); S88 DEH40392 R01 Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL; S89 DEH212 R02 Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S; S90 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S93 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o; S272 DEH047 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits, Catalog Numbers AMCB6EB, ; S285 GEH5589 R07 Spectra Series Power Panelboards - Type APN and APNB Panelboard Interiors into Type APB Pa; S293 DEH070 R02 Spectra Series Power Panelboards - Type AMB Main Lug Kit; S302 ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. T

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00573	**AMB2120CA**	Spectra main lug kit AMB2120CA	—	unknown
EDH-GEA-00581	**AMB2120DCA**	Spectra main lug kit AMB2120DCA	—	unknown
EDH-GEA-00561	**AMB2120DMA**	Spectra main lug kit AMB2120DMA	—	unknown
EDH-GEA-00559	**AMB2120DMC**	Spectra main lug kit AMB2120DMC	—	unknown
EDH-GEA-00565	**AMB2120DN**	Spectra main lug kit AMB2120DN	—	unknown
EDH-GEA-00556	**AMB2120MA**	Spectra main lug kit AMB2120MA	—	unknown
EDH-GEA-00563	**AMB2120N**	Spectra main lug kit AMB2120N	—	unknown
EDH-GEA-00567	**AMB2250CA**	Spectra main lug kit AMB2250CA	—	unknown
EDH-GEA-00575	**AMB2250DCA**	Spectra main lug kit AMB2250DCA	—	unknown
EDH-GEA-00569	**AMB2600CA**	Spectra main lug kit AMB2600CA	—	unknown
EDH-GEA-00577	**AMB2600DCA**	Spectra main lug kit AMB2600DCA	—	unknown
EDH-GEA-00552	**AMB2600MA**	Spectra main lug kit AMB2600MA	—	unknown
EDH-GEA-00554	**AMB2600MC**	Spectra main lug kit AMB2600MC	—	unknown
EDH-GEA-00571	**AMB2800CA**	Spectra main lug kit AMB2800CA	—	unknown
EDH-GEA-00579	**AMB2800DCA**	Spectra main lug kit AMB2800DCA	—	unknown
EDH-GEA-00574	**AMB3120CA**	Spectra main lug kit AMB3120CA	—	unknown
EDH-GEA-00582	**AMB3120DCA**	Spectra main lug kit AMB3120DCA	—	unknown
EDH-GEA-00562	**AMB3120DMA**	Spectra main lug kit AMB3120DMA	—	unknown
EDH-GEA-00560	**AMB3120DMC**	Spectra main lug kit AMB3120DMC	—	unknown
EDH-GEA-00566	**AMB3120DN**	Spectra main lug kit AMB3120DN	—	unknown
EDH-GEA-00557	**AMB3120MA**	Spectra main lug kit AMB3120MA	—	unknown
EDH-GEA-00558	**AMB3120MC**	Spectra main lug kit AMB3120MC	—	unknown
EDH-GEA-00564	**AMB3120N**	Spectra main lug kit AMB3120N	—	unknown
EDH-GEA-00568	**AMB3250CA**	Spectra main lug kit AMB3250CA	—	unknown
EDH-GEA-00576	**AMB3250DCA**	Spectra main lug kit AMB3250DCA	—	unknown
EDH-GEA-00570	**AMB3600CA**	Spectra main lug kit AMB3600CA	—	unknown
EDH-GEA-00578	**AMB3600DCA**	Spectra main lug kit AMB3600DCA	—	unknown
EDH-GEA-00553	**AMB3600MA**	Spectra main lug kit AMB3600MA	—	unknown
EDH-GEA-00555	**AMB3600MC**	Spectra main lug kit AMB3600MC	—	unknown
EDH-GEA-00572	**AMB3800CA**	Spectra main lug kit AMB3800CA	—	unknown
EDH-GEA-00580	**AMB3800DCA**	Spectra main lug kit AMB3800DCA	—	unknown
EDH-GEA-00231	**AML3120CFP**	Spectra main lug module AML3120CFP (1200 A compression)	—	unknown
EDH-GEA-00226	**AML3120FP**	Spectra main lug module AML3120FP (1200 A mechanical)	—	unknown
EDH-GEA-00227	**AML3250CFP**	Spectra main lug module AML3250CFP (250 A compression)	—	unknown
EDH-GEA-00220	**AML3250FP**	Spectra main lug module AML3250FP (250 A mechanical)	—	unknown
EDH-GEA-00219	**AML3250SFP**	Spectra main lug module AML3250SFP (250 A mechanical)	—	unknown
EDH-GEA-00228	**AML3400CFP**	Spectra main lug module AML3400CFP (400 A compression)	—	unknown
EDH-GEA-00222	**AML3400FP**	Spectra main lug module AML3400FP (400 A mechanical)	—	unknown
EDH-GEA-00221	**AML3400SFP**	Spectra main lug module AML3400SFP (400 A mechanical)	—	unknown
EDH-GEA-00229	**AML3600CFP**	Spectra main lug module AML3600CFP (600 A compression)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00224	**AML3600FP**	Spectra main lug module AML3600FP (600 A mechanical)	—	unknown
EDH-GEA-00223	**AML3600SFP**	Spectra main lug module AML3600SFP (600 A mechanical)	—	unknown
EDH-GEA-00230	**AML3800CFP**	Spectra main lug module AML3800CFP (800 A compression)	—	unknown
EDH-GEA-00225	**AML3800FP**	Spectra main lug module AML3800FP (800 A mechanical)	—	unknown

EDH-GEA-00573	AMB2120CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120CA

OEM part number	AMB2120CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00581	AMB2120DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DCA

OEM part number	AMB2120DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00561	AMB2120DMA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DMA

OEM part number	AMB2120DMA	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2120DMAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	2	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00559	AMB2120DMC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DMC

OEM part number	AMB2120DMC	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2120DMCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	2	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00565	AMB2120DN	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120DN

OEM part number	AMB2120DN	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120DNF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00556	AMB2120MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120MA

OEM part number	AMB2120MA	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2120MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	2	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00563	AMB2120N	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2120N

OEM part number	AMB2120N	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2120NF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00567	AMB2250CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2250CA

OEM part number	AMB2250CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2250CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 250 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00575	AMB2250DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2250DCA

OEM part number	AMB2250DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2250DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 250 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00569	AMB2600CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600CA

OEM part number	AMB2600CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2600CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00577	AMB2600DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600DCA

OEM part number	AMB2600DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2600DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 600 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00552	AMB2600MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600MA

OEM part number	AMB2600MA	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2600MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	2	B	S293 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00554	AMB2600MC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2600MC

OEM part number	AMB2600MC	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB2600MCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 2-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	2	B	S293 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00571	AMB2800CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2800CA

OEM part number	AMB2800CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2800CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 800 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00579	AMB2800DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB2800DCA

OEM part number	AMB2800DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB2800DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 2-pole, 800 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	2	B	S294 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00574	AMB3120CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120CA

OEM part number	AMB3120CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00582	AMB3120DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DCA

OEM part number	AMB3120DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00562	AMB3120DMA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DMA

OEM part number	AMB3120DMA	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120DMAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	3	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00560	AMB3120DMC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DMC

OEM part number	AMB3120DMC	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120DMCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	3	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00566	AMB3120DN	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120DN

OEM part number	AMB3120DN	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120DNF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00557	AMB3120MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120MA

OEM part number	AMB3120MA	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	3	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00558	AMB3120MC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120MC

OEM part number	AMB3120MC	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3120MCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	3	B	S293 DEH070 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Identification features	1200 A AMB...MA/MC/DMC/DMA kits: lug tangs must be fed through the support - failure causes destructive behaviour under short circuit	A	S293 DEH070 p.1 step 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00564	AMB3120N	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3120N

OEM part number	AMB3120N	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3120NF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 1200 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	1200 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00568	AMB3250CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3250CA

OEM part number	AMB3250CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3250CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 250 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00576	AMB3250DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3250DCA

OEM part number	AMB3250DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3250DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 250 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	250 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00570	AMB3600CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600CA

OEM part number	AMB3600CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3600CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00578	AMB3600DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600DCA

OEM part number	AMB3600DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3600DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 600 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00553	AMB3600MA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600MA

OEM part number	AMB3600MA	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3600MAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	3	B	S293 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00555	AMB3600MC	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3600MC

OEM part number	AMB3600MC	A	S293 DEH070 p.1; oem_spec
Alternate / superseded numbers	AMB3600MCF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (type AMB), 3-pole, 600 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S293 DEH070 pp.1-2; oem_spec
Poles	3	B	S293 DEH070 p.1; inference
Current rating	600 A	B	same as above
Mounting-hole pattern	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes	A	S293 DEH070 p.1 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S293 DEH070 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH070 R02	A	S293 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00572	AMB3800CA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3800CA

OEM part number	AMB3800CA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3800CAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 800 A; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00580	AMB3800DCA	GE / ABB lineage	main-lug-kit	STATUS UNKNOWN

Spectra main lug kit AMB3800DCA

OEM part number	AMB3800DCA	A	S294 DEH071 p.1; oem_spec
Alternate / superseded numbers	AMB3800DCAF [equivalent] (F suffix = kit including cover plates (AFPML))	A	same as above
Description	Spectra Series main lug kit (bolt-on main lug kit), 3-pole, 800 A, D = double lug set per catalog nomenclature; "F" suffix version includes cover plates (pole/amp decoding from catalog-number pattern (AMB<poles><amps>...))	A	same as above
Application	main lugs	A	same as above
Installation location	Line end of APN (lug tangs between buses of each phase) or APNB interior (on 2.75 in reference side); lug wire holes face the LINE end of the box; wire barriers flush with/aligned to side rails or Z rails	A	S294 DEH071 pp.1-2; oem_spec
Poles	3	B	S294 DEH071 p.1; inference
Current rating	800 A	B	same as above
Mounting-hole pattern	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes	A	S294 DEH071 p.2 step 3; oem_spec
Torque values	Lug tangs/straps to bus (carriage bolt fed through bus first, flat washer, Belleville washer, nut) 200-250 in-lb; cover screws 25-30 in-lb; conductor torques: Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	A	S294 DEH071 pp.1-2 step 4, Table 1; oem_spec
OEM instruction document	DEH071 R02	A	S294 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Requires	252B3638 (EDH-GEA-00583)		
Not yet documented	Dimensions, lug type per suffix (MA/MC/CA/N)		

EDH-GEA-00231	AML3120CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3120CFP (1200 A compression)

OEM part number	AML3120CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	1200 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00226	AML3120FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3120FP (1200 A mechanical)

OEM part number	AML3120FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	1200 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00227	AML3250CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250CFP (250 A compression)

OEM part number	AML3250CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00220	AML3250FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250FP (250 A mechanical)

OEM part number	AML3250FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00219	AML3250SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250SFP (250 A mechanical)

OEM part number	AML3250SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	4X module height; box width 27, 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00228	AML3400CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400CFP (400 A compression)

OEM part number	AML3400CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00222	AML3400FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400FP (400 A mechanical)

OEM part number	AML3400FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00221	AML3400SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400SFP (400 A mechanical)

OEM part number	AML3400SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00229	AML3600CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600CFP (600 A compression)

OEM part number	AML3600CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00224	AML3600FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600FP (600 A mechanical)

OEM part number	AML3600FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00223	AML3600SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600SFP (600 A mechanical)

OEM part number	AML3600SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00230	AML3800CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800CFP (800 A compression)

OEM part number	AML3800CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00225	AML3800FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800FP (800 A mechanical)

OEM part number	AML3800FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00243	**AFL120**	Spectra feed-thru lug cover plate kit AFL120	—	unknown
EDH-GEA-00242	**AFL600**	Spectra feed-thru lug cover plate kit AFL600	—	unknown

EDH-GEA-00243	AFL120	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL120

OEM part number	AFL120	A	S75 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	800/1200 A	A	same as above
Dimensions	12X; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

EDH-GEA-00242	AFL600	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL600

OEM part number	AFL600	A	S75 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	250/400/600 A	A	same as above
Dimensions	9X; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00583	**252B3638**	Spectra main lug assembly drawing 252B3638 (G1-G10)	—	unknown
EDH-GEA-00584	**GEA2-750**	Spectra main lug GEA2-750	—	unknown

EDH-GEA-00583	252B3638	GE / ABB lineage	lug	STATUS UNKNOWN

Spectra main lug assembly drawing 252B3638 (G1-G10)

OEM part number	252B3638	**A**	S294 DEH071 p.2 Table 1; oem_spec
Alternate / superseded numbers	252B3638G1-G2 (450 in-lb; (4) 2/0-600 kcmil)	**A**	S294 style_number; Table 1; oem_spec
	252B3638G3-G8 [style_number] (450 in-lb; (8) 2/0-600 kcmil)	**A**	same as above
	252B3638G9-G10 [style_number] (375 in-lb; (1) 8-500 kcmil / (1) #2/0-600 kcmil)	**A**	same as above
Description	Main lug (mechanical) assemblies used in Spectra AMB main lug kits	**A**	S293, S294 DEH070 p.2 / DEH071 p.2 Table 1; oem_spec
Torque values	Lug part 252B3638G9-10: 375 in-lb, (1) 8-500 kcmil or (1) #2/0-600 kcmil; 252B3638G1-2: 450 in-lb, (4) 2/0-600 kcmil; 252B3638G3-8: 450 in-lb, (8) 2/0-600 kcmil; GEA2-750: 475 in-lb, (2) 3/0-750 kcmil	**A**	S293, S294 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	G-number by kit, Material		

EDH-GEA-00584	GEA2-750	GE / ABB lineage	lug	STATUS UNKNOWN

Spectra main lug GEA2-750

OEM part number	GEA2-750	**A**	S294 DEH071 Table 1; oem_spec
Description	Lug, (2) 3/0-750 kcmil, 475 in-lb, used in Spectra AMB main lug kits	**A**	S293, S294 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	kits using it, Material		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00119	**AMCB2FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00444	**AMCB2FJ**	Spectra bolt-on breaker strap kit AMCB2FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00117	**AMCB2FJFP**	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00118	**AMCB2FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00446	**AMCB2GM**	Spectra bolt-on G-frame main/single-branch strap kit AMCB2GM (DEH060)	SGH, SGL, SGP; breaker cover kit AFP4SGS **A**	unknown
EDH-GEA-00120	**AMCB2GMFP**	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00450	**AMCB2KM**	Spectra bolt-on K-frame main strap kit AMCB2KM (DEH061)	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS **A**	unknown
EDH-GEA-00126	**AMCB2KMFP**	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)	SKH, SKL, SKP, TKM, THKM **A**	unknown
EDH-GEA-00123	**AMCB3FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00443	**AMCB3FJ**	Spectra bolt-on breaker strap kit AMCB3FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00121	**AMCB3FJFP**	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00122	**AMCB3FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00447	**AMCB3GM**	Spectra bolt-on G-frame main/single-branch strap kit AMCB3GM (DEH060)	SGH, SGL, SGP; breaker cover kit AFP4SGS **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00124	**AMCB3GMFP**	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00451	**AMCB3KM**	Spectra bolt-on K-frame main strap kit AMCB3KM (DEH061)	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS **A**	unknown
EDH-GEA-00127	**AMCB3KMFP**	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)	SKH, SKL, SKP, TKM, THKM **A**	unknown
EDH-GEA-00125	**AMCB3LBFP**	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	SKP (as printed; LB code = THLC2/THLC4 per nomenclature) **A**	unknown
EDH-GEA-00441	**AMCB4EB**	Spectra bolt-on breaker strap kit AMCB4EB (TEB/TED/THED/SE, DEH047)	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler **A**	unknown
EDH-GEA-00098	**AMCB4EBFP**	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	TEB, TED **A**	unknown
EDH-GEA-00452	**AMCB4EY**	Spectra bolt-on TEY strap kit AMCB4EY (DEH062)	TEY; breaker cover kit AFP3EYD **A**	unknown
EDH-GEA-00099	**AMCB4EYFP**	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	TEY **A**	unknown
EDH-GEA-00100	**AMCB4FBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00101	**AMCB4FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00113	**AMCB4FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00445	**AMCB4FJ**	Spectra bolt-on breaker strap kit AMCB4FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00109	**AMCB4FJFP**	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00111	**AMCB4FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00448	**AMCB4GB**	Spectra bolt-on G-frame double-branch strap kit AMCB4GB (DEH40129)	SGH, SGL, SGP; breaker cover kit AFP4SGD **A**	unknown
EDH-GEA-00114	**AMCB4GBFP**	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00102	**AMCB4QDFP**	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	TQD, THQD **A**	unknown
EDH-GEA-00440	**AMCB4SE**	Spectra bolt-on breaker strap kit AMCB4SE (TEB/TED/THED/SE, DEH047)	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler **A**	unknown
EDH-GEA-00103	**AMCB4SEFP**	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)	THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00439	**AMCB6EB**	Spectra bolt-on breaker strap kit AMCB6EB (TEB/TED/THED/SE, DEH047)	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler **A**	unknown
EDH-GEA-00104	**AMCB6EBFP**	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	superseded - ABB empower description reads "REPLCE BY AMCB6E
EDH-GEA-00453	**AMCB6EY**	Spectra bolt-on TEY strap kit AMCB6EY (DEH062)	TEY; breaker cover kit AFP3EYD **A**	unknown
EDH-GEA-00105	**AMCB6EYFP**	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	TEY **A**	unknown
EDH-GEA-00106	**AMCB6FBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)	FBV, FBN, FBH, FBL **A**	superseded - ABB empower description reads "REPLACED BY AMCB
EDH-GEA-00107	**AMCB6FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00115	**AMCB6FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)	FGV, FGN, FGH, FGP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00442	**AMCB6FJ**	Spectra bolt-on breaker strap kit AMCB6FJ (SF/TF, DEH059)	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3 **A**	unknown
EDH-GEA-00110	**AMCB6FJFP**	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	SFH, SFL, SFP **A**	superseded - ABB empower description reads "REPLACED BY AMCB
EDH-GEA-00112	**AMCB6FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00449	**AMCB6GB**	Spectra bolt-on G-frame double-branch strap kit AMCB6GB (DEH40129)	SGH, SGL, SGP; breaker cover kit AFP4SGD **A**	unknown
EDH-GEA-00116	**AMCB6GBFP**	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	SGH, SGL, SGP **A**	superseded - ABB empower description reads "REPLCE BY AMCB6G
EDH-GEA-00108	**AMCB6QDFP**	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	TQD, THQD **A**	unknown

EDH-GEA-00119 — AMCB2FGMFP — GE — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)

OEM part number	AMCB2FGMFP	**A**	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	**A**	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	**A**	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	**A**	S75 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00444	AMCB2FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB2FJ (SF/TF, DEH059)

OEM part number	AMCB2FJ	A	S273 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main or single-branch mounting in APNB interiors	A	same as above
Application	main (load/OFF-side terminals on straps) or single branch (line/ON-side terminals on straps)	A	S273 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S273 p.1; oem_spec
Poles	2 (configurations per Table 3)	A	S273 p.1; p.2 Table 3; oem_spec
Kit contents	Main/single-branch (Table 1): 1 A pole strap (1); 2 carriage bolt 1/4-20 x 1.50 [or 1/4-20 x 1.00 when single-breaker straps connect to a vertical bus rated 600 A or less] (6); 3 1/4 in Belleville washer (6); 4 1/4-20 nut (6); 5 B pole strap (1); 6 C pole strap (1); 7 breaker mounting bracket (1); 8 breaker mounting bracket (1); 9 thread-forming screw (4); 10 1/4-20 x 3/4 in machine screw (3); 11 1/4 in Belleville washer (3); 12 #10-32 x 3-3/4 in machine screw (2); 13 #10 flat washer (2); 14 #10-32 x 1/2 in machine screw (2); 15 #10 lock washer (2); 16 antiturn clip (6); 17 strap spacer (3)	A	S273 p.1 Table 1; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S273 pp.1-2; oem_spec
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S273 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S273 p.1, p.6; oem_spec
Identification features	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both)	A	S273 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00117	AMCB2FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)

OEM part number	AMCB2FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT ON STRAP KIT SF W/FILLER" (UPC 783175336050)	A	S301 empower page AMCB2FJFP; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB2FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00118	AMCB2FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)

OEM part number	AMCB2FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB2FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00446	AMCB2GM	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on G-frame main/single-branch strap kit AMCB2GM (DEH060)

OEM part number	AMCB2GM	**A**	S274 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main and single-branch G-frame breakers in APNB interiors	**A**	same as above
Application	main (load/OFF-side terminals on straps) or single branch	**A**	S274 p.6 step 7; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S274 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGS	**A**	S274 p.1; oem_spec
Poles	2 (A&C or A&B locations)	**A**	S274 p.1; p.7 Fig.35; oem_spec
Kit contents	Table 1 (Qty AMCB2GM / AMCB3GM): 1 10083041P1 terminal cover 1/1; 2 192A6976P189 thread-forming screw #10-32 x 7/16 in 2/2; 3 252B3576P1 circuit breaker mounting bracket 1/1; 4 252B3613P1 antiturn clip 4/6; 5 252B3618G13 G frame single strap 1/1; 6 252B3618G14 G frame single strap 1/1; 7 252B3618G15 G frame single strap 1/1; 8 252B3657P1 spacer 1/1; 9 252B3657P2 spacer 2/2; 10 75A105503P101 conical spring washer 1/4 in 4/6; 11 75A105503P105 conical spring washer 5/16 in 2/3; 12 DEH060 instructions 1/1; 13 N22P23016B6 hex-head bolt 3/8-16 x 1 in 2/3; 14 N245P21B6 nut 1/4-20 4/6; 15 N37P21060B6 screw 1/4-20 x 3-3/4 in 2/2; 16 N402P11B6 flat washer 1/4 in 2/2; 17 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 4/6; 18 N730BP1308B6 thread-forming screw #6 x 1/2 in 2/2	**A**	S274 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	**A**	S274 p.1; oem_spec
Fasteners	Cable connection on same side as 2.75 in reference: only 3 (AMCB3GM) / 2 (AMCB2GM) carriage bolts+antiturn clips used, no spacers; opposite side: 6/4 used with spacers 252B3657P1/P2. Terminal cover fixed with #6 thread-forming screws (Table lists 3/8-16 hex bolts with 5/16 in conical washers as printed)	**A**	S274 p.2 step 3; p.7 step 9; oem_spec
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	**A**	S274 pp.6-7 steps 6-8; oem_spec
OEM instruction document	DEH060 R04 (09/2001); replacement hardware kit AHKBG1	**A**	S274 p.1, p.8; oem_spec
Identification features	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end	**A**	S274 p.7 step 9; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G13 (EDH-GEA-00459), 252B3618G14 (EDH-GEA-00460), 252B3618G15 (EDH-GEA-00461), 252B3576P1 (EDH-GEA-00456), 10083041P1 (EDH-GEA-00454), AHKBG1 (EDH-GEA-00196)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00120	AMCB2GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)

OEM part number	AMCB2GMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S274 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
	Vertical space 5.50 in (4X)	B	S274 DEH060 p.1; inference
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S274 DEH060 pp.6-7; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
	Strap portion per DEH060 R04 (kit AMCB2GM); FP adds filler kit AFP4SGS	B	S274, S301 DEH060 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00450	AMCB2KM	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on K-frame main strap kit AMCB2KM (DEH061)

OEM part number	AMCB2KM	A	S275 p.1; oem_spec
Description	Spectra bolt-on kit to install K-frame main circuit breakers into APNB bolt-on interiors	A	same as above
Application	main (strap-assembly bolts pass through the load/OFF-side terminals)	A	S275 p.1 step 5; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S275 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS	A	S275 p.1; oem_spec
Poles	2	A	S275 p.1 Table 2; oem_spec
Kit contents	Table 1 (Qty AMCB2KM / AMCB3KM): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in 4/6; 3 conical spring washer 1/4 in 4/6; 4 nut 1/4-20 4/6; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 breaker mounting bracket 2/2; 8 thread-forming screw 4/4; 9 conical spring washer 3/8 in 2/3; 10 nut 3/8-16 2/3; 11 screw 1/4-20 x 1-1/4 in 4/4; 12 flat washer 1/4 in 4/4	A	S275 p.1 Table 1; oem_spec
Fasteners	Each strap assembly fastened to vertical bus with two 1/4-20 carriage bolts, conical washers and nuts	A	S275 p.1 step 3; oem_spec
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	A	S275 p.1 steps 4-6; oem_spec
OEM instruction document	DEH061 R02 (09/2001)	A	S275 p.1-2; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00126	AMCB2KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)

OEM part number	AMCB2KMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S275 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	B	S275 DEH061 p.1; inference
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S75 p.11-52; oem_spec
	Strap portion per DEH061 R02 (kit AMCB2KM); FP adds filler kit AFP6SKS (GEH5629)	B	S275, S279 DEH061 p.1; GEH5629 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00123	AMCB3FGMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)

OEM part number	AMCB3FGMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00443	AMCB3FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB3FJ (SF/TF, DEH059)

OEM part number	AMCB3FJ	A	S273 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main or single-branch mounting in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SF SB" (UPC 783175333820)	A	S301 empower page AMCB3FJ; oem_spec
Application	main (load/OFF-side terminals on straps) or single branch (line/ON-side terminals on straps)	A	S273 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S273 p.1; oem_spec
Poles	3	A	S273 p.1; p.2 Table 3; oem_spec
Kit contents	Main/single-branch (Table 1): 1 A pole strap (1); 2 carriage bolt 1/4-20 x 1.50 [or 1/4-20 x 1.00 when single-breaker straps connect to a vertical bus rated 600 A or less] (6); 3 1/4 in Belleville washer (6); 4 1/4-20 nut (6); 5 B pole strap (1); 6 C pole strap (1); 7 breaker mounting bracket (1); 8 breaker mounting bracket (1); 9 thread-forming screw (4); 10 1/4-20 x 3/4 in machine screw (3); 11 1/4 in Belleville washer (3); 12 #10-32 x 3-3/4 in machine screw (2); 13 #10 flat washer (2); 14 #10-32 x 1/2 in machine screw (2); 15 #10 lock washer (2); 16 antiturn clip (6); 17 strap spacer (3)	A	S273 p.1 Table 1; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S273 pp.1-2; oem_spec
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S273 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S273 p.1, p.6; oem_spec
Identification features	Main/single-branch kit includes 3 strap spacers used for left-hand cable connection (strap and spacer square holes aligned; carriage bolt passes through both)	A	S273 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00121	AMCB3FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)

OEM part number	AMCB3FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SF SB W/FILLER" (UPC 783175335916)	A	S301 empower page AMCB3FJFP; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above

Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB3FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Replacement / successor	ABB Tmax XT retrofit kit SRFB3XT4FPX (or SRFB3XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S302 guide p.28 retrofit table; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00122	AMCB3FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)

OEM part number	AMCB3FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Single/main: cover support to bracket #10-32 x 1/2 in screws with lock washers 18 in-lb; opposite bracket thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in screws with flat washers 30 in-lb; terminal to strap 1/4-20 x 3/4 in screws with Belleville washers 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB3FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00447	AMCB3GM	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on G-frame main/single-branch strap kit AMCB3GM (DEH060)

OEM part number	AMCB3GM	A	S274 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for main and single-branch G-frame breakers in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SG MAIN" (UPC 783175333844)	A	S301 empower page AMCB3GM; oem_spec
Application	main (load/OFF-side terminals on straps) or single branch	A	S274 p.6 step 7; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S274 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGS	A	S274 p.1; oem_spec
Poles	3	A	S274 p.1; p.7 Fig.35; oem_spec

Kit contents	Table 1 (Qty AMCB2GM / AMCB3GM): 1 10083041P1 terminal cover 1/1; 2 192A6976P189 thread-forming screw #10-32 x 7/16 in 2/2; 3 252B3576P1 circuit breaker mounting bracket 1/1; 4 252B3613P1 antiturn clip 4/6; 5 252B3618G13 G frame single strap 1/1; 6 252B3618G14 G frame single strap 1/1; 7 252B3618G15 G frame single strap 1/1; 8 252B3657P1 spacer 1/1; 9 252B3657P2 spacer 2/2; 10 75A105503P101 conical spring washer 1/4 in 4/6; 11 75A105503P105 conical spring washer 5/16 in 2/3; 12 DEH060 instructions 1/1; 13 N22P23016B6 hex-head bolt 3/8-16 x 1 in 2/3; 14 N245P21B6 nut 1/4-20 4/6; 15 N37P21060B6 screw 1/4-20 x 3-3/4 in 2/2; 16 N402P11B6 flat washer 1/4 in 2/2; 17 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 4/6; 18 N730BP1308B6 thread-forming screw #6 x 1/2 in 2/2	A	S274 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	A	S274 p.1; oem_spec
Fasteners	Cable connection on same side as 2.75 in reference: only 3 (AMCB3GM) / 2 (AMCB2GM) carriage bolts+antiturn clips used, no spacers; opposite side: 6/4 used with spacers 252B3657P1/P2. Terminal cover fixed with #6 thread-forming screws (Table lists 3/8-16 hex bolts with 5/16 in conical washers as printed)	A	S274 p.2 step 3; p.7 step 9; oem_spec
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	A	S274 pp.6-7 steps 6-8; oem_spec
OEM instruction document	DEH060 R04 (09/2001); replacement hardware kit AHKBG1	A	S274 p.1, p.8; oem_spec
Identification features	Terminal cover requires a 3/8 x 3/8 in relief hole when mounted as a main with an accessory cable leaving the load end	A	S274 p.7 step 9; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G13 (EDH-GEA-00459), 252B3618G14 (EDH-GEA-00460), 252B3618G15 (EDH-GEA-00461), 252B3576P1 (EDH-GEA-00456), 10083041P1 (EDH-GEA-00454), AHKBG1 (EDH-GEA-00196)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00124	**AMCB3GMFP**	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)

OEM part number	AMCB3GMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SG MAIN W/FILLER" (UPC 783175335947)	A	S301 empower page AMCB3GMFP; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S274 DEH060; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
	empower specification "Box/Front Height 4.375 in"	A	S301 empower page AMCB3GMFP; oem_spec
	Vertical space 5.50 in (4X)	B	S274 DEH060 p.1; inference
Torque values	Breaker mounting bracket thread-forming screws 30 in-lb; breaker to bracket (1/4-20 x 3-3/4 in machine screws + flat washers) 50 in-lb; breaker terminals to threaded strap holes (hex bolts + conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S274 DEH060 pp.6-7; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
	Strap portion per DEH060 R04 (kit AMCB3GM); FP adds filler kit AFP4SGS	B	S274, S301 DEH060 p.1; inference
Replacement / successor	ABB Tmax XT retrofit kit SRFB3XT5MFPX (or SRFB3XT5MFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S302 guide p.28 retrofit table; oem_spec

Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00451	AMCB3KM	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on K-frame main strap kit AMCB3KM (DEH061)

OEM part number	AMCB3KM	**A**	S275 p.1; oem_spec
Description	Spectra bolt-on kit to install K-frame main circuit breakers into APNB bolt-on interiors	**A**	same as above
	empower: "BOLT-ON STRAP KIT SK MAIN" (UPC 783175333851)	**A**	S301 empower page AMCB3KM; oem_spec
Application	main (strap-assembly bolts pass through the load/OFF-side terminals)	**A**	S275 p.1 step 5; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S275 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM; breaker cover kit AFP6SKS	**A**	S275 p.1; oem_spec
Poles	3	**A**	S275 p.1 Table 2; oem_spec
Kit contents	Table 1 (Qty AMCB2KM / AMCB3KM): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in 4/6; 3 conical spring washer 1/4 in 4/6; 4 nut 1/4-20 4/6; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 breaker mounting bracket 2/2; 8 thread-forming screw 4/4; 9 conical spring washer 3/8 in 2/3; 10 nut 3/8-16 2/3; 11 screw 1/4-20 x 1-1/4 in 4/4; 12 flat washer 1/4 in 4/4	**A**	S275 p.1 Table 1; oem_spec
Fasteners	Each strap assembly fastened to vertical bus with two 1/4-20 carriage bolts, conical washers and nuts	**A**	S275 p.1 step 3; oem_spec
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	**A**	S275 p.1 steps 4-6; oem_spec
OEM instruction document	DEH061 R02 (09/2001)	**A**	S275 p.1-2; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00127	AMCB3KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)

OEM part number	AMCB3KMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S275 DEH061; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
Torque values	Breaker mounting brackets (two thread-forming screws each) 35 in-lb; breaker base to brackets (1/4-20 x 1-1/4 in screws + flat washers) 50 in-lb; load-side breaker terminals to strap-assembly bolts (3/8-16 nuts + 3/8 in conical washers) 275 in-lb; strap-to-vertical-bus 65 in-lb	B	S275 DEH061 p.1; inference
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S75 p.11-52; oem_spec
	Strap portion per DEH061 R02 (kit AMCB3KM); FP adds filler kit AFP6SKS (GEH5629)	B	S275, S279 DEH061 p.1; GEH5629 p.1; inference
Replacement / successor	ABB Tmax XT retrofit kit SRFB3XT7MFPX (or SRFB3XT7MFPK with Kirk lock provision) for Tmax XT7, 1200 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S302 guide p.28 retrofit table; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00125	AMCB3LBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)

OEM part number	AMCB3LBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3LB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKP (as printed; LB code = THLC2/THLC4 per nomenclature)	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		
Open question	*AMCB3LBFP is listed for 'SKP 2-pole' but LB code = THLC2/THLC4 and the 3 = 3 poles: verify against OEM*		

EDH-GEA-00441	AMCB4EB	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB4EB (TEB/TED/THED/SE, DEH047)

OEM part number	AMCB4EB	A	S272 p.1; oem_spec
Description	Spectra Series bolt-on circuit breaker (strap) kit for APNB bolt-on interiors, without filler plate	A	same as above
Application	Branch (line or ON-side terminals rest on straps; opposite end supported by mounting brackets)	A	S272 p.1 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S272 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler) kits AFP3SED, AFP4SED, AFP2TED, AFP3TED	A	S272 p.1; oem_spec
Poles	1- or 2-pole configurations per Table 2; alternate 2X bracket for 4-pole 2X double-branch TEB/TED	A	S272 p.1, p.3 Table 2; oem_spec
Kit contents	Table 1 (single quantity column): 1 A&C pole outer straps (2); 2 A&C pole inner straps (2); 3 1/4-20 x 1.50 in carriage bolts (3); 4 1/4 in Belleville washers (3); 5 1/4-20 hex nuts (3); 6 B-pole straps (2); 7 breaker mounting brackets (2)*; 8 thread-forming screws (4); 9 screws with lockwashers (6); 10 8-32 x 2-3/4 in screws (4); 11 #8 cup washers (4); 12 antiturn clips (3). *Kit AMCB4EB uses an alternate 2X mounting bracket. Replacement hardware kit catalog number AHKBE1 (Table 1 has a single Qty column; quantities shown are for the three-strap-set assembly)	A	S272 p.1 Table 1; oem_spec
Dimensions	Alternate mounting bracket for four-pole 2X (2 x 1.38 in) double-branch assembly of TEB/TED breakers; both breakers in each branch fastened to center hole of each bracket	A	S272 p.3; oem_spec
Mounting-hole pattern	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap	A	S272 p.1 step 1; oem_spec
Fasteners	Strap assemblies: 1/4-20 x 1.50 in carriage bolt with antiturn clip (pin through circular hole in strap; bolt through square hole immediately below), 1/4 in Belleville washer, 1/4-20 hex nut; breakers: 8-32 x 2-3/4 in screws with #8 cup washers; line terminals: screws with lockwashers into threaded strap holes; Unused strap contact surfaces: multiple wrappings of UL Recognized 105 C thermoplastic tape (OANZ2), each turn overlapping > 1/2 of preceding turn, minimum tape thickness 0.013 in	A	S272 pp.1,3; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb	A	S272 p.1 steps 2-4; oem_spec
OEM instruction document	DEH047 R02 (04/2001) Installation Instructions	A	S272 p.4; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AHKBE1 (EDH-GEA-00194)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00098	AMCB4EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)

OEM part number	AMCB4EBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S272 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb (applies to the strap kit contained in the FP kit)	B	S272 DEH047 p.1; inference
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S75 p.11-52; oem_spec
	Strap portion installs per DEH047 R02 (kit AMCB4EB); FP suffix adds the breaker cover (filler) kit (AFP2TED) (DEH047 names base kits only; FP composition taken from BuyLog nomenclature and empower replacement text)	B	S272, S301 DEH047 p.1; empower AMCB4EBFP; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00452	AMCB4EY	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on TEY strap kit AMCB4EY (DEH062)

OEM part number	AMCB4EY	A	S276 p.1; oem_spec
Description	Spectra bolt-on kit to install TEY breakers into APNB bolt-on interiors	A	same as above
Application	double branch (line/ON-side terminals on straps)	A	S276 p.3 step 6; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S276 DEH062; oem_spec
Breaker compatibility	TEY; breaker cover kit AFP3EYD	A	S276 p.1; oem_spec
Poles	1- or 2-pole configurations (Table 2)	A	same as above
Kit contents	Table 1 (Qty AMCB4EY / AMCB6EY): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in [1/4-20 x 1 in for vertical bus rated 600 A or less] 2/3; 3 conical spring washer 1/4 in 2/3; 4 nut 1/4-20 2/3; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 lower mounting bracket 2/2; 8 thread-forming screw 4/4; 9 upper mounting bracket 2/2; 10 screw with lockwasher #8-32 x 1/4 in 4/4; 11 B-phase isolator 1/1; 12 antiturn clips 2/3	A	S276 p.1 Table 1; oem_spec
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	A	S276 p.1 step 4; p.3 steps 6-7; oem_spec
OEM instruction document	DEH062 R02 (09/2001)	A	S276 p.1, p.4; oem_spec
Identification features	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side	A	S276 pp.1,3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00099	AMCB4EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)

OEM part number	AMCB4EYFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT TEY W/FILLER" (UPC 783175336104)	A	S301 empower page AMCB4EYFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S276 DEH062; oem_spec
Breaker compatibility	TEY	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	B	S276 DEH062 pp.1-3; inference
OEM instruction document	DEH-062 (TEY)	A	S75 p.11-52; oem_spec
	Strap portion per DEH062 R02 (kit AMCB4EY); FP adds cover kit AFP3EYD	B	S276, S301 DEH062 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00100	AMCB4FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)

OEM part number	AMCB4FBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00101	AMCB4FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)

OEM part number	AMCB4FDBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00113	AMCB4FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)

OEM part number	AMCB4FGBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00445	AMCB4FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB4FJ (SF/TF, DEH059)

OEM part number	AMCB4FJ	A	S273 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch mounting in APNB interiors	A	same as above
Application	double branch	A	S273 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S273 p.1; oem_spec
Poles	2 (configurations per Table 3)	A	S273 p.1; p.2 Table 3; oem_spec
Kit contents	Double-branch (Table 2): 18 A&C pole outer strap (2); 19 A&C pole inner strap (2); 20 carriage bolt 1/4-20 x 1.50 [x 1.00 for vertical bus <=600 A] (3); 21 1/4 in Belleville washer (3); 22 1/4-20 nut (3); 23 B pole strap (2); 24 breaker mounting bracket (2); 25 thread-forming screw (4); 26 1/4-20 x 3/4 in machine screw (6); 27 1/4 in Belleville washer (6); 28 #10-32 x 3-3/4 in machine screw (4); 29 #10 flat washer (4); 30 antiturn clip (3)	A	S273 p.1 Table 2; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S273 pp.1-2; oem_spec
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S273 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S273 p.1, p.6; oem_spec
Identification features	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps	A	S273 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00109	AMCB4FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)

OEM part number	AMCB4FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SF DB W/FILLER" (UPC 783175336036)	A	S301 empower page AMCB4FJFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB4FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00111	AMCB4FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)

OEM part number	AMCB4FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB4FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00448	AMCB4GB	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on G-frame double-branch strap kit AMCB4GB (DEH40129)

OEM part number	AMCB4GB	**A**	S277 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch G-frame breakers in APNB interiors	**A**	same as above
Application	double branch	**A**	same as above
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S277 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGD	**A**	S277 p.1; oem_spec
Poles	2 (A-B, A-C or B-C)	**A**	S277 pp.2-4; oem_spec
Kit contents	Table 1 (Qty AMCB4GB / AMCB6GB): 1 192A6976P189 thread-forming screw #10-32 x 7/16 in 4/4; 2 252B3575P1 circuit breaker mounting bracket 2/2; 3 208C2291P1 filler center 2/2; 4 252B3613P1 antiturn clip 2/3; 5 252B3618G10 G frame double strap 2/2; 6 252B3618G11 G frame double strap 1/1; 7 75A105503P101 conical spring washer 1/4 in 4/4; 8 75A105503P105 conical spring washer 5/16 in 4/6; 9 DEH40129 instructions 1/1; 10 N22P23012B6 hex-head bolt 5/16-18 x 3/4 in 4/6; 11 N245P21B6 nut 1/4-20 2/3; 12 N37P21969B6 machine screw 1/4-20 x 3-3/4 in 4/4; 13 N402P11B6 flat washer 1/4 in 4/4; 14 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 2/3; 15 N730BP1308B6 thread-forming screw #6 x 1/2 in 4/4	**A**	S277 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	**A**	S277 p.1; oem_spec
Fasteners	Unused branch: strap contact blocks covered with two layers of UL-recognized 105 C thermoplastic tape (OANZ2, e.g. Permacel P-30-105 or 3M 66R), min 0.013 in	**A**	S277 p.5 step 10; oem_spec
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	**A**	S277 pp.4-5 steps 6-9; oem_spec
OEM instruction document	DEH40129 R03 (09/2001)	**A**	S277 p.1, p.6; oem_spec
Identification features	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly	**A**	S277 pp.4-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G10 (EDH-GEA-00462), 252B3618G11 (EDH-GEA-00463), 252B3575P1 (EDH-GEA-00457), 208C2291P1 (EDH-GEA-00466)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00114	AMCB4GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)

OEM part number	AMCB4GBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S277 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S277 DEH40129 pp.4-5; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
	Strap portion per DEH40129 R03 (kit AMCB4GB); FP adds filler kit AFP4SGD	B	S277, S301 DEH40129 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00102	AMCB4QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)

OEM part number	AMCB4QDFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S86 DEH065 Table 1; oem_spec
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	S75 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S86 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S86 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S86, S75 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S86 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		

Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00440	**AMCB4SE**	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB4SE (TEB/TED/THED/SE, DEH047)

OEM part number	AMCB4SE	**A**	S272 p.1; oem_spec
Description	Spectra Series bolt-on circuit breaker (strap) kit for APNB bolt-on interiors, without filler plate	**A**	same as above
Application	Branch (line or ON-side terminals rest on straps; opposite end supported by mounting brackets)	**A**	S272 p.1 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	**A**	S272 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler) kits AFP3SED, AFP4SED, AFP2TED, AFP3TED	**A**	S272 p.1; oem_spec
Poles	1/2-pole configurations per DEH047 Table 2	**A**	S272 p.1, p.3 Table 2; oem_spec
Kit contents	Table 1 (single quantity column): 1 A&C pole outer straps (2); 2 A&C pole inner straps (2); 3 1/4-20 x 1.50 in carriage bolts (3); 4 1/4 in Belleville washers (3); 5 1/4-20 hex nuts (3); 6 B-pole straps (2); 7 breaker mounting brackets (2)*; 8 thread-forming screws (4); 9 screws with lockwashers (6); 10 8-32 x 2-3/4 in screws (4); 11 #8 cup washers (4); 12 antiturn clips (3). *Kit AMCB4EB uses an alternate 2X mounting bracket. Replacement hardware kit catalog number AHKBE1 (Table 1 has a single Qty column; quantities shown are for the three-strap-set assembly)	**A**	S272 p.1 Table 1; oem_spec
Mounting-hole pattern	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap	**A**	S272 p.1 step 1; oem_spec
Fasteners	Strap assemblies: 1/4-20 x 1.50 in carriage bolt with antiturn clip (pin through circular hole in strap; bolt through square hole immediately below), 1/4 in Belleville washer, 1/4-20 hex nut; breakers: 8-32 x 2-3/4 in screws with #8 cup washers; line terminals: screws with lockwashers into threaded strap holes; Unused strap contact surfaces: multiple wrappings of UL Recognized 105 C thermoplastic tape (OANZ2), each turn overlapping > 1/2 of preceding turn, minimum tape thickness 0.013 in	**A**	S272 pp.1,3; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb	**A**	S272 p.1 steps 2-4; oem_spec
OEM instruction document	DEH047 R02 (04/2001) Installation Instructions	**A**	S272 p.4; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AHKBE1 (EDH-GEA-00194)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00103	AMCB4SEFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)

OEM part number	AMCB4SEFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4SE (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT SE W/FILLER" (UPC 783175336012)	A	S301 empower page AMCB4SEFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S272 DEH047 p.1; oem_spec
Breaker compatibility	THED, SED, SEH, SEL, SEP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb (applies to the strap kit contained in the FP kit)	B	S272 DEH047 p.1; inference
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S75 p.11-52; oem_spec
	Strap portion installs per DEH047 R02 (kit AMCB4SE); FP suffix adds the breaker cover (filler) kit (AFP3SED or AFP4SED (not stated)) (DEH047 names base kits only; FP composition taken from BuyLog nomenclature and empower replacement text)	B	S272, S301 DEH047 p.1; empower AMCB4SEFP; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00439	AMCB6EB	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB6EB (TEB/TED/THED/SE, DEH047)

OEM part number	AMCB6EB	A	S272 p.1; oem_spec
Description	Spectra Series bolt-on circuit breaker (strap) kit for APNB bolt-on interiors, without filler plate	A	same as above
	empower: "BOLT-ON STRAP KIT SE" (UPC 783175333806)	A	S301 empower page AMCB6EB; oem_spec
Application	Branch (line or ON-side terminals rest on straps; opposite end supported by mounting brackets)	A	S272 p.1 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S272 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP; for use with breaker cover (filler) kits AFP3SED, AFP4SED, AFP2TED, AFP3TED	A	S272 p.1; oem_spec
Poles	3 (three-phase, double-branch)	A	S272 p.1, p.3 Table 2; oem_spec
Kit contents	Table 1 (single quantity column): 1 A&C pole outer straps (2); 2 A&C pole inner straps (2); 3 1/4-20 x 1.50 in carriage bolts (3); 4 1/4 in Belleville washers (3); 5 1/4-20 hex nuts (3); 6 B-pole straps (2); 7 breaker mounting brackets (2)*; 8 thread-forming screws (4); 9 screws with lockwashers (6); 10 8-32 x 2-3/4 in screws (4); 11 #8 cup washers (4); 12 antiturn clips (3). *Kit AMCB4EB uses an alternate 2X mounting bracket. Replacement hardware kit catalog number AHKBE1 (Table 1 has a single Qty column; quantities shown are for the three-strap-set assembly)	A	S272 p.1 Table 1; oem_spec
Mounting-hole pattern	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap	A	S272 p.1 step 1; oem_spec
Fasteners	Strap assemblies: 1/4-20 x 1.50 in carriage bolt with antiturn clip (pin through circular hole in strap; bolt through square hole immediately below), 1/4 in Belleville washer, 1/4-20 hex nut; breakers: 8-32 x 2-3/4 in screws with #8 cup washers; line terminals: screws with lockwashers into threaded strap holes; Unused strap contact surfaces: multiple wrappings of UL Recognized 105 C thermoplastic tape (OANZ2), each turn overlapping > 1/2 of preceding turn, minimum tape thickness 0.013 in	A	S272 pp.1,3; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb	A	S272 p.1 steps 2-4; oem_spec
OEM instruction document	DEH047 R02 (04/2001) Installation Instructions	A	S272 p.4; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AHKBE1 (EDH-GEA-00194)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00104	AMCB6EBFP	GE	branch-connector-kit	SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)

OEM part number	AMCB6EBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON REPLCE BY AMCB6EB + AFP3SED" (UPC 783175335886)	A	S301 empower page AMCB6EBFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S272 DEH047 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above

	empower specification "Box/Front Height 3.375 in"	A	S301 empower page AMCB6EBFP; oem_spec
Torque values	Breaker mounting brackets to side rails (thread-forming screws) 25 in-lb; breaker to bracket (8-32 sheet-metal screws with #8 cup washers) 20 in-lb; breaker line terminals to threaded strap holes 32 in-lb; strap-to-vertical-bus bolted connections 65 in-lb (applies to the strap kit contained in the FP kit)	B	S272 DEH047 p.1; inference
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S75 p.11-52; oem_spec
	Strap portion installs per DEH047 R02 (kit AMCB6EB); FP suffix adds the breaker cover (filler) kit (AFP3SED) (DEH047 names base kits only; FP composition taken from BuyLog nomenclature and empower replacement text)	B	S272, S301 DEH047 p.1; empower AMCB6EBFP; inference
Status	superseded - ABB empower description reads "REPLCE BY AMCB6EB + AFP3SED"	A	S301 empower page AMCB6EBFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6EBFP as "REPLCE BY AMCB6EB + AFP3SED"	A	same as above
	ABB Tmax XT retrofit kit SRFB6XT1FPX (or SRFB6XT1FPK with Kirk lock provision) for Tmax XT1, 125 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S302 guide p.28 retrofit table; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, strap dimensions		

EDH-GEA-00453 AMCB6EY — GE / ABB lineage — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on TEY strap kit AMCB6EY (DEH062)

OEM part number	AMCB6EY	A	S276 p.1; oem_spec
Description	Spectra bolt-on kit to install TEY breakers into APNB bolt-on interiors	A	same as above
	empower: "BOLT-ON STRAP KIT TEY" (UPC 783175333868)	A	S301 empower page AMCB6EY; oem_spec
Application	double branch (line/ON-side terminals on straps)	A	S276 p.3 step 6; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S276 DEH062; oem_spec
Breaker compatibility	TEY; breaker cover kit AFP3EYD	A	S276 p.1; oem_spec
Poles	3	A	same as above
Kit contents	Table 1 (Qty AMCB4EY / AMCB6EY): 1 A pole strap assembly 1/1; 2 carriage bolt 1/4-20 x 1-1/2 in [1/4-20 x 1 in for vertical bus rated 600 A or less] 2/3; 3 conical spring washer 1/4 in 2/3; 4 nut 1/4-20 2/3; 5 B pole strap assembly 1/1; 6 C pole strap assembly 1/1; 7 lower mounting bracket 2/2; 8 thread-forming screw 4/4; 9 upper mounting bracket 2/2; 10 screw with lockwasher #8-32 x 1/4 in 4/4; 11 B-phase isolator 1/1; 12 antiturn clips 2/3	A	S276 p.1 Table 1; oem_spec
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	A	S276 p.1 step 4; p.3 steps 6-7; oem_spec
OEM instruction document	DEH062 R02 (09/2001)	A	S276 p.1, p.4; oem_spec
Identification features	Kit includes a B-phase isolator whose flaps fold up into the grooves of the TEY housing between phases; straps installed starting with the pole farthest from the 2.75 in dimension, carriage bolt head opposite the 2.75 in side	A	S276 pp.1,3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00105 AMCB6EYFP — GE — branch-connector-kit — STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)

OEM part number	AMCB6EYFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec

	empower: "BOLT-ON STRAP KIT TEY W/FILLER" (UPC 783175335961)	A	S301 empower page AMCB6EYFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S276 DEH062; oem_spec
Breaker compatibility	TEY	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
	empower specification "Box/Front Height 3.375 in"	A	S301 empower page AMCB6EYFP; oem_spec
Torque values	Lower mounting brackets thread-forming screws 35 in-lb; breaker captive terminal screws into threaded strap holes 35 in-lb; upper bracket #8-32 screws 18 in-lb (after sliding bracket to engage the toothed section with the steel flange under the breaker); strap-to-vertical-bus 65 in-lb	B	S276 DEH062 pp.1-3; inference
OEM instruction document	DEH-062 (TEY)	A	S75 p.11-52; oem_spec
	Strap portion per DEH062 R02 (kit AMCB6EY); FP adds cover kit AFP3EYD	B	S276, S301 DEH062 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00106 AMCB6FBFP GE branch-connector-kit SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)

OEM part number	AMCB6FBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "REPLACED BY AMCB6FB + AFP3FBD" (UPC 783164334135)	A	S301 empower page AMCB6FBFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Status	superseded - ABB empower description reads "REPLACED BY AMCB6FB + AFP3FBD"	A	S301 empower page AMCB6FBFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6FBFP as "REPLACED BY AMCB6FB + AFP3FBD"	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, strap dimensions		

EDH-GEA-00107	AMCB6FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)

OEM part number	AMCB6FDBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00115	AMCB6FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)

OEM part number	AMCB6FGBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00442	AMCB6FJ	GE / ABB lineage	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit AMCB6FJ (SF/TF, DEH059)

OEM part number	AMCB6FJ	A	S273 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch mounting in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SF DB" (UPC 783175333813)	A	S301 empower page AMCB6FJ; oem_spec
Application	double branch	A	S273 p.2 step 3; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059 pp.1-2; oem_spec
Breaker compatibility	SFH, SFL, SFP, TF and TH(F) breakers; breaker cover kits AFP3SFS, AFP3SFD, AFP3TFS, AFP3TFD ("TF, and TH" as printed (TFJ/TFK/THFK family))	A	S273 p.1; oem_spec
Poles	3	A	S273 p.1; p.2 Table 3; oem_spec
Kit contents	Double-branch (Table 2): 18 A&C pole outer strap (2); 19 A&C pole inner strap (2); 20 carriage bolt 1/4-20 x 1.50 [x 1.00 for vertical bus <=600 A] (3); 21 1/4 in Belleville washer (3); 22 1/4-20 nut (3); 23 B pole strap (2); 24 breaker mounting bracket (2); 25 thread-forming screw (4); 26 1/4-20 x 3/4 in machine screw (6); 27 1/4 in Belleville washer (6); 28 #10-32 x 3-3/4 in machine screw (4); 29 #10 flat washer (4); 30 antiturn clip (3)	A	S273 p.1 Table 2; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips (clip pin into small hole in strap; bolt in front square hole of vertical bus), 1/4 in Belleville washers and nuts; UL-recognized 105 C thermoplastic tape (OANZ2, Permacel P-30-105 or 3M 66R) on unused strap contact surfaces; overlap > 1/2 each turn; minimum 0.028 in = two complete layers of overlapping turns	A	S273 pp.1-2; oem_spec
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	A	S273 p.2 steps 2-4; oem_spec
OEM instruction document	DEH059 R02 (09/2001) Installation Instructions; replacement hardware kit AHKBF1	A	S273 p.1, p.6; oem_spec
Identification features	Double-branch kit uses back-to-back outer and inner A&C straps and two B straps	A	S273 p.1 step 1a/1b; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AHKBF1 (EDH-GEA-00195)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00110	AMCB6FJFP	GE	branch-connector-kit	SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)

OEM part number	AMCB6FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "REPLACED BY AMCB6FJ + AFP3SFD" (UPC 783175335893)	A	S301 empower page AMCB6FJFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
	empower specification "Box/Front Height 3.375 in"	A	S301 empower page AMCB6FJFP; oem_spec
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference

OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
	Strap portion installs per DEH059 R02 (kit AMCB6FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Status	superseded - ABB empower description reads "REPLACED BY AMCB6FJ + AFP3SFD"	A	S301 empower page AMCB6FJFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6FJFP as "REPLACED BY AMCB6FJ + AFP3SFD"	A	same as above
	ABB Tmax XT retrofit kit SRFB6XT4FPX (or SRFB6XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S302 guide p.28 retrofit table; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, strap dimensions		

EDH-GEA-00112 AMCB6FJFPTF GE branch-connector-kit STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)

OEM part number	AMCB6FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON STRAP KIT TF DB W/FILLER" (UPC 783175335909)	A	S301 empower page AMCB6FJFPTF; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S273 DEH059; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Torque values	Double-branch: brackets thread-forming screws 30 in-lb; breaker to bracket #10-32 x 3-3/4 in 30 in-lb; line terminals 1/4-20 x 3/4 in 50 in-lb; strap-to-vertical-bus 65 in-lb	B	S273 DEH059 p.2; inference
OEM instruction document	Strap portion installs per DEH059 R02 (kit AMCB6FJ) (DEH059 covers SF and TF breakers with base kits AMCB6FJ/3FJ/2FJ/4FJ; FP/FPTF suffix adds filler (AFP3SF*/AFP3TF*))	B	S273, S301 DEH059 p.1; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00449 AMCB6GB GE / ABB lineage branch-connector-kit STATUS UNKNOWN

Spectra bolt-on G-frame double-branch strap kit AMCB6GB (DEH40129)

OEM part number	AMCB6GB	A	S277 p.1; oem_spec
Description	Spectra bolt-on circuit breaker kit for double-branch G-frame breakers in APNB interiors	A	same as above
	empower: "BOLT-ON STRAP KIT SG DB" (UPC 783175333837)	A	S301 empower page AMCB6GB; oem_spec
Application	double branch	A	S277 p.1; oem_spec
Installation location	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S277 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP; breaker cover kit AFP4SGD	A	S277 p.1; oem_spec
Poles	3	A	S277 pp.2-4; oem_spec

Kit contents	Table 1 (Qty AMCB4GB / AMCB6GB): 1 192A6976P189 thread-forming screw #10-32 x 7/16 in 4/4; 2 252B3575P1 circuit breaker mounting bracket 2/2; 3 208C2291P1 filler center 2/2; 4 252B3613P1 antiturn clip 2/3; 5 252B3618G10 G frame double strap 2/2; 6 252B3618G11 G frame double strap 1/1; 7 75A105503P101 conical spring washer 1/4 in 4/4; 8 75A105503P105 conical spring washer 5/16 in 4/6; 9 DEH40129 instructions 1/1; 10 N22P23012B6 hex-head bolt 5/16-18 x 3/4 in 4/6; 11 N245P21B6 nut 1/4-20 2/3; 12 N37P21969B6 machine screw 1/4-20 x 3-3/4 in 4/4; 13 N402P11B6 flat washer 1/4 in 4/4; 14 N657P21024B6 carriage bolt 1/4-20 x 1-1/2 in 2/3; 15 N730BP1308B6 thread-forming screw #6 x 1/2 in 4/4	A	S277 p.1 Table 1; oem_spec
Dimensions	Vertical space required 5.50 in (4X)	A	S277 p.1; oem_spec
Fasteners	Unused branch: strap contact blocks covered with two layers of UL-recognized 105 C thermoplastic tape (OANZ2, e.g. Permacel P-30-105 or 3M 66R), min 0.013 in	A	S277 p.5 step 10; oem_spec
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	A	S277 pp.4-5 steps 6-9; oem_spec
OEM instruction document	DEH40129 R03 (09/2001)	A	S277 p.1, p.6; oem_spec
Identification features	G-frame double straps carry threaded strap contact blocks on which the breaker line terminals rest; terminal cover installed over centre of assembly	A	S277 pp.4-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	252B3618G10 (EDH-GEA-00462), 252B3618G11 (EDH-GEA-00463), 252B3575P1 (EDH-GEA-00457), 208C2291P1 (EDH-GEA-00466)		
Not yet documented	Finish / plating, Material		

EDH-GEA-00116 AMCB6GBFP GE branch-connector-kit SUPERSEDED - ABB EMPOW

Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)

OEM part number	AMCB6GBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
	empower: "BOLT-ON REPLCE BY AMCB6GB + AFP4SGD" (UPC 783175335930)	A	S301 empower page AMCB6GBFP; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
	Spectra APNB bolt-on interior: straps bolt to the vertical bus on the side where nearest vertical bus face to inner face of bus-support rail = 2.75 in; breaker mounting brackets fasten to the panel side rails	A	S277 DEH40129; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
	empower specification "Box/Front Height 4.375 in"	A	S301 empower page AMCB6GBFP; oem_spec
Torque values	Breaker mounting brackets thread-forming screws 30 in-lb; breakers to brackets (1/4-20 x 3-3/4 in screws + flat washers) 18 in-lb; line terminals to strap contact blocks (5/16-18 x 3/4 in hex bolts + 5/16 conical washers) 75 in-lb; strap-to-vertical-bus 65 in-lb	B	S277 DEH40129 pp.4-5; inference
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
	Strap portion per DEH40129 R03 (kit AMCB6GB); FP adds filler kit AFP4SGD	B	S277, S301 DEH40129 p.1; inference
Status	superseded - ABB empower description reads "REPLCE BY AMCB6GB + AFP4SGD"	A	S301 empower page AMCB6GBFP; oem_spec
Replacement / successor	empower (ABB) lists AMCB6GBFP as "REPLCE BY AMCB6GB + AFP4SGD"	A	same as above
	ABB Tmax XT retrofit kit SRFB6XT5BFPX (or SRFB6XT5BFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served (retrofit replaces breaker and mounting hardware together; not a like-for-like strap kit)	A	S302 guide p.28 retrofit table; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		

Not yet documented	hole pattern, Material, strap dimensions		

EDH-GEA-00108	AMCB6QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)

OEM part number	AMCB6QDFP	**A**	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	**A**	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	**A**	S75 p.11-43; oem_spec
Poles	3	**A**	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	**A**	S86 DEH065 Table 1; oem_spec
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	**A**	S75 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	**A**	S86 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	**A**	S86 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	**A**	S86, S75 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	**A**	S86 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00181	**AMC2FGMFP**	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00179	**AMC2FJFP**	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00178	**AMC2FJFPTF**	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00184	**AMC2FLSFP**	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00182	**AMC2GMFP**	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00180	**AMC2JKFP**	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00183	**AMC2KMFP**	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00162	**AMC3FGMFP**	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00160	**AMC3FJFP**	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00159	**AMC3FJFPTF**	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00165	**AMC3FLSFP**	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00163	**AMC3GMFP**	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	superseded - ABB empower description reads "REPLACED BY AMC3
EDH-GEA-00161	**AMC3JKFP**	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00164	**AMC3KMFP**	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00167	**AMC4EBFP**	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	TEB, TED **A**	unknown
EDH-GEA-00176	**AMC4EBSFP**	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00166	**AMC4FDBFP**	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00175	**AMC4FDSFP**	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00173	**AMC4FGBFP**	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00171	**AMC4FJFP**	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00170	**AMC4FJFPTF**	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00177	**AMC4FLSFP**	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00174	**AMC4GBFP**	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00172	**AMC4JKFP**	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00169	**AMC4QDFP**	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown
EDH-GEA-00168	**AMC4SEFP**	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)	SEDA, SEHA, SELA, SEPA, THED **A**	unknown
EDH-GEA-00149	**AMC6EBFP**	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)	TEB, TED, THED, SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00157	**AMC6EBSFP**	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00530	**AMC6EL**	Spectra plug-in breaker module AMC6EL (TEL)	TEL (only with a breaker of like type) **A**	unknown
EDH-GEA-00146	**AMC6EYFP**	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	TEY **A**	superseded - ABB empower description reads "REPLACED BY AMC6
EDH-GEA-00147	**AMC6FBFP**	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00148	**AMC6FDBFP**	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00156	**AMC6FDSPF**	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00154	**AMC6FGBFP**	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)	FGL, FGN, FGH, FGP **A**	unknown
EDH-GEA-00152	**AMC6FJFP**	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00151	**AMC6FJFPTF**	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00158	**AMC6FLSFP**	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00155	**AMC6GBFP**	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max) **A**	unknown
EDH-GEA-00153	**AMC6JKFP**	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00145	**AMC6QBFP**	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	THQB, THHQB **A**	unknown
EDH-GEA-00150	**AMC6QDFP**	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown

EDH-GEA-00181 — AMC2FGMFP

GE · breaker-mounting-kit · **STATUS UNKNOWN**

Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC2FGMFP	**A**	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	**B**	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	**A**	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	**A**	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	**A**	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	**A**	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	**A**	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	**A**	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	**A**	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00179 — AMC2FJFP

GE · breaker-mounting-kit · **STATUS UNKNOWN**

Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC2FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	**A**	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	**B**	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	**A**	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec

	empower: "MCCB MOUNTING MODULE 2PL W/FILLER" (UPC 783164239751)	A	S301 empower page AMC2FJFP; oem_spec
Application	Single branch or main	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00178	**AMC2FJFPTF**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC2FJFPTF	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec

Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00184 AMC2FLSFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC2FLSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec

Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00182	AMC2GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC2GMFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239683)	A	S301 empower page AMC2GMFP; oem_spec
Application	Single branch or main	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S75, S87 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kit AFP4SGS	A	S87 GEH5674 pp.1-2; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S87 GEH5674 steps 1-3; oem_spec
	Breaker to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; round-head screws + flat washers 40-50 in-lb; bus clip screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S87 GEH5674 pp.1-2; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S87, S75 GEH5674 p.1; BuyLog p.11-52; oem_spec
	GEH5674 R03 (Circuit Breakers and Modules)	A	S87 p.1; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S87 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00180	AMC2JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC2JKFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference

Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S289 GEH5624 p.1; oem_spec
Current rating	400/600 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S289 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S289 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S289 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00183	AMC2KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC2KMFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TKM, THKM, TK4V, TKL4V, SKHA, SKLA, SKPA	A	S287 GEH5623 p.1; oem_spec
Current rating	1200 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kit AFP6SKS; type SKPA adjacent to an ADS switch requires 1X (1-3/8 in) space closed with APP1W filler; SKPA branch requires large top cover per GEH-5592	A	S287 GEH5623 pp.1-3; oem_spec

Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Main TKM/THKM, TK4V/TKL4V and SKHA/SKLA/SKPA: screws 35-50 in-lb, contact-block nuts and strap bolts 200-250 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S287 GEH5623 pp.1-3; oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5623 R04 (Circuit Breakers and Modules)	A	S287 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00162 AMC3FGMFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC3FGMFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00160 AMC3FJFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC3FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239768)	A	S301 empower page AMC3FJFP; oem_spec
Application	Single branch or main	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec

Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00159	**AMC3FJFPTF**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC3FJFPTF	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783175334575)	A	S301 empower page AMC3FJFPTF; oem_spec
Application	Single branch or main	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec

Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00165 AMC3FLSFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC3FLSFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239553)	A	S301 empower page AMC3FLSFP; oem_spec
Application	Single branch or main adjacent to switch	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00163 AMC3GMFP GE breaker-mounting-kit SUPERSEDED - ABB EMPOW

Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC3GMFP	A	S75 p.11-40 (3-pole table); oem_spec

Alternate / superseded numbers	AMC3GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "REPLACED BY AMC3GM + AFP4SGS" (UPC 783164239676)	A	S301 empower page AMC3GMFP; oem_spec
Application	Single branch or main	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S75, S87 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kit AFP4SGS	A	S87 GEH5674 pp.1-2; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S87 GEH5674 steps 1-3; oem_spec
	Breaker to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; round-head screws + flat washers 40-50 in-lb; bus clip screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S87 GEH5674 pp.1-2; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S87, S75 GEH5674 p.1; BuyLog p.11-52; oem_spec
	GEH5674 R03 (Circuit Breakers and Modules)	A	S87 p.1; oem_spec
Status	superseded - ABB empower description reads "REPLACED BY AMC3GM + AFP4SGS"	A	S301 empower page AMC3GMFP; oem_spec
Replacement / successor	empower (ABB) lists AMC3GMFP as "REPLACED BY AMC3GM + AFP4SGS"	A	same as above
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S87 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material		

EDH-GEA-00161 AMC3JKFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC3JKFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (3-pole table); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S289 GEH5624 p.1; oem_spec

Current rating	400/600 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S289 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S289 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S289 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00164 AMC3KMFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC3KMFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S75 p.11-40 (3-pole table); oem_spec
	TKM, THKM, TK4V, TKL4V, SKHA, SKLA, SKPA	A	S287 GEH5623 p.1; oem_spec
Current rating	1200 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kit AFP6SKS; type SKPA adjacent to an ADS switch requires 1X (1-3/8 in) space closed with APP1W filler; SKPA branch requires large top cover per GEH-5592	A	S287 GEH5623 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Main TKM/THKM, TK4V/TKL4V and SKHA/SKLA/SKPA: screws 35-50 in-lb, contact-block nuts and strap bolts 200-250 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S287 GEH5623 pp.1-3; oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5623 R04 (Circuit Breakers and Modules)	A	S287 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00167	AMC4EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)

OEM part number	AMC4EBFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP2TED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239614)	A	S301 empower page AMC4EBFP; oem_spec
Application	Double branch	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S292 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2TED); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S292 GEH5625 pp.1-2; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S292 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S292 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP2TED (EDH-GEA-00129)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00176	AMC4EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC4EBSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec

Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S292 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S292 GEH5625 pp.1-2; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S292 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S292 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00166	AMC4FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC4FDBFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00175	AMC4FDSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC4FDSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00173	AMC4FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)

OEM part number	AMC4FGBFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00171	AMC4FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC4FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239737)	A	S301 empower page AMC4FJFP; oem_spec
Application	Double branch	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00170	AMC4FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC4FJFPTF	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec

Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00177	AMC4FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC4FLSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164254365)	A	S301 empower page AMC4FLSFP; oem_spec
Application	Double branch adjacent to switch	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec

Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00174 AMC4GBFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC4GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239669)	A	S301 empower page AMC4GBFP; oem_spec
Application	Double branch	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S75, S288 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kit AFP4SGC (as printed in GEH5673; BuyLog lists AFP4SGD for dual SG - possible misprint)	A	S288 GEH5673 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Line-end #10-32 inserts and screws into breaker ON-side holes 20-25 in-lb; breaker line straps to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; OFF side to mounting brackets (round-head SEMS + flat washers) 40-50 in-lb; center barrier thread-cutting screws 10 in-lb; bus clip slotted hex SEMS screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S288 GEH5673 pp.1-3; oem_spec
OEM instruction document	GEH5673 R03 (Circuit Breakers and Modules)	A	S288 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00172 AMC4JKFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC4JKFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S289 GEH5624 p.1; oem_spec
Current rating	400/600 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S289 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S289 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S289 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00169 AMC4QDFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)

OEM part number	AMC4QDFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP2QDD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TQD, THQD (any combination)	A	S291 GEH5643 p.1; oem_spec

Current rating	225 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2QDD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits AFP3QDD (AMC6QD), AFP2QDD (AMC4QD)	A	S291 GEH5643 pp.1-2; oem_spec
Dimensions	2X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: 1/4-20 screws 40-50 in-lb, #10-32 screws 25-30 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S291 GEH5643 pp.1-2; oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5643 R03 (Circuit Breakers and Modules)	A	S291 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00168 AMC4SEFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)

OEM part number	AMC4SEFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4SE (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA, THED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S292 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S292 GEH5625 pp.1-2; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S292 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec

	GEH5625 R04 (Circuit Breakers and Modules)	A	S292 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00149	AMC6EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)

OEM part number	AMC6EBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED, THED, SEDA, SEHA, SELA, SEPA	A	S75 p.11-40 (3-pole table); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S292 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S292 GEH5625 pp.1-2; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S292 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S292 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00157	AMC6EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC6EBSFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239638)	A	S301 empower page AMC6EBSFP; oem_spec

Application	Double branch adjacent to switch	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S75 p.11-40 (3-pole table); oem_spec
	TEB, TED, THED, SEDA, SEHA, SELA, SEPA combinable; TEL only with like type	A	S292 GEH5625 p.1; oem_spec
Current rating	150 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SED (AMC6EB, AMC4SE); AFP2TED (AMC4EB); AFP4SED (AMC6EBS, AMC4EBS); AFP3ELD (AMC6EL)	A	S292 GEH5625 pp.1-2; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to module: #10-32 screw-washer assemblies 27-32 in-lb, #8-32 screws with cup washers 15-20 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb; no space between units (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S292 GEH5625 pp.1-2; oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5625 R04 (Circuit Breakers and Modules)	A	S292 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00530 AMC6EL — GE / ABB lineage — breaker-mounting-kit — STATUS UNKNOWN

Spectra plug-in breaker module AMC6EL (TEL)

OEM part number	AMC6EL	A	S292 GEH5625 p.1; oem_spec
Description	Spectra plug-in circuit breaker module for TEL breakers (double branch, 3-pole) (listed as a catalog number covered by GEH5625; TEL may be used only with a breaker of like type)	B	S292 GEH5625 p.1; inference
Breaker compatibility	TEL (only with a breaker of like type)	A	S292 p.2; oem_spec
Kit contents	Filler plate kit AFP3ELD	A	S292 p.2 Table 1; oem_spec
Torque values	#10-32 screw-washer assemblies 27-32 in-lb; #8-32 screws with cup washers 15-20 in-lb; rail latch screws 25 in-lb	A	S292 pp.1-2; oem_spec
OEM instruction document	GEH5625 R04	A	S292 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	FP variant number, Status		

EDH-GEA-00146 AMC6EYFP — GE — breaker-mounting-kit — SUPERSEDED - ABB EMPOW

Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)

OEM part number	AMC6EYFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EY (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3EYD	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "REPLACED BY AMC6EY + AFP3EYD" (UPC 783164239713)	A	S301 empower page AMC6EYFP; oem_spec

Application	Double branch	**A**	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	**A**	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TEY	**A**	S75 p.11-40 (3-pole table); oem_spec
	TEY (AMC6EY); THQB, THHQB (AMC6QB)	**A**	S290 GEH5677 p.1; oem_spec
Current rating	100 A max breaker	**A**	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3EYD); breaker not included	**A**	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3EYD for AMC6EY; AFP3QBD for AMC6QB	**A**	S290 GEH5677 p.1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	**A**	S75 p.11-40 (3-pole table); oem_spec
Torque values	Filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; breaker line-end captive screws 25 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	**A**	S290 GEH5677 p.1; oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	**A**	S75 p.11-52; oem_spec
	GEH5677 R03 (Circuit Breakers and Modules)	**A**	S290 p.1; oem_spec
Status	superseded - ABB empower description reads "REPLACED BY AMC6EY + AFP3EYD"	**A**	S301 empower page AMC6EYFP; oem_spec
Replacement / successor	empower (ABB) lists AMC6EYFP as "REPLACED BY AMC6EY + AFP3EYD"	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Requires	AFP3EYD (EDH-GEA-00130)		
Not yet documented	bus clip/connector part numbers, Material		

EDH-GEA-00147	AMC6FBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)

OEM part number	AMC6FBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FBD	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "FB MODULE 3 POLE W/ COVERS" (UPC 783164334074)	A	S301 empower page AMC6FBFP; oem_spec
Application	Double branch	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FBD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	AFP3FBD (EDH-GEA-00132)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00148	AMC6FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC6FDBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00156	AMC6FDSPF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC6FDSPF	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDSPF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00154	AMC6FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)

OEM part number	AMC6FGBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGL, FGN, FGH, FGP	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00152	AMC6FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC6FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference

Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "CONSISTS OF AMC6FJ + AFP3SFD" (UPC 783164239744)	A	S301 empower page AMC6FJFP; oem_spec
Application	Double branch	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (3-pole table); oem_spec
	empower specification "Box/Front Height 3.375 in"	A	S301 empower page AMC6FJFP; oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Replacement / successor	empower (ABB) lists AMC6FJFP as "CONSISTS OF AMC6FJ + AFP3SFD"	A	S301 empower page AMC6FJFP; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00151	**AMC6FJFPTF**	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC6FJFPTF	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783175334568)	A	S301 empower page AMC6FJFPTF; oem_spec
Application	Double branch	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (3-pole table); oem_spec

	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	225 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00158 AMC6FLSFP GE breaker-mounting-kit STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC6FLSFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S75 p.11-40 (3-pole table); oem_spec
	empower: "SPECTRA SERIES MCCB MOUNTING MODULE" (UPC 783164239522)	A	S301 empower page AMC6FLSFP; oem_spec
Application	Double branch adjacent to switch	A	S75 p.11-40 (3-pole table); oem_spec
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
	TFJ, TFK, THFK, TFL may be combined; SFHA, SFLA, SFPA may be combined	A	S286 GEH5626 p.1; oem_spec
Current rating	250 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3SFD for AMC6FJ/AMC4FJ; AFP3SFS for AMC3FJ/AMC2FJ; AFP4SFD for AMC6FLS/AMC4FLS; AFP4SFS for AMC3FLS/AMC2FLS. Filler support position 4 for AMC6FJ/AMC4FJ/AMC6FLS, position 1 for AMC3FJ/AMC2FJ/AMC3FLS	A	S286 GEH5626 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to stud posts/module: 1/4-20 screws with conical washers 40-50 in-lb and #10-32 screws with flat washers 25-30 in-lb; filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S286 GEH5626 pp.1-3; oem_spec

OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5626 R04 (Circuit Breakers and Modules)	A	S286 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00155	AMC6GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC6GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max)	A	S75 p.11-40 (3-pole table); oem_spec
	SGDA, SGHA, SGLA, SGPA	A	S288 GEH5673 p.1; oem_spec
Current rating	600 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kit AFP4SGC (as printed in GEH5673; BuyLog lists AFP4SGD for dual SG - possible misprint)	A	S288 GEH5673 pp.1-3; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Line-end #10-32 inserts and screws into breaker ON-side holes 20-25 in-lb; breaker line straps to stud posts (hex-head screws + Belleville washers) 90-110 in-lb; OFF side to mounting brackets (round-head SEMS + flat washers) 40-50 in-lb; center barrier thread-cutting screws 10 in-lb; bus clip slotted hex SEMS screws 27-32 in-lb; latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S288 GEH5673 pp.1-3; oem_spec
OEM instruction document	GEH5673 R03 (Circuit Breakers and Modules)	A	S288 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00153	AMC6JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC6JKFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (3-pole table); oem_spec

	TJK, TJD, TJJ, THJK (combinable); TJ4V, THJ4V, TJL4V (combinable)	A	S289 GEH5624 p.1; oem_spec
Current rating	400/600 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits AFP6TJS (AMC2JK, AMC3JK) and AFP6TJD (AMC4JK, AMC6JK); double-mounted breakers joined by straps across opposing line terminals; single breaker on double module uses spacers on unused stud posts	A	S289 GEH5624 pp.1-3; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker load end round-head screws + lock washers 35-50 in-lb; stud-post nut-washer assemblies 80-110 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S289 GEH5624 pp.1-3; oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5624 R03 (Circuit Breakers and Modules)	A	S289 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00145	AMC6QBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)

OEM part number	AMC6QBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3QBD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	THQB, THHQB	A	S75 p.11-40 (3-pole table); oem_spec
	TEY (AMC6EY); THQB, THHQB (AMC6QB)	A	S290 GEH5677 p.1; oem_spec
Current rating	100 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QBD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits: AFP3EYD for AMC6EY; AFP3QBD for AMC6QB	A	S290 GEH5677 p.1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Filler supports #10-32 x 3/4 in hex-head screws 15-20 in-lb; breaker line-end captive screws 25 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S290 GEH5677 p.1; oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5677 R03 (Circuit Breakers and Modules)	A	S290 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00150	AMC6QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)

OEM part number	AMC6QDFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3QDD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-40 (3-pole table); oem_spec
	TQD, THQD (any combination)	A	S291 GEH5643 p.1; oem_spec
Current rating	225 A max breaker	A	S75 p.11-40 (3-pole table); oem_spec
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QDD); breaker not included	A	S75 p.11-40 product features; oem_spec
	Filler kits AFP3QDD (AMC6QD), AFP2QDD (AMC4QD)	A	S291 GEH5643 pp.1-2; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Breaker to module: 1/4-20 screws 40-50 in-lb, #10-32 screws 25-30 in-lb; filler supports 15-20 in-lb; Two-pole devices on three-phase systems: reposition bus clip (A&C as received; A&B or B&C) and retighten bus clip screws 27-32 in-lb; Module hooks on interior rail (guide fingers into rail notches), pivots onto bus bars, second latch engaged; rail latch screws 25 in-lb (Instruction is written for the base module number (without FP); FP = module + filler plate kit)	A	S291 GEH5643 pp.1-2; oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
	GEH5643 R03 (Circuit Breakers and Modules)	A	S291 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	bus clip/connector part numbers, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00462	**252B3618G10**	GE G frame double strap (bolt-on, double-branch) - 252B3618G10	—	unknown
EDH-GEA-00463	**252B3618G11**	GE G frame double strap (bolt-on, double-branch) - 252B3618G11	—	unknown
EDH-GEA-00459	**252B3618G13**	GE G frame single strap (bolt-on) - 252B3618G13	—	unknown
EDH-GEA-00460	**252B3618G14**	GE G frame single strap (bolt-on) - 252B3618G14	—	unknown
EDH-GEA-00461	**252B3618G15**	GE G frame single strap (bolt-on) - 252B3618G15	—	unknown

EDH-GEA-00462	252B3618G10	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame double strap (bolt-on, double-branch) - 252B3618G10

OEM part number	252B3618G10	A	S277 DEH40129 p.1 Table 1; oem_spec
Description	G frame double strap (bolt-on, double-branch)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB4GB and AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00463	252B3618G11	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame double strap (bolt-on, double-branch) - 252B3618G11

OEM part number	252B3618G11	A	S277 DEH40129 p.1 Table 1; oem_spec
Description	G frame double strap (bolt-on, double-branch)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB4GB and AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00459	252B3618G13	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame single strap (bolt-on) - 252B3618G13

OEM part number	252B3618G13	A	S274 DEH060 p.1 Table 1; oem_spec
Description	G frame single strap (bolt-on)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM and AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00460	252B3618G14	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame single strap (bolt-on) - 252B3618G14

OEM part number	252B3618G14	A	S274 DEH060 p.1 Table 1; oem_spec
Description	G frame single strap (bolt-on)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM and AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00461	252B3618G15	GE / ABB lineage	connector-strap	STATUS UNKNOWN

GE G frame single strap (bolt-on) - 252B3618G15

OEM part number	252B3618G15	A	S274 DEH060 p.1 Table 1; oem_spec
Description	G frame single strap (bolt-on)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM and AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00235	**ANK120D**	Spectra neutral kit ANK120D	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00234	**ANK800D**	Spectra neutral kit ANK800D	—	unknown
EDH-GEA-00233	**ANKN120**	Spectra neutral kit ANKN120	—	unknown
EDH-GEA-00232	**ANKN400**	Spectra neutral kit ANKN400	—	unknown

EDH-GEA-00235 ANK120D — GE — neutral-assembly — STATUS UNKNOWN

Spectra neutral kit ANK120D

OEM part number	ANK120D	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 1200 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
Current rating	1200 A	A	same as above
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S295 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S295 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00234 ANK800D — GE — neutral-assembly — STATUS UNKNOWN

Spectra neutral kit ANK800D

OEM part number	ANK800D	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 800 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
Current rating	800 A	A	same as above
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S295 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S295 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00233 ANKN120 — GE — neutral-assembly — STATUS UNKNOWN

Spectra neutral kit ANKN120

OEM part number	ANKN120	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 600/800/1200 A, single/dual: 8 main #2-600kcmil, 9 x #14-2/0, 10 x #6-300kcmil, 10 x #14-#4; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
	empower: "NEUT 4D/6/6D/8/1200A" (UPC 783175328376)	A	S301 empower page ANKN120; oem_spec
Current rating	600-1200 A	A	S75 p.11-45; oem_spec
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S295 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S295 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00232	ANKN400	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN400

OEM part number	ANKN400	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 250/400 A, single/dual main: 2 main lugs #2-600kcmil, 16 x #14-2/0, 5 x #6-300kcmil, 24 x #14-#4; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
	empower: "NEUTRAL KIT" (UPC 783175230136)	A	S301 empower page ANKN400; oem_spec
Current rating	250/400 A	A	S75 p.11-45; oem_spec
Torque values	Neutral on 1/4-20 enclosure studs (flat washer, lock washer, nut) 27-32 in-lb; opposite end two 10-32 x 11/16 thread-forming screws 27-32 in-lb; bond strap under wire connector nuts 200-250 in-lb and 10-32 x 3/8 SEMS screw to enclosure 27-32 in-lb; ground-fault sensor/connector strap 3/8-16 nuts 14 ft-lb (GEH5585 covers "Type ANK neutrals (Model 2)"; applicability to each ANK catalog number inferred from the ANK prefix)	B	S295 GEH5585 p.1; oem_spec
OEM instruction document	GEH5585 R05 (04/2001) Type ANK Neutrals (Model 2)	B	S295 p.1; inference
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00236	**AEG10**	Spectra equipment ground kit AEG10	—	unknown
EDH-GEA-00237	**AEG21**	Spectra equipment ground kit AEG21	—	unknown
EDH-GEA-00238	**AEG21S**	Spectra equipment ground kit AEG21S	—	unknown
EDH-GEA-00239	**AEG31S**	Spectra equipment ground kit AEG31S	—	unknown
EDH-GEA-00240	**AEG47**	Spectra equipment ground kit AEG47	—	unknown
EDH-GEA-00241	**AEG47S**	Spectra equipment ground kit AEG47S	—	unknown

EDH-GEA-00236	AEG10	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG10

OEM part number	AEG10	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 10 circuits, 10 wires #6-2/0 Cu/Al (cartons of 10)	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S296 p.1; oem_spec
	empower: "GROUND KIT 10 WIRE BONDED" (UPC 783175227945)	A	S301 empower page AEG10; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S296 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S296 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00237	AEG21	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21

OEM part number	AEG21	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 21 circuits, 9 wires	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S296 p.1; oem_spec
	empower: "GROUND KIT 21 WIRE BONDED" (UPC 783175227952)	A	S301 empower page AEG21; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S296 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S296 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00238	AEG21S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21S

OEM part number	AEG21S	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 21 circuits	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S296 p.1; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S296 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S296 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00239	AEG31S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG31S

OEM part number	AEG31S	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 31 circuits, 10 wires #6-2/0	A	same as above
	AEG10/AEG21 uninsulated; AEG21S/AEG31S insulated equipment grounds	A	S296 p.1; oem_spec
Torque values	Equipment ground mounted at end of box opposite LINE stamp with two 10-32 thread-forming screws, 25-30 in-lb (scratch paint at strap contact)	A	S296 GEH5586 p.1; oem_spec
OEM instruction document	GEH5586 R02 (04/2001)	A	S296 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, Status		

EDH-GEA-00240	AEG47	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47

OEM part number	AEG47	A	S89 DEH212; oem_spec
Description	Equipment ground, bonded for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S89 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S89 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S89 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

EDH-GEA-00241	AEG47S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47S

OEM part number	AEG47S	A	S89 DEH212; oem_spec
Description	Equipment ground, isolated for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S89 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S89 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S89 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00483	**208C1850P3**	Spectra breaker cover support 208C1850P3	—	unknown
EDH-GEA-00484	**208C1850P4**	Spectra breaker cover support 208C1850P4	—	unknown
EDH-GEA-00485	**208C1850P5**	Spectra breaker cover support 208C1850P5	—	unknown
EDH-GEA-00486	**208C1850P6**	Spectra breaker cover support 208C1850P6	—	unknown
EDH-GEA-00457	**252B3575P1**	GE Circuit breaker mounting bracket, G-frame bolt-on double-branch - 252B3575P1	—	unknown
EDH-GEA-00456	**252B3576P1**	GE Circuit breaker mounting bracket, G-frame bolt-on main/single-branch - 252B3576P1	—	unknown

EDH-GEA-00483	208C1850P3	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P3

OEM part number	208C1850P3	A	S281, S280, S88 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S281, S280, S272 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	4-1/8 in (3X) and 5-1/2 in (4X) cover height: 36 & 40 in panelboard / 40 in switchboard and 44 in panelboard / 45 in switchboard; also used for SFHA/SFLA/SFPA/TFL/TFJ/TFK/THFK single-branch mountings in all widths (DEH042 footnote); 3X cover support in AMCB6TEDL (qty 2); DEH044: 4-1/8 in (3X) for 36-45 in widths	A	S281, S280, S88 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S281 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S272, S273 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00484	208C1850P4	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P4

OEM part number	208C1850P4	A	S281, S280 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S281, S280, S272 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	4-1/8 in (3X) and 5-1/2 in (4X) cover height: 27 & 31 in panelboard / 35 in switchboard (DEH042, DEH044)	A	S281, S280 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S281 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S272, S273 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00485	208C1850P5	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P5

OEM part number	208C1850P5	A	S281, S280 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S281, S280, S272 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	2-3/4 in (2X) cover height: 36 & 40 in panelboard / 40 in switchboard and 44 in panelboard / 45 in switchboard	A	S281, S280 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S281 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S272, S273 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00486	208C1850P6	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

Spectra breaker cover support 208C1850P6

OEM part number	208C1850P6	A	S281, S280 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Description	Spectra circuit breaker cover support (snaps onto breaker mounting bracket / module via slots; four flexible prongs carry the push-on breaker cover)	A	S281, S280, S272 DEH042 p.1-2; DEH044 p.1; DEH047 p.1; oem_spec
Application	2-3/4 in (2X) cover height: 27 & 31 in panelboard / 35 in switchboard	A	S281, S280 DEH042 p.1 Table 1; DEH044 p.1 Table 1; oem_spec
Installation location	On bolt-on breaker mounting brackets (uppermost or lowest slot per kit instructions) or on plug-in AMC module	A	S281 DEH042 p.1 step 2; oem_spec
Identification features	Removed by inserting a screwdriver blade into the slot on the underside of the mounting bracket assembly and prying down while pushing the support off	A	S272, S273 DEH047 p.1; DEH059 p.2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material		

EDH-GEA-00457	252B3575P1	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

GE Circuit breaker mounting bracket, G-frame bolt-on double-branch - 252B3575P1

OEM part number	252B3575P1	A	S277 DEH40129 p.1 Table 1; oem_spec
Description	Circuit breaker mounting bracket, G-frame bolt-on double-branch	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB4GB/AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00456	252B3576P1	GE / ABB lineage	mounting-bracket	STATUS UNKNOWN

GE Circuit breaker mounting bracket, G-frame bolt-on main/single-branch - 252B3576P1

OEM part number	252B3576P1	A	S274 DEH060 p.1 Table 1; oem_spec
Description	Circuit breaker mounting bracket, G-frame bolt-on main/single-branch	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM/AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

Standoff

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00587	**208C2022P1**	Spectra ADF dead-front mounting post 208C2022P1	—	unknown

EDH-GEA-00587	208C2022P1	GE / ABB lineage	standoff	STATUS UNKNOWN

Spectra ADF dead-front mounting post 208C2022P1

OEM part number	208C2022P1	A	S298 GEH5930 p.1 Table 1; oem_spec
Description	Dead-front mounting post (4 per ADF kit); fastened to interior end plates at outermost holes with 1/4-20 x 1/2 in hex-head screws, 50-60 in-lb; with main lugs only load-end posts used	A	S298 pp.1-2; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00454	**10083041P1**	GE Terminal cover, G-frame bolt-on (main/single-branch) - 10083041P1	—	unknown
EDH-GEA-00479	**252B1667P1**	GE Barrier center - 252B1667P1	—	unknown

EDH-GEA-00454	10083041P1	GE / ABB lineage	barrier	STATUS UNKNOWN

GE Terminal cover, G-frame bolt-on (main/single-branch) - 10083041P1

OEM part number	10083041P1	A	S274 DEH060 p.1 Table 1; oem_spec
Description	Terminal cover, G-frame bolt-on (main/single-branch)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM/AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00479	252B1667P1	GE / ABB lineage	barrier	STATUS UNKNOWN

GE Barrier center - 252B1667P1

OEM part number	252B1667P1	**A**	S88 p.1 Table 1; oem_spec
Description	Barrier center (riveted to TEDL filler)	**A**	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	**A**	S88 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	**A**	S88 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00477	**168D1930P3**	GE Filler, TEDL double-branch 3X, for 36/40 in wide - 168D1930P3	—	unknown
EDH-GEA-00478	**168D1930P4**	GE Filler, TEDL double-branch 3X, for 44/45 in wide - 168D1930P4	—	unknown
EDH-GEA-00466	**208C2291P1**	GE Filler center, G-frame double-branch bolt-on - 208C2291P1	—	unknown
EDH-GEA-00508	**208C4262G1**	Spectra breaker cover 208C4262G1 (TFJ..., single-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00519	**208C4262G10**	Spectra breaker cover 208C4262G10 (THQB..., double-branch, (4X))	THQB, THHQB **A**	unknown
EDH-GEA-00520	**208C4262G11**	Spectra breaker cover 208C4262G11 (THQB..., double-branch, (4X))	THQB, THHQB **A**	unknown
EDH-GEA-00521	**208C4262G12**	Spectra breaker cover 208C4262G12 (THQB..., double-branch, (4X))	THQB, THHQB **A**	unknown
EDH-GEA-00522	**208C4262G13**	Spectra breaker cover 208C4262G13 (TEY, double-branch, (4X))	TEY **A**	unknown
EDH-GEA-00523	**208C4262G14**	Spectra breaker cover 208C4262G14 (TEY, double-branch, (4X))	TEY **A**	unknown
EDH-GEA-00524	**208C4262G15**	Spectra breaker cover 208C4262G15 (TEY, double-branch, (4X))	TEY **A**	unknown
EDH-GEA-00525	**208C4262G16**	Spectra breaker cover 208C4262G16 (SGDA..., single-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00526	**208C4262G17**	Spectra breaker cover 208C4262G17 (SGDA..., single-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00527	**208C4262G18**	Spectra breaker cover 208C4262G18 (SGDA..., single-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00529	**208C4262G19**	Spectra breaker cover 208C4262G19 (SGDA..., double-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00509	**208C4262G2**	Spectra breaker cover 208C4262G2 (TFJ..., single-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00513	**208C4262G20**	Spectra breaker cover 208C4262G20 (TQD..., double-branch, (2X))	TQD, THQD **A**	unknown
EDH-GEA-00514	**208C4262G21**	Spectra breaker cover 208C4262G21 (TQD..., double-branch, (2X))	TQD, THQD **A**	unknown
EDH-GEA-00515	**208C4262G22**	Spectra breaker cover 208C4262G22 (TQD..., double-branch, (2X))	TQD, THQD **A**	unknown
EDH-GEA-00516	**208C4262G23**	Spectra breaker cover 208C4262G23 (TQD..., double-branch, (3X))	TQD, THQD **A**	unknown
EDH-GEA-00517	**208C4262G24**	Spectra breaker cover 208C4262G24 (TQD..., double-branch, (3X))	TQD, THQD **A**	unknown
EDH-GEA-00518	**208C4262G25**	Spectra breaker cover 208C4262G25 (TQD..., double-branch, (3X))	TQD, THQD **A**	unknown
EDH-GEA-00502	**208C4262G26**	Spectra breaker cover 208C4262G26 (TEB..., double-branch, (2X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00503	**208C4262G27**	Spectra breaker cover 208C4262G27 (TEB..., double-branch, (2X))	TEB, TED, THED, TEL **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00504	**208C4262G28**	Spectra breaker cover 208C4262G28 (TEB..., double-branch, (2X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00505	**208C4262G29**	Spectra breaker cover 208C4262G29 (TEB..., double-branch, (3X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00510	**208C4262G3**	Spectra breaker cover 208C4262G3 (TFJ..., single-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00506	**208C4262G30**	Spectra breaker cover 208C4262G30 (TEB..., double-branch, (3X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00507	**208C4262G31**	Spectra breaker cover 208C4262G31 (TEB..., double-branch, (3X))	TEB, TED, THED, TEL **A**	unknown
EDH-GEA-00487	**208C4262G32**	Spectra breaker cover 208C4262G32 (SEDA..., double-branch, (3X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00488	**208C4262G33**	Spectra breaker cover 208C4262G33 (SEDA..., double-branch, (3X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00489	**208C4262G34**	Spectra breaker cover 208C4262G34 (SEDA..., double-branch, (3X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00490	**208C4262G35**	Spectra breaker cover 208C4262G35 (SEDA..., double-branch, (4X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00491	**208C4262G36**	Spectra breaker cover 208C4262G36 (SEDA..., double-branch, (4X))	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00528	**208C4262G49**	Spectra breaker cover 208C4262G49 (SGDA..., double-branch, (4X))	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00492	**208C4262G53**	Spectra breaker cover 208C4262G53 (SFHA..., single-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00493	**208C4262G54**	Spectra breaker cover 208C4262G54 (SFHA..., single-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00494	**208C4262G55**	Spectra breaker cover 208C4262G55 (SFHA..., single-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00495	**208C4262G56**	Spectra breaker cover 208C4262G56 (SFHA..., single-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00496	**208C4262G57**	Spectra breaker cover 208C4262G57 (SFHA..., single-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00497	**208C4262G58**	Spectra breaker cover 208C4262G58 (SFHA..., double-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00498	**208C4262G59**	Spectra breaker cover 208C4262G59 (SFHA..., double-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00511	**208C4262G6**	Spectra breaker cover 208C4262G6 (TFJ..., double-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00499	**208C4262G60**	Spectra breaker cover 208C4262G60 (SFHA..., double-branch, (3X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00500	**208C4262G61**	Spectra breaker cover 208C4262G61 (SFHA..., double-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00501	**208C4262G62**	Spectra breaker cover 208C4262G62 (SFHA..., double-branch, (4X))	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00512	**208C4262G7**	Spectra breaker cover 208C4262G7 (TFJ..., double-branch, (3X))	TFJ, TFK, THFK, TFL **A**	unknown
EDH-GEA-00542	**252B1768G1**	GE End filler plate, K-frame, 44 in panelboard / 45 in switchboard - 252B1768G1	—	unknown
EDH-GEA-00543	**252B1768G2**	GE End filler plate, K-frame, 40 in panelboard or switchboard - 252B1768G2	—	unknown
EDH-GEA-00480	**252B2056P8**	GE Spacer plate TED6 with TEDL - 252B2056P8	—	unknown
EDH-GEA-00544	**AFP10T**	Spectra ADS switch filler plate AFP10T	—	unknown
EDH-GEA-00545	**AFP10X**	Spectra ADS switch filler plate AFP10X	—	unknown
EDH-GEA-00546	**AFP19X**	Spectra ADS switch filler plate AFP19X	—	unknown
EDH-GEA-00131	**AFP2FBD**	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00128	**AFP2QDD**	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00129	**AFP2TED**	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	TEB, TED **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00533	**AFP3ELD**	Spectra breaker filler plate kit AFP3ELD	TEL **A**	unknown
EDH-GEA-00130	**AFP3EYD**	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	TEY **A**	unknown
EDH-GEA-00132	**AFP3FBD**	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00538	**AFP3QBD**	Spectra breaker filler plate kit AFP3QBD	THQB, THHQB **A**	unknown
EDH-GEA-00133	**AFP3QDD**	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00134	**AFP3SED**	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00135	**AFP3SFD**	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00139	**AFP3SFS**	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00532	**AFP3TED**	Spectra breaker filler plate kit AFP3TED	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00136	**AFP3TFD**	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00140	**AFP3TFS**	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00137	**AFP4FGD**	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00141	**AFP4FGS**	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00531	**AFP4SED**	Spectra breaker filler plate kit AFP4SED	SEDA, SEHA, SELA, SEPA / TEB, TED, THED **A**	unknown
EDH-GEA-00534	**AFP4SFD**	Spectra breaker filler plate kit AFP4SFD	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00535	**AFP4SFS**	Spectra breaker filler plate kit AFP4SFS	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00539	**AFP4SGC**	Spectra breaker filler plate kit AFP4SGC	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00138	**AFP4SGD**	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00142	**AFP4SGS**	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00547	**AFP4X**	Spectra ADS switch filler plate AFP4X	—	unknown
EDH-GEA-00143	**AFP5LCS**	Spectra breaker filler plate kit AFP5LCS (SKP, single)	SKP **A**	unknown
EDH-GEA-00548	**AFP5X**	Spectra ADS switch filler plate AFP5X	—	unknown
EDH-GEA-00144	**AFP6SKS**	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	SKP, SKH, SKL, TKM, THKM **A**	unknown
EDH-GEA-00537	**AFP6TJD**	Spectra breaker filler plate kit AFP6TJD	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V **A**	unknown
EDH-GEA-00536	**AFP6TJS**	Spectra breaker filler plate kit AFP6TJS	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V **A**	unknown
EDH-GEA-00549	**AFP7T**	Spectra ADS switch filler plate AFP7T	—	unknown
EDH-GEA-00551	**AFP7X**	Spectra ADS switch filler plate AFP7X	—	unknown
EDH-GEA-00550	**AFP7X2**	Spectra ADS switch filler plate AFP7X2	—	unknown
EDH-GEA-00244	**AMCB6TEDL**	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	—	unknown
EDH-GEA-00202	**APP1**	Spectra blank filler plate 1X (36, 40 in box)	—	unknown
EDH-GEA-00201	**APP1S**	Spectra blank filler plate 1X (27, 31 in box)	—	unknown
EDH-GEA-00203	**APP1W**	Spectra blank filler plate 1X (44 in box)	—	unknown
EDH-GEA-00205	**APP2**	Spectra blank filler plate 2X (36, 40 in box)	—	unknown
EDH-GEA-00204	**APP2S**	Spectra blank filler plate 2X (27, 31 in box)	—	unknown
EDH-GEA-00206	**APP2W**	Spectra blank filler plate 2X (44 in box)	—	unknown
EDH-GEA-00208	**APP3**	Spectra blank filler plate 3X (36, 40 in box)	—	unknown
EDH-GEA-00207	**APP3S**	Spectra blank filler plate 3X (27, 31 in box)	—	unknown
EDH-GEA-00209	**APP3W**	Spectra blank filler plate 3X (44 in box)	—	unknown
EDH-GEA-00211	**APP4**	Spectra blank filler plate 4X (36, 40 in box)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00210	**APP4S**	Spectra blank filler plate 4X (27, 31 in box)	—	unknown
EDH-GEA-00212	**APP4W**	Spectra blank filler plate 4X (44 in box)	—	unknown
EDH-GEA-00214	**APP5**	Spectra blank filler plate 5X (36, 40 in box)	—	unknown
EDH-GEA-00213	**APP5S**	Spectra blank filler plate 5X (27, 31 in box)	—	unknown
EDH-GEA-00215	**APP5W**	Spectra blank filler plate 5X (44 in box)	—	unknown
EDH-GEA-00217	**APP6**	Spectra blank filler plate 6X (36, 40 in box)	—	unknown
EDH-GEA-00216	**APP6S**	Spectra blank filler plate 6X (27, 31 in box)	—	unknown
EDH-GEA-00218	**APP6W**	Spectra blank filler plate 6X (44 in box)	—	unknown

EDH-GEA-00477 **168D1930P3** GE / ABB lineage filler-plate **STATUS UNKNOWN**

GE Filler, TEDL double-branch 3X, for 36/40 in wide - 168D1930P3

OEM part number	168D1930P3	A	S88 p.1 Table 1; oem_spec
Description	Filler, TEDL double-branch 3X, for 36/40 in wide (#CM 36, 40W TEDL DB 3X Filler)	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S88 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S88 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00478 **168D1930P4** GE / ABB lineage filler-plate **STATUS UNKNOWN**

GE Filler, TEDL double-branch 3X, for 44/45 in wide - 168D1930P4

OEM part number	168D1930P4	A	S88 p.1 Table 1; oem_spec
Description	Filler, TEDL double-branch 3X, for 44/45 in wide (#CM 44, 45W TEDL DB 3X Filler)	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S88 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S88 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00466 **208C2291P1** GE / ABB lineage filler-plate **STATUS UNKNOWN**

GE Filler center, G-frame double-branch bolt-on - 208C2291P1

OEM part number	208C2291P1	A	S277 DEH40129 p.1 Table 1; oem_spec
Description	Filler center, G-frame double-branch bolt-on	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB4GB/AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00508	208C4262G1	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G1 (TFJ..., single-branch, (3X))

OEM part number	208C4262G1	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00519	208C4262G10	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G10 (THQB..., double-branch, (4X))

OEM part number	208C4262G10	A	S280 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for THQB, THHQB breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S280 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	THQB, THHQB	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S280 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S280 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S280 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00520	208C4262G11	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G11 (THQB..., double-branch, (4X))

OEM part number	208C4262G11	A	S280 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for THQB, THHQB breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S280 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	THQB, THHQB	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S280 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S280 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S280 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00521	208C4262G12	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G12 (THQB..., double-branch, (4X))

OEM part number	208C4262G12	A	S280 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for THQB, THHQB breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S280 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	THQB, THHQB	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S280 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S280 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S280 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00522	208C4262G13	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G13 (TEY, double-branch, (4X))

OEM part number	208C4262G13	A	S280 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEY breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S280 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEY	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S280 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S280 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S280 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00523	208C4262G14	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G14 (TEY, double-branch, (4X))

OEM part number	208C4262G14	A	S280 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEY breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S280 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEY	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S280 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S280 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S280 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00524	208C4262G15	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G15 (TEY, double-branch, (4X))

OEM part number	208C4262G15	A	S280 DEH044 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEY breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S280 DEH044 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEY	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S280 DEH044 p.1 Table; oem_spec
Fasteners	Plastic space fillers snap into unused openings from the top side; cover pushed fully over four flexible prongs on the filler supports	A	S280 DEH044 p.1; oem_spec
OEM instruction document	DEH044 R02	A	S280 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00525	208C4262G16	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G16 (SGDA..., single-branch, (4X))

OEM part number	208C4262G16	A	S282 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S282 DEH045 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S282 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S282 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S282 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00526	208C4262G17	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G17 (SGDA..., single-branch, (4X))

OEM part number	208C4262G17	A	S282 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S282 DEH045 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S282 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S282 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S282 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00527	208C4262G18	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G18 (SGDA..., single-branch, (4X))

OEM part number	208C4262G18	A	S282 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S282 DEH045 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S282 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S282 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S282 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00529	208C4262G19	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G19 (SGDA..., double-branch, (4X))

OEM part number	208C4262G19	A	S282 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S282 DEH045 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S282 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S282 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S282 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00509	208C4262G2	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G2 (TFJ..., single-branch, (3X))

OEM part number	208C4262G2	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00513	208C4262G20	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G20 (TQD..., double-branch, (2X))

OEM part number	208C4262G20	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00514	208C4262G21	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G21 (TQD..., double-branch, (2X))

OEM part number	208C4262G21	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00515	208C4262G22	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G22 (TQD..., double-branch, (2X))

OEM part number	208C4262G22	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00516	208C4262G23	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G23 (TQD..., double-branch, (3X))

OEM part number	208C4262G23	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00517	208C4262G24	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G24 (TQD..., double-branch, (3X))

OEM part number	208C4262G24	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00518	208C4262G25	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G25 (TQD..., double-branch, (3X))

OEM part number	208C4262G25	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TQD, THQD breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00502	208C4262G26	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G26 (TEB..., double-branch, (2X))

OEM part number	208C4262G26	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00503	208C4262G27	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G27 (TEB..., double-branch, (2X))

OEM part number	208C4262G27	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00504	208C4262G28	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G28 (TEB..., double-branch, (2X))

OEM part number	208C4262G28	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 2-3/4 in (2X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00505	208C4262G29	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G29 (TEB..., double-branch, (3X))

OEM part number	208C4262G29	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00510	208C4262G3	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G3 (TFJ..., single-branch, (3X))

OEM part number	208C4262G3	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00506	208C4262G30	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G30 (TEB..., double-branch, (3X))

OEM part number	208C4262G30	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00507	208C4262G31	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G31 (TEB..., double-branch, (3X))

OEM part number	208C4262G31	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TEB, TED, THED, TEL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TEB, TED, THED, TEL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00487	208C4262G32	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G32 (SEDA..., double-branch, (3X))

OEM part number	208C4262G32	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00488	208C4262G33	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G33 (SEDA..., double-branch, (3X))

OEM part number	208C4262G33	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00489	208C4262G34	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G34 (SEDA..., double-branch, (3X))

OEM part number	208C4262G34	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00490	208C4262G35	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G35 (SEDA..., double-branch, (4X))

OEM part number	208C4262G35	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00491	208C4262G36	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G36 (SEDA..., double-branch, (4X))

OEM part number	208C4262G36	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SEDA, SEHA, SELA, SEPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00528	208C4262G49	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G49 (SGDA..., double-branch, (4X))

OEM part number	208C4262G49	A	S282 DEH045 p.1 Table 1; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SGDA, SGHA, SGLA, SGPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S282 DEH045 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 40 in wide panelboards or switchboards only (36/40 column, footnote *)	A	S282 DEH045 p.1 Table; oem_spec
Fasteners	Single-branch: plastic spacer bars with four #6-20 x 1 in washer-head screws and #6 nut clips, 10 in-lb; double-branch: two #10-16 x 1/2 in washer-head screws and #10 nut clips into center barrier, 10 in-lb; steel space filler for single breaker in double-branch: two #10-32 x 3/8 in screws 25 in-lb	A	S282 DEH045 p.1; oem_spec
OEM instruction document	DEH045 R05	A	S282 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00492	208C4262G53	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G53 (SFHA..., single-branch, (3X))

OEM part number	208C4262G53	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00493	208C4262G54	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G54 (SFHA..., single-branch, (3X))

OEM part number	208C4262G54	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00494	208C4262G55	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G55 (SFHA..., single-branch, (3X))

OEM part number	208C4262G55	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00495	208C4262G56	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G56 (SFHA..., single-branch, (4X))

OEM part number	208C4262G56	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00496	208C4262G57	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G57 (SFHA..., single-branch, (4X))

OEM part number	208C4262G57	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, single-branch mount, cover height 5-1/2 in (4X)	A	S281 DEH042 p.1; oem_spec
Application	single-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00497	208C4262G58	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G58 (SFHA..., double-branch, (3X))

OEM part number	208C4262G58	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00498	208C4262G59	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G59 (SFHA..., double-branch, (3X))

OEM part number	208C4262G59	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00511	208C4262G6	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G6 (TFJ..., double-branch, (3X))

OEM part number	208C4262G6	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00499	208C4262G60	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G60 (SFHA..., double-branch, (3X))

OEM part number	208C4262G60	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00500	208C4262G61	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G61 (SFHA..., double-branch, (4X))

OEM part number	208C4262G61	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00501	208C4262G62	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G62 (SFHA..., double-branch, (4X))

OEM part number	208C4262G62	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for SFHA, SFLA, SFPA breakers, double-branch mount, cover height 5-1/2 in (4X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Dimensions	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00512	208C4262G7	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker cover 208C4262G7 (TFJ..., double-branch, (3X))

OEM part number	208C4262G7	A	S281 DEH042 p.1 Table 2; oem_spec
Description	Spectra push-on circuit breaker cover (filler) for TFJ, TFK, THFK, TFL breakers, double-branch mount, cover height 4-1/8 in (3X)	A	S281 DEH042 p.1; oem_spec
Application	double-branch	A	same as above
Installation location	Snaps over the four flexible prongs of the cover supports (208C1850Px) on the breaker module or bolt-on mounting brackets	A	same as above
Breaker compatibility	TFJ, TFK, THFK, TFL	A	same as above
Dimensions	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard	A	S281 DEH042 p.1 Table; oem_spec
Fasteners	Double-branch 3X/4X covers: center barrier attached with two push-in rivets; unused openings closed by steel space filler with two #10 x 3/8 in screws (25 in-lb) plus one #10 x 7/8 in screw (15 in-lb) for SE/SF/TF	A	S281 DEH042 pp.1-2; oem_spec
OEM instruction document	DEH042 R03	A	S281 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Material, orderable catalog (AFP) kit containing this cover		

EDH-GEA-00542	252B1768G1	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE End filler plate, K-frame, 44 in panelboard / 45 in switchboard - 252B1768G1

OEM part number	252B1768G1	A	S279 GEH5629 p.1; oem_spec
Description	End filler plate, K-frame, 44 in panelboard / 45 in switchboard	A	same as above
Application	44 in wide panelboard; 45 in wide switchboard	A	S279 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	#10-32 x 9/16 in screws, 15 in-lb	A	S279 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00543	252B1768G2	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE End filler plate, K-frame, 40 in panelboard or switchboard - 252B1768G2

OEM part number	252B1768G2	A	S279 GEH5629 p.1; oem_spec
Description	End filler plate, K-frame, 40 in panelboard or switchboard	A	same as above
Application	40 in wide panelboard or switchboard	A	S279 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	#10-32 x 9/16 in screws, 15 in-lb	A	S279 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00480	252B2056P8	GE / ABB lineage	filler-plate	STATUS UNKNOWN

GE Spacer plate TED6 with TEDL - 252B2056P8

OEM part number	252B2056P8	A	S88 p.1 Table 1; oem_spec
Description	Spacer plate TED6 with TEDL	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S88 p.1; oem_spec
Kit contents	Qty 1 in circuit breaker cover kit AMCB6TEDL	A	S88 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00544	AFP10T	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP10T

OEM part number	AFP10T	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 400 A & 600 A J or T fuse, 10X main or branch	A	S283 p.1 Table 1; oem_spec
Dimensions	For box width 36, 44 in; X height per description (1X = 1-3/8 in)	A	same as above
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00545	AFP10X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP10X

OEM part number	AFP10X	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 400 A & 600 A R fuse, 10X main or branch	A	S283 p.1 Table 1; oem_spec
	empower: "FP 10X SWITCH FILLER PLATE" (UPC 783164015270)	A	S301 empower page AFP10X; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S283 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00546	AFP19X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP19X

OEM part number	AFP19X	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 800 A & 1200 A, 19X main or branch	A	S283 p.1 Table 1; oem_spec
	empower: "FP 19X SWITCH FILLER PLATE" (UPC 783164015294)	A	S301 empower page AFP19X; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S283 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00131	AFP2FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP2FBD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00128	AFP2QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)

OEM part number	AFP2QDD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC4QD; bolt-on AMCB6QD/4QD	A	S291 GEH5643 p.2; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S86 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00129	AFP2TED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)

OEM part number	AFP2TED	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
	empower: "FP AMC 4EB" (UPC 783164015331)	A	S301 empower page AFP2TED; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC4EB; bolt-on AMCB6EB/4SE/4EB	A	S292 GEH5625 p.2; DEH047 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED	A	S75 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00533	AFP3ELD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3ELD

OEM part number	AFP3ELD	A	S292 GEH5625 p.2 Table 1; oem_spec
Description	Filler plate kit for module AMC6EL	A	same as above
Breaker compatibility	TEL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00130	AFP3EYD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3EYD (TEY, dual)

OEM part number	AFP3EYD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
	empower: "FP AMC 6EY" (UPC 783164015355)	A	S301 empower page AFP3EYD; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC6EY; bolt-on AMCB6EY/AMCB4EY	A	S290 GEH5677 p.1; DEH062 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEY	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00132	AFP3FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP3FBD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00538	AFP3QBD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QBD

OEM part number	AFP3QBD	A	S290 GEH5677 p.1 Table 1; oem_spec
Description	Filler plate kit for module AMC6QB	A	S290, S301 GEH5677 p.1 Table 1; oem_spec
	empower: "FP AMC 6QB" (UPC 783164015379)	A	S301 empower page AFP3QBD; oem_spec
Breaker compatibility	THQB, THHQB	A	S290, S301 GEH5677 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00133	AFP3QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)

OEM part number	AFP3QDD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
	empower: "FP AMC 6QD" (UPC 783164015386)	A	S301 empower page AFP3QDD; oem_spec
Application	Filler (cover) kit used with: AMC6QD; bolt-on AMCB6QD/4QD	A	S291 GEH5643 p.2; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S86 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00134	AFP3SED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)

OEM part number	AFP3SED	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC6EB, AMC4SE (plug-in); bolt-on AMCB6EB/4SE/4EB	A	S292 GEH5625 p.2; DEH047 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00135	AFP3SFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)

OEM part number	AFP3SFD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
	empower: "FP AMC 6FS 4FI" (UPC 783164015409)	A	S301 empower page AFP3SFD; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC6FJ, AMC4FJ; bolt-on AMCB6FJ/4FJ	A	S286 GEH5626 p.3; DEH059 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 31-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00139	AFP3SFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)

OEM part number	AFP3SFS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
	empower: "FP AMC 3FJ 2FJ" (UPC 783164015416)	A	S301 empower page AFP3SFS; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC3FJ, AMC2FJ; bolt-on AMCB3FJ/2FJ	A	S286 GEH5626 p.3; DEH059 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00532	AFP3TED	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TED

OEM part number	AFP3TED	A	S272 DEH047 p.1; oem_spec
Description	Circuit breaker cover kit listed for bolt-on kits AMCB6EB/AMCB4SE/AMCB4EB	A	same as above
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00136	AFP3TFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)

OEM part number	AFP3TFD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: bolt-on AMCB6FJ/4FJ (TF breakers)	A	S273 DEH059 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Dimensions	2X, 3X vertical; box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00140	AFP3TFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)

OEM part number	AFP3TFS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: bolt-on AMCB3FJ/2FJ (TF breakers)	A	S273 DEH059 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00137	AFP4FGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)

OEM part number	AFP4FGD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00141	AFP4FGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)

OEM part number	AFP4FGS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00531	AFP4SED	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SED

OEM part number	AFP4SED	A	S292 GEH5625 p.2 Table 1; DEH047 p.1; oem_spec
Description	Filler plate kit for modules AMC6EBS and AMC4EBS; also listed as cover kit for bolt-on kits AMCB6EB/AMCB4SE/AMCB4EB	A	S292, S272 GEH5625 p.2 Table 1; DEH047 p.1; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA / TEB, TED, THED	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00534	AFP4SFD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SFD

OEM part number	AFP4SFD	A	S286 GEH5626 p.3 Table 1; oem_spec
Description	Filler plate kit for modules AMC6FLS and AMC4FLS (double branch, 4X)	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00535	AFP4SFS	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SFS

OEM part number	AFP4SFS	A	S286 GEH5626 p.3 Table 1; oem_spec
Description	Filler plate kit for modules AMC3FLS and AMC2FLS (single)	A	same as above
Breaker compatibility	SFHA, SFLA, SFPA	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00539	AFP4SGC	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGC

OEM part number	AFP4SGC	A	S288 GEH5673 p.3; oem_spec
Description	Filler plate kit named in GEH5673 for modules AMC4GB/AMC6GB (possible misprint of AFP4SGD)	A	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Kit contents		
Open question	*Is AFP4SGC a real catalog number or a misprint of AFP4SGD/AFP4SGS?*		

EDH-GEA-00138	AFP4SGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)

OEM part number	AFP4SGD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: bolt-on AMCB4GB/AMCB6GB	A	S277 DEH40129 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 40-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00142	AFP4SGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)

OEM part number	AFP4SGS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
	empower: "FP AMC 3GM 2GM" (UPC 783164015478)	A	S301 empower page AFP4SGS; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
	Filler (cover) kit used with: AMC2GM, AMC3GM; bolt-on AMCB2GM/3GM	A	S87 GEH5674 p.2; DEH060 p.1; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
OEM instruction document	GEH5674: install filler plate kit AFP4SGS on AMC2GM/AMC3GM module	A	S87 GEH5674 step 5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00547	AFP4X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP4X

OEM part number	AFP4X	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 30 A & 60 A, 4X	A	S283 p.1 Table 1; oem_spec
	empower: "FP 4X SWITCH" (UPC 783164015485)	A	S301 empower page AFP4X; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S283 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00143	AFP5LCS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP5LCS (SKP, single)

OEM part number	AFP5LCS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP	A	S75 p.11-43; oem_spec
Dimensions	6X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00548	AFP5X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP5X

OEM part number	AFP5X	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 60 A & 100 A, 5X	A	S283 p.1 Table 1; oem_spec
	empower: "FP 5X SWITCH" (UPC 783164016192)	A	S301 empower page AFP5X; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S283 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00144	AFP6SKS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)

OEM part number	AFP6SKS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 3-pole	A	same as above
	empower: "FP AMC 3KM 2KM" (UPC 783164016222)	A	S301 empower page AFP6SKS; oem_spec
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP, SKH, SKL, TKM, THKM	A	S75 p.11-43; oem_spec
	TKM, THKM, TK4V, TKL4V, SKHA, SKLA, SKPA (SKPA only in 44 in panelboard / 45 in switchboard)	A	S279 GEH5629 p.1; oem_spec
Kit contents	Lug covers 455C592P1 (furnished, for TKM/THKM) and 455C592P2 (furnished, for TK4V/TKL4V); SKHA/SKLA/SKPA use covers furnished with breaker; end filler plates 252B1768G2 (40 in panelboard or switchboard) or 252B1768G1 (44 in panelboard, 45 in switchboard); #10-32 x 9/16 in screws	A	S279 GEH5629 p.1 Tables 1-2; oem_spec
Dimensions	6X vertical; box width 44 in	A	S75 p.11-43; oem_spec
Torque values	End filler plates to breaker sides, #10-32 x 9/16 in screws, 15 in-lb	A	S279 GEH5629 p.1; oem_spec
OEM instruction document	GEH5629 R05 (08/2001); breaker per GEH-5623 (plug-in) or DEH-061 (bolt-on)	A	S279 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Requires	455C592P1 (EDH-GEA-00540), 455C592P2 (EDH-GEA-00541), 252B1768G1 (EDH-GEA-00542), 252B1768G2 (EDH-GEA-00543)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00537	AFP6TJD	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6TJD

OEM part number	AFP6TJD	A	S289 GEH5624 p.3; oem_spec
Description	Filler plate kit for modules AMC4JK and AMC6JK (double)	A	same as above
Breaker compatibility	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00536	AFP6TJS	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6TJS

OEM part number	AFP6TJS	A	S289 GEH5624 p.3; oem_spec
Description	Filler plate kit for modules AMC2JK and AMC3JK (single)	A	same as above
Breaker compatibility	TJK, TJD, TJJ, THJK, TJ4V, THJ4V, TJL4V	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, Kit contents		

EDH-GEA-00549	AFP7T	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP7T

OEM part number	AFP7T	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 100 A & 200 A T fuse, 7X	A	S283 p.1 Table 1; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	same as above
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00551	AFP7X	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP7X

OEM part number	AFP7X	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 200 A R fuse, 7X main or single branch	A	S283 p.1 Table 1; oem_spec
	empower: "FP 7X SWITCH" (UPC 783164016345)	A	S301 empower page AFP7X; oem_spec
Dimensions	For box width 36, 44 in; X height per description (1X = 1-3/8 in)	A	S283 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00550	AFP7X2	GE / ABB lineage	filler-plate	STATUS UNKNOWN

Spectra ADS switch filler plate AFP7X2

OEM part number	AFP7X2	A	S283 GEH5590 p.1 Table 1; oem_spec
Description	Spectra type AFP filler plate for ADS fusible switch: 200 A R fuse, 7X double branch	A	S283 p.1 Table 1; oem_spec
	empower: "FILLER PLATE" (UPC 783164016376)	A	S301 empower page AFP7X2; oem_spec
Dimensions	For box width 44 in; X height per description (1X = 1-3/8 in)	A	S283 p.1 Table 1; oem_spec
Fasteners	Flat end inserts into channel on edge of side trim; opposite end screwed to device flange with furnished screws, 25-30 in-lb; install after side trim	A	S283 p.1; oem_spec
Torque values	25-30 in-lb (filler plate to device flange)	A	same as above
OEM instruction document	GEH5590 R03 (07/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material		

EDH-GEA-00244	AMCB6TEDL	GE	filler-plate	STATUS UNKNOWN

Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter

OEM part number	AMCB6TEDL	A	S88 p.1; oem_spec
Description	Circuit breaker cover kit for TED136 breaker with TEDL36 current limiter on Spectra APNB bolt-on interiors; 3X (4.125 in) vertical space	A	same as above
	empower: "Description: STRAP KIT TED6 WITH TEDL PROTECTOR UPC:"	A	S301 empower page AMCB6TEDL; oem_spec
Kit contents	(1) filler 36/40W TEDL DB 3X 168D1930P3; (1) filler 44/45W 168D1930P4; (2) cover support 3X 208C1850P3; (1) barrier center 252B1667P1; (1) spacer plate TED6 w/TEDL 252B2056P8; (2) steel drive rivet #10 x 1/2 331A3329P2; (2) thread-forming screw 10-32 x 3/8 N722EP16006B6; instruction DEH40392	A	S88 Table 1; oem_spec
Dimensions	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards	A	S88 p.1; oem_spec
OEM instruction document	DEH40392 R01	A	S88 oem_spec
Identification features	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler	A	S88 steps 2-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, Status		

EDH-GEA-00202	APP1	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (36, 40 in box)

OEM part number	APP1	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
	empower: "FULL WIDTH FILLER 1X 36 BOX" (UPC 783175253081)	A	S301 empower page APP1; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S75 p.11-44; oem_spec
	empower specification "Box/Front Height 1.375 in"	A	S301 empower page APP1; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00201	APP1S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (27, 31 in box)

OEM part number	APP1S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
	empower: "FULL WIDTH FILLER 1X 27 BOX" (UPC 783175253098)	A	S301 empower page APP1S; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00203	APP1W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (44 in box)

OEM part number	APP1W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
	empower: "FULL WIDTH FILLER 1X 44 BOX" (UPC 783175253104)	A	S301 empower page APP1W; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00205	APP2	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (36, 40 in box)

OEM part number	APP2	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
	empower: "FULL WIDTH FILLER 2X 36 BOX" (UPC 783175253111)	A	S301 empower page APP2; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S75 p.11-44; oem_spec
	empower specification "Box/Front Height 2.375 in"	A	S301 empower page APP2; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00204	APP2S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (27, 31 in box)

OEM part number	APP2S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
	empower: "FULL WIDTH FILLER 2X 27 BOX" (UPC 783175253128)	A	S301 empower page APP2S; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00206	APP2W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (44 in box)

OEM part number	APP2W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
	empower: "FULL WIDTH FILLER 2X 44 BOX" (UPC 783175253197)	A	S301 empower page APP2W; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00208	APP3	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (36, 40 in box)

OEM part number	APP3	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
	empower: "FULL WIDTH FILLER 3X 36 BOX" (UPC 783175253142)	A	S301 empower page APP3; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00207	APP3S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (27, 31 in box)

OEM part number	APP3S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
	empower: "FULL WIDTH FILLER 3X 27 BOX" (UPC 783175253159)	A	S301 empower page APP3S; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00209	APP3W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (44 in box)

OEM part number	APP3W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
	empower: "FULL WIDTH FILLER 3X 44 BOX" (UPC 783175253166)	A	S301 empower page APP3W; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00211	APP4	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (36, 40 in box)

OEM part number	APP4	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
	empower: "FULL WIDTH FILLER 4X 36 BOX" (UPC 783175253173)	A	S301 empower page APP4; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00210	APP4S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (27, 31 in box)

OEM part number	APP4S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00212	APP4W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (44 in box)

OEM part number	APP4W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
	empower: "FULL WIDTH FILLER 4X 44 BOX" (UPC 783175253272)	A	S301 empower page APP4W; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00214	APP5	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (36, 40 in box)

OEM part number	APP5	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00213	APP5S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (27, 31 in box)

OEM part number	APP5S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
	empower: "FULL WIDTH FILLER 5X 27 BOX" (UPC 783175253210)	A	S301 empower page APP5S; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S75 p.11-44; oem_spec
	empower specification "Box/Front Height 5.375 in"	A	S301 empower page APP5S; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00215	APP5W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (44 in box)

OEM part number	APP5W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00217	APP6	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (36, 40 in box)

OEM part number	APP6	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
	empower: "FULL WIDTH FILLER 6X 36 BOX" (UPC 783175253234)	A	S301 empower page APP6; oem_spec
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00216	APP6S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (27, 31 in box)

OEM part number	APP6S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00218	APP6W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (44 in box)

OEM part number	APP6W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Kit contents	Filler plate with support brackets and #10 self-tapping screws; APP1-APP5 supplied with two supports, APP6 with four	A	S284 GEH5583 p.1; oem_spec
Dimensions	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	S75 p.11-44; oem_spec
Torque values	Support brackets to outer interior rails and plate to brackets, #10 self-tapping screws, 25-30 in-lb (oversize plate holes allow adjustment)	A	S284 GEH5583 p.1; oem_spec
OEM instruction document	GEH5583 R03 (03/2001)	A	S284 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00588	**10085396G1**	Spectra ADF dead-front hardware kit 10085396G1	—	unknown
EDH-GEA-00194	**AHKBE1**	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	SE A	unknown
EDH-GEA-00195	**AHKBF1**	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	SF A	unknown
EDH-GEA-00200	**AHKBFB1**	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	FB A	unknown
EDH-GEA-00198	**AHKBFD1**	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	FCS, FCV, FCN, FCH, FCL A	unknown
EDH-GEA-00199	**AHKBFG1**	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00196	**AHKBG1**	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	SG A	unknown
EDH-GEA-00197	**AHKBQ1**	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	THQD A	unknown
EDH-GEA-00185	**AHKE1**	Spectra plug-in single-breaker mounting hardware AHKE1	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS A	unknown
EDH-GEA-00186	**AHKEL1**	Spectra plug-in single-breaker mounting hardware AHKEL1	For AMC modules: AMC6EL A	unknown
EDH-GEA-00187	**AHKF1**	Spectra plug-in single-breaker mounting hardware AHKF1	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00192	**AHKFD1**	Spectra plug-in single-breaker mounting hardware AHKFD1	For AMC modules: FCS/FCV/FCN/FCH/FCL modules **A**	unknown
EDH-GEA-00193	**AHKFG1**	Spectra plug-in single-breaker mounting hardware AHKFG1	For AMC modules: FGV/FGN/FGH/FGP modules **A**	unknown
EDH-GEA-00188	**AHKG1**	Spectra plug-in single-breaker mounting hardware AHKG1	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM **A**	unknown
EDH-GEA-00189	**AHKJ1**	Spectra plug-in single-breaker mounting hardware AHKJ1	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK **A**	unknown
EDH-GEA-00190	**AHKLB1**	Spectra plug-in single-breaker mounting hardware AHKLB1	For AMC modules: AMC3LB, AMC6LB **A**	unknown
EDH-GEA-00191	**AHKQ1**	Spectra plug-in single-breaker mounting hardware AHKQ1	For AMC modules: AMC4QD, AMC6QD **A**	unknown

EDH-GEA-00588	**10085396G1**	GE / ABB lineage	hardware-kit	STATUS UNKNOWN

Spectra ADF dead-front hardware kit 10085396G1

OEM part number	10085396G1	**A**	S298 GEH5930 p.1 Table 1; oem_spec
Description	Hardware kit for type ADF dead front	**A**	S298 p.1; oem_spec
Kit contents	192A6976P189 #10-32 x 7/16 screw (2); 252B2269P2 label (1); 331A2631P2 plug (4); 44A718891P2 poly bag (1); GEH5930 instructions (1); N722P21008B6 1/4-20 x 1/2 screw (8)	**A**	S298 p.1 Table 2; oem_spec
Torque values	Posts and dead-front ends 1/4-20 screws 50-60 in-lb; line end to main lug brackets #10-32 x 7/16 screws 25-30 in-lb; door #10-32 x 11/16 self-tapping screws 25-30 in-lb	**A**	S298 pp.1-3; oem_spec
Cross-links	Families: SPECTRA-PP		

EDH-GEA-00194	**AHKBE1**	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)

OEM part number	AHKBE1	**A**	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	**A**	same as above
	Replacement hardware kit for TEB/TED/THED/SE bolt-on kits AMCB6EB/AMCB4SE/AMCB4EB	**A**	S272 DEH047 p.1; oem_spec
Breaker compatibility	SE	**A**	S75 p.11-44; oem_spec
Kit contents	Hardware items of DEH047 Table 1 (fasteners) - exact subset not itemised	**C**	S272 DEH047 p.1; inference
OEM instruction document	DEH047	**A**	S272 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	kit_contents (itemised), Material, Status		

EDH-GEA-00195	**AHKBF1**	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)

OEM part number	AHKBF1	**A**	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	**A**	same as above
	Replacement hardware kit for SF/TF bolt-on kits AMCB6FJ/3FJ/2FJ/4FJ	**A**	S273 DEH059 p.1; oem_spec
Breaker compatibility	SF	**A**	S75 p.11-44; oem_spec
Kit contents	Hardware items of DEH059 Table 1 (fasteners) - exact subset not itemised	**C**	S273 DEH059 p.1; inference
OEM instruction document	DEH059	**A**	S273 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	kit_contents (itemised), Material, Status		

EDH-GEA-00200	AHKBFB1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)

OEM part number	AHKBFB1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00198	AHKBFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)

OEM part number	AHKBFD1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00199	AHKBFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)

OEM part number	AHKBFG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FGV, FGN, FGH, FGP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00196	AHKBG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)

OEM part number	AHKBG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
	Replacement hardware kit for SG main/single-branch bolt-on kits AMCB2GM/AMCB3GM	A	S274 DEH060 p.1; oem_spec
Breaker compatibility	SG	A	S75 p.11-44; oem_spec
Kit contents	Hardware items of DEH060 Table 1 (fasteners) - exact subset not itemised	C	S274 DEH060 p.1; inference
OEM instruction document	DEH060	A	S274 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	kit_contents (itemised), Material, Status		

EDH-GEA-00197	AHKBQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)

OEM part number	AHKBQ1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	THQD	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00185	AHKE1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKE1

OEM part number	AHKE1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
	empower: "MOUNTING HARDWARE KIT THLC1 E-FRMS" (UPC 783175056774)	A	S301 empower page AHKE1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	S278 p.1; oem_spec
Breaker compatibility	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	E-frame (TEB/TED/THED; SE) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw #8-32 x 2-3/4 in round head (torque cell not legible/merged); load-end mounting screw (not shown) (torque cell not legible/merged) (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw #8-32 x 2-3/4 in round head (torque cell not legible/merged); load-end mounting screw (not shown) (torque cell not legible/merged) (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00186	AHKEL1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKEL1

OEM part number	AHKEL1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC6EL (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	TEL / E-frame with limiter (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw #10-32 x 1/2 in pan head 27-32 in-lb; load-end mounting screw #8-32 x 2-1/2 in round head 16-20 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw #10-32 x 1/2 in pan head 27-32 in-lb; load-end mounting screw #8-32 x 2-1/2 in round head 16-20 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00187	AHKF1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKF1

OEM part number	AHKF1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC4FLS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	F-frame (TFJ/TFK/THFK/TFL, SF) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw 1/4-20 x 3/4 in hex head 40-50 in-lb; load-end mounting screw #10-32 x 3-3/4 in pan head (torque cell not legible/merged) (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 1/4-20 x 3/4 in hex head 40-50 in-lb; load-end mounting screw #10-32 x 3-3/4 in pan head (torque cell not legible/merged) (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00192	AHKFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFD1

OEM part number	AHKFD1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FCS/FCV/FCN/FCH/FCL modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00193	AHKFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFG1

OEM part number	AHKFG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FGV/FGN/FGH/FGP modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00188	AHKG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKG1

OEM part number	AHKG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	G-frame (SG) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw 5/16-18 x 1 in hex head (torque cell not legible/merged); load-end mounting screw #10-32 x 3 in round head 27-32 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 5/16-18 x 1 in hex head (torque cell not legible/merged); load-end mounting screw #10-32 x 3 in round head 27-32 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00189	AHKJ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKJ1

OEM part number	AHKJ1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	J-frame (TJD/TJJ/TJK/THJK) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw 5/16-18 hex nut (nut-washer assembly) 70-110 in-lb; load-end mounting screw 1/4-20 x 1-1/2 in round head 40-50 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 5/16-18 hex nut (nut-washer assembly) 70-110 in-lb; load-end mounting screw 1/4-20 x 1-1/2 in round head 40-50 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00190	AHKLB1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKLB1

OEM part number	AHKLB1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC3LB, AMC6LB (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	LB (SKP-type) frame (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw 1/4-20 x 1 in socket head (torque cell not legible/merged); load-end mounting screw #10-32 x 2-3/4 in pan head (torque cell not legible/merged) (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 1/4-20 x 1 in socket head (torque cell not legible/merged); load-end mounting screw #10-32 x 2-3/4 in pan head (torque cell not legible/merged) (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

EDH-GEA-00191	AHKQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKQ1

OEM part number	AHKQ1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
	Spectra plug-in module circuit breaker mounting hardware kit (line- and load-end mounting screws)	A	S278 p.1; oem_spec
Installation location	Plug-in AMC breaker module: breaker ON side placed over stud posts and resting on the load-end mounting bracket; on J-frame the line mounting screws are replaced by 5/16-18 nut-washer assemblies	A	same as above
Breaker compatibility	For AMC modules: AMC4QD, AMC6QD (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	S75 p.11-44; oem_spec
	Q-frame (TQD/THQD) (frame inferred from kit letter and Spectra module nomenclature; GEH5913 lists only catalog numbers)	C	S278 p.1; inference
Fasteners	Line-end mounting screw 1/4-20 x 3/4 in round head 40-50 in-lb; load-end mounting screw #10-32 x 2-3/4 in round head 27-32 in-lb (Text rendering runs table columns together; screw/torque pairing for cells shown as merged is not certain)	A	S278 p.1 Table 1; oem_spec
Torque values	Line-end mounting screw 1/4-20 x 3/4 in round head 40-50 in-lb; load-end mounting screw #10-32 x 2-3/4 in round head 27-32 in-lb (column alignment reconstructed from text rendering)	B	same as above
OEM instruction document	GEH5913 R02 (07/2001)	A	S278 p.1-2; oem_spec
	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Kit contents, kit_contents (washers, quantities), Material, Status		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00455	**192A6976P189**	GE Thread-forming screw #10-32 x 7/16 in - 192A6976P189	—	unknown
EDH-GEA-00458	**252B3613P1**	GE Antiturn clip (for 1/4-20 carriage bolt in square bus hole) - 252B3613P1	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00481	**331A3329P2**	GE Steel drive rivet #10 x 1/2 in - 331A3329P2	—	unknown
EDH-GEA-00467	**75A105503P101**	GE Conical spring washer 1/4 in - 75A105503P101	—	unknown
EDH-GEA-00468	**75A105503P105**	GE Conical spring washer 5/16 in - 75A105503P105	—	unknown
EDH-GEA-00470	**N22P23012B6**	GE Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block) - N22P23012B6	—	unknown
EDH-GEA-00469	**N22P23016B6**	GE Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit) - N22P23016B6	—	unknown
EDH-GEA-00471	**N245P21B6**	GE Nut 1/4-20 - N245P21B6	—	unknown
EDH-GEA-00472	**N37P21060B6**	GE Screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21060B6	—	unknown
EDH-GEA-00473	**N37P21969B6**	GE Machine screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21969B6	—	unknown
EDH-GEA-00474	**N402P11B6**	GE Flat washer 1/4 in - N402P11B6	—	unknown
EDH-GEA-00475	**N657P21024B6**	GE Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus) - N657P21024B6	—	unknown
EDH-GEA-00482	**N722EP16006B6**	GE Thread-forming screw 10-32 x 3/8 in - N722EP16006B6	—	unknown
EDH-GEA-00476	**N730BP1308B6**	GE Thread-forming screw #6 x 1/2 in (terminal cover) - N730BP1308B6	—	unknown

EDH-GEA-00455 — 192A6976P189

GE / ABB lineage · fastener · **STATUS UNKNOWN**

GE Thread-forming screw #10-32 x 7/16 in - 192A6976P189

OEM part number	192A6976P189	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Thread-forming screw #10-32 x 7/16 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/3GM; 4 per AMCB4GB/6GB; 2 in ADF deadfront hardware kit 10085396G1	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00458 — 252B3613P1

GE / ABB lineage · fastener · **STATUS UNKNOWN**

GE Antiturn clip (for 1/4-20 carriage bolt in square bus hole) - 252B3613P1

OEM part number	252B3613P1	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Antiturn clip (for 1/4-20 carriage bolt in square bus hole)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 2, AMCB6GB 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00481 — 331A3329P2

GE / ABB lineage · fastener · **STATUS UNKNOWN**

GE Steel drive rivet #10 x 1/2 in - 331A3329P2

OEM part number	331A3329P2	A	S88 p.1 Table 1; oem_spec
Description	Steel drive rivet #10 x 1/2 in	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S88 p.1; oem_spec
Kit contents	Qty 2 in circuit breaker cover kit AMCB6TEDL	A	S88 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00467	75A105503P101	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Conical spring washer 1/4 in - 75A105503P101

OEM part number	75A105503P101	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Conical spring washer 1/4 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 4, AMCB6GB 4	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00468	75A105503P105	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Conical spring washer 5/16 in - 75A105503P105

OEM part number	75A105503P105	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Conical spring washer 5/16 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 2, AMCB3GM 3, AMCB4GB 4, AMCB6GB 6	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00470	N22P23012B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block) - N22P23012B6

OEM part number	N22P23012B6	A	S277 DEH40129 p.1 Table 1; oem_spec
Description	Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB4GB 4, AMCB6GB 6	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00469	N22P23016B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit) - N22P23016B6

OEM part number	N22P23016B6	A	S274 DEH060 p.1 Table 1; oem_spec
Description	Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 2, AMCB3GM 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00471	N245P21B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Nut 1/4-20 - N245P21B6

OEM part number	N245P21B6	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Nut 1/4-20	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 2, AMCB6GB 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00472	N37P21060B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21060B6

OEM part number	N37P21060B6	A	S274 DEH060 p.1 Table 1; oem_spec
Description	Screw 1/4-20 x 3-3/4 in (breaker to bracket)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/AMCB3GM	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00473	N37P21969B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Machine screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21969B6

OEM part number	N37P21969B6	A	S277 DEH40129 p.1 Table 1; oem_spec
Description	Machine screw 1/4-20 x 3-3/4 in (breaker to bracket)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 4 per AMCB4GB/AMCB6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00474	N402P11B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Flat washer 1/4 in - N402P11B6

OEM part number	N402P11B6	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Flat washer 1/4 in	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/3GM; 4 per AMCB4GB/6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00475	N657P21024B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus) - N657P21024B6

OEM part number	N657P21024B6	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: AMCB2GM 4, AMCB3GM 6, AMCB4GB 2, AMCB6GB 3	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00482	N722EP16006B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Thread-forming screw 10-32 x 3/8 in - N722EP16006B6

OEM part number	N722EP16006B6	A	S88 p.1 Table 1; oem_spec
Description	Thread-forming screw 10-32 x 3/8 in	A	same as above
Installation location	Spectra APNB bolt-on interior, TED6 breaker with TEDL current limiter, 3X (4.125 in) vertical space	A	S88 p.1; oem_spec
Kit contents	Qty 2 in circuit breaker cover kit AMCB6TEDL	A	S88 p.1 Table 1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, Material		

EDH-GEA-00476	N730BP1308B6	GE / ABB lineage	fastener	STATUS UNKNOWN

GE Thread-forming screw #6 x 1/2 in (terminal cover) - N730BP1308B6

OEM part number	N730BP1308B6	A	S274, S277 DEH060 p.1 Table 1; DEH40129 p.1 Table 1; oem_spec
Description	Thread-forming screw #6 x 1/2 in (terminal cover)	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/3GM; 4 per AMCB4GB/6GB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00595	**SRFB3XT4FPK**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK	Tmax XT4 (replaces legacy Spectra F frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00594	**SRFB3XT4FPX**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX	Tmax XT4 (replaces legacy Spectra F frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00599	**SRFB3XT5MFPK**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK	Tmax XT5 (replaces legacy Spectra G frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00598	**SRFB3XT5MFPX**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX	Tmax XT5 (replaces legacy Spectra G frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00601	**SRFB3XT7MFPK**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK	Tmax XT7 (replaces legacy Spectra K frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00600	**SRFB3XT7MFPX**	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX	Tmax XT7 (replaces legacy Spectra K frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00591	**SRFB6XT1FPK**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK	Tmax XT1 (replaces legacy Spectra E frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00590	**SRFB6XT1FPX**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX	Tmax XT1 (replaces legacy Spectra E frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00593	**SRFB6XT4FPK**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK	Tmax XT4 (replaces legacy Spectra F frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00592	**SRFB6XT4FPX**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX	Tmax XT4 (replaces legacy Spectra F frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00597	**SRFB6XT5BFPK**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK	Tmax XT5 (replaces legacy Spectra G frame breaker position) A	current (ABB retrofit offering)
EDH-GEA-00596	**SRFB6XT5BFPX**	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX	Tmax XT5 (replaces legacy Spectra G frame breaker position) A	current (ABB retrofit offering)

EDH-GEA-00595	SRFB3XT4FPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK

OEM part number	SRFB3XT4FPK	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00594	SRFB3XT4FPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX

OEM part number	SRFB3XT4FPX	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00599	SRFB3XT5MFPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK

OEM part number	SRFB3XT5MFPK	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3GMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00598	SRFB3XT5MFPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX

OEM part number	SRFB3XT5MFPX	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3GMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00601	SRFB3XT7MFPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK

OEM part number	SRFB3XT7MFPK	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3KMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT7, 1200 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side; XT7 kit includes breaker handle extension/folding handle	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT7 (replaces legacy Spectra K frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00600	SRFB3XT7MFPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX

OEM part number	SRFB3XT7MFPX	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB3KMFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT7, 1200 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side; XT7 kit includes breaker handle extension/folding handle	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT7 (replaces legacy Spectra K frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00591	SRFB6XT1FPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK

OEM part number	SRFB6XT1FPK	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6EBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT1, 125 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT1 (replaces legacy Spectra E frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00590	SRFB6XT1FPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX

OEM part number	SRFB6XT1FPX	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6EBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT1, 125 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT1 (replaces legacy Spectra E frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00593	SRFB6XT4FPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK

OEM part number	SRFB6XT4FPK	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00592	SRFB6XT4FPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX

OEM part number	SRFB6XT4FPX	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6FJFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT4, 250 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT4 (replaces legacy Spectra F frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00597	SRFB6XT5BFPK	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK

OEM part number	SRFB6XT5BFPK	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6GBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A with Kirk lock provision; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

EDH-GEA-00596	SRFB6XT5BFPX	GE / ABB lineage	conversion-kit	CURRENT (ABB RETROFIT

Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX

OEM part number	SRFB6XT5BFPX	A	S302 guide pp.28-29; oem_spec
Alternate / superseded numbers	AMCB6GBFP (ABB retrofit table pairs the legacy Spectra-breaker kit with this Tmax XT kit; replaces a different breaker, not an identical part)	A	S302 supersedes; guide p.28 table "Legacy Spectra based kit"; oem_spec
Description	Tmax XT bolt-on retrofit (strap) kit for existing Spectra bolt-on panelboards, Tmax XT5, 600 A; all mounting kits, filler plates and hardware under one part number; breaker ordered separately	A	S302 guide p.28; oem_spec
Application	Retrofit/addition of breakers in Spectra bolt-on (APNB) panelboards and switchboards; max two XT4, XT5 or XT7 retrofit kits side by side	A	S302 guide pp.28-30; oem_spec
Breaker compatibility	Tmax XT5 (replaces legacy Spectra G frame breaker position)	A	S302 guide p.28 table; oem_spec
Status	current (ABB retrofit offering)	B	S302 guide p.27; oem_spec
Identification features	SRFB nomenclature: SRFB + poles/mounting (6 = dual, 3 = single) + XT1/XT4/XT5/XT7 + modification code (blank = main or branch, B = branch only, M = main only) + FPX (with filler plate kit: full-width plates with handle cutouts) or FPK (with filler plate kit and Kirk lock provision)	A	S302 guide p.28; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	install_doc number, Kit contents, Torque values		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00589	**ATHMEGNDN**	Spectra TVSS neutral & ground wire kit ATHMEGNDN	—	unknown

EDH-GEA-00589	ATHMEGNDN	GE / ABB lineage	spd-kit	STATUS UNKNOWN

Spectra TVSS neutral & ground wire kit ATHMEGNDN

OEM part number	ATHMEGNDN	A	S297 DEH40471 p.1; oem_spec
Description	Neutral and ground wire kit for Spectra TVSS units with catalog prefix ATME or ATHE	A	S297 p.1; oem_spec
Kit contents	#2-gauge black wire 273A7900P12BK19, 12.5 ft; tie wraps PEL#PLT1.5I-M (10); ground AEG10 (1)	A	S297 p.1 Table 1; oem_spec
Torque values	#2 Cu cable into TVSS Ground/Neutral lug hex screw 150 lb-in	A	S297 p.1 step 3; oem_spec
OEM instruction document	DEH40471 R02 (10/2001)	A	S297 p.1; oem_spec
Cross-links	Families: SPECTRA-PP		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00540	**455C592P1**	GE Lug cover, TKM/THKM - 455C592P1	—	unknown
EDH-GEA-00541	**455C592P2**	GE Lug cover, TK4V/TKL4V - 455C592P2	—	unknown
EDH-GEA-00605	**SRFN100GF**	Spectra retrofit neutral CT kit SRFN100GF	—	unknown
EDH-GEA-00606	**SRFN120GF**	Spectra retrofit neutral CT kit SRFN120GF	—	unknown
EDH-GEA-00602	**SRFN400GF**	Spectra retrofit neutral CT kit SRFN400GF	—	unknown
EDH-GEA-00603	**SRFN600GF**	Spectra retrofit neutral CT kit SRFN600GF	—	unknown
EDH-GEA-00604	**SRFN800GF**	Spectra retrofit neutral CT kit SRFN800GF	—	unknown

EDH-GEA-00540	455C592P1	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

GE Lug cover, TKM/THKM - 455C592P1

OEM part number	455C592P1	A	S279 GEH5629 p.1; oem_spec
Description	Lug cover, TKM/THKM (furnished with AFP6SKS)	A	same as above
Application	TKM, THKM in Spectra K-frame module/bolt-on position	A	S279 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	placed on line and load ends of breaker	A	S279 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00541	455C592P2	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

GE Lug cover, TK4V/TKL4V - 455C592P2

OEM part number	455C592P2	A	S279 GEH5629 p.1; oem_spec
Description	Lug cover, TK4V/TKL4V (furnished with AFP6SKS)	A	same as above
Application	TK4V, TKL4V	A	S279 GEH5629 p.1 Tables 1-2; oem_spec
Fasteners	placed on line and load ends of breaker	A	S279 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA), TKM / THKM		
Not yet documented	Dimensions, Material		

EDH-GEA-00605	SRFN100GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN100GF

OEM part number	SRFN100GF	A	S302 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT7 UL 1000 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S302 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00606	SRFN120GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN120GF

OEM part number	SRFN120GF	A	S302 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT7 UL 1200 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S302 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00602	SRFN400GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN400GF

OEM part number	SRFN400GF	A	S302 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT5 UL 400 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S302 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00603	SRFN600GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN600GF

OEM part number	SRFN600GF	A	S302 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT5 UL 600 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S302 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

EDH-GEA-00604	SRFN800GF	GE / ABB lineage	breaker-accessory	STATUS UNKNOWN

Spectra retrofit neutral CT kit SRFN800GF

OEM part number	SRFN800GF	A	S302 guide p.28; oem_spec
Description	Tmax XT Spectra panel neutral CT kit: XT7 UL 800 A neutral current transformer kit	A	same as above
Application	Ground-fault neutral sensing for Tmax XT retrofit in Spectra panelboards	A	S302 guide pp.28-30; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00464	**252B3657P1**	GE Strap spacer, G-frame bolt-on - 252B3657P1	—	unknown
EDH-GEA-00465	**252B3657P2**	GE Strap spacer, G-frame bolt-on - 252B3657P2	—	unknown
EDH-GEA-00585	**APN49**	Spectra permanent circuit marker kit APN49	—	unknown
EDH-GEA-00586	**APN99**	Spectra permanent circuit marker kit APN99	—	unknown

EDH-GEA-00464	252B3657P1	GE / ABB lineage	other	STATUS UNKNOWN

GE Strap spacer, G-frame bolt-on - 252B3657P1

OEM part number	252B3657P1	A	S274 DEH060 p.1 Table 1; oem_spec
Description	Strap spacer, G-frame bolt-on	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 1 per AMCB2GM/AMCB3GM (used when cable connection is opposite the 2.75 in reference side)	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00465	252B3657P2	GE / ABB lineage	other	STATUS UNKNOWN

GE Strap spacer, G-frame bolt-on - 252B3657P2

OEM part number	252B3657P2	A	S274 DEH060 p.1 Table 1; oem_spec
Description	Strap spacer, G-frame bolt-on	A	same as above
Installation location	Spectra APNB bolt-on G-frame breaker assembly	A	same as above
Kit contents	Supplied in kits: 2 per AMCB2GM/AMCB3GM (cable connection opposite the 2.75 in side)	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-GEA-00585	APN49	GE / ABB lineage	other	STATUS UNKNOWN

Spectra permanent circuit marker kit APN49

OEM part number	APN49	A	S299 GEH5598 p.1; oem_spec
Description	Spectra permanent circuit marker kit, numbers 1-49	A	S299 p.1; oem_spec
Application	Strip selection by interior height (X = 1-3/8 in): 13X P3; 18X P1+P3; 23X P2+P3; 28X P1+P2+P3; 33X P2+P3; 38X P1+P2+P3; 43X P2+P3; 48X P1+P2+P3; 53X P2+P3 (two each)	A	S299 p.1 Table 2; oem_spec
Kit contents	Marker strips 252B1679P1 (5X, 10 circuits) x2, 252B1679P2 (10X, 20 circuits) x2, 252B1679P3 (13X, 26 circuits) x2; thread-forming screws N605P13005B #6-32 x 5/16 (24); permanent marker tabs 264V287P1-49	A	S299 p.1 Table 1; oem_spec
Mounting-hole pattern	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws	A	S299 p.1; oem_spec
OEM instruction document	GEH5598 R02 (05/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		

EDH-GEA-00586	APN99	GE / ABB lineage	other	STATUS UNKNOWN

Spectra permanent circuit marker kit APN99

OEM part number	APN99	A	S299 GEH5598 p.1; oem_spec
Description	Spectra permanent circuit marker kit, numbers 1-99	A	S299 p.1; oem_spec
Application	Strip selection by interior height (X = 1-3/8 in): 13X P3; 18X P1+P3; 23X P2+P3; 28X P1+P2+P3; 33X P2+P3; 38X P1+P2+P3; 43X P2+P3; 48X P1+P2+P3; 53X P2+P3 (two each)	A	S299 p.1 Table 2; oem_spec
Kit contents	Marker strips 252B1679P1 (5X, 10 circuits) x2, 252B1679P2 (10X, 20 circuits) x2, 252B1679P3 (13X, 26 circuits) x2; thread-forming screws N605P13005B #6-32 x 5/16 (24); permanent marker tabs 264V287P1-99	A	S299 p.1 Table 1; oem_spec
Mounting-hole pattern	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws	A	S299 p.1; oem_spec
OEM instruction document	GEH5598 R02 (05/2001)	A	same as above
Cross-links	Families: SPECTRA-PP		

5.11 TRUMBULL — Trumbull Electric (Plainville CT) panelboards and switches

FAM-GEA-010 · panelboard · aka Trumbell (misspelling), GE-Trumbull · markings: Trumbull, Trumbull Electric Mfg. Co., A General Electric Organization

Trumbull Electric was GE's panelboard/switch maker before GE-branded distribution products; later Trumbull panels accept GE breakers per labels. Coded GEA per lineage. No Trumbull hardware part numbers were found.

Attribute	Value	Cl.	Sources
Status	Obsolete; forum states GE and Trumbull breakers share part numbers (e.g., TQL/THQL)	D	S158 forum
Era of manufacture	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; split-bus panels into early 1960s	C	same as above
Successor	General Electric (GE Industrial -> ABB 2018)	C	same as above
Branch breakers accepted	GE-type plug-in (TQL/THQL family) in later panels; ATB-type breakers reported in older Trumbull switchboards (not in SKM library)	D	same as above

Key documents: S158 Trumbull Electric panel / GE-Trumbull discussions

5.12 AV-LINE — AV-Line switchboards (legacy)

FAM-GEA-009 · switchboard · aka AV Line, AV-1, AV-2, AV-Line, AV1, AV2 · markings: General Electric
Legacy GE distribution switchboard; only surplus listings (800-1600 A, 208Y/120 to 480Y/277 V, Power Break mains) were found. No OEM document located.

Evidence record for existing GE AV-Line family: GE publication 'AV-Line Switchboards GEA-7931' cited in a 1983 design text; dealers distinguish AV1 and AV2 and list CCB-type DPK/SPK strap kits, GAVFP filler plates and THLCDPK 'hardware kit for AV panel' for them.

Attribute	Value	Cl.	Sources
Ratings	Surplus units listed at 800, 1200, 1600 A; 120/208 and 480 V 3ph4w	C	S96 surplus_listing
Oem publication	AV-Line Switchboards GEA-7931 (Publication number seen in textbook snippet only)	B	S269 oem_spec
Generations	Dealer panel-type designations 'AV1' and 'AV2' (also 'AV LINE')	C	S251 surplus_listing

Breaker families associated: GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV)
Key documents: S96 Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A); S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it; S269 electricalwiring0000star Electrical Wiring and Design: A Practical Approach (1983) - 'For designer's use (AV-Line s
Also fits this family (entry printed elsewhere): TB1DPK, TB4SPK, TB4SBK, TB8SPK, TP8SPK, TJ6SPK, THJV6DPK, TED1DPK2, GAVFP2

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00432	**SG6DPK**	GE SG-frame twin mounting kit, 600 A (dealer label 'AV')	SGDA, SGHA, SGLA, SGPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00433	**SG6SPK**	GE SG-frame single mounting kit, 600 A (dealer label 'AV')	SGDA, SGHA, SGLA, SGPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00434	**SGS6K**	SG-frame single mounting kit, 600 A (dealer label 'AV'; possibly aftermarket)	SGDA, SGHA, SGLA, SGPA C	Discontinued OEM item traded new-surplus / recertified by de
EDH-GEA-00435	**THLCDPK**	GE hardware kit for AV panel (THLC breaker, twin)	THLC (inferred from catalog number) C	Discontinued OEM item traded new-surplus / recertified by de

EDH-GEA-00432 **SG6DPK** General Electric branch-connector-kit **DISCONTINUED OEM ITEM**

GE SG-frame twin mounting kit, 600 A (dealer label 'AV')

OEM part number	SG6DPK	C	S251 surplus_listing
Description	AV	C	same as above
Application	branch (twin)	C	same as above
Installation location	Dealer spec block 'APNB-APN' (Spectra) vs title 'AV' - conflicting	C	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00433 **SG6SPK** General Electric branch-connector-kit **DISCONTINUED OEM ITEM**

GE SG-frame single mounting kit, 600 A (dealer label 'AV')

OEM part number	SG6SPK	C	S251 surplus_listing
Description	AV	C	same as above
Application	branch (single)	C	same as above
Installation location	Dealer spec block 'APNB-APN' vs title 'AV' - conflicting	C	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-GEA-00434	SGS6K	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

SG-frame single mounting kit, 600 A (dealer label 'AV'; possibly aftermarket)

OEM part number	SGS6K	C	S251 surplus_listing
Description	AV	C	same as above
Application	branch (single)	C	same as above
Installation location	Dealer spec 'APNB-APN'	C	same as above
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*'xxxK' numbering resembles aftermarket kits (SGD1K, SFS1K) - is SGS6K an OEM GE number?*		

EDH-GEA-00435	THLCDPK	General Electric	branch-connector-kit	DISCONTINUED OEM ITEM

GE hardware kit for AV panel (THLC breaker, twin)

OEM part number	THLCDPK	C	S251 surplus_listing
Description	GEN; Hardware Kit for AV Panel	C	same as above
Installation location	GE AV-Line switchboard	C	same as above
Breaker compatibility	THLC (inferred from catalog number)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: AV-LINE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

5.13 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family E150 line (TEB, TED, THED, TEC)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00287	**TC012**	GE TC012 copper-only lug, E150/TB1 thru 150A	E150, TB1 (thru 150 A) A	current
EDH-GEA-00284	**TCAL12**	GE TCAL12 lug, E150/THLC1/TB1 15-60A	E150, THLC1, TB1; 15-60 A A	current
EDH-GEA-00285	**TCAL12A**	GE TCAL12A lug, E150/THLC1/TB1 70-90A	E150, THLC1, TB1; 70-90 A A	current
EDH-GEA-00283	**TCAL14**	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A A	current
EDH-GEA-00286	**TCAL15**	GE TCAL15 lug, E150/THLC1/TB1 100-150A	E150, THLC1, TB1; 100-150 A A	current

EDH-GEA-00287	TC012	GE	lug	CURRENT

GE TC012 copper-only lug, E150/TB1 thru 150A

OEM part number	TC012	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, TB1 (thru 150 A)	A	same as above
Kit contents	1 lug; wire range #14-2/0 Cu	A	same as above
Material	{'value': 'Copper (copper-only lug, with follower and extra plating)', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00284	TCAL12	GE	lug	CURRENT

GE TCAL12 lug, E150/THLC1/TB1 15-60A

OEM part number	TCAL12	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 15-60 A	A	same as above
Current rating	15-60 A	A	same as above
Kit contents	1 lug; wire range (1) #14-3 Cu, #12-1 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00285	TCAL12A	GE	lug	CURRENT

GE TCAL12A lug, E150/THLC1/TB1 70-90A

OEM part number	TCAL12A	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 70-90 A	A	same as above
Current rating	70-90 A	A	same as above
Kit contents	1 lug; wire range (1) #6-2/0 Cu, #4-2/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00283	TCAL14	GE	lug	CURRENT

GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8

OEM part number	TCAL14	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A	A	same as above
Current rating	15-30 A	A	same as above
Kit contents	1 lug; wire range (1) #14-8	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00286	TCAL15	GE	lug	CURRENT

GE TCAL15 lug, E150/THLC1/TB1 100-150A

OEM part number	TCAL15	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 100-150 A	A	same as above
Current rating	100-150 A	A	same as above
Kit contents	1 lug; wire range (1) #3-3/0 Cu, #1-3/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00325	**TEDLS**	GE TEDLS line shield, TEB/TEC/TED/THED	TEB, TEC, TED, THED A	current

EDH-GEA-00325	TEDLS	GE	barrier	CURRENT

GE TEDLS line shield, TEB/TEC/TED/THED

OEM part number	TEDLS	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Installation location	Line end of breaker	C	S130, S132 s1 p. 6-102; s3 p. 3-120; inference
Breaker compatibility	TEB, TEC, TED, THED	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Kit contents, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00386	**TEF1**	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (50 A) A	current
EDH-GEA-00387	**TEF2**	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (50 A) A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00388	**TEF3**	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (150 A) **A**	current
EDH-GEA-00389	**TEF4**	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (150 A) **A**	current

EDH-GEA-00386 TEF1 GE breaker-accessory CURRENT

GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)

OEM part number	TEF1	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 25/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00387 TEF2 GE breaker-accessory CURRENT

GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)

OEM part number	TEF2	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 4 13/32 in (long)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00388 TEF3 GE breaker-accessory CURRENT

GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)

OEM part number	TEF3	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 3 13/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00389	TEF4	GE	breaker-accessory	CURRENT

GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)

OEM part number	TEF4	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 25/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family F225 line (TFJ, TFK, THFK, TFC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00289	**TCALK324**	GE TCALK324 3-lug kit, F225	F225 A	current

EDH-GEA-00289	TCALK324	GE	lug-kit	CURRENT

GE TCALK324 3-lug kit, F225

OEM part number	TCALK324	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225	A	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00290	**TC024**	GE TC024 copper-only lug, TFJ 250A	TFJ (250 A) A	current
EDH-GEA-00288	**TCAL24**	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	F225 (TFJ/TFK/THFK) A	current
EDH-GEA-00291	**TCAL27**	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	THLC2 A	discontinued

EDH-GEA-00290	TC024	GE	lug	CURRENT

GE TC024 copper-only lug, TFJ 250A

OEM part number	TC024	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ (250 A)	A	same as above
Kit contents	1 lug; wire range #4-300 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00288	TCAL24	GE	lug	CURRENT

GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL24	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225 (TFJ/TFK/THFK)	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00291	TCAL27	GE	lug	DISCONTINUED

GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL27	A	S132 s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC2	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In the 9/12 table but absent from the 11/13 and 1/19 lug tables)	C	S130, S132 s3 p. 3-120; absent from s1 p. 6-102; inference
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which F225-type frame is THLC2, and what replaced TCAL27 when it left the table?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00326	**TFKLS**	GE TFKLS line shield, TFJ/TFK/TFC	TFJ, TFK, TFC **A**	current

EDH-GEA-00326	TFKLS	GE	barrier	CURRENT

GE TFKLS line shield, TFJ/TFK/TFC

OEM part number	TFKLS	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TFJ, TFK, TFC	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00390	**TFK1**	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current
EDH-GEA-00391	**TFK2**	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current

EDH-GEA-00390	TFK1	GE	breaker-accessory	CURRENT

GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)

OEM part number	TFK1	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 23/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00391	TFK2	GE	breaker-accessory	CURRENT

GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)

OEM part number	TFK2	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 5 31/32 in (long)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00300	**TCALK343**	GE TCALK343 3-lug kit, TLB4/THLC4	TLB4, THLC4 A	discontinued
EDH-GEA-00294	**TCALK347**	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	J400, TJD A	discontinued
EDH-GEA-00296	**TCALK363**	GE TCALK363 3-lug kit, J600 450-600A	J600 (450-600 A) A	current

EDH-GEA-00300 **TCALK343** GE lug-kit **DISCONTINUED**

GE TCALK343 3-lug kit, TLB4/THLC4

OEM part number	TCALK343	A	S132 s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TLB4, THLC4	A	same as above
Kit contents	3 lugs; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	C	S130, S132 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00294 **TCALK347** GE lug-kit **DISCONTINUED**

GE TCALK347 3-lug kit, J400/TJD 750 kcmil

OEM part number	TCALK347	A	S132 s3 p. 3-120; oem_spec
Description	3-lug kit (TCAL47 range)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD	A	same as above
Kit contents	3 lugs; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In 9/12 but not in the 11/13 or 1/19 tables)	C	S130, S132 absent from s1 p. 6-102; inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00296 **TCALK363** GE lug-kit **CURRENT**

GE TCALK363 3-lug kit, J600 450-600A

OEM part number	TCALK363	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A)	A	same as above
Kit contents	3 lugs; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00297	**TC043**	GE TC043 copper-only lug, J400/TB4	J400, TB4 A	current
EDH-GEA-00298	**TC063**	GE TC063 copper-only lug, J600	J600 A	current
EDH-GEA-00292	**TCAL43**	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all rating A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00293	**TCAL47**	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	J400, TJD; alternate on TJJ/TJK 400A **A**	current
EDH-GEA-00295	**TCAL63**	GE TCAL63 lug, J600 450-600A	J600 (450-600 A); TJK/THJK 600A frame 450-600 A **A**	current
EDH-GEA-00299	**TCLK43**	GE TCLK43 lug, TLB4/THLC4	TLB4, THLC4 **A**	current

EDH-GEA-00297 TC043 GE lug CURRENT

GE TC043 copper-only lug, J400/TB4

OEM part number	TC043	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J400, TB4	**A**	same as above
Kit contents	1 lug; wire range (1) 6-600 kcmil or (2) 1/0-250 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00298 TC063 GE lug CURRENT

GE TC063 copper-only lug, J600

OEM part number	TC063	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J600	**A**	same as above
Kit contents	1 lug; wire range (2) 250-350 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00292 TCAL43 GE lug CURRENT

GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD

OEM part number	TCAL43	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Alternate / superseded numbers	TCAL433 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL433 / TCAL432'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Footnote 2/3 on p. 6-36/37 reads 'Alternate lug for 750 kcmil Cu/Al cable, Product Number TCAL47'.)	**B**	S130, S132 alias; s1 p. 6-36; s3 TJJ/TJK tables; oem_spec
Description	Copper-aluminum single lug, standard lug on TJJ/TJK 400A frames and on J600 frames rated 250-400 A	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all ratings); TJK/THJK 600A frame 250-400 A	**A**	same as above
Kit contents	1 lug; order 2 per pole; wire range (1) 6-600 kcmil or (2) 2/0-250 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00293	TCAL47	GE	lug	CURRENT

GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al

OEM part number	TCAL47	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36 fn; oem_spec
Description	Copper-aluminum single lug, alternate lug for 750 kcmil Cu/Al cable on TJJ/TJK	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD; alternate on TJJ/TJK 400A	A	same as above
Kit contents	1 lug; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00295	TCAL63	GE	lug	CURRENT

GE TCAL63 lug, J600 450-600A

OEM part number	TCAL63	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-37; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A); TJK/THJK 600A frame 450-600 A	A	same as above
Kit contents	1 lug; order 2 per pole; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00299	TCLK43	GE	lug	CURRENT

GE TCLK43 lug, TLB4/THLC4

OEM part number	TCLK43	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TLB4, THLC4	A	same as above
Kit contents	1 lug; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00327	**TJKLS**	GE TJKLS line shield, TJJ/TJK/TJC	TJJ, TJK, TJC A	current

EDH-GEA-00327	TJKLS	GE	barrier	CURRENT

GE TJKLS line shield, TJJ/TJK/TJC

OEM part number	TJKLS	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TJJ, TJK, TJC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00334	**TJLVK**	GE TJLVK line voltage control wire kit, J600	J600 A	discontinued

EDH-GEA-00334	TJLVK	GE	breaker-accessory	DISCONTINUED

GE TJLVK line voltage control wire kit, J600

OEM part number	TJLVK	A	S132 s3 p. 3-120; oem_spec
Alternate / superseded numbers	TJLVK8 (as printed) [alias] (Footnote 8 = '3-pole kit')	B	same as above
Description	Line voltage control wire kit for terminating control wire at breaker lugs (3-pole kit per footnote)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600	A	same as above
Status	discontinued (Not in the 1/19 table)	C	S130, S132 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00313	**TCALK2121**	GE TCALK2121 2-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) B	current
EDH-GEA-00317	**TCALK2122**	GE TCALK2122 2-lug kit (TCAL122)	K1200 (1200 A) B	current
EDH-GEA-00305	**TCALK261**	GE TCALK261 2-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) A	current
EDH-GEA-00309	**TCALK281**	GE TCALK281 2-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A A	current
EDH-GEA-00320	**TCALK291**	GE TCALK291 2-lug kit, TK4V load end	TK4V - load end B	current
EDH-GEA-00314	**TCALK3121**	GE TCALK3121 3-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) B	current
EDH-GEA-00318	**TCALK3122**	GE TCALK3122 3-lug kit (TCAL122)	K1200 (1200 A) B	current
EDH-GEA-00302	**TCALK341**	GE TCALK341 3-lug kit, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	discontinued
EDH-GEA-00306	**TCALK361**	GE TCALK361 3-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) A	current
EDH-GEA-00310	**TCALK381**	GE TCALK381 3-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A A	current
EDH-GEA-00321	**TCALK391**	GE TCALK391 3-lug kit, TK4V load end	TK4V - load end B	current

EDH-GEA-00313	TCALK2121	GE	lug-kit	CURRENT

GE TCALK2121 2-lug kit with wrench (TCAL121)

OEM part number	TCALK2121	**B**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21214 / TCALK21212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21214/TCALK21212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	2-lug kit with wrench	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	K1200 (1000-1200 A)	**B**	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	**B**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**B**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00317	TCALK2122	GE	lug-kit	CURRENT

GE TCALK2122 2-lug kit (TCAL122)

OEM part number	TCALK2122	**B**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21225 / TCALK21223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21225/TCALK21223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	2-lug kit with wrench	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	K1200 (1200 A)	**B**	same as above
Kit contents	2 lugs + wrench; wire range (3) 750 kcmil Cu-Al	**B**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**B**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00305	TCALK261	GE	lug-kit	CURRENT

GE TCALK261 2-lug kit with wrench, K1200/TB6

OEM part number	TCALK261	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	**A**	same as above
Kit contents	2 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00309	TCALK281	GE	lug-kit	CURRENT

GE TCALK281 2-lug kit with wrench (TCAL81)

OEM part number	TCALK281	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK2812 / TCALK2811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2812/TCALK2811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00320	TCALK291	GE	lug-kit	CURRENT

GE TCALK291 2-lug kit, TK4V load end

OEM part number	TCALK291	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK2912 / TCALK2911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2912/TCALK2911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00314	TCALK3121	GE	lug-kit	CURRENT

GE TCALK3121 3-lug kit with wrench (TCAL121)

OEM part number	TCALK3121	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31214 / TCALK31212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31214/TCALK31212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1000-1200 A)	B	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00318	TCALK3122	GE	lug-kit	CURRENT

GE TCALK3122 3-lug kit (TCAL122)

OEM part number	TCALK3122	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31225 / TCALK31223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31225/TCALK31223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	3 lugs + wrench; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00302	TCALK341	GE	lug-kit	DISCONTINUED

GE TCALK341 3-lug kit, K1200/TB6 300-400A

OEM part number	TCALK341	A	S132 s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	3 lugs; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	C	S130, S132 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00306	TCALK361	GE	lug-kit	CURRENT

GE TCALK361 3-lug kit with wrench, K1200/TB6

OEM part number	TCALK361	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	3 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00310	TCALK381	GE	lug-kit	CURRENT

GE TCALK381 3-lug kit with wrench (TCAL81)

OEM part number	TCALK381	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK3812 / TCALK3811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3812/TCALK3811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00321	TCALK391	GE	lug-kit	CURRENT

GE TCALK391 3-lug kit, TK4V load end

OEM part number	TCALK391	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK3912 / TCALK3911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3912/TCALK3911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00315	**TC0121**	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	K1200 (1000-1200 A); Spectra SK1200 600-1200 A A	current
EDH-GEA-00324	**TC0131**	GE TC0131 copper lug, TK4V load end	TK4V - load end A	current
EDH-GEA-00303	**TC041**	GE TC041 copper-only lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	current
EDH-GEA-00307	**TC061**	GE TC061 copper-only lug, K1200/TB6 300-600A	K1200, TB6 (300-600 A) A	current
EDH-GEA-00311	**TC081A**	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A A	current
EDH-GEA-00323	**TC091**	GE TC091 copper lug, TK4V load end	TK4V - load end A	current
EDH-GEA-00312	**TCAL121**	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A A	current
EDH-GEA-00316	**TCAL122**	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	K1200 (1200 A) B	current
EDH-GEA-00322	**TCAL131**	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	TK4V - load end B	current
EDH-GEA-00301	**TCAL41**	GE TCAL41 lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	current
EDH-GEA-00304	**TCAL61**	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	K1200, TB6 (300-600 A) A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00308	**TCAL81**	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 **A**	current
EDH-GEA-00319	**TCAL91**	GE TCAL91 lug, TK4V load end, (3) 3/0-500	TK4V - load end **B**	current

EDH-GEA-00315 TC0121 GE lug CURRENT

GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A

OEM part number	TC0121	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO121 (Printed TCO121 (letter O) in the 2012 Spectra table)	**B**	S132 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	K1200 (1000-1200 A); Spectra SK1200 600-1200 A	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00324 TC0131 GE lug CURRENT

GE TC0131 copper lug, TK4V load end

OEM part number	TC0131	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TK4V - load end	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Is this printed as TC0131 (zero) or TCO131 (letter O)? Is there a trailing footnote digit?*		

EDH-GEA-00303	TC041	GE	lug	CURRENT

GE TC041 copper-only lug, K1200/TB6 300-400A

OEM part number	TC041	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TC0416 / TC0414 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TC0416 (2012, fn6 'Not UL listed') / TC0414 (2019, fn4 'Not UL listed')'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The base number TC041 is printed in the 2012 lug-cover row.)	B	same as above
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (1) 1/0-600 kcmil or (2) 1/0-250 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Identification features	Not UL listed (per table footnote) (Taken from the footnote digit appended to the printed part number)	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Torque values		

EDH-GEA-00307	TC061	GE	lug	CURRENT

GE TC061 copper-only lug, K1200/TB6 300-600A

OEM part number	TC061	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00311	TC081A	GE	lug	CURRENT

GE TC081A copper lug, K1200/TB8/SK1200 600-800A

OEM part number	TC081A	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO81A (The 2012 Spectra table prints letter 'O' (TCO81A); the general table prints zero (TC081A).)	B	S132 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug with follower and extra plating	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu (6-102); (3) 250-500 kcmil (6-103)	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*The two tables give different wire ranges (3/0-500 vs 250-500 kcmil). Which is correct?*		

EDH-GEA-00323	TC091	GE	lug	CURRENT

GE TC091 copper lug, TK4V load end

OEM part number	TC091	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TK4V - load end	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00312	TCAL121	GE	lug	CURRENT

GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL121	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Alternate / superseded numbers	TCAL1214 / TCAL1212 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1214 (2012 fn4) / TCAL1212 (2019 fn2)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Suitable for 500 kcmil copper for voltage drop considerations'.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al (TKMA table: (4) 300-500 Al)	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00316	TCAL122	GE	lug	CURRENT

GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al

OEM part number	TCAL122	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1225 / TCAL1223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1225 (2012 fn5) / TCAL1223 (2019 fn3)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not UL listed, requires user supplied lug cover'. The bare base number TCAL122 is not printed anywhere, so it is inferred.)	B	same as above
Description	Copper-aluminum single lug; not UL listed, requires user-supplied lug cover (footnote)	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	1 lug; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug cover part number (footnote says a user-supplied lug cover is required), Torque values		
Open question	*Confirm that the orderable base number is TCAL122 (for example on a distributor or ABB product page).*		

EDH-GEA-00322	TCAL131	GE	lug	CURRENT

GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL131	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1314 / TCAL1312 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1314/TCAL1312'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00301	TCAL41	GE	lug	CURRENT

GE TCAL41 lug, K1200/TB6 300-400A

OEM part number	TCAL41	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00304	TCAL61	GE	lug	CURRENT

GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500

OEM part number	TCAL61	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00308	TCAL81	GE	lug	CURRENT

GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500

OEM part number	TCAL81	A	S130, S132, S133 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Alternate / superseded numbers	TCAL812 / TCAL811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL812 (2012) / TCAL811 (2019)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not suitable for 100 A aluminum conductor'. TCAL81 is printed bare in the Spectra SK1200 table, TKMA tables and lug-cover row.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Plated extruded aluminum lug for Cu or Al cables (per the Spectra table)	A	S130, S132, S133 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 A; SK800	A	same as above
Current rating	300-800 A (SK1200 table)	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00319	TCAL91	GE	lug	CURRENT

GE TCAL91 lug, TK4V load end, (3) 3/0-500

OEM part number	TCAL91	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL912 / TCAL911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL912/TCAL911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Installation location	Load end of TK4V breaker	A	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00332	**TKMC1**	GE TKMC1 connector (back strap), TKM	TKM **A**	current

EDH-GEA-00332	TKMC1	GE	connector-strap	CURRENT

GE TKMC1 connector (back strap), TKM

OEM part number	TKMC1	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Connector (back strap)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What is the TKMC1 back strap geometry, and which end of the breaker does it fit?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00331	**286A8066G1**	GE 286A8066G1 lug cover, TH4V/THK9V	TH4V, THK9V A	discontinued
EDH-GEA-00328	**789A448G1**	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	TKM with TC061, TCAL61, TCAL81 or TC081A lugs A	current
EDH-GEA-00329	**789A448G2**	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	TKM with TC0121 or TCAL121 lugs A	current
EDH-GEA-00330	**789A448G3**	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	TKM with TC041 or TCAL41 lugs C	discontinued
EDH-GEA-00333	**SKLVK**	GE SKLVK line voltage control wire kit, K1200/SK1200	K1200; Spectra SK1200 A	current
EDH-GEA-00394	**TKM11**	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current
EDH-GEA-00395	**TKM12**	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current

EDH-GEA-00331	286A8066G1	GE	breaker-accessory	DISCONTINUED

GE 286A8066G1 lug cover, TH4V/THK9V

OEM part number	286A8066G1	A	S132 s3 p. 3-120; oem_spec
Description	Lug cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TH4V, THK9V	A	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S130, S132 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00328	789A448G1	GE	breaker-accessory	CURRENT

GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)

OEM part number	789A448G1	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC061, TCAL61, TCAL81 or TC081A lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00329	789A448G2	GE	breaker-accessory	CURRENT

GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)

OEM part number	789A448G2	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC0121 or TCAL121 lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00330	789A448G3	GE	breaker-accessory	DISCONTINUED

GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain

OEM part number	789A448G3	C	S132 s3 p. 3-120; oem_spec
Alternate / superseded numbers	789A448G377 (as printed) [alias] (The printed string '789A448G377' probably carries footnote digit(s) 7 ('End cover supplied with 800A frame is used as lug cover'). The base number may be 789A448G3 or 789A448G37.)	C	same as above
Description	Lug cover, TKM breaker (two per breaker)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	TKM with TC041 or TCAL41 lugs	C	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S130, S132 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the true number 789A448G3 or 789A448G37?*		

EDH-GEA-00333	SKLVK	GE	breaker-accessory	CURRENT

GE SKLVK line voltage control wire kit, K1200/SK1200

OEM part number	SKLVK	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SKLVK6 / SKLVK8 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'SKLVK8/SKLVK6'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The footnote is '3-pole kit'.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200; Spectra SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00394	TKM11	GE	breaker-accessory	CURRENT

GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in

OEM part number	TKM11	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 1/2 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00395	TKM12	GE	breaker-accessory	CURRENT

GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in

OEM part number	TKM12	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 8 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family Record Plus FB 100

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00370	**FCALK12**	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A **A**	current
EDH-GEA-00372	**FCALK13**	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A **A**	current
EDH-GEA-00374	**FCALK14**	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A **A**	current

EDH-GEA-00370	FCALK12	GE	lug-kit	CURRENT

GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A

OEM part number	FCALK12	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	3 lugs; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00372	FCALK13	GE	lug-kit	CURRENT

GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A

OEM part number	FCALK13	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	3 lugs; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00374	FCALK14	GE	lug-kit	CURRENT

GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A

OEM part number	FCALK14	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	3 lugs; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00369	**FCAL12**	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A A	current
EDH-GEA-00371	**FCAL13**	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A A	current
EDH-GEA-00373	**FCAL14**	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A A	current

EDH-GEA-00369	FCAL12	GE	lug	CURRENT

GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A

OEM part number	FCAL12	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	1 lug; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00371	FCAL13	GE	lug	CURRENT

GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A

OEM part number	FCAL13	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	1 lug; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00373	FCAL14	GE	lug	CURRENT

GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A

OEM part number	FCAL14	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	1 lug; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FE 250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00376	**FCALK15**	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	Record Plus FE 250; 150 A A	current
EDH-GEA-00377	**FCALK15LV**	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	Record Plus FE 250; 150 A A	current
EDH-GEA-00379	**FCALK16**	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	Record Plus FE 250; 250 A A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00380	**FCALK16LV**	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current

EDH-GEA-00376 FCALK15 GE lug-kit CURRENT

GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)

OEM part number	FCALK15	**A**	S130 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00377 FCALK15LV GE lug-kit CURRENT

GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)

OEM part number	FCALK15LV	**A**	S130 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	lug kit with control wire terminal; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00379 FCALK16 GE lug-kit CURRENT

GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)

OEM part number	FCALK16	**A**	S130 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 250 A	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #8-250 MCM Cu / #8-350 MCM Al	**A**	same as above
Torque values	Lug torque 275 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00380	FCALK16LV	GE	lug-kit	CURRENT

GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)

OEM part number	FCALK16LV	A	S130 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	lug kit with control wire terminal; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00375	**FCAL15**	GE FCAL15 single lug, Record Plus FE 250 (150 A)	Record Plus FE 250; 150 A A	current
EDH-GEA-00378	**FCAL16**	GE FCAL16 single lug, Record Plus FE 250 (250 A)	Record Plus FE 250; 250 A A	current

EDH-GEA-00375	FCAL15	GE	lug	CURRENT

GE FCAL15 single lug, Record Plus FE 250 (150 A)

OEM part number	FCAL15	A	S130 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 150 A	A	same as above
Current rating	150 A	A	same as above
Kit contents	1 lug; wire range #14-3/0 Cu/Al	A	same as above
Torque values	Lug torque 150 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00378	FCAL16	GE	lug	CURRENT

GE FCAL16 single lug, Record Plus FE 250 (250 A)

OEM part number	FCAL16	A	S130 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 lug; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FG 600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00381	**FCALK218H**	GE FCALK218H 2-pole lug kit, Record Plus FG 600	Record Plus FG 600, 2-pole A	current
EDH-GEA-00382	**FCALK318H**	GE FCALK318H 3-pole lug kit, Record Plus FG 600	Record Plus FG 600, 3-pole A	current

EDH-GEA-00381 **FCALK218H** GE lug-kit **CURRENT**

GE FCALK218H 2-pole lug kit, Record Plus FG 600

OEM part number	FCALK218H	A	S130 s1 p. 6-88; oem_spec
Description	2-pole lug kit for FG600, top and bottom lug types	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600, 2-pole	A	same as above
Poles	2	A	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	A	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*How many lugs are in the kit, and are the top and bottom lugs different parts?*		

EDH-GEA-00382 **FCALK318H** GE lug-kit **CURRENT**

GE FCALK318H 3-pole lug kit, Record Plus FG 600

OEM part number	FCALK318H	A	S130 s1 p. 6-88; oem_spec
Description	3-pole lug kit for FG600 (table lists FCALK218H/FCALK318H against the 3-pole row)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600, 3-pole	A	same as above
Poles	3	A	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	A	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00384	**FGJS3**	GE FGJS3 terminal shield fin cover, Record Plus FG	Record Plus FG 600 A	current

EDH-GEA-00384 **FGJS3** GE barrier **CURRENT**

GE FGJS3 terminal shield fin cover, Record Plus FG

OEM part number	FGJS3	A	S130 s1 p. 6-88; oem_spec
Description	Terminal shield fin cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FG 600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00383	**FGH1LCK**	GE FGH1LCK lug cover kit, Record Plus FG	Record Plus FG 600 **A**	current
EDH-GEA-00385	**FGJN3**	GE FGJN3 nut plate / terminal shoe, Record Plus FG	Record Plus FG 600 **A**	current

EDH-GEA-00383 **FGH1LCK** GE breaker-accessory **CURRENT**

GE FGH1LCK lug cover kit, Record Plus FG

OEM part number	FGH1LCK	**A**	S130 s1 p. 6-88; oem_spec
Description	Lug cover kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00385 **FGJN3** GE breaker-accessory **CURRENT**

GE FGJN3 nut plate / terminal shoe, Record Plus FG

OEM part number	FGJN3	**A**	S130 s1 p. 6-88; oem_spec
Description	Nut plate / terminal shoe	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SE150

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00364	**TCAL19PD3**	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	SE1, TED; max 125 A **A**	current
EDH-GEA-00336	**TCALK318**	GE TCALK318 3-lug kit, Spectra SE150	Spectra RMS SE150 **A**	current

EDH-GEA-00364 **TCAL19PD3** GE lug-kit **CURRENT**

GE TCAL19PD3 3-lug power distribution kit, SE1/TED

OEM part number	TCAL19PD3	**A**	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	**A**	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	**A**	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	**A**	same as above
Kit contents	3-lug power distribution kit; wire range (2) 4-14 or (1) 2/0-4 Cu only	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00336	TCALK318	GE	lug-kit	CURRENT

GE TCALK318 3-lug kit, Spectra SE150

OEM part number	TCALK318	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	3 lugs; wire range (1) #12-3/0 Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00354	**TC018**	GE TC018 (TCO18) plated copper lug, SE150	Spectra RMS SE150 A	current
EDH-GEA-00335	**TCAL18**	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	Spectra RMS SE150 A	current
EDH-GEA-00360	**TCAL18LV**	GE TCAL18LV lug with control-voltage quick connect, SE150	Spectra RMS SE150 A	current
EDH-GEA-00363	**TCAL19PD1**	GE TCAL19PD1 power distribution lug, SE1/TED 125A	SE1, TED; max 125 A A	current

EDH-GEA-00354	TC018	GE	lug	CURRENT

GE TC018 (TCO18) plated copper lug, SE150

OEM part number	TC018	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO18 (2012 prints TCO18 (letter O); 2019 prints TC018)	B	S132 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00335	TCAL18	GE	lug	CURRENT

GE TCAL18 lug, Spectra SE150, (1) #12-3/0

OEM part number	TCAL18	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug for terminating copper or aluminum cables	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00360	TCAL18LV	GE	lug	CURRENT

GE TCAL18LV lug with control-voltage quick connect, SE150

OEM part number	TCAL18LV	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #12-3/0 Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00363	TCAL19PD1	GE	lug	CURRENT

GE TCAL19PD1 power distribution lug, SE1/TED 125A

OEM part number	TCAL19PD1	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	A	same as above
Kit contents	1 power distribution lug; wire range (2) 4-14 or (1) 2/0-4 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00347	**SE3LCK**	GE SE3LCK lug cover kit, SE150 line end	Spectra RMS SE150 A	current
EDH-GEA-00348	**SE3LCKL**	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	Spectra RMS SE150 with SEFR1 handle A	current

EDH-GEA-00347	SE3LCK	GE	breaker-accessory	CURRENT

GE SE3LCK lug cover kit, SE150 line end

OEM part number	SE3LCK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00348	SE3LCKL	GE	breaker-accessory	CURRENT

GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)

OEM part number	SE3LCKL	A	S130 s1 p. 6-103; oem_spec
Description	SE150 lug cover kit (modified for SEFR1 handle)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150 with SEFR1 handle	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SF250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00366	**TCAL28PD3**	GE TCAL28PD3 3-lug power distribution kit, SF	SF; max 250 A **A**	current
EDH-GEA-00338	**TCALK329**	GE TCALK329 3-lug kit, Spectra SF250	Spectra RMS SF250 **A**	current

EDH-GEA-00366	TCAL28PD3	GE	lug-kit	CURRENT

GE TCAL28PD3 3-lug power distribution kit, SF

OEM part number	TCAL28PD3	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00338	TCALK329	GE	lug-kit	CURRENT

GE TCALK329 3-lug kit, Spectra SF250

OEM part number	TCALK329	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	3 lugs; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00365	**TCAL28PD1**	GE TCAL28PD1 power distribution lug, SF 250A	SF; max 250 A A	current
EDH-GEA-00337	**TCAL29**	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	Spectra RMS SF250 A	current
EDH-GEA-00361	**TCAL29LV**	GE TCAL29LV lug with control-voltage quick connect, SF250	Spectra RMS SF250 A	current
EDH-GEA-00355	**TCO29**	GE TCO29 plated copper lug, SF250	Spectra RMS SF250 A	current

EDH-GEA-00365	TCAL28PD1	GE	lug	CURRENT

GE TCAL28PD1 power distribution lug, SF 250A

OEM part number	TCAL28PD1	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	1 power distribution lug; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00337	TCAL29	GE	lug	CURRENT

GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil

OEM part number	TCAL29	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00361	TCAL29LV	GE	lug	CURRENT

GE TCAL29LV lug with control-voltage quick connect, SF250

OEM part number	TCAL29LV	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00355	TCO29	GE	lug	CURRENT

GE TCO29 plated copper lug, SF250

OEM part number	TCO29	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00349	**SF3LCK**	GE SF3LCK lug cover kit, SF250 line end	Spectra RMS SF250 A	current

EDH-GEA-00349	SF3LCK	GE	breaker-accessory	CURRENT

GE SF3LCK lug cover kit, SF250 line end

OEM part number	SF3LCK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SG600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00368	**TCAL40PD3**	GE TCAL40PD3 3-lug power distribution kit, SG	SG; max 400 A A	current
EDH-GEA-00339	**TCLK265**	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP) A	current
EDH-GEA-00340	**TCLK365**	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 3-pole A	current
EDH-GEA-00356	**TCOK265**	GE TCOK265 2-pole copper lug kit, SG600	Spectra RMS SG600 A	current
EDH-GEA-00357	**TCOK365**	GE TCOK365 3-pole copper lug kit, SG600	Spectra RMS SG600 A	current

EDH-GEA-00368	TCAL40PD3	GE	lug-kit	CURRENT

GE TCAL40PD3 3-lug power distribution kit, SG

OEM part number	TCAL40PD3	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00339	TCLK265	GE	lug-kit	CURRENT

GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK265	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK2652 / TCLK2651 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK2652'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	S130, S132 alias; s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP)	**A**	same as above
Current rating	125-600 A	**A**	same as above
Kit contents	lugs for one end of a 2-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	**A**	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00340	TCLK365	GE	lug-kit	CURRENT

GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK365	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK3652 / TCLK3653 / TCLK3654 (as printed) [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK3652/TCLK3653/TCLK3654'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	3-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 3-pole	**A**	same as above
Current rating	125-600 A	**A**	same as above
Kit contents	lugs for one end of a 3-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	**A**	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00356	TCOK265	GE	lug-kit	CURRENT

GE TCOK265 2-pole copper lug kit, SG600

OEM part number	TCOK265	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 2-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	2-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00357	TCOK365	GE	lug-kit	CURRENT

GE TCOK365 3-pole copper lug kit, SG600

OEM part number	TCOK365	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 3-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	3-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00367	**TCAL40PD1**	GE TCAL40PD1 power distribution lug, SG 400A	SG; max 400 A A	current

EDH-GEA-00367	TCAL40PD1	GE	lug	CURRENT

GE TCAL40PD1 power distribution lug, SG 400A

OEM part number	TCAL40PD1	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	1 power distribution lug; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00351	**SG1BCK**	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	Spectra RMS SG600 **A**	current
EDH-GEA-00350	**SG1LCK**	GE SG1LCK 3-pole lug cover, SG600	Spectra RMS SG600 **A**	current
EDH-GEA-00392	**SGBCS1**	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	SG600 (600 A) **A**	current
EDH-GEA-00393	**SGBCS2**	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	SG600 (600 A) **A**	current
EDH-GEA-00362	**SGLVK**	GE SGLVK line voltage control wire kit, SG600	Spectra RMS SG600 **A**	current

EDH-GEA-00351 — SG1BCK — GE — breaker-accessory — CURRENT

GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)

OEM part number	SG1BCK	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SG1BCK4 (as printed 2019) [alias] (Footnote 4 'Required for line end bus connection' is appended in the 2019 extract. The 2012 edition prints SG1BCK.)	**B**	same as above
Description	3-pole lug cover for upper (line) or lower (load) end; required for line end bus connection	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Line or load end; required at line end for bus connection	**A**	same as above
Breaker compatibility	Spectra RMS SG600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00350 — SG1LCK — GE — breaker-accessory — CURRENT

GE SG1LCK 3-pole lug cover, SG600

OEM part number	SG1LCK	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Replacement 3-pole lug cover for upper (line) or lower (load) end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Line or load end	**A**	same as above
Breaker compatibility	Spectra RMS SG600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00392 — SGBCS1 — GE — breaker-accessory — CURRENT

GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)

OEM part number	SGBCS1	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SG600 (600 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 13/16 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00393	SGBCS2	GE	breaker-accessory	CURRENT

GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)

OEM part number	SGBCS2	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SG600 (600 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 6 1/16 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00362	SGLVK	GE	breaker-accessory	CURRENT

GE SGLVK line voltage control wire kit, SG600

OEM part number	SGLVK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SK1200

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00342	**TCALK2124**	GE TCALK2124 2-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00345	**TCALK2125**	GE TCALK2125 2-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current
EDH-GEA-00343	**TCALK3124**	GE TCALK3124 3-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00346	**TCALK3125**	GE TCALK3125 3-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current

EDH-GEA-00342	TCALK2124	GE	lug-kit	CURRENT

GE TCALK2124 2-lug kit with wrench (TCAL124)

OEM part number	TCALK2124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00345	TCALK2125	GE	lug-kit	CURRENT

GE TCALK2125 2-lug kit with wrench (TCAL125)

OEM part number	TCALK2125	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00343	TCALK3124	GE	lug-kit	CURRENT

GE TCALK3124 3-lug kit with wrench (TCAL124)

OEM part number	TCALK3124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00346	TCALK3125	GE	lug-kit	CURRENT

GE TCALK3125 3-lug kit with wrench (TCAL125)

OEM part number	TCALK3125	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00341	**TCAL124**	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00344	**TCAL125**	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00358	**TCO124**	GE TCO124 plated copper lug, SK1200 (3) 350-750	Spectra RMS SK1200 A	current
EDH-GEA-00359	**TCO125**	GE TCO125 plated copper lug, SK1200 (4) 250-500	Spectra RMS SK1200 A	current

EDH-GEA-00341	TCAL124	GE	lug	CURRENT

GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil

OEM part number	TCAL124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00344	TCAL125	GE	lug	CURRENT

GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil

OEM part number	TCAL125	A	S130, S132, S133 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00358	TCO124	GE	lug	CURRENT

GE TCO124 plated copper lug, SK1200 (3) 350-750

OEM part number	TCO124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00359	TCO125	GE	lug	CURRENT

GE TCO125 plated copper lug, SK1200 (4) 250-500

OEM part number	TCO125	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00353	**SKPSHLD**	GE SKPSHLD lug cover/arc shield, SKPA upper end	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices A	current

EDH-GEA-00353	SKPSHLD	GE	barrier	CURRENT

GE SKPSHLD lug cover/arc shield, SKPA upper end

OEM part number	SKPSHLD	A	S130 s1 p. 6-103 fn 3; oem_spec
Description	Longer lug cover/arc shield for the upper end of the 100 kA 480 Vac SKPA; replacement part number; may be used on other SK1200 devices	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00352	**SK1LCK**	GE SK1LCK lug cover, SK1200	Spectra RMS SK1200 A	current

EDH-GEA-00352	SK1LCK	GE	breaker-accessory	CURRENT

GE SK1LCK lug cover, SK1200

OEM part number	SK1LCK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SK1LCK3 (as printed 2019) (Footnote 3 is appended)	B	S130 alias; s1 p. 6-103; oem_spec
Description	Lug cover for upper (line) or lower (load) end. SKPA (100 kA, 480 Vac) uses a longer lug cover/arc shield on the upper end (SKPSHLD).	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family TQD / THQD (Q-Line 225A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00282	**TCALK325**	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	TQD **A**	current

EDH-GEA-00282 **TCALK325** GE lug-kit **CURRENT**

GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCALK325	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit of Cu-Al lugs (TCAL25 range)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TQD	**A**	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Does TCALK325 contain three TCAL25 lugs? The kit/single relationship is inferred from shared table rows, not stated.*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00281	**TCAL25**	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	TQD **A**	current

EDH-GEA-00281 **TCAL25** GE lug **CURRENT**

GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL25	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TQD	**A**	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

5.14 General / family not yet assigned

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00610	**AMCB6QD**	GE/ABB AMCB6QD	—	unknown

EDH-GEA-00610 **AMCB6QD** GE / ABB lineage other **STATUS UNKNOWN**

GE/ABB AMCB6QD

Description	empower: "BOLT-ON STRAP KIT THQD" (UPC 783175333905)	**A**	S301 empower page AMCB6QD; oem_spec

6 Siemens lineage

Lineage / brand markings: Siemens, ITE, ITE Imperial, Gould, Murray

Family	Type	Status	Era	Entries	Pg
MURRAY Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	loadcenter	Murray-branded breakers (MP/MP-T/MP-HT types) treated as interchangeable with Siemens Q-line per forum; panel label governs	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and restored Murray name; Murray brand reportedly phased out c.2019	0	912
CDP-ITE ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	panelboard	Obsolete; hardware traded by surplus dealers	—	8	912
NLAB ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	panelboard	unknown	Listed in 1985 Canadian distributor price book under 'ITE - Siemens Distribution Equipment'	1	914
P1 Type P1 (original)	panelboard	discontinued (kits still offered)	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	41	915
P2 Type P2 panelboard	panelboard	current	—	74	925
P3 Type P3 panelboard	panelboard	current	—	79	948
P4 Type P4 / S4 / Sentron SPP (10in deep) power panelboard	panelboard	current	—	68	957
P5 Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	panelboard	current	—	88	992
PUSHMATIC Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	panelboard	Obsolete; replacement breakers from Connecticut Electric (UBIP series, 1-2 pole 120/240 V, 10 kAIC ETL) and new-old-stock ITE/Siemens Pushmatic; 3-pole 208Y/120 replacements reported back-ordered/unavailable	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,320 of 1947); installed mainly 1950-1970; ITE (Gould) purchase stated 1976 (forum says 1950s - conflicting); Siemens c.1982-84	0	1020
RP1 Type P1 (Revised P1)	panelboard	current	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014'	129	1020
S1/S2 Type S1 / S2 lighting panelboards	panelboard	discontinued; some kits available	—	31	1085
SE Type SE panelboard	panelboard	discontinued	—	11	1088
CDP6 Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	switchboard	discontinued equipment; strap kits still catalogued (Canada)	Strap kits fit switchboards manufactured since 1974	70	1088
SB Type SB1 / SB2 / SB3 distribution switchboards	switchboard	current	—	88	1096

6.1 MURRAY — Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)

FAM-SIE-012 · loadcenter · aka Murray MP, MP-HT, Crouse-Hinds MP · markings: Murray, Crouse-Hinds, Siemens Murray

Murray (and Crouse-Hinds-branded) panels are primarily residential/light-commercial loadcenters; lineage passed to Siemens (code SIE). Commercial three-phase Murray panelboards were not found in this batch; surplus listings show only loadcenter mains (MEQ9985, MEQ9683R, MD200-H) and a motor-control ground bar LX074M.

Attribute	Value	Cl.	Sources
Status	Murray-branded breakers (MP/MP-T/MP-HT types) treated as interchangeable with Siemens Q-line per forum; panel label governs	D	S171 forum
Era of manufacture	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and restored Murray name; Murray brand reportedly phased out c.2019	D	same as above
Branch breakers accepted	Murray MP / MP-T / MP-HT plug-in; MD-series 2P mains (MD200-H, MD2150V); MEQ9985 / MEQ9683R 150 A 4P 120/240 MP-HT with mounting hardware	C	S161, S171 distributor

Key documents: S161 Superbreakers Murray + Wadsworth collections (products.json); S171 Murray / Crouse-Hinds / Siemens lineage (forum threads)

6.2 CDP-ITE — ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)

FAM-SIE-014 · panelboard · aka ITE CDP, CDP pre-Series 5, CDP 5.25, CDP7, CDP-7 · markings: ITE, Gould-ITE, Siemens

ITE-heritage CDP distribution panelboards that pre-date or sit beside the Series 5/6 CDP covered by family CDP6. Known only from dealer kit descriptions: 'ITE CDP Pre Series 5 hardware kit 2-3/4 in rise' (CD55JJ2), CDP 5.25 in deep FJ3/JL3 kits, 'CDP7 panel board 3 phase QJ MB/subfeed kit' and CDP7 BQ hardware. Construction and dates unconfirmed.

Attribute	Value	Cl.	Sources
Status	Obsolete; hardware traded by surplus dealers	C	S251 surplus_listing
Variants	Pre-Series 5 (2-3/4 in rise hardware), 5.25 in deep CDP, CDP7	C	same as above

Breaker families associated: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers

Key documents: S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00331	**CDP7MBKQJ3**	CDP-7 panelboard 3-phase QJ main/sub-feed breaker kit, 225 A	QJ C	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00331 **CDP7MBKQJ3** ITE / Siemens main-breaker-kit **DISCONTINUED OEM ITEM**

CDP-7 panelboard 3-phase QJ main/sub-feed breaker kit, 225 A

OEM part number	CDP7MBKQJ3	C	S251 surplus_listing
Description	CDP7 panel board 3 phase QJ MB/subfeed kit	C	same as above
Application	main or sub-feed	C	same as above
Installation location	CDP-7	C	same as above
Breaker compatibility	QJ	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00324	**CD55JJ2**	ITE CDP pre-Series 5 J-frame hardware kit, 2-3/4 in rise	JJ (inferred from catalog number) C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00325	**CD62JJ2**	ITE CDP mounting hardware for JJ3/JL3/HJL3	JJ3, JL3, HJL3 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00326	**CDP525-FD63BT**	ITE CDP 5.25 in deep panelboard twin hardware kit, FD63B	FD63B C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00327	**CDP525-FJ3B**	ITE CDP 5.25 in deep panelboard hardware kit, FJ3B200	FJ3B200 C	Discontinued OEM item traded new-surplus / recertified by de

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00328	**CDP525-FJ3BT**	ITE CDP 5.25 in deep panelboard twin hardware kit, FJ3B200	FJ3B200 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00329	**CDP71PHED4**	ITE CDP mounting hardware for HED breakers	HED C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00330	**CDP7BQ3**	Siemens/ITE CDP-7 3-pole BQ hardware	BQ 3-pole (inferred) C	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00324	CD55JJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP pre-Series 5 J-frame hardware kit, 2-3/4 in rise

OEM part number	CD55JJ2	C	S251 surplus_listing
Description	ITE CDP Pre Series 5 Hardware Kit 2 3/4in Rise	C	same as above
Installation location	ITE CDP pre-Series 5	C	same as above
Breaker compatibility	JJ (inferred from catalog number)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00325	CD62JJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP mounting hardware for JJ3/JL3/HJL3

OEM part number	CD62JJ2	C	S251 surplus_listing
Description	ITE, Mounting Hardware, CDP, JJ3/JL3/HJL3	C	same as above
Installation location	ITE CDP (Series 6 by catalog number - inference)	C	same as above
Breaker compatibility	JJ3, JL3, HJL3	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE, CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00326	CDP525-FD63BT	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP 5.25 in deep panelboard twin hardware kit, FD63B

OEM part number	CDP525-FD63BT	C	S251 surplus_listing
Description	FD63B panelboard twin hardware kit	C	same as above
Application	branch (twin)	C	same as above
Installation location	CDP 5.25 in deep (dealer panel type 'FJ3B')	C	same as above
Breaker compatibility	FD63B	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00327	CDP525-FJ3B	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP 5.25 in deep panelboard hardware kit, FJ3B200

OEM part number	CDP525-FJ3B	C	S251 surplus_listing
Description	FJ3B200 panelboard hardware kit	C	same as above
Application	branch (single)	C	same as above
Installation location	CDP 5.25 in deep	C	same as above
Breaker compatibility	FJ3B200	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00328	CDP525-FJ3BT	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP 5.25 in deep panelboard twin hardware kit, FJ3B200

OEM part number	CDP525-FJ3BT	C	S251 surplus_listing
Description	FJ3B200 panelboard twin hardware kit	C	same as above
Application	branch (twin)	C	same as above
Installation location	CDP 5.25 in deep	C	same as above
Breaker compatibility	FJ3B200	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00329	CDP71PHED4	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE CDP mounting hardware for HED breakers

OEM part number	CDP71PHED4	C	S251 surplus_listing
Description	ITE; CDP; Mounting Hardware for HED Breakers	C	same as above
Installation location	ITE CDP (CDP-7 by catalog number - inference)	C	same as above
Breaker compatibility	HED	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00330	CDP7BQ3	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Siemens/ITE CDP-7 3-pole BQ hardware

OEM part number	CDP7BQ3	C	S251 surplus_listing
Description	Siemens; Hardware; 3P; Hardware for CDP Panel	C	same as above
Installation location	CDP-7 panelboard	C	same as above
Breaker compatibility	BQ 3-pole (inferred)	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP-ITE · Breakers: ITE BQ / BQH / HBQ bolt-on (Canada)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

6.3 NLAB — ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards

FAM-SIE-013 · panelboard · aka NLAB, NLABLX, NLAB-LXX, NHB, HR-7 · markings: ITE, Siemens, ITE-Siemens

Canadian ITE-Siemens lighting panelboards seen only in a 1985 Copel/Electrozad price book: NLAB and NHB (BQ bolt-on breakers, aluminum bus standard, copper +30%), NLABLX/LXX column type and HR-7 for plug-in breakers. Shows NLAB/NHB were generic NEMA-style designations reused by several makers. US applicability unknown.

Attribute	Value	Cl.	Sources
Era of manufacture	Listed in 1985 Canadian distributor price book under 'ITE - Siemens Distribution Equipment'	C	S247 distributor
Voltage rating	NLAB, NHB: 240 V class ('NLAB, NHB-240V basic panel selector'); 100-600 A mains, 100 A max branch	C	same as above
Branch breakers accepted	BQ bolt-on (and BQH / HBQ) breakers; HR-7 panels for plug-in breakers; some HB breakers single-branch mounted only in NLAB	C	same as above
Bus	Aluminum bus bars standard; copper bus +30% to price	C	same as above

Breaker families associated: ITE BQ / BQH / HBQ bolt-on (Canada)
Key documents: S247 bwb_P9-BJG-737 Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens,
Also fits this family (entry printed elsewhere): 5JJ2

6.4 P1 — Type P1 (original)

FAM-SIE-002 · panelboard · aka Original P1, P1 (pre-2014/2015) · markings: Siemens

Original Siemens P1 lighting panelboard (pre-revision), 20in wide x 5.75in deep, main lug or main/subfeed strap kits through 400A. Subfeed space standard. Catalog numbers like Revised P1 but without the T suffix, up to 42 circuits. Kits for original P1 (MBKBL1, MBKED3, MBKQR3, MLKA3 etc.) are strap-only (breakers not included) and also fit 250A-max S1/S2 panels.

Attribute	Value	Cl.	Sources
Status	discontinued (kits still offered)	A	S97 p.11-15; oem_spec
Era of manufacture	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	A	S97, S100 s1 p.11-7, s4 p.10-17; oem_spec
Successor	Revised P1 (RP1)	A	S97 p.11-7; oem_spec
Branch breakers accepted	BL, BLH, HBL, BQD, NGB/HGB/LGB	A	S100 p.10-18; oem_spec

Breaker families associated: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S100 SPEEDFAX 2007-2008 pp.10-17..10-22 SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22
Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFP01B, DFFPFD01, DFFPJD01, DFFPQJ01, DFFPQJ02, MBKQRFK, P1SCRWS, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK3, EWK1B

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00045	**MBKBC3**	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	3-pole BQD 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00043	**MBKBL1**	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	2-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00044	**MBKBL3**	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	3-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00048	**MBKED1**	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	2-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00049	**MBKED3**	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	3-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00052	**MBKFD1**	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	2-pole F(X)D6/HF(X)D6 70A-250A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00053	**MBKFD3**	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	3-pole F(X)D6/HF(X)D6 70A-250A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00054	**MBKJD1**	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00055	**MBKJD3**	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00046	**MBKNB1**	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	2-pole NGB/LGB/HGB 15A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00047	**MBKNB3**	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	3-pole NGB/LGB/HGB 15A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00050	**MBKQR1**	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	2-pole QR(H)2/HQR2(H) 125A-225A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00051	**MBKQR3**	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	3-pole QR(H)2/HQR2(H) 125A-225A A	listed for Original P1 (2021); strap only, breaker kits not

EDH-SIE-00045	MBKBC3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A

OEM part number	MBKBC3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BQD 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BQD 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BQD		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00043	MBKBL1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00044	MBKBL3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00048	MBKED1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A

OEM part number	MBKED1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00049	MBKED3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A

OEM part number	MBKED3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00052	MBKFD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00053	MBKFD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00054	MBKJD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00055	MBKJD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00046	MBKNB1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00047	MBKNB3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00050	MBKQR1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR1	A	S97, S378 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
	Main or subfeed <=250 A; subfeed only above 250 A	A	S378 pp. 2-3; oem_spec
Breaker compatibility	2-pole QR(H)2/HQR2(H) 125A-225A	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H; S1 and P1 (240 V maximum) panelboards; NOT compatible with Revised P1 (catalog ending N or T)	A	S378 pp. 2-3; oem_spec
Current rating	225A max	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Kit contents	Breaker support; breaker connector assembly (MBKQR3 has 3 connectors); QR breaker filler; MAIN label; neutral lug assembly; 2 #10-32 slotted hex washer thread-forming (30 lb-in); 1/4-20 x 1/2 hex head SEMS (72 lb-in); 2 #10-24 x 7/16 thread-forming (50 lb-in); 1/4-28 x 2-3/8 slotted round head machine screws (30 lb-in)	A	S378 pp. 2-3; oem_spec
Fasteners	Connector assembly half-holes engage anti-turn tabs under main bus, 1/4-20 SEMS; breaker support to base rail two #10-32; breaker to support 1/4-28 RH machine screw(s)	A	same as above
Torque values	#10-32 30; 1/4-20 72; #10-24 50; 1/4-28 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1138-01 Rev. 00: S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00051	MBKQR3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR3	A	S97, S378 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
	Main or subfeed <=250 A; subfeed only above 250 A	A	S378 pp. 2-3; oem_spec
Breaker compatibility	3-pole QR(H)2/HQR2(H) 125A-225A	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H; S1 and P1 (240 V maximum) panelboards; NOT compatible with Revised P1 (catalog ending N or T)	A	S378 pp. 2-3; oem_spec
Current rating	225A max	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Kit contents	Breaker support; breaker connector assembly (MBKQR3 has 3 connectors); QR breaker filler; MAIN label; neutral lug assembly; 2 #10-32 slotted hex washer thread-forming (30 lb-in); 1/4-20 x 1/2 hex head SEMS (72 lb-in); 2 #10-24 x 7/16 thread-forming (50 lb-in); 1/4-28 x 2-3/8 slotted round head machine screws (30 lb-in)	A	S378 pp. 2-3; oem_spec
Fasteners	Connector assembly half-holes engage anti-turn tabs under main bus, 1/4-20 SEMS; breaker support to base rail two #10-32; breaker to support 1/4-28 RH machine screw(s)	A	same as above
Torque values	#10-32 30; 1/4-20 72; #10-24 50; 1/4-28 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1138-01 Rev. 00: S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00029	**4MLKA1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00030	**4MLKA3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00031	**4MLKC1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00032	**4MLKC3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00025	**MLKA1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00026	**MLKA3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00027	**MLKC1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00028	**MLKC3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)

EDH-SIE-00029	4MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKA1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00030	4MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKA3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00031	4MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKC1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00032	4MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKC3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00025	MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKA1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00026	MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKA3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00027	MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKC1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00028	MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKC3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00069	**DFFPED01**	P1 main filler for 100-125A frames ED	—	replaced by DFFPVA41A

EDH-SIE-00069	DFFPED01	Siemens	filler-plate	REPLACED BY DFFPVA41A

P1 main filler for 100-125A frames ED

OEM part number	DFFPED01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPVA41A	A	S97 superseded_by; p.11-20; oem_spec
Description	P1 main filler for 100-125A frames ED, BL/BQD or xGB (replaced by DFFPVA41A)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Status	replaced by DFFPVA41A	A	S97 pp.11-13, 11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1802-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: P1, RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00441	**TPS3 09**	TPS3 09 SPD module kit for Type P1 lighting panelboard (250 A max P1)	—	unknown

EDH-SIE-00441	TPS3 09	Siemens lineage	spd-kit	STATUS UNKNOWN

TPS3 09 SPD module kit for Type P1 lighting panelboard (250 A max P1)

OEM part number	TPS3 09	A	S460 single page; oem_spec
Application	Do not perform dielectric tests with TPS unit installed	A	same as above
Kit contents	1 TPS3 09 SPD; 8 #10-32 x 1/2 slotted hex thread-forming screws; 1 bracket TPS3 09 P1 (right); 1 bracket TPS3 09 P1 (left); 1 20 A 3-pole breaker; 1 SPD (TVSS) label; 1 plastic cover plate	A	same as above
Fasteners	Brackets to TPS3 09 with 4 #10-32 screws; TPS with brackets to P1 rails with 4 #10-32 screws; leads to 20 A 3-pole breaker and neutral; ground lead ring terminal to chassis ground	A	same as above
OEM instruction document	Siemens instruction sheet #8177 (12.09.09): Installation Instructions for TPS3 09 in Lighting Panelboards Type P1	A	same as above
Cross-links	Families: P1, RP1		

6.5 P2 — Type P2 panelboard

FAM-SIE-005 · panelboard · aka P2 · markings: Siemens

Siemens bolt-on lighting/distribution panelboard with unit-space construction; branch devices installed via field strap kits (BBK*) in 3in or 6in increments; deadfront uses center strips (DFK*) and blank plates (DFFP3/DFFP6).

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-42; oem_spec
Branch breakers accepted	BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	A	S97 p.11-53; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S102 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)
Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK2, EWK3, EWK1B, EWK2B, LPDC01, LPLOCK01A, LPLOCK02A, B74FLR, LPJSPDNUT01

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00117	**BNK350N**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00117 **BNK350N** Siemens lug-kit **LISTED (2019-2021)**

Neutral lug kit

OEM part number	BNK350N	**A**	S97, S414 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, narrow 350 kcmil lug with two mounting screws; used in P2/P3 neutrals	**A**	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Installation location	Neutral lug pad, neutral cross bus or vertical neutral bus	**A**	S414 single sheet; oem_spec
Kit contents	1 350 MCM narrow lug 11-A-1869-01; 2 mounting screws	**A**	same as above
Wire range	Max 350 kcmil Cu or Al	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1177-01 Rev. 00: BNK350N 350 MCM narrow neutral lug replacement kit for P2 and P3	**A**	same as above
Status	listed (2019-2021)	**A**	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Identification features	Drawing ref 11-A-1869-61	**A**	same as above
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00102	**BBKB32**	P2/P3 BL/BQD 100A max twin-mount branch strap kit	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole **A**	current
EDH-SIE-00104	**BBKED32**	P2/P3 ED twin-mount branch strap kit	P2/P3 ED twin-mount branch strap kit **A**	field replacement only; use 3VA41 with BBKVA4P2P3 where poss
EDH-SIE-00106	**BBKGB32**	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00105	**BBKNB32**	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00110	**BBKQ1**	P2 QJ single-mount branch strap kit	P2 QJ single-mount branch strap kit **A**	discontinued - QJ not available, use new kit BBKQR1
EDH-SIE-00108	**BBKQR1**	P2 QR 225A max single-mount branch strap kit	P2 QR 225A max single-mount branch strap kit **A**	current
EDH-SIE-00103	**BBKVA4P2P3**	P2/P3 3VA41/xGB 125A max twin-mount strap kit	P2/P3 3VA41/xGB 125A max twin-mount strap kit **A**	current
EDH-SIE-00112	**BBKVA5262P2S**	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit **A**	current

EDH-SIE-00102 **BBKB32** Siemens branch-connector-kit **CURRENT**

P2/P3 BL/BQD 100A max twin-mount branch strap kit

OEM part number	BBKB32	**A**	S97, S430, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole, uses 3in of unit space for 6 circuits	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

	(P2/P3) BL/BQD 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space) (BL/BQD kits also accept GFCI/AFCI breakers, BT twin and BSPD surge devices (s6))	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S430 pp. 2-4 (image); oem_spec
Breaker compatibility	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Siemens BL and BQD breakers; 1-ph or 3-ph	A	S430 pp. 2-4 (image); oem_spec
Current rating	100A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
	1 BL/BQD breaker mounting barrier; 3 outer connector bus; 1 center connector bus; 6 1 in unit-space deadfront fillers; 2 P3 panel deadfront adaptor plates; 6 8-32 self-threading screws; 3 1/4-20 x 5/8 self-threading screws (P2 5-3/4 in deep); 3 1/4-20 x 1 self-threading screws (P3 7-3/4 in deep); 6 10-24 x 5/8 self-threading screws (breaker line stabs)	A	S430 pp. 2-4 (image); oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S430 pp. 2-4 (image); oem_spec
Fasteners	Barrier to base rails two 8-32; connectors to panel bus three 1/4-20 x 5/8 (P2) or 1/4-20 x 1 (P3); P3 deadfront adaptor plates four 8-32	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1078-01 Rev. 0: P2 & P3 Panelboard Kit BBKB32 For Branch Mounting of BL & BQD Breakers (scanned; read visually)	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 11-D-2267-01	A	S97 p.11-53; oem_spec
Requires (stated)	DFFP3 (3 in gap), DFFP6 (6 in gap), DFK1 (P2 center strip), BKN2/BNK2 (P2 neutral sites)	A	S430 pp. 2-4 (image); oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00104	**BBKED32**	Siemens	branch-connector-kit	**FIELD REPLACEMENT ONLY**

P2/P3 ED twin-mount branch strap kit

OEM part number	BBKED32	A	S97, S431, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 ED twin-mount branch strap kit, 6-pole, 3in of unit space for 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

	(P2/P3) ED 6-pole 3 in branch breaker kit: breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S431 pp. 2-4 (image); oem_spec
Breaker compatibility	P2/P3 ED twin-mount branch strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Siemens ED breakers; 1-ph or 3-ph	A	S431 pp. 2-4 (image); oem_spec
Kit contents	breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
	2 ED breaker supports; 3 outer connector bus; 1 center connector bus; 2 ED branch 1-phase system barriers; 2 ED branch 3-phase system barriers; 6 1 in unit-space deadfront fillers; 2 P3 panel deadfront adaptor plates; 8 8-32 x 9/32 self-threading screws; 3 1/4-20 x 5/8 self-threading (P2); 3 1/4-20 x 1 self-threading (P3); 2 8-32 x 5/8 self-threading; 6 10-24 x 5/8 self-threading (line stabs)	A	S431 pp. 2-4 (image); oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S431 pp. 2-4 (image); oem_spec
Fasteners	Two breaker supports to base rails with four 8-32 screws; 3-ph: two ED branch 3-ph barriers inserted by pins into middle panel bus; connectors to panel bus 1/4-20 x 5/8 (P2) / x 1 (P3)	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1079-01 Rev. 0: P2 & P3 Panelboard Kit BBKED32 For Branch Mounting of ED Breakers (scanned; read visually)	A	same as above
Status	field replacement only; use 3VA41 with BBKVA4P2P3 where possible	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P2, P3 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00106	**BBKGB32**	Siemens	branch-connector-kit	**FIELD REPLACEMENT ONLY**

P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit

OEM part number	BBKGB32	A	S97, S363, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P2/P3) NGB2, HGB2, LGB2 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S363 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	NGB2, HGB2, LGB2 ONLY (not NGB/LGB/HGB); 1-ph or 3-ph	A	S363 pp. 1-4; oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
	1 GB2 breaker mounting barrier; 3 outer connector bus; 1 center connector bus; 6 1 in unit-space deadfront fillers; 2 P3 panel deadfront adaptor plates; 6 #8-32 self-threading screws; 3 1/4-20 x 5/8 self-threading screws; 3 1/4-20 x 1 self-threading screws; 6 #10-24 x 1/2 socket head cap screws; 1 1/4-20 x 2-1/4 self-threading screw; 1 1/4-20 x 1-7/8 self-threading screw	A	S363 pp. 1-4; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S363 pp. 1-4; oem_spec
Fasteners	Barrier to base rails two #8-32; connectors to panel bus 1/4-20 x 5/8 (P2) or 1/4-20 x 1 (P3); breaker line stabs #10-24 x 1/2 SHCS; P3 deadfront adaptor plates #8-32	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1030-01 Rev. 01: P2 & P3 Panelboard Kit BBKGB32 Installation Instructions for Branch Mounting Type GB2 Breakers	A	same as above
Status	field replacement only; use BBKVA4P2P3 where possible	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Requires (stated)	DFFP3 / DFFP6 deadfront filler kits for gaps; DFK1 for P2 center strip; BNK2 if P2 branch neutral lacks sites	A	S363 pp. 1-4; oem_spec
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00105	**BBKNB32**	Siemens	branch-connector-kit	**FIELD REPLACEMENT ONLY**

P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit

OEM part number	BBKNB32	A	S97, S364, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P2/P3) NGB, HGB, LGB 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S364 pp. 1-4; oem_spec

Breaker compatibility	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Type GB (NGB, HGB, LGB); 1-ph or 3-ph	A	S364 pp. 1-4; oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S364 pp. 1-4; oem_spec
Fasteners	Barrier two #8-32 to base rails; P2: outer connectors 1/4-20 x 5/8, center connector 1/4-20 x 1-7/8; P3: outer 1/4-20 x 1, center 1/4-20 x 2-1/4; 1-ph: three outer connectors alternating left-right-left; breaker stabs #10-24 x 5/8	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1092-01 Rev. 02: P2 & P3 Panelboard Kit BBKNB32 Installation Instructions for Branch Mounting Type GB Breakers	A	same as above
Status	field replacement only; use BBKVA4P2P3 where possible	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00110 BBKQ1 Siemens branch-connector-kit DISCONTINUED - QJ NOT

P2 QJ single-mount branch strap kit

OEM part number	BBKQ1	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QJ single-mount branch strap kit, 6in for one 2-p or 3-p breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QJ single-mount branch strap kit	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	discontinued - QJ not available, use new kit BBKQR1	A	same as above
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00108 BBKQR1 Siemens branch-connector-kit CURRENT

P2 QR 225A max single-mount branch strap kit

OEM part number	BBKQR1	A	S97, S366 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QR 225A max single-mount branch strap kit, 6in of unit space for one 2-pole or 3-pole breaker	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S366 pp. 1-4; oem_spec

Breaker compatibility	P2 QR 225A max single-mount branch strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H; 2-pole on 1-ph or 3-pole on 3-ph	A	S366 pp. 1-4; oem_spec
Current rating	225A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	1 QR breaker support; 1 long outer connector bus; 1 short outer connector bus type A; 1 short outer connector bus type B; 1 center connector bus; 1 branch neutral lug; 1 QR branch deadfront plate; 1 QR breaker deadfront escutcheon; 6 #8-32 x 9/32 thread-forming screws (30 lb-in); 9 1/4-20 x 5/8 thread-forming (72 lb-in); 1 1/4-20 x 3/4 thread-forming (72 lb-in); 2 1/4-20 x 2-1/2 machine screws (30 lb-in)	A	S366 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space; breaker connection holes spaced 1.50 in; 2.50 in dims shown	A	S366 pp. 1-4; oem_spec
Torque values	#8-32 30 lb-in; 1/4-20 thread-forming 72 lb-in; breaker mounting 1/4-20 x 2-1/2 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1131-01 Rev. 00: P2 Panelboard Kit BBKQR1 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 11-D-2636-01	A	S97 p.11-53; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00103 **BBKVA4P2P3** Siemens branch-connector-kit **CURRENT**

P2/P3 3VA41/xGB 125A max twin-mount strap kit

OEM part number	BBKVA4P2P3	A	S97, S365 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 3VA41/xGB 125A max twin-mount strap kit, 3in of unit space for 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space) (3VA41/xGB kits also accept BSPD surge devices (s6))	A	same as above
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S365 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 3VA41/xGB 125A max twin-mount strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB)	A	S365 pp. 1-4; oem_spec
Current rating	125A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

Kit contents	1 top barrier; 3 outer connector bus; 1 center connector bus; 6 1 in deadfront fillers; 2 P3 deadfront adaptor plates; 6 #8-32 self-threading screws; 1/4-20 screws 5/8 in and 1 in (outer) and 1-7/8 / 2-1/4 in (center) by bus lamination; #10-24 x 5/8 breaker stab screws	A	S365 pp. 1-4; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	A	S365 pp. 1-4; oem_spec
Fasteners	Single-lamination bus (P2 125-600 A; P3 250-400 A): 5/8 in outer, 1-7/8 in center; double-lamination bus (P3 600-800 A): 1 in outer, 2-1/4 in center	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1055-01 Rev. 02: BBKVA4P2P3 Type 3VA41 or xGB Branch Breaker Mounting Kit Installation Instructions for P2 or P3 Panelboards	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 13-D-2011-13	A	S97 p.11-53; oem_spec
	Panels installed before 2021: remove old plastic 1 in fillers and replace the 4 deadfront supports; only 1 in fillers marked DFFP1A on back to be used	A	S365 pp. 1-4; oem_spec
Requires (stated)	DFK1 or DFK07 thru DFK21 center strips; DFFP3/DFFP6; BNK2	A	S365 pp. 1-4; oem_spec
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00112 **BBKVA5262P2S** Siemens branch-connector-kit **CURRENT**

P2/P3 250A max 3VA52/61/62 single-mount branch strap kit

OEM part number	BBKVA5262P2S	A	S97, S369 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Alternate / superseded numbers	BBKVA5262S (Spelling in P3 data sheet; likely same kit)	A	S102 alias; oem_spec
Description	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit, 1ph or 3ph, 6in for one 2-pole or 3-pole breaker	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S369 pp. 1-4; oem_spec
Breaker compatibility	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	3VA52, 3VA61, 3VA62; 1-ph 2/3-w or 3-ph 3/4-w	A	S369 pp. 1-4; oem_spec
Current rating	250A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	includes 1 BBKVA5262P2HW hardware kit	A	S97 p.11-67; oem_spec

	1 3VA52/61/62 top barrier; A-, B-, C-phase connector bus (1 each); 1 P2 deadfront plate; 1 P3 deadfront plate; 1 escutcheon plate; 1 350 kcmil neutral lug; 1 3VA52/62 hardware kit; 4 #8-32 x 9/32 HWH (30 lb-in); 1 1/4-20 x 1/2 SHWHSW (72); 3 1/4-20 x 5/8 SHWHSW (72); 2 1/4-20 x 3/4 SHWHSW (72); 4 1/4-20 x 1 machine screws (72); 3 5/16-18 x 3/4 machine screws (144 lb-in)	A	S369 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space; connector breaker holes spaced 1.38 in	A	S369 pp. 1-4; oem_spec
Fasteners	Connector bus to phase bus 1/4-20 x 5/8 (single-lamination) or 1 in (double-lamination); breaker bus extensions to connectors 5/16-18 x 3/4; breaker to barrier #8-32 x 3	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1051-01 Rev. 01: P2 / P3 Panelboard Kit BBKVA5262P2S Installation Instructions for Branch Mounting 3VA52 / 3VA61 / 3VA62 Circuit Breakers	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 11-D-2894-01	A	S97 p.11-53; oem_spec
Requires (stated)	Provision kit DFFPVA5262P2B if breaker not mounted	A	S369 pp. 1-4; oem_spec
Location neutral	Neutral lug on any of eight sites of upper/lower neutral cross bus (1/4-20 x 3/4), or auxiliary 3-hole sites on vertical neutral riser in 30 in wide enclosures (not with 24 in wide)	A	same as above
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA5262P2HW (EDH-SIE-00113)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00116	**BNK2**	Neutral lug kit	—	listed (2019-2021)
EDH-SIE-00119	**BNKP2EX1**	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	—	listed (2019-2021)
EDH-SIE-00118	**LPP2NB01**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00116	BNK2	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK2	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 3-step, for P2 neutrals and others: (14x) #14-1/0 max and (14x) #14-#6 max connections, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1862	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00119	BNKP2EX1	Siemens	neutral-assembly	LISTED (2019-2021)

P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)

OEM part number	BNKP2EX1	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-1850-01 / 11-C-2011-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00118	LPP2NB01	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	LPP2NB01	A	S97, S413 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 2-step, for P2 neutrals: (3x) #6-1/0 max and (18x) #14-#6 max, with hardware & instructions	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Installation location	P2 neutral bus (250A/400A/600A arrangements shown)	A	S413 single sheet; oem_spec
Kit contents	1 2-step aluminum lug 15-A-1800-01; 2 mounting screws	A	same as above
Wire range	Larger holes max 1/0 Cu/Al (3 holes); smaller holes max #6 Cu/Al (18 holes); one wire per hole	A	same as above
Material	Aluminum	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1179-01 Rev. 00: LPP2NB01 neutral lug replacement / addition kit for P2 panelboard	A	same as above
Status	listed (2019-2021)	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Identification features	Drawing ref 15-A-1800-61	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00232	**SEBKP2V1**	SEB kit, P2 BL/BQD horizontal main	BL or BQD main (outer bracket hole) A	unknown
EDH-SIE-00233	**SEBKP2V2**	SEB kit, P2 xGB horizontal main	xGB main (inner bracket hole) A	unknown
EDH-SIE-00234	**SEBKP2V3**	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	Horizontally-mounted FD, CFD, QJ or QR main (tear perforated strip for A	unknown
EDH-SIE-00235	**SEBKP2V4**	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	Vertically-mounted FD, CFD, QJ or QR main in P2 (two kits for extended A	unknown
EDH-SIE-00236	**SEBKP2V5**	SEB kit (P2, P2 w/SEM3) ED horizontal main	ED or CED main in P2 (with or without SEM3) A	unknown
EDH-SIE-00237	**SEBKP2V6**	SEB kit (P2, P2 w/SEM3) ED vertical main	Vertically-mounted ED main (two kits for extended-circuit P2 where ED A	unknown
EDH-SIE-00238	**SEBKP2V7**	SEB kit, P2/P3 3VA52/61/62 horizontal main	—	unknown
EDH-SIE-00427	**SEBKP3V3**	FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3)	—	unknown

EDH-SIE-00232	SEBKP2V1	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 BL/BQD horizontal main

OEM part number	SEBKP2V1	A	S97, S393 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 BL/BQD horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S393 single sheet; oem_spec
Breaker compatibility	BL or BQD main (outer bracket hole)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 large plastic ribbed shank rivet; 1 #8-32 x 9/32 IHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	20 lb-in	A	S393 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1151-01 Rev. 00: SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards	A	same as above
Identification features	Drawing ref 11-D-2733-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00233	SEBKP2V2	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 xGB horizontal main

OEM part number	SEBKP2V2	A	S97, S393 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 xGB horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S393 single sheet; oem_spec
Breaker compatibility	xGB main (inner bracket hole)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 rivet; 1 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	20 lb-in	A	S393 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1151-01 Rev. 00: SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards	A	same as above
Identification features	Drawing ref 11-D-2734-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00234	SEBKP2V3	Siemens	barrier	STATUS UNKNOWN
SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main				
OEM part number	SEBKP2V3	A	S97, S394 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec	
Description	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec	
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S394 single sheet; oem_spec	
Breaker compatibility	Horizontally-mounted FD, CFD, QJ or QR main (tear perforated strip for QJ/QR in P2)	A	same as above	
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S97 p.11-67; oem_spec	
	1 barrier support assembly; 3 #8-32 x 9/32 IHWHSW; 1 P3 adapter (FD in P3)	A	S394 single sheet; oem_spec	
Torque values	20 lb-in	A	same as above	
OEM instruction document	Siemens instruction sheet 11-A-1153-01 Rev. 00: SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)	A	same as above	
Identification features	Drawing ref 11-D-2735-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec	
Cross-links	Families: P2, P3			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material			

EDH-SIE-00235	SEBKP2V4	Siemens	barrier	STATUS UNKNOWN
SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main				
OEM part number	SEBKP2V4	A	S97, S395 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec	
Description	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec	
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S395 single sheet; oem_spec	
Breaker compatibility	Vertically-mounted FD, CFD, QJ or QR main in P2 (two kits for extended-circuit P2 where FD wire bending space >15 in)	A	same as above	
Kit contents	1 barrier support assembly; 2 #8-32 x 9/32 IHWHSW	A	same as above	
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec	
Dimensions	Mounted X above (top-fed) or below breaker support: X = 2.00 in FD/CFD in P2, 1.50 in QJ/QR in P2	A	S395 single sheet; oem_spec	
Torque values	20 lb-in	A	same as above	
OEM instruction document	Siemens instruction sheet 11-A-1154-01 Rev. 00: SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	A	same as above	
Identification features	Drawing ref 11-D-2736-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec	
Cross-links	Families: P2, P3			
Not yet documented	Finish / plating, Mounting-hole pattern, Material			

EDH-SIE-00236	SEBKP2V5	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED horizontal main

OEM part number	SEBKP2V5	A	S97, S396 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S396 single sheet; oem_spec
Breaker compatibility	ED or CED main in P2 (with or without SEM3)	A	same as above
Kit contents	1 barrier support assembly; 1 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	20 lb-in	A	S396 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1155-01 Rev. 00: SEBKP2V5 Service Entrance Barrier Kit for P2 (ED/CED main)	A	same as above
Identification features	Drawing ref 11-D-2738-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00237	SEBKP2V6	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED vertical main

OEM part number	SEBKP2V6	A	S97, S397 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED vertical main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S397 single sheet; oem_spec
Breaker compatibility	Vertically-mounted ED main (two kits for extended-circuit P2 where ED wire bending space >8 in; second kit offset 2 in further)	A	same as above
Kit contents	1 barrier support assembly; 2 #8-32 x 9/32 IHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Dimensions	Mount 1 in above/below breaker support	A	S397 single sheet; oem_spec
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1156-01 Rev. 00: SEBKP2V6 Service Entrance Barrier Kit for P2 (vertical ED main)	A	same as above
Identification features	Drawing ref 11-D-2739-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00238	SEBKP2V7	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2/P3 3VA52/61/62 horizontal main

OEM part number	SEBKP2V7	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2/P3 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2898-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00427	SEBKP3V3	Siemens lineage	barrier	STATUS UNKNOWN

FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3)

OEM part number	SEBKP3V3	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3): barrier, mounting brackets, hardware	A	same as above
Cross-links	Families: P2, P3		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00086	**DFK07**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00087	**DFK08**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00398	**DFK09**	P2/P3 deadfront center strip kit, 27 in flange length	—	unknown
EDH-SIE-00085	**DFK1**	P2/P3 deadfront center strip kit	—	listed (2021)
EDH-SIE-00399	**DFK10**	P2/P3 deadfront center strip kit, 30 in flange length	—	unknown
EDH-SIE-00400	**DFK11**	P2/P3 deadfront center strip kit, 33 in flange length	—	unknown
EDH-SIE-00401	**DFK12**	P2/P3 deadfront center strip kit, 36 in flange length	—	unknown
EDH-SIE-00402	**DFK13**	P2/P3 deadfront center strip kit, 39 in flange length	—	unknown
EDH-SIE-00403	**DFK14**	P2/P3 deadfront center strip kit, 42 in flange length	—	unknown
EDH-SIE-00404	**DFK15**	P2/P3 deadfront center strip kit, 45 in flange length	—	unknown
EDH-SIE-00405	**DFK16**	P2/P3 deadfront center strip kit, 48 in flange length	—	unknown
EDH-SIE-00406	**DFK17**	P2/P3 deadfront center strip kit, 51 in flange length	—	unknown
EDH-SIE-00407	**DFK18**	P2/P3 deadfront center strip kit, 54 in flange length	—	unknown
EDH-SIE-00408	**DFK19**	P2/P3 deadfront center strip kit, 57 in flange length	—	unknown
EDH-SIE-00409	**DFK20**	P2/P3 deadfront center strip kit, 60 in flange length	—	unknown
EDH-SIE-00410	**DFK21**	P2/P3 deadfront center strip kit, 63 in flange length	—	unknown

EDH-SIE-00086	DFK07	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK07	A	S97, S411 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 21in of unit space, with hardware	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	S411 single sheet, flange length table; oem_spec
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 21 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-67	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00087	DFK08	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK08	A	S97, S411 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 24in of unit space, with hardware (DFK09-DFK21 = 27in-63in in 3in steps)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	S411 single sheet, flange length table; oem_spec
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 24 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-68	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00398	DFK09	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 27 in flange length

OEM part number	DFK09	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 27 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00085	DFK1	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip kit

OEM part number	DFK1	A	S97, S451, S319 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip kit: 7 lengths (3, 6, 9, 12, 15, 18, 21in of branch height) with mounting hardware, for 1in-pole breakers	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	BL, BQD, ED deadfront kit for 1 in pole breakers: center strips 3, 6, 9, 15, 21 in plus mounting hardware (instruction sheet 12-A-1082-01 lists 3/6/9/12/15/18/21 in)	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions on P2 deadfront, any 3 in increment 3-21 in (select strip by side-flange length = opening length)	A	S451 single sheet (image); oem_spec
Kit contents	Fill center strips 3, 6, 9, 12, 15, 18 and 21 in (one each); 4 8-32 x 9/16 self-threading screws	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1082-01 Rev. 0: P2 Panelboard Kit DFK1 For Dead Front Coverage of 1in Pole Breaker Modules	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41, ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00399	DFK10	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 30 in flange length

OEM part number	DFK10	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 30 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00400	DFK11	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 33 in flange length

OEM part number	DFK11	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 33 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00401	DFK12	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 36 in flange length

OEM part number	DFK12	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 36 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00402	DFK13	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 39 in flange length

OEM part number	DFK13	**A**	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 39 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00403	DFK14	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 42 in flange length

OEM part number	DFK14	**A**	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 42 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00404	DFK15	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 45 in flange length

OEM part number	DFK15	**A**	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 45 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00405	DFK16	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 48 in flange length

OEM part number	DFK16	**A**	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	**A**	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	**A**	same as above
Dimensions	Center plate flange length 48 in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00406	DFK17	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 51 in flange length

OEM part number	DFK17	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 51 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00407	DFK18	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 54 in flange length

OEM part number	DFK18	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 54 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00408	DFK19	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 57 in flange length

OEM part number	DFK19	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 57 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00409	DFK20	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 60 in flange length

OEM part number	DFK20	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 60 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00410	DFK21	Siemens lineage	deadfront	STATUS UNKNOWN

P2/P3 deadfront center strip kit, 63 in flange length

OEM part number	DFK21	A	S411 single sheet, flange length table; oem_spec
Application	Covers dual-mounted 1 in pole breakers and provisions in P2/P3 deadfronts (standard 3 in increments, 21-63 in)	A	same as above
Kit contents	1 deadfront center plate (piece no. 11-D-3018-XX); 4 #8-32 x 9/16 self-threading screws	A	same as above
Dimensions	Center plate flange length 63 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1182-01 Rev. 00: DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	A	same as above
Cross-links	Families: P2, P3		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00076	**DFFP3**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00077	**DFFP6**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00078	**DFFPVA5262P2A**	3VA52/61/62 filler for single mount P2/P3 applications	—	listed (2021)
EDH-SIE-00079	**DFFPVA5262P2B**	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	—	listed (2021)
EDH-SIE-00084	**DFP3AP01**	P3 adapter plate	—	listed (2021)
EDH-SIE-00082	**P2QRFP01**	P2 QR deadfront filler	—	listed (2021)

EDH-SIE-00076	DFFP3	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP3	A	S97, S452, S319 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 3in high blank steel plates for both P2 (11-D-3014-02) and P3 (11-D-3035-02, 2.97in); hardware & instructions included	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	Deadfront filler 3 in: 3 in empty space filler and hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Covers a 3 in portion of branch unit space with no installed branches/provisions; distance to next full-width plate must be a multiple of 3 in	A	S452 single sheet (image); oem_spec
Kit contents	1 P2 3 in blank deadfront plate; 1 P3 3 in blank deadfront plate; 4 8-32 x 9/32 self-threading screws	A	same as above
Material	steel	A	S97 p.11-23; oem_spec
Dimensions	3in high (P3 plate 2.97in)	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1083-01 Rev. 0: P2 & P3 Panelboard Kit DFFP3 For Dead Front Coverage of a 3 in Unallocated Branch Space	A	S452 single sheet (image); oem_spec
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2269-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00077	DFFP6	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP6	A	S97, S453, S319 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 6in high blank steel plates for both P2 (11-D-3014-01) and P3 (11-D-3035-01, 5.97in); hardware & instructions included	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	Deadfront filler 6 in: 6 in empty space filler and hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Covers a 6 in portion of branch unit space with no installed branches/provisions; distance to next full-width plate must be a multiple of 3 in	A	S453 single sheet (image); oem_spec
Kit contents	1 P2 6 in blank deadfront plate; 1 P3 6 in blank deadfront plate; 4 8-32 x 9/32 self-threading screws	A	same as above
Material	steel	A	S97 p.11-23; oem_spec
Dimensions	6in high (P3 plate 5.97in)	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1084-01 Rev. 0: P2 & P3 Panelboard Kit DFFP6 For Dead Front Coverage of a 6 in Unallocated Branch Space	A	S453 single sheet (image); oem_spec
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2270-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00078	DFFPVA5262P2A	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 filler for single mount P2/P3 applications

OEM part number	DFFPVA5262P2A	A	S97, S409 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 filler for single mount P2/P3 applications, 1 piece	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Kit contents	1 3VA52/61/62 single mount filler plate, Siemens piece no. 11-D-4610-01	A	S409 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1052-01 Rev. 00: DFFPVA5262P2A filler plate (3VA52/61/62 single mount) installation	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4610-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	Pair of grooves one side, pair of snaps other side; 'ON' marking aligns with breaker ON side	A	S409 single sheet; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00079	DFFPVA5262P2B	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)

OEM part number	DFFPVA5262P2B	A	S97, S410 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Kit contents	1 provision plate 11-D-3340-01; 1 provision barrier 11-D-4614-01 (fastened to B-phase strap); 1 provision label 11-B-1049-01; 4 #8-32 screws 11-1512-03	A	S410 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1053-01 Rev. 00: DFFPVA5262P2B Provision Plate kit installation	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00084	DFP3AP01	Siemens	filler-plate	LISTED (2021)

P3 adapter plate

OEM part number	DFP3AP01	A	S97, S412 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 adapter plate: fills 3in of unit space on one side of the deadfront so BL/BQD/ED/xGB/3VA41 breakers and DFFP1A fillers fit	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Kit contents	1 adaptor plate 11-D-3033-01; 2 mounting screws	A	S412 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1178-01 Rev. 00: DFP3AP01 replacement Adaptor Plate for BL/BQD/ED/GB/GB2 breaker in P3	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3033-61 (11-D-3033-01)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	Slight offset bend near mounting holes (mounting portion higher than part over breaker); unused positions closed with DFFP1 fillers	A	S412 single sheet; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41, ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00082	P2QRFP01	Siemens	filler-plate	LISTED (2021)

P2 QR deadfront filler

OEM part number	P2QRFP01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 QR deadfront filler, plastic snap-in, vertical main position, 1 per package	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4564-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00113	**BBKVA5262P2HW**	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	Hardware kit for branch/main horizontal single mount or vertical mount **A**	current
EDH-SIE-00120	**P2BK1**	P2 250A max horizontal main breaker bonding strap kit	—	listed (2019-2021)
EDH-SIE-00121	**P2BK2**	P2 125A max main lug bonding strap assembly	—	listed (2019-2021)
EDH-SIE-00122	**P2BK3**	P2 250-600A MLO and all vertical MB bonding kit	—	listed (2019-2021)

EDH-SIE-00113	BBKVA5262P2HW	Siemens	hardware-kit	CURRENT

Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3

OEM part number	BBKVA5262P2HW	A	S97, S368 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Breaker compatibility	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	A	same as above
Kit contents	3 3VA52 nut keepers; 3 3VA61/62 nut keepers; 3 bus extensions; 3 socket-head screws; 2 pan-head (breaker mounting) screws	A	S368 single sheet; oem_spec
Torque values	#8-32 x 3 SHRMS 13.3 +/- 1.8 lb-in; 5/16-18 x 3/4 machine screw (bus extension to strap) 177 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1050-01 Rev. 01: BBKVA5262P2HW hardware kit instructions (3VA52/61/62 breaker to P2/P3 strap kit)	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Identification features	Drawing ref 11-D-2895-61	A	S97 p.11-53; oem_spec
	Nut keepers differ for 3VA52 vs 3VA61/62 and only fully seat in their own breaker cavity; bus extension anti-turn protrusions engage top of stabs, smaller hole toward breaker	A	S368 single sheet; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00120	P2BK1	Siemens	hardware-kit	LISTED (2019-2021)

P2 250A max horizontal main breaker bonding strap kit

OEM part number	P2BK1	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250A max horizontal main breaker bonding strap kit	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00121	P2BK2	Siemens	hardware-kit	LISTED (2019-2021)

P2 125A max main lug bonding strap assembly

OEM part number	P2BK2	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 125A max main lug bonding strap assembly	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-02	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00122	P2BK3	Siemens	hardware-kit	LISTED (2019-2021)

P2 250-600A MLO and all vertical MB bonding kit

OEM part number	P2BK3	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250-600A MLO and all vertical MB bonding kit	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-03	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00080	**BBKQRP1FK**	P2 filler kit for QR	—	listed (2021)

EDH-SIE-00080	BBKQRP1FK	Siemens	conversion-kit	LISTED (2021)

P2 filler kit for QR

OEM part number	BBKQRP1FK	A	S97, S380 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 filler kit for QR, horizontal or vertical mount; all cover plates to change from QJ to QR, 2- and 3-pole	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Application	P2 panelboards, 1-ph or 3-ph, main, subfeed or branch; single-phase 2-pole top-fed vertically mounted not supported; also QJ-to-QR change (2-pole horizontal requires moving long strap; replace QJ deadfront plate)	A	S380 single sheet; oem_spec
Kit contents	QR plastic filler for vertical P2; QR plastic filler for horizontal P2; QR deadfront plate for horizontal P2; MAIN label; SERVICE DISCONNECT label; 4 #8-32 x 3/8 HWH screws	A	same as above
Dimensions	6.00 in kit unit space; 2.50 in and 1.50 in connector spacing (horizontal 2-pole)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1135-01 Rev. 00: BBKQRP1FK filler kit for horizontally or vertically mounted 225A MAX QR breaker (P2)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00430	**NBK3**	P2/P3 snap-in number strips 1-42	—	unknown
EDH-SIE-00431	**NBK4**	P2/P3 snap-in number strips 43-84	—	unknown
EDH-SIE-00432	**NBK5**	P2/P3 snap-in number strips 85-126	—	unknown
EDH-SIE-00433	**NBK6**	P2/P3 snap-in number strips 127-168	—	unknown
EDH-SIE-00434	**NBK7**	P2/P3 snap-in number strips 169-210	—	unknown
EDH-SIE-00435	**NBK8**	P2/P3 snap-in number strips 211-252	—	unknown

EDH-SIE-00430	NBK3	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 1-42

OEM part number	NBK3	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 1-42, snap-in type; use with P2 & P3 series panels	A	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00431	NBK4	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 43-84

OEM part number	NBK4	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 43-84, snap-in type; use with P2 & P3 series panels	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00432	NBK5	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 85-126

OEM part number	NBK5	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 85-126, snap-in type; use with P2 & P3 series panels	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00433	NBK6	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 127-168

OEM part number	NBK6	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 127-168, snap-in type; use with P2 & P3 series panels	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00434	NBK7	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 169-210

OEM part number	NBK7	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 169-210, snap-in type; use with P2 & P3 series panels	**A**	same as above
Cross-links	Families: P2, P3		

EDH-SIE-00435	NBK8	Siemens lineage	other	STATUS UNKNOWN

P2/P3 snap-in number strips 211-252

OEM part number	NBK8	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Number strips 211-252, snap-in type; use with P2 & P3 series panels	**A**	same as above
Cross-links	Families: P2, P3		

6.6 P3 — Type P3 panelboard

FAM-SIE-006 · panelboard · aka P3 · markings: Siemens

Siemens 24in wide x 7.75in deep lighting/distribution panelboard sized like a lighting panel; unit-space construction with twin-mount strap kits (BBKB32 etc.), QJ/QR twin kits and 3VA52 twin kits (max 6 large-frame breakers in unit space).

Attribute	Value	Cl.	Sources
Status	current	**A**	S97 p.11-58; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NEB / HEB, QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S102 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)

Also fits this family (entry printed elsewhere): LNLK4X11B, LNLK6X17B, LNLK7X20B, DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, DFFP3, DFFP6, DFFPVA5262P2A, DFFPVA5262P2B, DFP3AP01, DFK1, DFK07, DFK08, IMK1, EGK, ECGK, IGK, ICGK, BBKB32, BBKVA4P2P3, BBKED32, BBKNB32, BBKGB32, BBKVA5262P2S, BBKVA5262P2HW, BNK350N, SEBKP1P2P3V1, SEBKP2V3, SEBKP2V4, SEBKP2V7, EWK1, EWK2, EWK1B, EWK2B, DFK09, DFK10, DFK11, DFK12, DFK13, DFK14, DFK15, DFK16, DFK17, DFK18, DFK19, DFK20, DFK21, LPDC01, LPLOCK01A, LPLOCK02A, SEBKP3V3, NBK3, NBK4, NBK5, NBK6, NBK7, NBK8, LPJSPDNUT01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00107	**BBKEB32**	P3 NEB/HEB 6-pole 3in branch breaker kit	P3 NEB/HEB 6-pole 3in branch breaker kit **A**	listed 2019 (p.11-67)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00111	**BBKQ2**	P3 branch breaker kit for 2- and 3-pole QJ twin mount	P3 branch breaker kit for 2- and 3-pole QJ twin mount **A**	listed 2019 (p.11-67); QJ superseded by QR
EDH-SIE-00109	**BBKQR2**	P3 twin breaker mounting kit for QR	P3 twin breaker mounting kit for QR **A**	current
EDH-SIE-00114	**BBKVA52P3T**	P3 strap kit	P3 strap kit **A**	current

EDH-SIE-00107 BBKEB32 — Siemens — branch-connector-kit — LISTED 2019 (P.11-67)

P3 NEB/HEB 6-pole 3in branch breaker kit

OEM part number	BBKEB32	**A**	S97, S433, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 NEB/HEB 6-pole 3in branch breaker kit	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P3) NEB/HEB 6-pole 3 in branch breaker kit: top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	**A**	S433 pp. 2-4 (image); oem_spec
Breaker compatibility	P3 NEB/HEB 6-pole 3in branch breaker kit	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Siemens EB (NEB or HEB) breakers; 1-ph or 3-ph	**A**	S433 pp. 2-4 (image); oem_spec
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S97 p.11-67; oem_spec
	1 EB breaker mounting barrier (threaded inserts); 3 outer connector bus; 1 center connector bus; 6 1 in deadfront fillers; 2 P3 deadfront adaptor plates; 12 8-32 self-threading; 3 1/4-20 x 1 self-threading; 6 10-24 x 5/8 self-threading	**A**	S433 pp. 2-4 (image); oem_spec
Dimensions	Unit space: 3in / 6 circuits	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 3 in of branch unit space	**A**	S433 pp. 2-4 (image); oem_spec
Fasteners	Connectors three 1/4-20 x 1 to panel bus; line stabs 10-24 x 5/8; breaker to barrier with 6-32 x 2-3/4 machine screws supplied with breaker (overtightening can strip threaded inserts); #6 screw clip with 1-pole EB	**A**	same as above
Torque values	Per back-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 12-A-1093-01 Rev. 1: P3 Panelboard Kit BBKEB32 For Branch Mounting of EB Breakers (scanned; read visually)	**A**	same as above
Status	listed 2019 (p.11-67)	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: NEB / HEB		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00111 BBKQ2 — Siemens — branch-connector-kit — LISTED 2019 (P.11-67);

P3 branch breaker kit for 2- and 3-pole QJ twin mount

OEM part number	BBKQ2	A	S97, S432, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	(P3) branch breaker kit for 2 and 3-pole QJ twin mount: all connectors and cover plates	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S432 pp. 2-4 (image); oem_spec
Breaker compatibility	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	One or two Siemens QJ breakers: 2-pole on 1-ph, 2- or 3-pole on 3-ph	A	S432 pp. 2-4 (image); oem_spec
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S97 p.11-67; oem_spec
	2 QJ breaker supports; 1 QJ outer connector type A; 2 QJ outer connector type B; 1 QJ center connector; 1 QJ branch barrier; 2 branch neutral lugs; 1 QJ branch deadfront plate type A (1-ph); 1 type B (3-ph); 2 QJ breaker deadfront adaptors; 1 QJ provision filler plate; 8 8-32 x 9/32 self-threading; 6 1/4-20 x 5/8 self-threading; 4 1/4-20 x 3/4 self-threading; 6 1/4-20 x 1 self-threading; 4 1/4-20 x 2-1/2 machine screws; 2 #10 carriage bolts; 2 flat washers; 2 nuts	A	S432 pp. 2-4 (image); oem_spec
Dimensions	Requires 6 in of branch unit space (figure: 5.5 in, 2.5 in, 6.0 in)	A	same as above
Fasteners	Breaker supports to base rails four 8-32; center connector two 1/4-20 x 1 to middle bus; outer connectors 1/4-20 x 1; breaker to support 1/4-20 x 2-1/2 machine screw; line pads 1/4-20 x 5/8; neutral lugs four 1/4-20 x 3/4 on any of eight neutral cross-bus sites	A	same as above
Torque values	Per back-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1081-01 Rev. 1: P3 Panelboard Kit BBKQ2 For Branch Mounting of QJ Breakers (scanned; read visually)	A	same as above
Status	listed 2019 (p.11-67); QJ superseded by QR	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00109 **BBKQR2** Siemens branch-connector-kit **CURRENT**

P3 twin breaker mounting kit for QR

OEM part number	BBKQR2	A	S97, S367, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 twin breaker mounting kit for QR, 1-phase/3-phase (limit 6 QR per panel)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	P3 twin breaker mounting kit for QR 1-phase/3-phase (limit 6 QR per panel; QR limited to 225 A in panelboard)	A	S319 p. 11-48 (revised 05/15/18); oem_spec

Application	branch (unit space)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	S367 pp. 1-4; oem_spec
Breaker compatibility	P3 twin breaker mounting kit for QR	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H	A	S367 pp. 1-4; oem_spec
Current rating	225A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S97 p.11-67; oem_spec
	2 QR breaker supports; 1 QR outer connector bus type A; 2 type B; 1 QR center connector; 1 QR branch barrier; 2 branch neutral lugs; QR branch deadfront plate type A (1-ph) and type B (3-ph); 2 QR breaker deadfront escutcheons; 1 QR provision filler plate; 8 #8-32 x 9/32 thread-forming (30 lb-in); 6 1/4-20 x 5/8 (72); 4 1/4-20 x 3/4 (72); 6 1/4-20 x 1 (72); 4 1/4-20 x 2-1/2 machine screws (30); 2 #10 carriage bolts; 2 nuts (20 lb-in)	A	S367 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space (two breakers, 5.50 / 6.00 in figure dims)	A	S367 pp. 1-4; oem_spec
Torque values	#8-32 30 lb-in; 1/4-20 thread-forming 72 lb-in; 1/4-20 x 2-1/2 machine 30 lb-in; provision filler nuts 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1132-01 Rev. 00: P3 Panelboard Kit BBKQR2 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00114	**BBKVA52P3T**	Siemens	branch-connector-kit	CURRENT

P3 strap kit

OEM part number	BBKVA52P3T	A	S97, S371, S319 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 strap kit, twin mount 3VA52 (TMTU) branch, 1ph or 3ph, 250A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	P3 strap kit, twin mount 3VA52 branch; uses 6 in unit space; includes 2x BBKVA52P3HW, barrier, straps & mounting hardware (max 6 large-frame breakers QR + 3VA52)	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	branch (unit space)	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec

	Supersedes breaker-supplied instructions for applications above 500 V	A	S371 pp. 1-4; oem_spec
Installation location	Type P2 (5-3/4 in deep) or Type P3 (7-3/4 in deep) panelboard branch unit space; kit locating dimension D must be a multiple of 3 in from P3 neutral barrier, or +0.25 in when measured from a P2/P3 bus support	A	same as above
Breaker compatibility	P3 strap kit	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	250A MAX 3VA52 MFAS, HFAS, CFAS; 2-pole FAS on 1-ph (A and C only) or 2/3-pole FAS on 3-ph	A	S371 pp. 1-4; oem_spec
Current rating	250A max	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	2x BBKVA52P3HW, barrier, straps, mounting hardware	A	S97 p.11-67; oem_spec
	1 FAS P3 top barrier; 2 FAS A/C-phase straps; 1 FAS B-phase strap (dual-mount); 2 350 kcmil lugs; 1 P3 cover plate; 2 provision filler assemblies; 6 screw retainers; 6 5/16-18 x 3/4 socket head screws (144 lb-in); 4 #8-32 x 3-1/4 SRHMS (20 lb-in); 4 1/4-20 x 3/4 thread-forming (50/72 lb-in); 6 #8-32 x 3/8 HWH (30 lb-in); 4 #10-24 x 5/8 RHSNB (20 lb-in); 4 #10 lock nuts (20 lb-in); 6 1/4-20 x 1 thread-forming (50/72 lb-in)	A	S371 pp. 1-4; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
	Requires 6 in of branch unit space	A	S371 pp. 1-4; oem_spec
Torque values	1/4-20 thread-forming: 50 lb-in aluminum bus / 72 lb-in copper bus; strap screws 144 lb-in; breaker mounting 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1167-01 Rev. 00: P3 Panelboard Kit BBKVA52P3T Installation Instructions for Branch Mounting of Twin FAS (3VA52) Breakers	A	same as above
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA52P3HW (EDH-SIE-00115)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00239	**SEBKP3V1**	Service entrance barrier kit CFD, FD (P3 only)	Vertically-mounted FD or CFD main in P3 A	unknown

EDH-SIE-00239	SEBKP3V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier kit CFD, FD (P3 only)

OEM part number	SEBKP3V1	A	S97, S395, S319 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	Service entrance barrier kit CFD, FD (P3 only); field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
	Service entrance barrier kit CFD, FD (P3 only): barrier, mounting brackets, hardware; required by UL 67	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S395 single sheet; oem_spec
Breaker compatibility	Vertically-mounted FD or CFD main in P3	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S97 p.11-67; oem_spec
	1 barrier support assembly; 4 #8-32 x 9/32 IHWHSW; 2 P3 adapters	A	S395 single sheet; oem_spec
Dimensions	X = 1.63 in from breaker support (1.00 in breaker support to P3 adapter mount hole)	A	same as above
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1154-01 Rev. 00: SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	A	same as above
Identification features	Drawing ref (p.11-67)	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00426	**DFFP1**	1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing QF3 in P1 thru P5 panelboards and switchboards	—	unknown
EDH-SIE-00083	**EBF1**	NEB/HEB filler plate (EB deadfront filler)	—	listed (2021)

EDH-SIE-00426	DFFP1	Siemens lineage	filler-plate	STATUS UNKNOWN

1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing QF3 in P1 thru P5 panelboards and switchboards

OEM part number	DFFP1	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing QF3 in P1 thru P5 panelboards and switchboards	A	same as above
Cross-links	Families: P3		

EDH-SIE-00083	EBF1	Siemens	filler-plate	LISTED (2021)

NEB/HEB filler plate (EB deadfront filler)

OEM part number	EBF1	A	S97, S447, S319 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	NEB/HEB filler plate (EB deadfront filler)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	EB deadfront filler plate placed over empty EB breaker location; align filler plate mounting hole with existing hole in deadfront (orient as shown) and attach with supplied hardware	A	S447 card 11-D-1017-01; oem_spec
	HEB/NEB filler plate	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Kit contents	EB filler plate and mounting hardware	A	S447 card 11-D-1017-01; oem_spec
OEM instruction document	Siemens instruction sheet 11-D-1017-01 Rev. 0: EB Deadfront Filler EBF1 installation instruction card (drawing 11-D-1017)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4529-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3, P4, P5 · Breakers: NEB / HEB		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00436	**24WD56**	P3 box 24 in wide x 56 in high	—	unknown
EDH-SIE-00437	**24WD62**	P3 box 24 in wide x 62 in high	—	unknown
EDH-SIE-00438	**24WD68**	P3 box 24 in wide x 68 in high	—	unknown
EDH-SIE-00439	**24WD74**	P3 box 24 in wide x 74 in high	—	unknown
EDH-SIE-00440	**24WD80**	P3 box 24 in wide x 80 in high	—	unknown

EDH-SIE-00436	24WD56	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 56 in high

OEM part number	24WD56	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 56 in high; trims P3S56 (surface) / P3F56 (flush); Type 3R 24NRD56; Type 3R/12 24WPD56; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00437	24WD62	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 62 in high

OEM part number	24WD62	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 62 in high; trims P3S62 (surface) / P3F62 (flush); Type 3R 24NRD62; Type 3R/12 24WPD62; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00438	24WD68	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 68 in high

OEM part number	24WD68	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 68 in high; trims P3S68 (surface) / P3F68 (flush); Type 3R 24NRD68; Type 3R/12 24WPD68; trim suffixes H hinged, D door-in-door, M metal card holder	A	same as above
Cross-links	Families: P3		

EDH-SIE-00439	24WD74	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 74 in high

OEM part number	24WD74	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 74 in high; trims P3S74 (surface) / P3F74 (flush); Type 3R 24NRD74; Type 3R/12 24WPD74; trim suffixes H hinged, D door-in-door, M metal card holder	**A**	same as above
Cross-links	Families: P3		

EDH-SIE-00440	24WD80	Siemens lineage	box/enclosure	STATUS UNKNOWN

P3 box 24 in wide x 80 in high

OEM part number	24WD80	**A**	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	P3 standard Type 1 box 80 in high; trims P3S80 (surface) / P3F80 (flush); Type 3R 24NRD80; Type 3R/12 24WPD80; trim suffixes H hinged, D door-in-door, M metal card holder	**A**	same as above
Cross-links	Families: P3		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00115	**BBKVA52P3HW**	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & **A**	current
EDH-SIE-00428	**BBKVR52P3HW**	P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52P3HW)	—	unknown
EDH-SIE-00425	**BK1**	Bonding kit for 250A max. and all P1 panels	—	unknown
EDH-SIE-00123	**P3BK1**	P3 bonding kit 800A max MLO+MB	—	listed (2019-2021)

EDH-SIE-00115	BBKVA52P3HW	Siemens	hardware-kit	CURRENT

P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws

OEM part number	BBKVA52P3HW	**A**	S97, S370 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	**A**	same as above
	Supersedes instructions supplied with the breaker for applications above 500 V	**A**	S370 single sheet; oem_spec
Breaker compatibility	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Kit contents	screw retainers & mounting screws	**A**	S97 p.11-67; oem_spec
	3 screw retainers; 3 strap screws; 2 breaker mounting screws	**A**	S370 single sheet; oem_spec
Torque values	Strap 5/16-18 x 3/4 SHWHS 144 lb-in; breaker mounting #8-32 x 3-1/4 SRHMS 20 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1166-01 Rev. 00: BBKVA52P3HW hardware kit instructions (3VA52 FAS breaker in P3 twin strap kit; supersedes breaker instructions above 500 V)	**A**	same as above
Status	current	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00428	BBKVR52P3HW	Siemens lineage	hardware-kit	STATUS UNKNOWN

P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52P3HW)

OEM part number	BBKVR52P3HW	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Alternate / superseded numbers	BBKVA52P3HW [alias]	A	same as above
Description	P3 branch breaker hardware kit: screw retainers & mounting screws	A	same as above
Cross-links	Families: P3		

EDH-SIE-00425	BK1	Siemens lineage	hardware-kit	STATUS UNKNOWN

Bonding kit for 250A max. and all P1 panels

OEM part number	BK1	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Bonding kit for 250A max. and all P1 panels	A	same as above
Cross-links	Families: P3		

EDH-SIE-00123	P3BK1	Siemens	hardware-kit	LISTED (2019-2021)

P3 bonding kit 800A max MLO+MB

OEM part number	P3BK1	A	S97, S448, S319 p.11-67; oem_spec
Description	P3 bonding kit 800A max MLO+MB: bonding strap and hardware	A	S97 p.11-67; oem_spec
	P3 bonding kit: bonding strap and hardware	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Kit contents	Bonding strap; long bonding screw; short bonding screw	A	S448 card 11-D-1007-01; oem_spec
OEM instruction document	Align bonding strap below neutral barrier with first hole on neutral (above for bottom feed); long bonding screw through strap into neutral; short bonding screw into base rail through strap	A	same as above
Status	listed (2019-2021)	A	S97 p.11-67; oem_spec
Identification features	Drawing ref (p.11-67)	A	same as above
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00081	**BBKQRP2FK**	P3 filler kit for QR	—	listed (2021)

EDH-SIE-00081	BBKQRP2FK	Siemens	conversion-kit	LISTED (2021)

P3 filler kit for QR

OEM part number	BBKQRP2FK	A	S97, S381, S319 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 filler kit for QR, dual mount horizontal; cover plates to change from QJ to QR (1-phase panel: both breakers must change)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
	P3 filler for QR, dual mount horizontal: cover plates to change QJ to QR (2/3-pole); in 1-phase panel both breakers must change	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Converting both branch locations to QR breakers in all Siemens P3 panelboards, or single QJ-to-QR location in 3-phase panels only	A	S381 single sheet; oem_spec
Kit contents	2 QR plastic fillers for P3; QR deadfront plate for 2-pole P3; QR deadfront plate for 3-pole P3; hybrid deadfront plate for P3 (QR + QJ); provision steel filler plate; 2 #10-24 x 5/8 RH square neck bolts; 2 #10-24 lock nuts; 4 #8-32 HWH screws	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1136-01 Rev. 00: BBKQRP2FK filler kit for dual-mounted horizontal 225A MAX QR breakers (P3)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00429	**LPDC02**	Directory card holder (pack of 10)	—	unknown

EDH-SIE-00429	LPDC02	Siemens lineage	other	STATUS UNKNOWN

Directory card holder (pack of 10)

OEM part number	LPDC02	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Directory card holder, pack of 10 (ref. 11-1824-01)	A	same as above
Cross-links	Families: P3		

6.7 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard

FAM-SIE-007 · panelboard · aka F1, FPP (10in), S4, SPP, Sentron SPP shallow · markings: Siemens

Siemens 10in-deep distribution (power) panelboard. Branch circuit breakers mount in unit space on 'Connecting Strap Kits' (S* series, e.g. SBL, SE6, SQR, SF6, SJ1, SL6) supplied without breaker; fusible branches use F6xx kits. Same strap kit family serves Type S4 and Sentron SPP shallow panels.

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-89; oem_spec
Main ampacity	Branch devices to 800A (MG1) per strap kit table	A	S97 p.11-96; oem_spec
Seismic mounting	Seismic-rated box installation: (4) 1/2-13 Grade 5 bolts with narrow flat washers tightened to 60 lb-ft; or minimum (4) 3/8-16 Grade 5 bolts with wide flat washers tightened to 30 lb-ft (center hole in each mounting bracket end)	A	S361 single sheet; oem_spec
Trim installation	Trims attached with 1/4-20 washer-head thread-forming screws: 1-piece trims 1-1/4 in only; 4-piece trims 1-1/4 in on exterior edges; 32 in wide P4 trims with deep inner flanges (1.56 in) 2 in screws on interior edges; 32/38 in wide P5 trims with shallow inner flanges (0.60 in) 1 in screws; hinges 1/4-20 x 1/2 countersunk screws + 1/4-20 Belleville nuts; trim cover screws 50 in-lb	A	S427 single sheet; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S361 12-B-1015-01 Rev. 03 P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards; S427 11-A-1078-01 Rev. 02 Trim & Hinge Installation Instructions (P4 / P5)

Also fits this family (entry printed elsewhere): DFFP1A, EBF1, SEB, SEBD, SDG, SLM1, SNB, SNBD, SEBPPVA1

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00375	**SMBKL6**	P4/P5 main breaker kit for Sentron JD / LD frame (shallow P4)	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w **A**	unknown
EDH-SIE-00376	**SMBKL6D**	P4/P5 main breaker kit for Sentron JD / LD frame (deep P5)	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w **A**	unknown
EDH-SIE-00377	**SMBKLG**	P4/P5 main breaker kit for Sentron VL JG / LG frame (shallow P4)	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w **A**	unknown
EDH-SIE-00378	**SMBKLG1D**	P4/P5 main breaker kit for Sentron VL JG / LG frame (deep P5)	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w **A**	unknown
EDH-SIE-00379	**SMBKMG**	P4/P5 main breaker kit for Sentron VL MG frame (shallow P4)	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for ther **A**	unknown
EDH-SIE-00380	**SMBKMG1D**	P4/P5 main breaker kit for Sentron VL MG frame (deep P5)	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for ther **A**	unknown

EDH-SIE-00375 — SMBKL6

Siemens lineage · main-breaker-kit · **STATUS UNKNOWN**

P4/P5 main breaker kit for Sentron JD / LD frame (shallow P4)

OEM part number	SMBKL6	**A**	S356 pp. 1-3; oem_spec
Installation location	Main position: unit space top marked 15 in down from top (or bottom for bottom feed) of Z-rail; left feed shown, rotate 180 deg for right feed	**A**	same as above
Breaker compatibility	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w	**A**	same as above
Mounting-hole pattern	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4)	**A**	same as above
Torque values	Phase connector screws per rear-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1019-01 Rev. 0: Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers	**A**	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00376 — SMBKL6D

Siemens lineage · main-breaker-kit · **STATUS UNKNOWN**

P4/P5 main breaker kit for Sentron JD / LD frame (deep P5)

OEM part number	SMBKL6D	**A**	S356 pp. 1-3; oem_spec
Installation location	Main position: unit space top marked 15 in down from top (or bottom for bottom feed) of Z-rail; left feed shown, rotate 180 deg for right feed	**A**	same as above
Breaker compatibility	Sentron JD, SJD, LD, SLD frame main breakers, 3-ph 4-w	**A**	same as above
Mounting-hole pattern	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4)	**A**	same as above
Torque values	Phase connector screws per rear-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1019-01 Rev. 0: Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers	**A**	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00377	SMBKLG	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL JG / LG frame (shallow P4)

OEM part number	SMBKLG	A	S357 pp. 1-3; oem_spec
Breaker compatibility	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w	A	same as above
Dimensions	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail	A	same as above
Mounting-hole pattern	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes	A	same as above
Torque values	5/16-18 hardware per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1022-01 Rev. 1: Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00378	SMBKLG1D	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL JG / LG frame (deep P5)

OEM part number	SMBKLG1D	A	S357 pp. 1-3; oem_spec
Breaker compatibility	VL JG and LG frame electronic-trip breakers as main, 3-ph 4-w	A	same as above
Dimensions	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail	A	same as above
Mounting-hole pattern	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes	A	same as above
Torque values	5/16-18 hardware per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1022-01 Rev. 1: Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00379	SMBKMG	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL MG frame (shallow P4)

OEM part number	SMBKMG	A	S358 pp. 1-3; oem_spec
Breaker compatibility	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for thermal-magnetic vs electronic breakers	A	same as above
Mounting-hole pattern	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier	A	same as above
Torque values	3/8-16 per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1020-01 Rev. 0: Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

EDH-SIE-00380	SMBKMG1D	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

P4/P5 main breaker kit for Sentron VL MG frame (deep P5)

OEM part number	SMBKMG1D	A	S358 pp. 1-3; oem_spec
Breaker compatibility	VL MG frame breakers as main, 3-ph 4-w; separate cover plates for thermal-magnetic vs electronic breakers	A	same as above
Mounting-hole pattern	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier	A	same as above
Torque values	3/8-16 per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1020-01 Rev. 0: Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers	A	same as above
Cross-links	Families: P4, P5		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00381	**SMLK12**	P4/P5 400-1200 A main lug kit	—	unknown

EDH-SIE-00381	SMLK12	Siemens lineage	main-lug-kit	STATUS UNKNOWN

P4/P5 400-1200 A main lug kit

OEM part number	SMLK12	**A**	S359 p. 2; oem_spec
Current rating	400-1200 A	**A**	same as above
Wire range	Up to four 500 MCM cables max per phase	**A**	same as above
Mounting-hole pattern	Lug elevation 13.75 in from top (or bottom) of Z-rail aligning with 0.228 in section-bus holes; four 1/4-20 x 1-3/4 screws per lug through lug 4-hole pattern; 1.69 in minimum clearance between lug and section bus; lugs on end of section bus closest to neutral	**A**	same as above
Torque values	Per back of deadfront cover	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-D-1018-01 Rev. 0: Power Panel Kit (P4, P5) SMLK12 for Main Lug Mounting (400-1200A)	**A**	same as above
Cross-links	Families: P4, P5		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00157	**6QR2**	6QR2 connecting strap kit - QR (5.00in, twin)	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00419	**F602**	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 2.5 in & 5 in high twin units	Siemens Vacu-Break fusible switch units: 2.5 in units V7A2211, V7A3211 **A**	unknown
EDH-SIE-00420	**F657**	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in high twin units	Siemens Vacu-Break fusible switch units: 7.5 in units V7E2223, V7E2233 **A**	unknown
EDH-SIE-00421	**F671**	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in & 10 in high single units (10 in unit)	Siemens Vacu-Break fusible switch units: 10 in units V7E3204, V7E2604, **A**	unknown
EDH-SIE-00149	**MG1**	MG1 connecting strap kit - VL MG (8.75in, single)	VL MG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00175	**MG1D**	MG1D connecting strap kit - VL MG (8.75in, single)	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3] **A**	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00125	**S3VA41T**	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00151	**S3VA41TD**	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1]; 3VA41 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00129	**S3VA52T**	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00156	**S3VA52TD**	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00135	**S3VA53T**	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00161	**S3VA53TD**	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1]; 3VA53, 3VA63 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00142	**S3VA54T**	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00168	**S3VA54TD**	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1]; 3VA54, 3VA64 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00136	**S3VA63T**	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00143	**S3VA64T**	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00124	**SBL**	SBL connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00150	**SBLBD**	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00128	**SCE**	SCE connecting strap kit - CED (3.75in, twin)	CED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00134	**SCF**	SCF connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00139	**SCJ**	SCJ connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD [s1] **A**	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00146	**SCL**	SCL connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00130	**SDGD**	SDGD connecting strap kit - VL DG (5.00in, twin)	VL DG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00127	**SE6**	SE6 connecting strap kit - ED (3.75in, twin)	ED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00133	**SF6**	SF6 connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00132	**SFG**	SFG connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00158	**SFGD**	SFGD connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00126	**SGB2**	SGB2 connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00153	**SGB2D**	SGB2D connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00138	**SJ1**	SJ1 connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00137	**SJG**	SJG connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00164	**SJG1D**	SJG1D connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00145	**SL6**	SL6 connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00144	**SLG**	SLG connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00170	**SLGD**	SLGD connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00176	**SLM1D**	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00131	**SQR**	SQR connecting strap kit - QR (5.00in, twin)	QR [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00181	**SQRD**	SQRD connecting strap kit - QR (5.00in, twin)	QR [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00141	**SSCJ**	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	Sentron SCJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00148	**SSCL**	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00140	**SSJ1**	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	Sentron SJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00147	**SSL6**	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1] **A**	listed in SpeedFax 2021

EDH-SIE-00157 — 6QR2

Siemens | branch-connector-kit | **LISTED IN SPEEDFAX 202**

6QR2 connecting strap kit - QR (5.00in, twin)

OEM part number	6QR2	**A**	S97, S338 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	6QR2CAN	**A**	S98 alias; p.11-15; oem_spec
	6QR2CCAN [alias]	**A**	same as above
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S97, S98 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Distribution switchboard sections (SB1, SB2, SB3) and Type P4 (shallow) / P5 (deep) power panelboards	**A**	S338 pp. 1-3; oem_spec
Breaker compatibility	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2]	**A**	S97, S98 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H (breaker not included); 3-phase 3/4-wire only	**A**	S338 pp. 1-3; oem_spec
Current rating	225A max (table max-amp rating)	**A**	S97, S98 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec

Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S97, S98 p.11-110 | p.11-15; oem_spec
	Instructions; 2 A/C straps; 1 B strap; 1 strap-section bus hardware kit (screw length per card 11-B-1005-01 by number of bus laminations); 2 A/C link bars; 1 B link bar; 2 QR mounting brackets; 1 5 in QR cover plate; 2 card holders; 1 circuit ID card; 2 neutral lug assemblies (panelboard and switchboard types); 6 1/4-20 x 3/8 thread-forming screws; 12 1/4-20 x 5/8 thread-forming screws; 4 1/4-20 x 2-3/4 thread-forming screws	A	S338 pp. 1-3; oem_spec
Material	QR filler plates only: 6QR2FKCAN; copper QR kit 6QR2CCAN (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 5 / 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
	Requires 5 in of unit space; link bars 1.50 in vertically between centers; C-phase strap holes 2.50 in below A/B strap screws	A	S338 pp. 1-3; oem_spec
Mounting-hole pattern	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes	A	same as above
Torque values	All 1/4-20 thread-forming screws 72 lb-in (or per deadfront label)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1133-01 Rev. 00: Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating		

EDH-SIE-00419	F602	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 2.5 in & 5 in high twin units

OEM part number	F602	A	S454 single sheet drawing + BOM (image); oem_spec
Installation location	SPP/FPP/S4/F1/P4 panelboards (shallow box)	A	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch units: 2.5 in units V7A2211, V7A3211; 5 in units V7B2211, V7B2212, V7B2222, V7B3211, V7B3212, V7B3222	A	same as above
Kit contents	Fusible switch (see catalog no.) x1; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2022-05; neutral lug assembly 12-B-2105-01; instruction sheet	A	same as above
Dimensions	0.312 in dia (4) holes, 0.375 in dia (3) holes; 1.250 / 2.500 / 3.750 / 5.000 in; 0.625 in; 17.000 in overall	A	same as above
Torque values	50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1001-01 Rev. 3: CAT. NO. F602 Vacu-Break mounting F1 branch kit, 2.5 in & 5 in high twin units (drawing 11-B-2000-00 Rev 3 / BOM 11-B-2000-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	A	same as above
Cross-links	Families: P4		
Open question	*Kit BOM item 1 is the fusible switch itself - confirm whether F-kits are sold with or without the switch*		

EDH-SIE-00420	F657	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in high twin units

OEM part number	F657	**A**	S455 single sheet drawing + BOM (image); oem_spec
Installation location	SPP/FPP/S4/F1/P4 panelboards (shallow box)	**A**	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch units: 7.5 in units V7E2223, V7E2233, V7E3223, V7E3233, V7E2611, V7E2612, V7E2622, V7E2633, V7E3611, V7E3612, V7E3622, V7E3623, V7E3633 (as legible)	**A**	same as above
Kit contents	Fusible switch (see catalog no.) x1; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2022-05; neutral lug assembly 12-B-2105-01 x2; instruction sheet	**A**	same as above
Dimensions	17.000 in overall	**A**	same as above
Torque values	50 in-lb Al / 72 in-lb Cu	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1002-01 Rev. 1: CAT. NO. F657 Vacu-Break mounting F1 branch kit, 7.5 in high twin units (drawing 11-B-2001-00 Rev 3 / BOM 11-B-2001-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	**A**	same as above
Cross-links	Families: P4		
Open question	*Kit BOM item 1 is the fusible switch itself - confirm whether F-kits are sold with or without the switch*		

EDH-SIE-00421	F671	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in & 10 in high single units (10 in unit)

OEM part number	F671	**A**	S456 single sheet drawing + BOM (image); oem_spec
Installation location	SPP/FPP/S4/F1/P4 panelboards (shallow box)	**A**	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch units: 10 in units V7E3204, V7E2604, V7E3604	**A**	same as above
Kit contents	Fusible switch (see catalog no.) x1; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2022-05; neutral lug assembly 12-B-2105-05; instruction sheet	**A**	same as above
Dimensions	17.000 in overall	**A**	same as above
Torque values	50 in-lb Al / 72 in-lb Cu	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1004-01 Rev. 1: CAT. NO. F671 Vacu-Break mounting F1 branch kit, 7.5 in & 10 in high single units (10 in unit) (drawing 11-B-2002-00 Rev 2 / BOM 11-B-2002-04 Rev 7) for SPP/FPP/S4/F1/P4 (shallow box)	**A**	same as above
Cross-links	Families: P4		
Open question	*Kit BOM item 1 is the fusible switch itself - confirm whether F-kits are sold with or without the switch*		

EDH-SIE-00149	MG1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1 connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1	A	S97, S342 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	VL MG [s1]	A	S97 p.11-96 (s1); oem_spec
	Sentron LMD and VL MG frame breakers	A	S342 p. 4; oem_spec
Current rating	800A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	S342 p. 4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	S342 p. 4; oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00175	MG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1D connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1D	A	S97, S342 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3]	A	same as above
	Sentron LMD and VL MG frame breakers	A	S342 p. 4; oem_spec
Current rating	800A max (table max-amp rating)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	S342 p. 4; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	S342 p. 4; oem_spec

Status	listed in SpeedFax 2021, 2005 price list	A	S97, S99 oem_spec
Identification features	2005 list price $2938.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		
Open question	*2005 list maps NM/HM/LM (VL 800A) to MG1D while SpeedFax maps VL MG to MG1D - confirm whether 'NM/HM/LM' are VL MG-frame trip variants*		

EDH-SIE-00125	**S3VA41T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41T	A	S97, S344 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA41, xGB [s1] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	A	S97 p.11-96 (s1); oem_spec
	3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB); 1-ph 2/3-w or 3-ph 3/4-w	A	S344 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	2 A/C-phase runbacks; 3 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 barrier support brackets; 1 top barrier; 1 3.75 in cover plate; 6 circuit ID cards; 6 card holders; 6 blank fillers; 1 'Standard Bus Hardware Kit' (18 fasteners in 3 lengths + instruction card; select 5); 2 #10-24 x 3/8 HHWS; 6 #10-24 x 5/8 SHCS; 4 1/4-20 x 3/8 HHWS; 5 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; 1 branch neutral connector (S3VA41TD only); 1 branch neutral terminal strip	A	S344 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 3.75 in of unit space	A	S344 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top	A	same as above
Torque values	#8-32 screws 35 lb-in; 1/4-20 per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1057-01 Rev. 00: P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Material		

EDH-SIE-00151	**S3VA41TD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41TD	A	S97, S344 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec

Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB); 1-ph 2/3-w or 3-ph 3/4-w	A	S344 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	2 A/C-phase runbacks; 3 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 barrier support brackets; 1 top barrier; 1 3.75 in cover plate; 6 circuit ID cards; 6 card holders; 6 blank fillers; 1 'Standard Bus Hardware Kit' (18 fasteners in 3 lengths + instruction card; select 5); 2 #10-24 x 3/8 HHWS; 6 #10-24 x 5/8 SHCS; 4 1/4-20 x 3/8 HHWS; 5 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; 1 branch neutral connector (S3VA41TD only); 1 branch neutral terminal strip	A	S344 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 3.75 in of unit space	A	S344 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top	A	same as above
Torque values	#8-32 screws 35 lb-in; 1/4-20 per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1057-01 Rev. 00: P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Material		

EDH-SIE-00129	**S3VA52T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52T	A	S97, S346 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Alternate / superseded numbers	KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	A	S346 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]	A	S97 p.11-96 (s1); oem_spec
	250A MAX 3VA52 (MFAS, HFAS, CFAS), 150A MAX 3VA61 (MDAE, HDAE, CDAE, LDAE), 250A MAX 3VA62 (MFAE, HFAE, CFAE, LFAE); 1-ph only with 3VA52; twin mount	A	S346 pp. 1-4; oem_spec
Current rating	150/250A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	see note (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S98 oem_spec

	1 B-phase strap; 2 A/C-phase strap 1; 2 A/C-phase strap 2; 1 top barrier; 2 breaker mounting brackets; 1 5 in cover plate; 8 1/4-20 x 7/16 SHWHSW (72 lb-in); 1/4-20 x 1/2 SHWHSW (deep kits); 1 strap-section bus hardware kit (instruction sheet 11-B-1009-01); 2 card holders; 2 circuit ID cards; 1-ph top barrier mounting bracket kit (deep); 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); 2 breaker provision kits (bus extensions, nut keepers, 5/16-18 x 3/4 SHCS, #8-32 mounting screws); 2 provision filler assemblies; 2 provision B-phase barriers	A	S346 pp. 1-4; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 5 in of unit space; top barrier supports offset 1.25 in from unit-space centerline	A	S346 pp. 1-4; oem_spec
Torque values	Strap-section bus hardware 50 lb-in Al bus / 72 lb-in Cu bus; 1/4-20 SHWHSW 72 lb-in; bus extension to strap 5/16-18 (RP1 label value 177 lb-in for 3VA52/61/62 extensions)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1168-01 Rev. 02: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Replacement / successor	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A	S346 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00156	**S3VA52TD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52TD	A	S97, S346 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	A	S346 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	250A MAX 3VA52 (MFAS, HFAS, CFAS), 150A MAX 3VA61 (MDAE, HDAE, CDAE, LDAE), 250A MAX 3VA62 (MFAE, HFAE, CFAE, LFAE); 1-ph only with 3VA52; twin mount	A	S346 pp. 1-4; oem_spec
Current rating	150/250A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S97 p.11-110; oem_spec
	1 B-phase strap; 2 A/C-phase strap 1; 2 A/C-phase strap 2; 1 top barrier; 2 breaker mounting brackets; 1 5 in cover plate; 8 1/4-20 x 7/16 SHWHSW (72 lb-in); 1/4-20 x 1/2 SHWHSW (deep kits); 1 strap-section bus hardware kit (instruction sheet 11-B-1009-01); 2 card holders; 2 circuit ID cards; 1-ph top barrier mounting bracket kit (deep); 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); 2 breaker provision kits (bus extensions, nut keepers, 5/16-18 x 3/4 SHCS, #8-32 mounting screws); 2 provision filler assemblies; 2 provision B-phase barriers	A	S346 pp. 1-4; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 5 in of unit space; top barrier supports offset 1.25 in from unit-space centerline	A	S346 pp. 1-4; oem_spec

Torque values	Strap-section bus hardware 50 lb-in Al bus / 72 lb-in Cu bus; 1/4-20 SHWHSW 72 lb-in; bus extension to strap 5/16-18 (RP1 label value 177 lb-in for 3VA52/61/62 extensions)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1168-01 Rev. 02: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Replacement / successor	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A	S346 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00135 S3VA53T Siemens branch-connector-kit LISTED IN SPEEDFAX 202

S3VA53T connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53T	A	S97, S347 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Alternate / superseded numbers	KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	A	S347 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA53 [s1]	A	S97 p.11-96 (s1); oem_spec
	400A MAX 3VA53 (MJAS, HJAS, CJAS) or 3VA63 (MJAE, HJAE, CJAE, LJAE); 3-ph 3/4-w	A	S347 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	B-phase strap; A/C-phase strap short; A/C-phase strap long; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); breaker provision kit; provision filler plate assembly; provision phase barrier assembly	A	S347 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 6.25 in of unit space (figure: 1.25 in, 2.50 in, 3.13 in strap offsets)	A	S347 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; strap-section bus hardware 50 lb-in Al / 72 lb-in Cu; bus extension 3/8-16 SHCS (RP1 label: 3VA53/63 nutkeeper 354 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1078-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Replacement / successor	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A	S347 pp. 1-4; oem_spec
Identification features	In P4 applications the B-phase set of straps MUST be taped together	A	same as above
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00161 S3VA53TD Siemens branch-connector-kit LISTED IN SPEEDFAX 202

S3VA53TD connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53TD	A	S97, S347 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	A	S347 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA53 [s1]; 3VA53, 3VA63 [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	400A MAX 3VA53 (MJAS, HJAS, CJAS) or 3VA63 (MJAE, HJAE, CJAE, LJAE); 3-ph 3/4-w	A	S347 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	A	S97 p.11-110; oem_spec
	B-phase strap; A/C-phase strap short; A/C-phase strap long; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard branch neutral lug assys; 2 switchboard branch neutral lug assys (deep); breaker provision kit; provision filler plate assembly; provision phase barrier assembly	A	S347 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space (figure: 1.25 in, 2.50 in, 3.13 in strap offsets)	A	S347 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; strap-section bus hardware 50 lb-in Al / 72 lb-in Cu; bus extension 3/8-16 SHCS (RP1 label: 3VA53/63 nutkeeper 354 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1078-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Replacement / successor	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A	S347 pp. 1-4; oem_spec
Identification features	In P4 applications the B-phase set of straps MUST be taped together	A	same as above
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00142	**S3VA54T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54T connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54T	A	S97, S348 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Alternate / superseded numbers	KS3VA54T / KS3VA54TD panel-builder versions	A	S348 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec

Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA54 [s1]	A	S97 p.11-96 (s1); oem_spec
	600A MAX 3VA54 (MLAS, HLAS, CLAS) or 3VA64 (MLAE, HLAE, CLAE, LLAE); 3-ph 3/4-w	A	S348 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	A/C-phase straps short top/bottom; B-phase straps top/bottom; A/C-phase straps long top/bottom; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard + 2 switchboard (deep) branch neutral lug assys; breaker provision kit; provision filler plate assembly; phase barrier assembly	A	S348 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 6.25 in of unit space; double-lamination strap sets	A	S348 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; bus hardware 50 lb-in Al / 72 lb-in Cu	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1079-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Replacement / successor	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A	S348 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00168	**S3VA54TD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54TD connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54TD	A	S97, S348 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	KS3VA54T / KS3VA54TD panel-builder versions	A	S348 equivalent; pp. 1-4; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA54 [s1]; 3VA54, 3VA64 [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	600A MAX 3VA54 (MLAS, HLAS, CLAS) or 3VA64 (MLAE, HLAE, CLAE, LLAE); 3-ph 3/4-w	A	S348 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	A	S97 p.11-110; oem_spec
	A/C-phase straps short top/bottom; B-phase straps top/bottom; A/C-phase straps long top/bottom; long strap barrier; breaker mounting bracket; cover plate; 4 1/4-20 x 7/16 SHWHSW; 2 1/4-20 x 1/2 SHWHSW; strap-section bus hardware kit; card holder; circuit ID card; 3 plastic tree rivets; 2 panelboard + 2 switchboard (deep) branch neutral lug assys; breaker provision kit; provision filler plate assembly; phase barrier assembly	A	S348 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec

	Requires 6.25 in of unit space; double-lamination strap sets	A	S348 pp. 1-4; oem_spec
Torque values	1/4-20 SHWHSW 72 lb-in; bus hardware 50 lb-in Al / 72 lb-in Cu	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1079-01 Rev. 00: Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Replacement / successor	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A	S348 pp. 1-4; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00136	**S3VA63T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63T connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA63 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00143	**S3VA64T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64T connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA64 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00124	**SBL**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBL connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBL	A	S97, S428 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec

Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	BL, BQD [s1]	A	S97 p.11-96 (s1); oem_spec
	Siemens BL / BQD (BQDH) breakers; 3-ph 3-w or 4-w	A	S428 pp. 2-4 (image); oem_spec
Current rating	100A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	1 BL/BQDH breaker installation instruction; 2 BL-BQD A/C straps; 1 BL-BQD B-phase strap; 1 top barrier; 2 barrier supports; 2 A/C branch connectors; 1 breaker cover panel; 6 card holders; 1 circuit ID card; 1 strap-section bus hardware kit; 6 10-32 hex washer head screws; 2 10-24 x 3/8 SHWHSW; 6 1/4-20 x 3/8 SHWHSW; 1 neutral lug assembly; 5 EQ filler plates; box; carton label	A	S428 pp. 2-4 (image); oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 3-3/4 in of unit space (strap spacing 1.25 in, B-phase offset 3-5/8 in)	A	S428 pp. 2-4 (image); oem_spec
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact	A	same as above
Torque values	All hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1013-01 Rev. 0: Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: BL, BQD		
Not yet documented	Finish / plating, Material		
Open question	*Distributor listings for SBL disagree (one calls it a padlock kit / QR frame); SpeedFax p.11-96 shows BL/BQD 100A twin 3.75in - physical verification advised*		

EDH-SIE-00150 SBLBD Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SBLBD connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBLBD	A	S97, S428 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Siemens BL / BQD (BQDH) breakers; 3-ph 3-w or 4-w	A	S428 pp. 2-4 (image); oem_spec

Current rating	100A max (table max-amp rating)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
	1 BL/BQDH breaker installation instruction; 2 BL-BQD A/C straps; 1 BL-BQD B-phase strap; 1 top barrier; 2 barrier supports; 2 A/C branch connectors; 1 breaker cover panel; 6 card holders; 1 circuit ID card; 1 strap-section bus hardware kit; 6 10-32 hex washer head screws; 2 10-24 x 3/8 SHWHSW; 6 1/4-20 x 3/8 SHWHSW; 1 neutral lug assembly; 5 EQ filler plates; box; carton label	A	S428 pp. 2-4 (image); oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Requires 3-3/4 in of unit space (strap spacing 1.25 in, B-phase offset 3-5/8 in)	A	S428 pp. 2-4 (image); oem_spec
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact	A	same as above
Torque values	All hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1013-01 Rev. 0: Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $768.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: BL, BQD		
Not yet documented	Finish / plating		

EDH-SIE-00128	SCE	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCE connecting strap kit - CED (3.75in, twin)

OEM part number	SCE	A	S97, S434 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	For use with CED6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S434 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CED [s1]	A	S97 p.11-96 (s1); oem_spec
	CED6 frame (I-T-E type breakers CLE, CED6)	A	S434 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	125A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	BOM 15-B-2012-05: E2-4-6 Ph A&C branch bus 15-B-4005-02 x2; E2-4-6 Ph B branch bus 15-B-4006-02 x1; E2-4-6 line connector 11-7138-01 x3; interphase barrier 15-7505-01 x2; E2-4-6 mounting bracket 15-B-3016-01 x2; 3.75 in E2-4-6 cover plate 12-6024-01 x1; circuit ID card 11-7505-01; card holder 11-7506-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x8; strap-bus hardware kit 11-B-2022-05 x1; 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; 8-32 x 4-3/16 SRHSW 11-1510-15 x4; neutral lug assembly 12-B-2105-01 x1; blank filler 12-5531-09 x2; instruction sheet 31-1200-01	A	S434 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above

Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Location dims B/M -01/-03: A 3.750, B 0.625, C 1.250 in; -02/-04: A 6.250, B 1.875, C 2.500 in	A	S434 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware: 50 in-lb Al / 72 in-lb Cu; 10-24 screws: 30 in-lb Al / 50 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1200-01 Rev. 1: CAT. NO. SCE - CED6 breaker mounting, S4 copper branch bus (drawing 15-B-2012-00 / BOM 15-B-2012-05 Rev 4)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00134 SCF Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SCF connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCF	A	S97, S436 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	For use with CFD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth); branch unit shown, reverse breaker for main feed	A	S436 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CFD [s1]	A	S97 p.11-96 (s1); oem_spec
	I-T-E type breakers CLF, CFD6, 70-225 A	A	S436 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	BOM 15-B-2016-03: phase A branch bus 12-B-4011-01; phase B 12-B-4012-01; phase C 12-B-4013-01; mounting bracket 15-B-3020-01; 5 in main cover plate 12-6029-01; circuit ID card 11-7505-01; card holder 11-7506-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; 1/4-20 x 1 SHWHSW 11-1553-09 x3; 1/4-20 x 4 SRHMS 11-1542-19 x2; blank filler 12-5531-10; neutral lug assembly 12-B-2105-05; strap-bus hardware kit 11-B-2022-05	A	S436 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	5.000 in unit; 6.594 in to panel centerline; bus spacings 1.00 / 1.500 / 1.250 in	A	S436 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1204-01 Rev. 1: CAT. NO. SCF - 225 A CLF breaker, S4 copper branch bus (drawing 15-B-2016-00 Rev 2 'CLF main/branch kit SPP (shallow)' / BOM 15-B-2016-03 Rev 5)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00139 SCJ Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SCJ connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJ	A	S97, S437 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec

Description	Connecting strap kit (breaker not included) for Sentron CJD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
	Use (1) 500 or (2) 250 kcmil terminal lugs on load side due to wire bending space	A	S437 single sheet drawing + BOM (scanned image, read visually); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	For use with CJD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S437 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CJD [s1]	A	S97 p.11-96 (s1); oem_spec
	I.T.E. type breakers CJD6 (CLJ, CJD6)	A	S437 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	400A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	Phase branch bus A 12-B-4008-03, B 12-B-4008-04, C 12-B-4008-05; mounting bracket 15-B-3022-01; barrier clip 15-B-3007-02 x2; barrier clip 11-B-3007-01; load barriers 11-B-4501-01 and 11-B-4501-03; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; 5/16-18 x 1-1/4 HHMS 11-1566-07 x3; 5/16 lock washer 11-1618-04 x3; strap-bus hardware kit 11-B-2023-05; 1/4-20 x 3/8 SHWHSW 11-1553-02 x14; 1/4-20 x 2-1/2 SRHMS 11-1542-13 x2; neutral lug assembly 12-B-2105-06	A	S437 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	8.75 in unit space; 7.50 in, 2.50 in, 5.00 in, 1.88 in, 0.63 in; bus spacing 3.63 in	A	S437 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Breaker to bus 5/16-18 HHMS (item 13) 12 ft-lb; strap-bus hardware (item 16) 72 in-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1208-01 Rev. 2: CAT. NO. SCJ - CJD6 (CLJ, CJD6) breaker mounting, S4 copper branch bus (drawing 12-B-2002-00 Rev 6 / BOM 12-B-2002-03 Rev 4)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00146	**SCL**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCL connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCL	A	S97, S438 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	For use with CLD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S438 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CLD [s1]	A	S97 p.11-96 (s1); oem_spec
	I.T.E. type breakers CLD6 (CLL, CLD)	A	S438 single sheet drawing + BOM (scanned image, read visually); oem_spec

Current rating	600A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	Phase branch bus A 12-B-4008-06, B 12-B-4008-07, C 12-B-4008-08; mounting bracket 15-B-3032-01; barrier clips 11-B-3007-03 x2 and 11-B-3007-04; load barriers 11-B-4501-01 and 11-B-4501-04; cover plate 12-6194-04; circuit ID card 11-7505-01; card holder 11-7506-01; 5/16-18 x 1-1/4 HHMS 11-1566-07 x3; 5/16 lock washer 11-1618-04 x3; strap-bus hardware kit 11-B-2023-05; 1/4-20 x 3/8 SHWHSW 11-1553-02 x14; 1/4-20 x 2-1/2 SRHMS 11-1542-13 x2; neutral lug assembly 12-B-2105-06	A	S438 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	8.75 in unit space; 7.50 in, 2.50 in, 5.00 in, 1.88 in, 0.63 in; bus spacing 3.63 in	A	S438 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Breaker to bus 5/16-18 HHMS (item 13) 12 ft-lb; strap-bus hardware (item 16) 72 in-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1212-01 Rev. 1: CAT. NO. SCL - CLD6 (CLL, CLD) breaker mounting, S4 copper branch bus (drawing 12-B-2006-00 Rev 7 / BOM 12-B-2006-03 Rev 7)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00130	SDGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SDGD connecting strap kit - VL DG (5.00in, twin)

OEM part number	SDGD	A	S97, S339 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL DG branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w or 4-w	A	S339 pp. 1-4; oem_spec
Breaker compatibility	VL DG [s1]	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
	Siemens VL DG frame electronic-trip breakers	A	S339 pp. 1-4; oem_spec
Current rating	150A max (table max-amp rating)	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	S339 pp. 1-4; oem_spec
Mounting-hole pattern	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link	A	same as above
Torque values	Per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1023-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

Open question	*Same catalog number SDGD listed in both P4 (10in) and P5 (12.75in) tables - verify one kit serves both depths*		

EDH-SIE-00127	SE6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6 connecting strap kit - ED (3.75in, twin)

OEM part number	SE6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	ED [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00133	SF6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6 connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6	A	S97, S435 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
	Provisions: fill blank space with items 15 & 25	A	S435 single sheet drawing + BOM (scanned image, read visually); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	For use with FXD6, FD6 and HFD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S435 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron FD [s1]	A	S97 p.11-96 (s1); oem_spec
	I-T-E type breakers FJ6, F6, HF6, FXD6, FD6, HFD6, 70-250 A, double mounting	A	S435 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	BOM 15-B-2014-03: F6 Ph A&C front branch bus 12-B-4002-02 x2; F6 Ph A&C rear branch bus 12-B-4003-02 x2; F6 Ph B branch bus 12-B-4004-02 x1; F6 mounting bracket 15-B-3018-01 x2; 5 in F6 cover plate 12-6028-01 x1; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2023-05 x1; 1/4-20 x 1 SHWHSW 11-1553-09 x6; 1/4-20 x 4 SRHMS 11-1542-19 x4; blank filler 12-5531-10 x2; 10-24 x 5/8 RHSNB 11-1630-02 x4; 10-24 lock nut 11-1821-02 x4; neutral lug assembly 12-B-2105-05 x2; Ph B barrier (for provisions) 11-7548-02 x4	A	S435 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	5.00 in unit; location dims 3.75, 1.25, 0.63 in	A	S435 single sheet drawing + BOM (scanned image, read visually); oem_spec

Torque values	Strap-bus hardware: 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1202-01 Rev. 3: CAT. NO. SF6 - F6 frame mounting S4 copper branch bus (drawing 15-B-2014-00 Rev 4 / BOM 15-B-2014-03 Rev 7)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00132	SFG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFG connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFG	A	S97, S446 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5)	A	S446 pp. 1-4 (image); oem_spec
Breaker compatibility	VL FG [s1]	A	S97 p.11-96 (s1); oem_spec
	Siemens VL FG frame electronic-trip breakers; 3-ph 3-w or 4-w	A	S446 pp. 1-4 (image); oem_spec
Current rating	250A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	Instruction manual; 2 A/C bottom straps; 2 A/C top straps; 1 B phase strap; 2 A/C bottom links; 2 A/C top links; 1 B bottom link; 1 B top link; 1 barrier; 1 christmas tree rivet; 2 breaker mounting brackets; 1 strap-section bus hardware kit; 6 1/4-20 x 1-1/4 screws; 4 1/4-20 x 1/2 screws; 6 1/4-20 socket head cap screws; 6 1/4 washers; 1 card holder; 2 circuit ID cards; 3 8-32 x 1/4 screws; 1 5 in cover plate; 4 1/4-20 x 3/8 screws; 4 provision barriers; 2 neutral lug assemblies	A	S446 pp. 1-4 (image); oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	S446 pp. 1-4 (image); oem_spec
Mounting-hole pattern	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1024-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00158	SFGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFGD connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFGD	A	S97, S446 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec

Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-110 (s1); oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5)	A	S446 pp. 1-4 (image); oem_spec
Breaker compatibility	VL FG [s1]	A	S97 p.11-110 (s1); oem_spec
	Siemens VL FG frame electronic-trip breakers; 3-ph 3-w or 4-w	A	S446 pp. 1-4 (image); oem_spec
Current rating	250A max (table max-amp rating)	A	S97 p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	Instruction manual; 2 A/C bottom straps; 2 A/C top straps; 1 B phase strap; 2 A/C bottom links; 2 A/C top links; 1 B bottom link; 1 B top link; 1 barrier; 1 christmas tree rivet; 2 breaker mounting brackets; 1 strap-section bus hardware kit; 6 1/4-20 x 1-1/4 screws; 4 1/4-20 x 1/2 screws; 6 1/4-20 socket head cap screws; 6 1/4 washers; 1 card holder; 2 circuit ID cards; 3 8-32 x 1/4 screws; 1 5 in cover plate; 4 1/4-20 x 3/8 screws; 4 provision barriers; 2 neutral lug assemblies	A	S446 pp. 1-4 (image); oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	S446 pp. 1-4 (image); oem_spec
Mounting-hole pattern	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1024-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00126	**SGB2**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2 connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2	A	S97, S343 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	xGB2 [s1]	A	S97 p.11-96 (s1); oem_spec
	NGB2, HGB2, LGB2 ONLY - do NOT use with NGB, LGB or HGB; 3-ph 3-w or 4-w only	A	S343 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec

Kit contents	2 A/C-phase runbacks; 2 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 GB2 barrier support brackets; 1 GB2 top barrier; 1 3-3/4 in cover plate; 6 circuit ID cards; 6 card holders; blank fillers; 1 bus hardware kit 1/8 in strap to section; 2 #10-24 x 3/8 HHWS; 6 #10-24 x 1/2 socket head cap screws; 4 1/4-20 x 3/8 HHWS; 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; branch neutral connector (SGB2D only); 1 branch neutral terminal strip. Runbacks/brackets shorter for SGB2, taller for SGB2D.	A	S343 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 3-3/4 in of unit space; 3.75 in cover plate	A	S343 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space	A	same as above
Torque values	#8-32 neutral strip screws 35 lb-in; 1/4-20 per label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1031-01 Rev. 00: Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Material		

EDH-SIE-00153 SGB2D Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SGB2D connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2D	A	S97, S343 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	xGB2 [s1]	A	same as above
	NGB2, HGB2, LGB2 ONLY - do NOT use with NGB, LGB or HGB; 3-ph 3-w or 4-w only	A	S343 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S97 p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	2 A/C-phase runbacks; 2 A/C-phase straps; 1 B-phase runback; 1 B-phase strap; 2 GB2 barrier support brackets; 1 GB2 top barrier; 1 3-3/4 in cover plate; 6 circuit ID cards; 6 card holders; blank fillers; 1 bus hardware kit 1/8 in strap to section; 2 #10-24 x 3/8 HHWS; 6 #10-24 x 1/2 socket head cap screws; 4 1/4-20 x 3/8 HHWS; 1/4-20 x 5/8 HHWS; 2 #8-32 x 5/8 HHWS; branch neutral connector (SGB2D only); 1 branch neutral terminal strip. Runbacks/brackets shorter for SGB2, taller for SGB2D.	A	S343 pp. 1-4; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
	Requires 3-3/4 in of unit space; 3.75 in cover plate	A	S343 pp. 1-4; oem_spec
Mounting-hole pattern	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space	A	same as above
Torque values	#8-32 neutral strip screws 35 lb-in; 1/4-20 per label	A	same as above
OEM instruction document	Siemens instruction sheet 12-A-1031-01 Rev. 00: Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Material		

EDH-SIE-00138	SJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1 connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron JD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00137	SJG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG	A	S97, S341 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S341 pp. 1-4; oem_spec
Breaker compatibility	VL JG [s1]	A	S97 p.11-96 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S341 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
	Requires 6-1/4 in of unit space	A	S341 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00164	SJG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG1D connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG1D	A	S97, S341 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S341 pp. 1-4; oem_spec
Breaker compatibility	VL JG [s1]	A	S97 p.11-110 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S341 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S97 p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
	Requires 6-1/4 in of unit space	A	S341 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00145 **SL6** Siemens branch-connector-kit **LISTED IN SPEEDFAX 202**

SL6 connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron LD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00144 **SLG** Siemens branch-connector-kit **LISTED IN SPEEDFAX 202**

SLG connecting strap kit - VL LG (6.25in, single)

OEM part number	SLG	A	S97, S341 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S341 pp. 1-4; oem_spec
Breaker compatibility	VL LG [s1]	A	S97 p.11-96 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S341 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
	Requires 6-1/4 in of unit space	A	S341 pp. 1-4; oem_spec
Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00170	**SLGD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLGD connecting strap kit - VL LG (6.25in, single)

OEM part number	SLGD	A	S97, S341 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w/4-w	A	S341 pp. 1-4; oem_spec
Breaker compatibility	VL LG [s1]	A	S97 p.11-110 (s1); oem_spec
	Siemens VL JG and LG frame electronic-trip breakers	A	S341 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	A	S97 p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
	Requires 6-1/4 in of unit space	A	S341 pp. 1-4; oem_spec

Mounting-hole pattern	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes	A	same as above
Torque values	5/16-18 hardware per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1025-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00176 SLM1D Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SLM1D connecting strap kit - Sentron LMD (8.75in, single)

OEM part number	SLM1D	A	S97, S342 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LMD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
	Sentron LMD and VL MG frame breakers	A	S342 p. 4; oem_spec
Current rating	800A max (table max-amp rating)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	S342 p. 4; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	S342 p. 4; oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $2938.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00131 SQR Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SQR connecting strap kit - QR (5.00in, twin)

OEM part number	SQR	A	S97, S338 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	Distribution switchboard sections (SB1, SB2, SB3) and Type P4 (shallow) / P5 (deep) power panelboards	A	S338 pp. 1-3; oem_spec
Breaker compatibility	QR [s1]	A	S97 p.11-96 (s1); oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H (breaker not included); 3-phase 3/4-wire only	A	S338 pp. 1-3; oem_spec
Current rating	225A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	Instructions; 2 A/C straps; 1 B strap; 1 strap-section bus hardware kit (screw length per card 11-B-1005-01 by number of bus laminations); 2 A/C link bars; 1 B link bar; 2 QR mounting brackets; 1 5 in QR cover plate; 2 card holders; 1 circuit ID card; 2 neutral lug assemblies (panelboard and switchboard types); 6 1/4-20 x 3/8 thread-forming screws; 12 1/4-20 x 5/8 thread-forming screws; 4 1/4-20 x 2-3/4 thread-forming screws	A	S338 pp. 1-3; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	Requires 5 in of unit space; link bars 1.50 in vertically between centers; C-phase strap holes 2.50 in below A/B strap screws	A	S338 pp. 1-3; oem_spec
Mounting-hole pattern	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes	A	same as above
Torque values	All 1/4-20 thread-forming screws 72 lb-in (or per deadfront label)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1133-01 Rev. 00: Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Material		

EDH-SIE-00181	SQRD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SQRD connecting strap kit - QR (5.00in, twin)

OEM part number	SQRD	A	S98, S338 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	Distribution switchboard sections (SB1, SB2, SB3) and Type P4 (shallow) / P5 (deep) power panelboards	A	S338 pp. 1-3; oem_spec
Breaker compatibility	QR [s2]	A	S98 p.11-5 (s2); oem_spec
	225A MAX QR2, QRH2, HQR2, HQR2H (breaker not included); 3-phase 3/4-wire only	A	S338 pp. 1-3; oem_spec
Current rating	225A max (table max-amp rating)	A	S98 p.11-5 (s2); oem_spec

Kit contents	Instructions; 2 A/C straps; 1 B strap; 1 strap-section bus hardware kit (screw length per card 11-B-1005-01 by number of bus laminations); 2 A/C link bars; 1 B link bar; 2 QR mounting brackets; 1 5 in QR cover plate; 2 card holders; 1 circuit ID card; 2 neutral lug assemblies (panelboard and switchboard types); 6 1/4-20 x 3/8 thread-forming screws; 12 1/4-20 x 5/8 thread-forming screws; 4 1/4-20 x 2-3/4 thread-forming screws	A	S338 pp. 1-3; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-5 (s2); oem_spec
	Requires 5 in of unit space; link bars 1.50 in vertically between centers; C-phase strap holes 2.50 in below A/B strap screws	A	S338 pp. 1-3; oem_spec
Mounting-hole pattern	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes	A	same as above
Torque values	All 1/4-20 thread-forming screws 72 lb-in (or per deadfront label)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1133-01 Rev. 00: Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Material		

EDH-SIE-00141 SSCJ — Siemens — branch-connector-kit — LISTED IN SPEEDFAX 202

SSCJ connecting strap kit - Sentron SCJD (8.75in, single)

OEM part number	SSCJ	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SCJD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00148 SSCL — Siemens — branch-connector-kit — LISTED IN SPEEDFAX 202

SSCL connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCL	A	S97, S439 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
	For use with SCLD6 frame breakers mounted in SPP/FPP/S4/F1/P4 panelboards (shallow box / shallow depth)	A	S439 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron SCLD [s1]	A	S97 p.11-96 (s1); oem_spec

	I.T.E. type breakers SCLD6	A	S439 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	600A max (table max-amp rating)	A	S97 p.11-96 (s1); oem_spec
Kit contents	Phase branch bus A 12-B-4008-06, B 12-B-4008-07, C 12-B-4008-08; mounting bracket 15-B-3032-01; barrier clips 11-B-3007-03 x2 and 11-B-3007-04; load barriers 11-B-4501-01 and 11-B-4501-04; cover plate 12-6487-03; circuit ID card 11-7505-01; card holder 11-7506-01; 5/16-18 x 1-1/4 HHMS 11-1566-07 x3; 5/16 lock washer 11-1618-04 x3; strap-bus hardware kit 11-B-2023-05; 1/4-20 x 3/8 SHWHSW 11-1553-02 x14; 1/4-20 x 2-1/2 SRHMS 11-1542-13 x2; neutral lug assembly 12-B-2105-06	A	S439 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
	8.75 in unit space; 7.50 in, 2.50 in, 5.00 in, 1.88 in, 0.63 in; bus spacing 3.63 in	A	S439 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Breaker to bus 5/16-18 HHMS (item 13) 12 ft-lb; strap-bus hardware (item 16) 72 in-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1213-01 Rev. 2: CAT. NO. SSCL - SCLD6 breaker mounting, S4 copper branch bus (drawing 12-B-2013-00 Rev 4 / BOM 12-B-2013-03 Rev 7)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00140	**SSJ1**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSJ1 connecting strap kit - Sentron SJD (8.75in, single)

OEM part number	SSJ1	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SJD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00147	SSL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6 connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SLD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00217	**SEBP4V1**	Service entrance barrier for (S)JD, (S)LD, MG mains	Horizontally-mounted JD, LD or MG main in P4 or P5 A	unknown
EDH-SIE-00218	**SEBP4V2**	Service entrance barrier for CJD, CLD	Horizontally-mounted CJD or CLD main in P4 or P5 A	unknown
EDH-SIE-00219	**SEBP4V3**	Service entrance barrier for JG, LG	Horizontally-mounted JG or LG main in P4 or P5 A	unknown

EDH-SIE-00217	SEBP4V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)JD, (S)LD, MG mains

OEM part number	SEBP4V1	A	S97, S399 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)JD, (S)LD, MG mains	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S399 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted JD, LD or MG main in P4 or P5	A	same as above
Kit contents	1 barrier support bracket; 2 1/4-20 x 1/2 SHWHSW; 1 barrier assembly; 2 #10-32 x 3/8 HWHSW	A	same as above
Torque values	1/4-20 to strap support barrier 20 lb-in; #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1158-01 Rev. 00: SEBP4V1 Service Entrance Barrier Kit for P4 or P5	A	same as above
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00218	SEBP4V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for CJD, CLD

OEM part number	SEBP4V2	A	S97, S400 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for CJD, CLD	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S400 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted CJD or CLD main in P4 or P5	A	same as above
Kit contents	1 barrier support bracket; 2 #10-32 x 5/8 SHWHSW; 1 barrier assembly; 2 removable screw-type rivets; 1 P4 CLD support adaptor	A	same as above
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1159-01 Rev. 00: SEBP4V2 Service Entrance Barrier Kit for P4 or P5	A	same as above
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00219	SEBP4V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for JG, LG

OEM part number	SEBP4V3	A	S97, S401 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for JG, LG	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S401 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted JG or LG main in P4 or P5	A	same as above
Kit contents	1 barrier support bracket; 2 #8-32 x 5/8 IHWHSW; 1 barrier assembly; 2 removable screw-type rivets	A	same as above
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1162-01 Rev. 00: SEBP4V3 Service Entrance Barrier Kit for P4 or P5	A	same as above
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00211	**6FPB01**	6FPB01 blank plate, 1.25in unit space	—	current
EDH-SIE-00212	**6FPB02**	6FPB02 blank plate, 2.5in unit space	—	current
EDH-SIE-00213	**6FPB03**	6FPB03 blank plate, 3.75in unit space	—	current
EDH-SIE-00214	**6FPB05**	6FPB05 blank plate, 5in unit space	—	current
EDH-SIE-00215	**6FPB10**	6FPB10 blank plate, 10in unit space	—	current

EDH-SIE-00211	6FPB01	Siemens	filler-plate	CURRENT

6FPB01 blank plate, 1.25in unit space

OEM part number	6FPB01	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 1.25in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	1.25in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $154.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00212	6FPB02	Siemens	filler-plate	CURRENT

6FPB02 blank plate, 2.5in unit space

OEM part number	6FPB02	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 2.5in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	2.5in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00213	6FPB03	Siemens	filler-plate	CURRENT

6FPB03 blank plate, 3.75in unit space

OEM part number	6FPB03	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 3.75in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	3.75in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00214	6FPB05	Siemens	filler-plate	CURRENT

6FPB05 blank plate, 5in unit space

OEM part number	6FPB05	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 5in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	5in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00215	6FPB10	Siemens	filler-plate	CURRENT

6FPB10 blank plate, 10in unit space

OEM part number	6FPB10	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 10in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	10in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $239.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00205	**S3VA52PR**	3VA52/61/62 breaker provision hardware kit (twin mount)	—	current

EDH-SIE-00205	S3VA52PR	Siemens	hardware-kit	CURRENT

3VA52/61/62 breaker provision hardware kit (twin mount)

OEM part number	S3VA52PR	A	S97, S424 s1 pp.11-96, 11-110; s2 p.11-14; oem_spec
Description	Only required when installing a 3VA52, 3VA61 or 3VA62 breaker to an existing provision in the field; parts included with kit S3VA52T/S3VA52TD	A	S97 pp.11-96, 11-110; oem_spec
Application	Required (one per breaker) when adding a 3VA52/61/62 breaker to factory-installed provisions made before April 2021 lacking bus extensions	A	S424 single sheet; oem_spec
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	A	S98 p.11-14; oem_spec
	3 3VA52 nut keepers; 3 3VA61/62 nut keepers; 3 bus extensions; 3 hex-head screws; 3 socket-head screws; 2 breaker mounting screws	A	S424 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1171-01 Rev. 01: S3VA52PR provision kit (3VA52/61/62 nut keepers and bus extensions)	A	same as above
Status	current	A	S97, S98 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00210	**SQRC**	QR cover plate for P4/P5/SPP power panels	—	unknown

EDH-SIE-00210	SQRC	Siemens	other	STATUS UNKNOWN

QR cover plate for P4/P5/SPP power panels

OEM part number	SQRC	A	S97, S425 pp.11-96, 11-110 'Cover Plates'; oem_spec
Description	Cover plate for QR breaker; 'To replace a QJ with a QR only a new cover is needed'	A	S97 pp.11-96, 11-110; oem_spec
Application	branch (QJ to QR conversion cover)	A	S97 p.11-96; oem_spec
	Adding 225A max QR breaker to power panel or distribution switchboard that already has a QJ breaker; branch, 3-phase only	A	S425 single sheet; oem_spec
Kit contents	1 hybrid (QJ+QR) deadfront plate P4/P5/SB; 1 dual QR deadfront plate P4/P5/SB; 2 circuit ID cards; 2 card holders; 4 1/4-20 slotted washer head screws	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1139-01 Rev. 00: SQRC QR Breaker Retrofit Field Kit Installation Instructions for P4/P5/SB	A	same as above
Cross-links	Families: P4, P5, SB · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

6.8 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard

FAM-SIE-008 · panelboard · aka F2, FPP deep, S5, SPP deep, Sentron Deep · markings: Siemens

Siemens 12.75in-deep distribution panelboard. Branch connecting strap kits carry a 'D' suffix (SBLBD, SE6D, SF6D, SJ1D, SMND...). SpeedFax footnote: these kits also fit Types FCI, FCII, SB1 and SB2 switchboards.

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-103; oem_spec
Main ampacity	Branch devices to 1200A (NG1D/SMND)	A	S97 p.11-110; oem_spec
Installation notes	Unassembled P5 power panels (32 in / 38 in wide) ship with Type 1 enclosure, top feed; deadfront of removable filler plates; require separate main lug kit, main breaker kit or main switch kit (see label on back of deadfront); service equipment with single main or max six breakers/switches; interior held by four 1/4-20 screws and four 1/4 in Belleville washer nuts; deadfront by four 1/4-20 screws; large angled filler ~5.63 in from rail end	A	S360 pp. 2-4; oem_spec
Seismic mounting	Seismic-rated box installation: (4) 1/2-13 Grade 5 bolts with narrow flat washers tightened to 60 lb-ft; or minimum (4) 3/8-16 Grade 5 bolts with wide flat washers tightened to 30 lb-ft (center hole in each mounting bracket end)	A	S361 single sheet; oem_spec
Trim installation	Trims attached with 1/4-20 washer-head thread-forming screws: 1-piece trims 1-1/4 in only; 4-piece trims 1-1/4 in on exterior edges; 32 in wide P4 trims with deep inner flanges (1.56 in) 2 in screws on interior edges; 32/38 in wide P5 trims with shallow inner flanges (0.60 in) 1 in screws; hinges 1/4-20 x 1/2 countersunk screws + 1/4-20 Belleville nuts; trim cover screws 50 in-lb	A	S427 single sheet; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S360 11-D-1013-01 Rev. 00 Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60; S361 12-B-1015-01 Rev. 03 P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards; S427 11-A-1078-01 Rev. 02 Trim & Hinge Installation Instructions (P4 / P5)

Also fits this family (entry printed elsewhere): DFFP1A, EBF1, SBL, S3VA41T, SGB2, S3VA52T, SDGD, SQR, SFG, S3VA53T, SJG, S3VA54T, SLG, MG1, SBLBD, S3VA41TD, SGB2D, S3VA52TD, 6QR2, SFGD, S3VA53TD, SJG1D, S3VA54TD, SLGD, MG1D, SLM1D, SQRD, S3VA52PR, SQRC, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, SEBP4V1, SEBP4V2, SEBP4V3, SEB, SEBD, SDG, SLM1, SNB, SNBD, SMBKL6, SMBKL6D, SMBKLG, SMBKLG1D, SMBKMG, SMBKMG1D, SMLK12, SEBPPVA1

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00155	**6CLE2**	6CLE2 connecting strap kit - CED (3.75in, twin)	CED [s1]; CED6 [s3]; CED6 [s2] A	listed in SpeedFax 2021, 2005 price list, Siemens Canada cat
EDH-SIE-00192	**6JJ61**	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)	JXD2, JXD6, JD6, HJD6 single branch [s3] A	listed in 2005 price list
EDH-SIE-00197	**6LL61**	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2] A	listed in 2005 price list, Siemens Canada catalogue 2025

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00195	**6SJL1**	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00199	**6SLL1**	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	SLL, SLD6, SHLD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00422	**F602D**	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 2.5 in high twin units (30A)	Siemens Vacu-Break fusible switch 2.5 in high twin units (30A) **A**	unknown
EDH-SIE-00423	**F657D**	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 5 in and 7.5 in high twin units (30, 60, 100A)	Siemens Vacu-Break fusible switch 5 in and 7.5 in high twin units (30, **A**	unknown
EDH-SIE-00424	**F671D**	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 7.5 in and 10 in high single units (200A)	Siemens Vacu-Break fusible switch 7.5 in and 10 in high single units (**A**	unknown
EDH-SIE-00179	**NG1D**	NG1D connecting strap kit - VL NG (10.00in, single)	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3] **A**	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00152	**S3VA41TDHD**	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	3VA41, xGB [s1]; 3VA41 [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00182	**S3VA53T2D**	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	3VA53, 3VA63 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00185	**S3VA54T2D**	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	3VA54, 3VA64 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00186	**S3VA55TD**	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	3VA55, 3VA65; 3VA66 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00187	**S3VA57TD**	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	3VA57, 3VA67 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00162	**S3VA63TD**	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00169	**S3VA64TD**	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00180	**SCED**	SCED connecting strap kit - CED (3.75in, twin)	CED [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00160	**SCFD**	SCFD connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1]; CFD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00167	**SCJD**	SCJD connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00172	**SCLD**	SCLD connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1]; CLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00154	**SE6D**	SE6D connecting strap kit - ED (3.75in, twin)	ED [s1]; ED [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00159	**SF6D**	SF6D connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1]; FD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00165	**SJ1D**	SJ1D connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00166	**SJ2D**	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00163	**SJG2D**	SJG2D connecting strap kit - VL JG (6.25in, twin)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00171	**SL6D**	SL6D connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1]; LD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00177	**SMND**	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00174	**SSCLD**	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1]; SCLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00183	**SSJ1D**	SSJ1D connecting strap kit - SJD (8.75in, single)	SJD [s2] **A**	listed in Siemens Canada catalogue 2025

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00173	**SSL6D**	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1]; SLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00178	**SSMND**	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005

EDH-SIE-00155	6CLE2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6CLE2 connecting strap kit - CED (3.75in, twin)

OEM part number	6CLE2	**A**	S97, S394 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S97, S99, S98 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	**A**	S394 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CED [s1]; CED6 [s3]; CED6 [s2]	**A**	S97, S99, S98 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	CED6 frame branch breaker 15-125 A, double mounting; I-T-E type CLE, CLE-A, CED6	**A**	S394 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	125A max (table max-amp rating)	**A**	S97, S99, S98 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S97, S99, S98 p.11-110 | p.8-13 | p.11-15; oem_spec
	BOM 11-5068-05: E2-4-6 AC-phase branch bus 11-7140-01 x2; B-phase 11-7141-01 x1; line connector 11-7138-01 x3; interphase barrier 15-7505-01 x2; mounting bracket 15-B-3016-02 x2; 3.750 cover plate 12-6024-01; circuit ID card x2; card holder x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap bus hardware kit 11-B-2022-05; 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; 8-32 x 4-3/16 SRHSW 11-1510-15 x6; 1/4-20 x 5/8 SHWHSW 11-1553-06 x4; neutral lug assembly 12-B-2105-02; blank filler 12-5531-09 x2; Series 5 conversion kit 11-5570-01; instruction sheet 31-1153-01	**A**	S394 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S98 p.11-15; oem_spec
	Copper branch bus	**A**	S394 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S99, S98 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Location dims A 3.750 / B 0.625 / C 1.250 (-01/-03) or 6.250 / 1.875 / 2.500 (-02/-04) in; 2.500 in	**A**	S394 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Item 10: 50 in-lb Al / 72 in-lb Cu; item 11: 30 in-lb Al / 50 in-lb Cu; Series 5 adaptor 5/16-18 HHMS 13 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1153-01 Rev. 00: SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)	**A**	same as above

Status	listed in SpeedFax 2021, 2005 price list, Siemens Canada catalogue 2025	A	S97, S99, S98 oem_spec
Identification features	2005 list price $845.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00192	6JJ61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)

OEM part number	6JJ61	A	S99, S429 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 single branch branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 single branch [s3]	A	S99 p.8-13 (2005) (s3); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating		

EDH-SIE-00197	6LL61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)

OEM part number	6LL61	A	S99, S429 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6LL61C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for LXD6, LD6, HLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2]	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Material	copper only; Canadian catalogue lists as 6LL61C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating		

EDH-SIE-00195	6SJL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)

OEM part number	6SJL1	A	S99, S429 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6SJL1C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for SJL, SJD6, SHJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2]	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Material	copper only; Canadian catalogue lists as 6SJL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating		

EDH-SIE-00199	**6SLL1**	Siemens	branch-connector-kit	**LISTED IN 2005 PRICE L**

6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)

OEM part number	6SLL1	A	S99, S429 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SLL, SLD6, SHLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Installation location	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	SLL, SLD6, SHLD6 [s3]	A	S99 p.8-13 (2005) (s3); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating		

EDH-SIE-00422	F602D	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P5/F2 (deep) Vacu-Break fusible switch mounting kit, 2.5 in high twin units (30A)

OEM part number	F602D	**A**	S457 sheet header text; oem_spec
Installation location	SPP/FPP/S5/F2/P5 panelboards (deep box)	**A**	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch 2.5 in high twin units (30A)	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1239-01 Rev. 2: CAT. NO. F602D Vacu-Break mounting kit for 2.5 in high twin units (30A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	**A**	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-SIE-00423	F657D	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P5/F2 (deep) Vacu-Break fusible switch mounting kit, 5 in and 7.5 in high twin units (30, 60, 100A)

OEM part number	F657D	**A**	S458 sheet header text; oem_spec
Installation location	SPP/FPP/S5/F2/P5 panelboards (deep box)	**A**	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch 5 in and 7.5 in high twin units (30, 60, 100A)	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1240-01 Rev. 2: CAT. NO. F657D Vacu-Break mounting kit for 5 in and 7.5 in high twin units (30, 60, 100A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	**A**	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-SIE-00424	F671D	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

P5/F2 (deep) Vacu-Break fusible switch mounting kit, 7.5 in and 10 in high single units (200A)

OEM part number	F671D	**A**	S459 sheet header text; oem_spec
Installation location	SPP/FPP/S5/F2/P5 panelboards (deep box)	**A**	same as above
Breaker compatibility	Siemens Vacu-Break fusible switch 7.5 in and 10 in high single units (200A)	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1242-01 Rev. 2: CAT. NO. F671D Vacu-Break mounting kit for 7.5 in and 10 in high single units (200A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	**A**	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Kit contents, Torque values		

EDH-SIE-00179	NG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

NG1D connecting strap kit - VL NG (10.00in, single)

OEM part number	NG1D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL NG branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3]	A	same as above
Current rating	1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S97, S99 oem_spec
Identification features	2005 list price $3489.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00152	S3VA41TDHD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)

OEM part number	S3VA41TDHD	A	S97, S345 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin, high density (six 2-pole breakers) mount, 7.50in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin, high density, Twin, high density (six 2-pole breakers)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	2-pole 3VA41 (SEAB, MEAB, HEAB) or xGB (NGB, HGB, LGB)	A	S345 pp. 1-4; oem_spec
Current rating	125A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	2 A/C-phase runbacks; 4 A/C-phase straps; 2 B-phase runbacks; 2 B-phase straps; 2 barrier support brackets; 2 top barriers; 1 7.5 in cover plate; 12 circuit ID cards; 12 card holders; blank fillers; bus hardware kit; 4 #10-24 x 3/8 HHWS; 12 #10-24 x 5/8 SHCS; 6 1/4-20 x 3/8 HHWS; 1/4-20 x 5/8 HHWS; 4 #8-32 x 5/8 HHWS; branch neutral connector; 2 branch neutral terminal strips	A	S345 pp. 1-4; oem_spec

Dimensions	Unit height 7.50 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 7.5 in of unit space; 7.5 in cover plate	A	S345 pp. 1-4; oem_spec
Mounting-hole pattern	Locate 0.228 in hole in A-phase bus 1.25 in down from top of the 7.5 in unit space	A	same as above
Torque values	#8-32 35 lb-in; others per deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1058-01 Rev. 00: Distribution Switchboard / Power Panel Kit S3VA41TDHD for Branch Mounting of 2-pole 3VA41 or xGB Breakers (high density)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Finish / plating, Material		

EDH-SIE-00182	S3VA53T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)

OEM part number	S3VA53T2D	A	S98, S353 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53, 3VA63 branch breaker(s), twin mount, 6.25in unit height	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S98 p.11-5; oem_spec
	Distribution switchboard or 38 in wide P5 power panel; 1-ph 2/3-w or 3-ph 3/4-w	A	S353 pp. 1-4; oem_spec
Breaker compatibility	3VA53, 3VA63 [s2]	A	S98 p.11-5 (s2); oem_spec
	3VA53 (MJAS, HJAS, CJAS) or 3VA63 (MJAE, HJAE, CJAE, LJAE) in 400A application; breakers and lugs not included	A	S353 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S98 p.11-5 (s2); oem_spec
Kit contents	2 A/C-phase straps; 1 B-phase strap; 2 breaker mounting brackets; 1 6.25 in cover plate; 2 filler plates; 1 interphase barrier; 8 provision barriers; 2 circuit ID cards; 2 card holders; panelboard and switchboard neutral branch lug assys; 4 #10-32 breaker mounting screws (20 lb-in); 4 #10-24 x 1/2 carriage bolts; 4 #10 lock nuts (20 lb-in); 6 1/4-20 x 3/8 HHWS (72 lb-in); 4 1/4-20 x 1/2 HHWS (72 lb-in); 6 3/8-16 x 1-1/8 SEMS (240 lb-in); 1 'Standard Bus Hardware Kit' strap-to-section (72 lb-in; 18 fasteners, select per card). Strap components differ for 400A vs 600A.	A	S353 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space (figure dims 2.50 in, 1.87 in, 3.13 in)	A	S353 pp. 1-4; oem_spec
Mounting-hole pattern	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each	A	same as above
Torque values	Breaker stab to strap 3/8-16 x 1-1/8 SEMS 240 lb-in; bus hardware 72 lb-in; single-barrel lug mounting screws 142 lb-in to nutkeeper; double-barrel lug mounting screws 355 lb-in to nutkeeper	A	same as above
OEM instruction document	11-B-1086-01; handle extension per 11-B-1088-01; breaker caution label 11-B-1067-01	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00185	S3VA54T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)

OEM part number	S3VA54T2D	**A**	S98, S353 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54, 3VA64 branch breaker(s), twin mount, 6.25in unit height	**A**	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 46in	**A**	S98 p.11-5; oem_spec
	Distribution switchboard or 38 in wide P5 power panel; 1-ph 2/3-w or 3-ph 3/4-w	**A**	S353 pp. 1-4; oem_spec
Breaker compatibility	3VA54, 3VA64 [s2]	**A**	S98 p.11-5 (s2); oem_spec
	3VA53/3VA63 or 3VA54 (MLAS, HLAS, CLAS) / 3VA64 (MLAE, HLAE, CLAE) in 600A application; a 400A breaker can be installed in a 600A twin kit; breakers and lugs not included	**A**	S353 pp. 1-4; oem_spec
Current rating	600A max (table max-amp rating)	**A**	S98 p.11-5 (s2); oem_spec
Kit contents	2 A/C-phase straps; 1 B-phase strap; 2 breaker mounting brackets; 1 6.25 in cover plate; 2 filler plates; 1 interphase barrier; 8 provision barriers; 2 circuit ID cards; 2 card holders; panelboard and switchboard neutral branch lug assys; 4 #10-32 breaker mounting screws (20 lb-in); 4 #10-24 x 1/2 carriage bolts; 4 #10 lock nuts (20 lb-in); 6 1/4-20 x 3/8 HHWS (72 lb-in); 4 1/4-20 x 1/2 HHWS (72 lb-in); 6 3/8-16 x 1-1/8 SEMS (240 lb-in); 1 'Standard Bus Hardware Kit' strap-to-section (72 lb-in; 18 fasteners, select per card). Strap components differ for 400A vs 600A.	**A**	S353 pp. 1-4; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S98 p.11-5 (s2); oem_spec
	Requires 6.25 in of unit space (figure dims 2.50 in, 1.87 in, 3.13 in)	**A**	S353 pp. 1-4; oem_spec
Mounting-hole pattern	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each	**A**	same as above
Torque values	Breaker stab to strap 3/8-16 x 1-1/8 SEMS 240 lb-in; bus hardware 72 lb-in; single-barrel lug mounting screws 142 lb-in to nutkeeper; double-barrel lug mounting screws 355 lb-in to nutkeeper	**A**	same as above
OEM instruction document	11-B-1086-01; handle extension per 11-B-1088-01; breaker caution label 11-B-1067-01	**A**	same as above
Status	listed in Siemens Canada catalogue 2025	**A**	S98 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00186	S3VA55TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)

OEM part number	S3VA55TD	A	S98, S354 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA55, 3VA65; 3VA66 branch breaker(s), single mount, 8.75in unit height	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for 3VA66)in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA55, 3VA65; 3VA66 [s2]	A	S98 p.11-5 (s2); oem_spec
	3VA55 (MMAS, HMAS, CMAS) or 3VA65 (MMAE, HMAE, CMAE) 800A; 3VA66 (MMNAE, HMNAE, CMNAE) 1000A; main or branch; breaker and lugs not included	A	S354 pp. 1-4; oem_spec
Current rating	800/1000A max (table max-amp rating)	A	S98 p.11-5 (s2); oem_spec
Kit contents	2 mounting brackets; 1 barrier; short (A), medium (B) and long (C) straps; cover plate; circuit ID card; card holder; handle extension holder assembly; 4 panelboard + 4 switchboard neutral branch lug assys; provision strap barrier; provision filler; #10-32 thread-forming screw (20 lb-in); 2 #10-24 x 5/8 round head screws; 2 #10 locknuts (30 lb-in); Standard Bus Hardware Kit strap-to-section (72 lb-in); 4 1/4-20 x 3/8 HHWS (40 lb-in); 4 1/4-20 x 1/2 HHWS (72 lb-in); 4 1/4-20 x 1/2 tall hex washer screws (72 lb-in); 6 M10 SEMS screws (275 lb-in; discard the six M10 screws shipped with breaker)	A	S354 pp. 1-4; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-5 (s2); oem_spec
	Requires 8.75 in of unit space; kit can be rotated 180 deg	A	S354 pp. 1-4; oem_spec
Torque values	M10 breaker-to-strap 275 lb-in; M6 x 80 mm breaker OFF-side mounting screws 18 lb-in; shield cover screws 13 lb-in; straps to bus 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1097-01 Rev. 00: Distribution Switchboard or P5 Power Panel Strap Mounting Kit S3VA55TD for 800A 3VA55/65 or 1000A 3VA66 Breaker	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00187	S3VA57TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)

OEM part number	S3VA57TD	A	S98, S355 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA57, 3VA67 branch breaker(s), single mount, 10.00in unit height	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA57, 3VA67 [s2]	A	S98 p.11-5 (s2); oem_spec
	3VA57 (MNAS, HNAS, CNAS) or 3VA67 (MNAE, HNAE, CNAE) as branch device, 1200 A, 3-ph 3/4-w; breakers and lugs not included	A	S355 pp. 1-4; oem_spec

Current rating	1200A max (table max-amp rating)	A	S98 p.11-5 (s2); oem_spec
Kit contents	Long, medium and short straps; breaker mounting bracket; phase bracket; plastic phase brace; gutter barrier; 4 panelboard + 4 switchboard neutral lug assemblies; filler plate assembly; cover plate; circuit ID card; card holder; handle holder kit; Standard Bus Hardware Kit (select 12 screws per bus laminations; 72 lb-in); 6 5/16-18 x 1-3/8 SEMS (144 lb-in); 6 5/16 narrow washers (critical for creepage); 2 1/4-20 x 3/8 (72); 7 1/4-20 x 1/2 (72); 6 1/4-20 x 5/8 (72); 2 1/4-20 x 3-3/4 (72; replace the four long screws shipped with breaker)	A	S355 pp. 1-4; oem_spec
Dimensions	Unit height 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-5 (s2); oem_spec
	Requires 10 in of unit space; minimum 38 in wide enclosure for lugs up to 600 kcmil, 46 in wide for 750 kcmil lugs or SEM3 applications	A	S355 pp. 1-4; oem_spec
Mounting-hole pattern	Straps land on bus mounting holes, four screws per phase, strap assembly vertically centered in 10 in unit space	A	same as above
Torque values	Breaker to strap 5/16-18 SEMS 144 lb-in; straps to bus 72 lb-in; shield cover screws 11 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1101-01 Rev. 00: Switchboard / P5 Powerpanel Strap Mounting Kit S3VA57TD for a 1,200A 3VA57 or 3VA67 Breaker	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00162	**S3VA63TD**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63TD connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63TD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	3VA63 [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00169	S3VA64TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64TD connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64TD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	3VA64 [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00180	SCED	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SCED connecting strap kit - CED (3.75in, twin)

OEM part number	SCED	A	S98, S445 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	For use with CED6 frame breakers mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S445 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CED [s2]	A	S98 p.11-5 (s2); oem_spec
	CED6 frame branch breaker 15-125 A, double mounting; I-T-E type CLE, CLE-A, CED6	A	S445 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	125A max (table max-amp rating)	A	S98 p.11-5 (s2); oem_spec
Kit contents	BOM 11-5068-06: E2-4-6 AC-phase branch bus 11-7140-01 x2; B-phase branch bus 11-7141-01 x1; line connector 11-7138-01 x3; interphase barrier 15-7505-01 x2; mounting bracket 15-B-3016-02 x2; 3.750 cover plate 12-6024-01 x1; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2022-05 x1; 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; 8-32 x 4-3/16 SRHSW 11-1510-15 x6; 1/4-20 x 5/8 SHWHSW 11-1553-06 x4; neutral lug assembly 12-B-2105-01 x1; blank filler 12-5531-09 x2	A	S445 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-5 (s2); oem_spec
	Location dims 11-5068-01/-03: A 3.750, B 0.625, C 1.250 in; -02/-04: A 6.250, B 1.875, C 2.500 in	A	S445 single sheet drawing + BOM (scanned image, read visually); oem_spec

Torque values	Item 10: 50 in-lb Al / 72 in-lb Cu; item 11: 30 in-lb Al / 50 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1216-01 Rev. 1: CAT. NO. SCED - CED6 branch breaker mounting S5 copper branch bus (drawing 11-5068-00 Rev 2 / BOM 11-5068-06 Rev 3)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: P5, SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00160	SCFD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCFD connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCFD	A	S97, S441 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	For use with CFD6 frame breakers mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S441 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CFD [s1]; CFD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	I-T-E type CLF, CFD6 frame branch breaker, 70-250 A, single mounting	A	S441 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	BOM 11-5383-02: breaker support bracket 15-B-3020-02; phase A connector bus 12-7144-01; phase B connector bus 12-7145-01; phase C connector bus 12-7146-01; phase A branch bus 12-7143-01; phase B branch bus 12-7143-02; phase C branch bus 12-7143-03; bus support bracket 12-6257-01; stand-off insulator 11-1800-01 x3; branch bus barrier 11-7715-01; 5 in front plate 12-6029-02; circuit ID card; card holder; 1/4-20 x 3/8 SHWHSW 11-1553-02 x9; strap-bus hardware kit 11-B-2022-05 x2 (+1 item 26); 1/4-20 x 1-7/16 SHWHSW 11-1553-13 x3; 1/4-20 x 4 SRHMS 11-1542-19 x2; neutral lug assembly 12-B-2105-05; blank filler 12-5531-10; 10-24 x 5/8 RHSNB 11-1630-02 x2; 10-24 lock nut 11-1821-02 x2	A	S441 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	5.000 in unit; 1.750 / 1.500 / 1.250 / 1.000 in bus spacings; 0.625 in	A	S441 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Items 16/17: 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1220-01 Rev. 1: CAT. NO. SCFD - CFD6 branch breaker mounting S4/S5 copper bus (drawing 11-5383-00 Rev 5 / BOM 11-5383-02 Rev 8)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00167	SCJD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJD connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJD	A	S97, S442 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	Deep box SPP/FPP/S5/F2/P5 panelboards (deep box); PC -02 assembly used on strap kit SCJD	A	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) [s1]; CJD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types CLJ, CJD6, 400 A breaker	A	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	400A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only). Column quantities per -01/-02 read from scan - verify	A	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1225-01 Rev. 1: CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		
Open question	*P5 table pairs both CJD and SJD with SCJD; SB table pairs SJD with SSJ1D - which is correct for SJD in P5?*		

EDH-SIE-00172	SCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCLD connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCLD	**A**	S97, S444 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S98 p.11-5; oem_spec
	Deep box SPP/FPP/S5/F2/P5 panelboards (deep box); PC -02 assembly of drawing 12-5720 used on strap kit SCLD	**A**	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron CLD [s1]; CLD [s2]	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types CLL, CLD6, 600 A breaker	**A**	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	600A max (table max-amp rating)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S97 p.11-110; oem_spec
	Drawing BOM (same structure as 12-5719/12-5772): mounting bracket 16-6114-01; support bracket 16-6120-02; AC jitney 17-6768-02 x2; B jitney 17-6769-02; AC long connector 12-6776-06; B connector 12-6776-05; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulators 11-1800-02 x4; barriers 11-7721-01, 11-6415-02; cover plate 12-6194-02; strap-bus hardware kit 11-B-2022-05 x2; 5/16-18 inserts, flat and lock washers; 5/16-18 x 1 and x 1-1/4 HHMS; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / -06; 3/8-16 x 1 RHSNB 11-1580-02; 3/8-16 Belleville washer nut 11-1622-01; 1/4-20 x 3/8 SHWHSW 11-1553-02; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01). Column quantities read from scan - verify	**A**	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 in; 5.63 / 3.75 / 3.13 / 1.25 in	**A**	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Item 16 (strap-bus hardware) 72 in-lb; item 29 20 ft-lb; items 20/21 12 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1229-01 Rev. 2: CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)	**A**	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00154	SE6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6D connecting strap kit - ED (3.75in, twin)

OEM part number	SE6D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	ED [s1]; ED [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00159	SF6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6D connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6D	A	S97, S440 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	For use with FXD6, FD6 and HFD6 frame breakers mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	A	S440 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron FD [s1]; FD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	FD6 frame twin mounted 70-250 A: FXD6, FD6, HFD6	A	S440 single sheet drawing + BOM (scanned image, read visually); oem_spec
Current rating	250A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec

	BOM 11-5098-03: F6 phase AC front branch bus 12-7031-01 x2; AC rear 12-7032-01 x2; phase B branch bus 12-7033-01 x1; phase B heat sink 11-6846-01 x2; F6 mounting bracket 15-B-3018-02 x2; 5 in F6 cover plate 12-6028-01; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit 11-B-2023-05 (use 11-B-2022-05 for B-phase); 8-32 x 5/8 IHWHSW 11-1512-07 x4; 1/4-20 x 1 SHWHSW 11-1553-09 x6; 1/4-20 x 4 SRHMS 11-1542-19 x4; 1/4-20 x 5/8 SHWHSW 11-1553-06 x2; blank filler 12-5531-10 x2; neutral lug assembly 12-B-2105-07 x2; phase B barrier (provisions) 11-7548-02 x4	A	S440 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	5.00 in unit; 3.75, 1.25, 0.63 in	A	S440 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware 50 in-lb Al / 72 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1218-01 Rev. 2: CAT. NO. SF6D - FD6 frame mounting S4/S5 copper branch bus (drawing 11-5098-00 Rev 6 / BOM 11-5098-03 Rev 9)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Identification features	Same branch-bus drawing family as Series 6 kit 6F62 (11-5098); items 3, 4 & 11 sub-assembled before packing	A	S440 single sheet drawing + BOM (scanned image, read visually); oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00165	**SJ1D**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1D connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1D	A	S97, S429 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Current rating	400A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec

	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00166 SJ2D Siemens branch-connector-kit LISTED IN SPEEDFAX 202

SJ2D connecting strap kit - Sentron JD (8.75in, twin)

OEM part number	SJ2D	A	S97, S352 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), twin mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S98 p.11-5; oem_spec
	Strap kit SJ2D (deep box P5 / SPP/FPP/S5/F2) uses PC -02 assembly of drawing 12-5721	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types JD2, JJ6, JL6, HJ6, HJD6, JXD2, JXD6, JD6, HHJD6 (400 A)	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Current rating	400A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	Mounting bracket 11-6398-01 x2; phase AC branch bus 16-6974-01 x2; phase B branch bus 16-6949-02 x1; 5/16-18 x 1-1/4 HHMS 11-1566-07 x6; 5/16 lock washer 11-1618-04 x6; 5/16 flat washer 11-1615-06 x6; 5/16-18 insert 11-1620-04 x6; front plate 12-6139-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2022-05 x2; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; filler plate assembly 12-5531-11; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; (-02/SJ2D column only) 1/4-20 x 5/8 HHMS 11-1546-03 x4 with 1/4 lock and flat washers, instruction sheet 31-1223-01; 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01 listed (quantities not legible); (-01/6JJ62 column only) Series 5 conversion kit 11-5570-02 and instruction sheet 31-1169-01; neutral lug assembly 12-B-2105-04 (6JJ62) / 12-B-2105-06 (SJ2D). Column assignment read from a scanned drawing - verify	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec

	Branch bus layout 3.75 / 8.75 / 3.13 in	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Torque values	Item 4 (5/16-18 x 1-1/4 HHMS) 12 ft-lb; item 10 strap-bus hardware 72 in-lb; Series 5 adaptor 5/16-18 bolts 13 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1169-01 Rev. 3: CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00163	SJG2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG2D connecting strap kit - VL JG (6.25in, twin)

OEM part number	SJG2D	A	S97, S340 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), twin mount, 6.25in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-110 (s1); oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or deep panelboard (P5)	A	S340 pp. 1-4; oem_spec
Breaker compatibility	VL JG [s1]	A	S97 p.11-110 (s1); oem_spec
	Siemens VL JG frame electronic-trip breakers	A	S340 pp. 1-4; oem_spec
Current rating	400A max (table max-amp rating)	A	S97 p.11-110 (s1); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
	Requires 6.25 in of unit space; straps 1.75 in vertically between centers	A	S340 pp. 1-4; oem_spec
Mounting-hole pattern	B strap two 0.228 in holes in B-phase bus 5.00 in down from top of 6.25 in unit space; A straps 1-1/4 in down; C straps 5.00 in down; B link half-punch into 0.218 in hole of B strap, 5/16-18 screw through 0.375 in link hole into 0.281 in strap hole; breaker line contacts 5/16-18 into 0.281 in strap holes; mounting brackets on 0.228 in Z-rail holes 1.875 in down; breaker load end 1/4-20 x 3-3/4 into 0.228 in bracket holes	A	same as above
Torque values	5/16-18 connections per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1026-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel Kit (P5) SJG2D for Branch Mounting Type VL JG Frame Breakers	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00171	SL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6D connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6D	A	S97, S429 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec

Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S98 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	**A**	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	Sentron LD [s1]; LD [s2]	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	**A**	S429 pp. 2-4 (image); oem_spec
Current rating	600A max (table max-amp rating)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S97 p.11-110; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	**A**	S429 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	**A**	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	**A**	same as above
Torque values	Per rear-of-deadfront label	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	**A**	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00177	SMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)

OEM part number	SMND	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron MD, CMD; ND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for ND)in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, HND6, CND6 [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $3489.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00174	SSCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCLD connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCLD	A	S97, S443 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	Deep box SPP/FPP/S5/F2/P5 panelboards (deep box); PC -02 assembly used on strap kit SSCLD	A	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	Sentron SCLD [s1]; SCLD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	ITE breaker types SCLD6, 600 A breaker	A	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec

Current rating	600A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only); 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01. Column quantities per -01/-02 read from scan - verify	A	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	Copper branch bus	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1230-01 Rev. 1: CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'	A	same as above
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00183	**SSJ1D**	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSJ1D connecting strap kit - SJD (8.75in, single)

OEM part number	SSJ1D	A	S98, S429 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SJD branch breaker(s), single mount, 8.75in unit height	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	SJD [s2]	A	S98 p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Current rating	400A max (table max-amp rating)	A	S98 p.11-5 (s2); oem_spec
Kit contents	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec

Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00173	**SSL6D**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6D connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6D	A	S97, S429 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
	Switchboard or deep panelboard; 3-ph 3-w or 3-ph 4-w	A	S429 pp. 2-4 (image); oem_spec
Breaker compatibility	Sentron SLD [s1]; SLD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Siemens class JD / SJD / LD / SLD breakers (kit family 6JJ61/SJ1D/6SJL1/SSJ1D for JD/SJD; 6LL61/SL6D/SSL6D/6SLL1 for LD/SLD)	A	S429 pp. 2-4 (image); oem_spec
Current rating	600A max (table max-amp rating)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
	Breaker installation instruction; strap support barrier; long, medium and short phase connectors; strap-section bus hardware kit; Series 5 conversion kit; breaker mounting bracket; 2 barrier mounts; breaker cover panel; card holder; circuit ID card; filler plate assembly; 2 1/4-20 x 3/8 screws; 4 1/4-20 x 1/2 small-head screws; 2 1/4-20 x 9/16 screws; 2 1/4-20 x 2-3/4 screws; 3 5/16-18 x 1-1/8 screws; 2 neutral lug assemblies (two types); 4 1/4-20 x 1/2 screws	A	S429 pp. 2-4 (image); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
	Requires 8-3/4 in of unit space; Z-rail hole 1-7/8 (1.88) in down	A	S429 pp. 2-4 (image); oem_spec
Mounting-hole pattern	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes	A	same as above
Torque values	Per rear-of-deadfront label	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1012-01 Rev. 2: Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	A	same as above

Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Material		

EDH-SIE-00178	**SSMND**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)

OEM part number	SSMND	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SMD; SND branch breaker(s), single mount, 10.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	**A**	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for SND)in	**A**	S98 p.11-5; oem_spec
Breaker compatibility	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, SHND6, SCND6 [s3]	**A**	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	**A**	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	**A**	S99 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	**A**	S97, S98, S99 oem_spec
Identification features	2005 list price $3489.00	**A**	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00220	**SEBP5V1**	Service entrance barrier for (S)MD, (S)ND without shield	Horizontally-mounted MD, ND or NG main in P5, without lug shield **A**	unknown
EDH-SIE-00221	**SEBP5V2**	Service entrance barrier for (S)MD, (S)ND with shield	Horizontally-mounted MD, ND or NG main in P5, with lug shield **A**	unknown
EDH-SIE-00222	**SEBP5V3**	Service entrance barrier for Vacu-Break switches	200A or 400A Siemens Vacu-Break main switch in P5 **A**	unknown
EDH-SIE-00223	**SEBP5V4**	Service entrance barrier for HCP switches	HCP main switch in P5 **A**	unknown
EDH-SIE-00395	**SEBPPVA2**	P5 service entrance barrier kit - horizontal 3VA55/3VA65/3VA66	Horizontally-mounted 3VA55, 3VA65 or 3VA66 in P5 **A**	unknown

EDH-SIE-00220	SEBP5V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)MD, (S)ND without shield

OEM part number	SEBP5V1	A	S97, S402 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND without shield	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S402 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted MD, ND or NG main in P5, without lug shield	A	same as above
Kit contents	2 barrier support brackets; 2 1/4-20 x 5/8 SHWHSW; 1 barrier assembly; 2 removable screw-type rivets	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1160-01 Rev. 00: SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00221	SEBP5V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)MD, (S)ND with shield

OEM part number	SEBP5V2	A	S97, S402 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND with shield	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S402 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted MD, ND or NG main in P5, with lug shield	A	same as above
Kit contents	2 barrier support brackets; 2 1/4-20 x 5/8 SHWHSW; 1 barrier assembly; 2 removable rivets	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1160-01 Rev. 00: SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00222	SEBP5V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for Vacu-Break switches

OEM part number	SEBP5V3	A	S97, S403 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for Vacu-Break switches	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S403 single sheet; oem_spec
Breaker compatibility	200A or 400A Siemens Vacu-Break main switch in P5	A	same as above
Kit contents	1 barrier support bracket; 2 1/4-20 x 3/8 SHWHSW; 1 barrier assembly; 2 #10-32 x 3/8 HWHSW; auxiliary barrier(s) 1 (200A) / 2 (400A); side barrier hardware 4 (200A) / 2 (400A)	A	same as above
Dimensions	Bracket on base rail X from nearest end: X = 5.63 in (200A), 4.38 in (400A)	A	same as above
Torque values	Bracket 1/4-20 30 lb-in; #10-32 20 lb-in; 400A auxiliary barrier 1/4-20 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1163-01 Rev. 00: SEBP5V3 Service Entrance Barrier Kit for P5 (Vacu-Break main switch)	A	same as above
Cross-links	Families: P5		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00223	SEBP5V4	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for HCP switches

OEM part number	SEBP5V4	A	S97, S404 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for HCP switches	A	S97 pp.11-96, 11-110; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S404 single sheet; oem_spec
Breaker compatibility	HCP main switch in P5	A	same as above
Kit contents	2 barrier support brackets; 2 1/4-20 x 5/8 SHWHSW; 1 barrier assembly; 2 removable screw-type rivets	A	same as above
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1164-01 Rev. 00: SEBP5V4 Service Entrance Barrier Kit for P5 (HCP main)	A	same as above
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00395	SEBPPVA2	Siemens lineage	barrier	STATUS UNKNOWN

P5 service entrance barrier kit - horizontal 3VA55/3VA65/3VA66

OEM part number	SEBPPVA2	A	S406 single sheet; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	same as above
Breaker compatibility	Horizontally-mounted 3VA55, 3VA65 or 3VA66 in P5	A	same as above
Kit contents	1 service barrier assembly; 1 barrier mounting bracket; 2 #10-32 x 3/8 thread-forming screws; 2 #10-32 x 5/16 SEMS screws	A	same as above
Torque values	All #10-32 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1095-01 Rev. 00: SEBPPVA2 Service Entrance Barrier Kit for 3VA55, 3VA65 or 3VA66 Breaker in a P5 Panelboard	A	same as above
Cross-links	Families: P5		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00382	**P53RCONVKIT**	P5 power panel Type 1 to Type 3R/12 enclosure interior conversion kit	—	unknown

EDH-SIE-00382	P53RCONVKIT	Siemens lineage	conversion-kit	STATUS UNKNOWN

P5 power panel Type 1 to Type 3R/12 enclosure interior conversion kit

OEM part number	P53RCONVKIT	A	S360 pp. 2-4; oem_spec
Description	Required to modify P5 interior for mounting in a Type 3R/12 enclosure (four L-shaped brackets attached to sides of interior with supplied hardware)	A	same as above
Application	P5 32 in / 38 in wide power panels (e.g. P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH); interior designed for 3-ph 4-w density-rated bus, 208Y/120 or 480Y/277 dual rated	A	same as above
OEM instruction document	Siemens instruction sheet 11-D-1013-01 Rev. 00: Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH)	A	same as above
Cross-links	Families: P5		

6.9 PUSHMATIC — Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)

FAM-SIE-011 · panelboard · aka Pushmatic, Bulldog Pushmatic, Electri-Center, Electra-Center · markings: Bulldog, Bull Dog, Pushmatic, ITE Pushmatic, Gould ITE, Siemens, Electri-Center

Bulldog Pushmatic panels use push-button (not toggle) bolt-on breakers, grease-lubricated mechanisms reported to stiffen if not exercised, thermal plus (in at least some versions) magnetic trip. Brand passed to ITE/Gould and then Siemens. Replacement 1-2 pole breakers exist (Connecticut Electric UBIP); 3-phase Pushmatic panelboards exist but replacement 3-pole breakers are scarce. Condensed-space P1515 dual breakers do not fit older ITE Pushmatic panels.

Attribute	Value	Cl.	Sources
Status	Obsolete; replacement breakers from Connecticut Electric (UBIP series, 1-2 pole 120/240 V, 10 kAIC ETL) and new-old-stock ITE/Siemens Pushmatic; 3-pole 208Y/120 replacements reported back-ordered/unavailable	C	S155, S159, S176 distributor
Era of manufacture	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,320 of 1947); installed mainly 1950-1970; ITE (Gould) purchase stated 1976 (forum says 1950s - conflicting); Siemens c.1982-84	C	S170, S176, S159 other
Successor	Siemens owns Pushmatic trademark (per InspectAPedia/forum); no current panelboard	D	S176, S159 other
Voltage rating	120/240 V 1-ph; some 120/208Y 3-ph panels	C	S159, S176 forum
Branch breakers accepted	Pushmatic push-button breakers (P-series e.g. P1515 dual 15 A condensed); bolt-on to bus	C	S176, S155 other

Breaker families associated: Pushmatic (Bulldog / ITE)
Key documents: S155 Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings; S159 Bulldog Pushmatic forum threads (3-phase Pushmatic, ITE/Siemens lineage); S170 Pushmatic / Bulldog design history; S176 Pushmatic - Bulldog panels & breakers

6.10 RP1 — Type P1 (Revised P1)

FAM-SIE-001 · panelboard · aka New Revised P1, NextGen P1, P1...N, P1...T, Revised P1 · markings: Siemens

Siemens 20in wide x 5.75in deep bolt-on lighting/appliance panelboard, 250A or 400A bus, split (cross-bussed) neutral at both ends of an open-ended bus. Field-convertible mains: main lug kits (MLK*) or horizontal main/subfeed strap kits (MBK*) through 250A, vertical 400A main. Catalog numbers end in T (feed-thru/subfeed space) or N (non-feed-thru, 6in shorter box). Revised P1 kits are not interchangeable with original P1, S1/S2 or SE panels.

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-11; oem_spec
Era of manufacture	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014' (OEM document is internally inconsistent (2014 vs 2015))	A	S97 pp.11-7, 11-11; oem_spec
Voltage rating	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V limited (factory only)	A	S97 pp.11-7, 11-24; oem_spec
Main ampacity	250A or 400A bus; 400A max mains	A	same as above
Branch breakers accepted	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	A	S97 pp.11-7, 11-16; oem_spec
Branch connection limit	All configurations allow 125A per connection max (250A per pair); 18-circuit 250A Revised P1 limited to 100A per connection (200A per pair) with BL/BQD/xGB across from each other	A	S97 p.11-12 footnote; oem_spec
Torque table	P1-250/P1-400 torque label: #10-32 branch breaker to phase bus and BL/BT/BQD/ED/xGB/3VA41 (and FD/QJ/QR) breaker to straps 20 lb-in; 1/4-20 straps to phase bus (BL/BT/BQD/ED/FD/xGB/QJ/QR/3VA41/3VA52/3VA61/3VA62) 72 lb-in; P1-250 main copper lugs to phase bus 1/4-20 72 lb-in; P1-400 main lugs to phase bus 5/16-18 144 lb-in; 3VA52/61/62 breaker to bus extensions 5/16-18 177 lb-in; JD breaker to straps 3/8-16 240 lb-in; 3VA53/63 to bus extensions 3/8-16 354 lb-in; breaker mounting screws QR 1/4-20 x 3-1/4 35 lb-in, FD/3VA52 1/4-20 x 4 40 lb-in, 3VA61/62 #8-32 x 3 13 lb-in; 3VA nutkeepers 177 (52/61/62) / 354 (53/63) lb-in; branch neutral terminal-strip wire screws 20 lb-in (#14-#10) rising to 45 lb-in (#4, large hole) and 50 lb-in (#3-2/0, large hole) - small/large hole values per label table (column layout not fully legible in text extraction); lug set screws 5/16 Allen 275, 3/8 375, 1/2 500 lb-in; bus connections per bus material (1/8 in Cu / 3/16 in Al): #10-24 25/30 (A&C straps, B connectors), #10-24 neutral strips to risers 30/30, 1/4-20 50/30, 5/16-18 72/108 lb-in. Bus material: catalog ending A/AT = aluminum, C/CT = copper.	A	S362 both sides (P1-250 and P1-400 versions); oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S101 SIE_CS_P1 / Siemens SIOS 109799956 Type P1 Panelboard data sheet (SIE_CS_P1); S104 SI-LP-1633 NextGen P1 panelboard brochure (Siemens Canada); S362 11-D-1030-01 Rev. 03 Revised P1 (P1-250 / P1-400) Hardware Tightening Torque instructions label

Also fits this family (entry printed elsewhere): DFFPED01, TPS3 09

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00385	**MBKBC1NBA**	Revised P1 BQD/GB main/subfeed breaker kit, 1-phase	Type BQD and GB breakers (separate BQD and GB support brackets supplie **A**	unknown
EDH-SIE-00386	**MBKBC3NBA**	Revised P1 BQD/GB main/subfeed breaker kit, 3-phase	Type BQD and GB breakers (separate BQD and GB support brackets supplie **A**	unknown
EDH-SIE-00383	**MBKBL1A**	Revised P1 BL main/subfeed breaker kit, 1-phase	Type BL breakers (purchased separately) **A**	unknown
EDH-SIE-00384	**MBKBL3A**	Revised P1 BL main/subfeed breaker kit, 3-phase	Type BL breakers (purchased separately) **A**	unknown
EDH-SIE-00003	**MBKED1A**	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	ED (125A max) **A**	current (2021)
EDH-SIE-00004	**MBKED3A**	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	ED (125A max) **A**	current (2021)
EDH-SIE-00007	**MBKFD1A**	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	FD (250A max) **A**	current (2021)
EDH-SIE-00008	**MBKFD3A**	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	FD (250A max) **A**	current (2021)
EDH-SIE-00345	**MBKJD1A**	Revised P1-400 JD main breaker kit, 1-phase	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains re **A**	unknown
EDH-SIE-00346	**MBKJD3A**	Revised P1-400 JD main breaker kit, 3-phase	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains re **A**	unknown
EDH-SIE-00012	**MBKJD3B**	RP1 400A JD strap kit 1ph/3ph, 2 fillers	JD, HJD, JXD, HJXD top feed; JXD/HJXD bottom (reverse) feed **A**	current (2021)
EDH-SIE-00005	**MBKQR1A**	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	QR (225A max) **A**	current (2021)
EDH-SIE-00006	**MBKQR3A**	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	QR (225A max) **A**	current (2021)
EDH-SIE-00001	**MBKVA41A**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) **A**	current (2021)
EDH-SIE-00002	**MBKVA41B**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) **A**	current (2021)
EDH-SIE-00009	**MBKVA5262A**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	3VA52/61/62 (250A max) **A**	current (2021)
EDH-SIE-00010	**MBKVA5262B**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	3VA52/61/62 (250A max) **A**	current (2021)
EDH-SIE-00011	**MBKVA5363A**	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	3VA53/3VA63 **A**	current (2021)
EDH-SIE-00391	**MBKVAH3200A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3200A)	—	unknown
EDH-SIE-00392	**MBKVAH3250A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3250A)	—	unknown
EDH-SIE-00387	**MBKVAM3150A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3150A)	—	unknown
EDH-SIE-00388	**MBKVAM3200A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3200A)	—	unknown
EDH-SIE-00389	**MBKVAM3225A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3225A)	—	unknown
EDH-SIE-00390	**MBKVAM3250A**	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3250A)	—	unknown

EDH-SIE-00385	MBKBC1NBA	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1 BQD/GB main/subfeed breaker kit, 1-phase

OEM part number	MBKBC1NBA	A	S373 pp. 2-3; oem_spec
Application	Main or subfeed <=250 A panels; subfeed only above 250 A	A	same as above
Breaker compatibility	Type BQD and GB breakers (separate BQD and GB support brackets supplied)	A	same as above
Kit contents	Breaker barrier assembly; breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS; 4 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (20 lb-in); 1/4-20 Belleville nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; BQD breaker support bracket; GB breaker support bracket; blank filler	A	same as above
Torque values	#10-24 30 lb-in; #10-32 20 lb-in; Belleville nut 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1141-01 Rev. 01: P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00386	MBKBC3NBA	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1 BQD/GB main/subfeed breaker kit, 3-phase

OEM part number	MBKBC3NBA	A	S373 pp. 2-3; oem_spec
Application	Main or subfeed <=250 A panels; subfeed only above 250 A	A	same as above
Breaker compatibility	Type BQD and GB breakers (separate BQD and GB support brackets supplied)	A	same as above
Kit contents	Breaker barrier assembly; breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS; 4 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (20 lb-in); 1/4-20 Belleville nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; BQD breaker support bracket; GB breaker support bracket; blank filler	A	same as above
Torque values	#10-24 30 lb-in; #10-32 20 lb-in; Belleville nut 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1141-01 Rev. 01: P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00383	MBKBL1A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1 BL main/subfeed breaker kit, 1-phase

OEM part number	MBKBL1A	A	S372 pp. 2-3; oem_spec
Application	Main or subfeed in panels <=250 A; subfeed only above 250 A	A	same as above
Breaker compatibility	Type BL breakers (purchased separately)	A	same as above
Kit contents	Breaker barrier assembly (strap barriers pre-installed); breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (72 lb-in); 4 #10-24 x 7/16 slotted hex washer thread-forming (30 lb-in); #10-32 x 3/8 hex head SEMS (20 lb-in); 1/4-20 Belleville washer nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; breaker support bracket; blank filler (2-pole)	A	same as above
Torque values	Straps to bus 72 lb-in; barrier to rails 30 lb-in; breaker to connectors #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1140-01 Rev. 00: P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00384	MBKBL3A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1 BL main/subfeed breaker kit, 3-phase

OEM part number	MBKBL3A	A	S372 pp. 2-3; oem_spec
Application	Main or subfeed in panels <=250 A; subfeed only above 250 A	A	same as above
Breaker compatibility	Type BL breakers (purchased separately)	A	same as above
Kit contents	Breaker barrier assembly (strap barriers pre-installed); breaker escutcheon; MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (72 lb-in); 4 #10-24 x 7/16 slotted hex washer thread-forming (30 lb-in); #10-32 x 3/8 hex head SEMS (20 lb-in); 1/4-20 Belleville washer nut (72 lb-in); phase-to-phase strap barriers; plastic tree rivets; breaker support bracket; blank filler (2-pole)	A	same as above
Torque values	Straps to bus 72 lb-in; barrier to rails 30 lb-in; breaker to connectors #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1140-01 Rev. 00: P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00003	MBKED1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 1-ph, 125A

OEM part number	MBKED1A	A	S97, S331 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKED1***A / MBKED3***A = kit with ED breaker factory-installed	A	S331 equivalent; pp. 2-4; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for ED (125A max); breaker not included	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only above 250 A	A	S331 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	ED2, ED4, ED6, HED4, HED6 (breaker not included)	A	S331 pp. 2-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 4 #10-24 x 1/2 slotted hex washer thread-forming screws (30 lb-in); #10-32 x 1/2 hex head SEMS screws (20 lb-in, breaker to straps); 1 1/4-20 Belleville washer nut (72 lb-in); 1 in filler plate (used with 2-pole breaker)	A	S331 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 72 lb-in; barrier to base rails #10-24 30 lb-in; ED breaker to straps #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1113-01 Rev. 00: P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00004	MBKED3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 3-ph, 125A

OEM part number	MBKED3A	A	S97, S331 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKED1***A / MBKED3***A = kit with ED breaker factory-installed	A	S331 equivalent; pp. 2-4; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for ED (125A max); breaker not included	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only above 250 A	A	S331 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	ED2, ED4, ED6, HED4, HED6 (breaker not included)	A	S331 pp. 2-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
	1 breaker barrier assembly; 1 breaker escutcheon; 1 MAIN label; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 4 #10-24 x 1/2 slotted hex washer thread-forming screws (30 lb-in); #10-32 x 1/2 hex head SEMS screws (20 lb-in, breaker to straps); 1 1/4-20 Belleville washer nut (72 lb-in); 1 in filler plate (used with 2-pole breaker)	A	S331 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 72 lb-in; barrier to base rails #10-24 30 lb-in; ED breaker to straps #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1113-01 Rev. 00: P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00007	MBKFD1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, FD, 1-ph, 250A

OEM part number	MBKFD1A	A	S97, S330 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKFD1***A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier	A	S330 equivalent; pp. 2-4; oem_spec

Description	Revised P1 1-phase main/subfeed strap kit for FD (250A max); breaker not included	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only in panels above 250 A (P1-400)	A	S330 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	FD6, FXD6, HFD6, HFXD6 (breaker not included). Do not backfeed breakers marked LINE and LOAD with interchangeable trips (FD6, HFD6).	A	S330 pp. 2-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	A	same as above
	Item 1 breaker barrier assembly; 2 breaker escutcheon; 3 MAIN label; 4 neutral lug assembly; 5 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 6 #10-24 x 1/2 slotted hex washer thread-forming screws qty 2 (30 lb-in); 7 1/4-20 x 7/8 hex head SEMS screws (72 lb-in); 8 1/4-20 Belleville washer nut (72 lb-in); 9 two 1/4-20 x 4 in slotted round head screws (20 lb-in)	A	S330 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 SEMS 72 lb-in; barrier to base rails #10-24 30 lb-in; breaker to straps 1/4-20 x 7/8 SEMS 72 lb-in; neutral nut 72 lb-in; breaker mounting 1/4-20 x 4 in slotted screws 20 lb-in max (P1-400)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1111-01 Rev. 00: P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00008 **MBKFD3A** Siemens main-breaker-kit **CURRENT (2021)**

Revised P1 main/subfeed strap kit, FD, 3-ph, 250A

OEM part number	MBKFD3A	A	S97, S330 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKFD1***A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier	A	S330 equivalent; pp. 2-4; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for FD (250A max); breaker not included	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
	Main or subfeed in panels rated 250 A or less; subfeed only in panels above 250 A (P1-400)	A	S330 pp. 2-4; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

	FD6, FXD6, HFD6, HFXD6 (breaker not included). Do not backfeed breakers marked LINE and LOAD with interchangeable trips (FD6, HFD6).	A	S330 pp. 2-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	A	same as above
	Item 1 breaker barrier assembly; 2 breaker escutcheon; 3 MAIN label; 4 neutral lug assembly; 5 1/4-20 x 1/2 hex head SEMS screws (72 lb-in); 6 #10-24 x 1/2 slotted hex washer thread-forming screws qty 2 (30 lb-in); 7 1/4-20 x 7/8 hex head SEMS screws (72 lb-in); 8 1/4-20 Belleville washer nut (72 lb-in); 9 two 1/4-20 x 4 in slotted round head screws (20 lb-in)	A	S330 pp. 2-4; oem_spec
Torque values	Straps to phase bus 1/4-20 SEMS 72 lb-in; barrier to base rails #10-24 30 lb-in; breaker to straps 1/4-20 x 7/8 SEMS 72 lb-in; neutral nut 72 lb-in; breaker mounting 1/4-20 x 4 in slotted screws 20 lb-in max (P1-400)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1111-01 Rev. 00: P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00345	**MBKJD1A**	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-400 JD main breaker kit, 1-phase

OEM part number	MBKJD1A	A	S333 pp. 2-4; oem_spec
Alternate / superseded numbers	MBKJD1***A, MBKJD12***A = JD kits with breaker (amperage ***), incl. bottom-feed variants [equivalent]	A	same as above
Application	Main breaker, 400 A Revised P1	A	same as above
Breaker compatibility	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains require JXD, HJXD. Breaker purchased separately. Line lugs: (2) 250 MCM per phase use TA2J6500 (Al) or TC2J6500 (Cu); (1) 600 MCM per phase use TA1L6750 or copper TC1J6600.	A	same as above
Kit contents	1 breaker support barrier; phase connectors; 1 breaker escutcheon; 1 MAIN label; 3/8 narrow washers; helical spring lockwashers; 3/8-16 x 1 hex head bolts (240 lb-in); 5/16-18 x 3/4 hex head SEMS screws (two per joint); 2 1/4-20 x 2-3/4 Phillips round head thread-forming screws (72 lb-in); 600 kcmil neutral lug; 350 kcmil neutral lug assembly; 1 anti-turn plate; 1 1/4-20 x 1 carriage bolt; 2 1/4-20 Belleville washer nuts (72 lb-in)	A	same as above
Torque values	JD breaker to connectors 3/8-16 = 240 lb-in; connectors to bus 5/16-18 SEMS (P1-400 label 144 lb-in); 1/4-20 = 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1115-01 Rev. 02: P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00346	MBKJD3A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-400 JD main breaker kit, 3-phase

OEM part number	MBKJD3A	A	S333 pp. 2-4; oem_spec
Alternate / superseded numbers	MBKJD3***A, MBKJD32***A = JD kits with breaker (amperage ***), incl. bottom-feed variants [equivalent]	A	same as above
Application	Main breaker, 400 A Revised P1	A	same as above
Breaker compatibility	Top-feed mains: JD, HJD, JXD, HJXD; bottom-feed (reverse fed) mains require JXD, HJXD. Breaker purchased separately. Line lugs: (2) 250 MCM per phase use TA2J6500 (Al) or TC2J6500 (Cu); (1) 600 MCM per phase use TA1L6750 or copper TC1J6600.	A	same as above
Kit contents	1 breaker support barrier; phase connectors; 1 breaker escutcheon; 1 MAIN label; 3/8 narrow washers; helical spring lockwashers; 3/8-16 x 1 hex head bolts (240 lb-in); 5/16-18 x 3/4 hex head SEMS screws (two per joint); 2 1/4-20 x 2-3/4 Phillips round head thread-forming screws (72 lb-in); 600 kcmil neutral lug; 350 kcmil neutral lug assembly; 1 anti-turn plate; 1 1/4-20 x 1 carriage bolt; 2 1/4-20 Belleville washer nuts (72 lb-in)	A	same as above
Torque values	JD breaker to connectors 3/8-16 = 240 lb-in; connectors to bus 5/16-18 SEMS (P1-400 label 144 lb-in); 1/4-20 = 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1115-01 Rev. 02: P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00012	MBKJD3B	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A JD strap kit 1ph/3ph, 2 fillers

OEM part number	MBKJD3B	A	S97, S377 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKJD1A	A	S97 supersedes; p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	MBKJD3A [supersedes]	A	same as above
Description	RP1 400A JD strap kit 1ph/3ph, 2 fillers; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S97, S104 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S97 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	JD, HJD, JXD, HJXD top feed; JXD/HJXD bottom (reverse) feed	A	S377 pp. 2-4; oem_spec
	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A (Table says 'JD'; frame variants from original P1 MBKJD1/3 row)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	400A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes DFFPJD02 (large) and DFFPJD01 (small) filler	A	same as above
	Breaker support barrier; phase connectors; breaker escutcheon; MAIN label; 3/8 narrow washers; helical spring lockwashers; 3/8-16 x 1 hex head bolts (240 lb-in); 5/16-18 x 3/4 SEMS (72 lb-in 1/8 in Cu / 108 lb-in 3/16 in Al); 2 1/4-20 x 2-3/4 Phillips round head thread-forming (30 lb-in in Rev 05; 72 lb-in in Rev 02); anti-turn plate; 1/4-20 x 1 carriage bolt; 2 1/4-20 Belleville nuts (72 lb-in)	A	S377 pp. 2-4; oem_spec
Torque values	3/8-16 breaker bolts 240 lb-in; connector to bus 5/16-18: 72 lb-in (1/8 in Cu) / 108 lb-in (3/16 in Al)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1115-01 Rev. 05: P1-400 Panelboard Kit MBKJD1A & MBKJD3A (MBKJD3B) JD Main Breaker Kit Instructions, Rev. 05	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00005	**MBKQR1A**	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 1-ph, 225A

OEM part number	MBKQR1A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00006	MBKQR3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 3-ph, 225A

OEM part number	MBKQR3A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00001	MBKVA41A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A

OEM part number	MBKVA41A	A	S97, S374 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL1A (Old kit: 'Parts will no longer be available after inventory is depleted')	A	S97 supersedes; p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	MBKBC1NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	A	same as above
Description	Revised P1 1-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
	Main or subfeed <=250 A; subfeed only in Revised P1 400 A	A	S374 pp. 2-3; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	BL, BQD, xGB or 3VA4 breakers (purchased separately)	A	S374 pp. 2-3; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference

Current rating	125A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	A	same as above
	Strap and barrier assembly; breaker escutcheon (rib on rear toward unit space); MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (3 for 1-ph / 4 for 3-ph); 2 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (2 for 1-ph / 3 for 3-ph; 20 lb-in); BL/BQD breaker support bracket; 1 in blank filler	A	S374 pp. 2-3; oem_spec
Torque values	1/4-20 SEMS 72 lb-in for strap-to-bus but ONLY 40 lb-in where into plastic (BL/BQD support bracket); #10-24 30 lb-in; #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1193-01 Rev. 00: MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00002	**MBKVA41B**	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A

OEM part number	MBKVA41B	A	S97, S374 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL3A (Old kit: 'Parts will no longer be available after inventory is depleted')	A	S97 supersedes; p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	MBKBC3NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	A	same as above
Description	Revised P1 3-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
	Main or subfeed <=250 A; subfeed only in Revised P1 400 A	A	S374 pp. 2-3; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	BL, BQD, xGB or 3VA4 breakers (purchased separately)	A	S374 pp. 2-3; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	A	same as above
	Strap and barrier assembly; breaker escutcheon (rib on rear toward unit space); MAIN label; neutral lug assembly; 1/4-20 x 1/2 hex head SEMS (3 for 1-ph / 4 for 3-ph); 2 #10-24 x 7/16 thread-forming (30 lb-in); #10-32 x 3/8 SEMS (2 for 1-ph / 3 for 3-ph; 20 lb-in); BL/BQD breaker support bracket; 1 in blank filler	A	S374 pp. 2-3; oem_spec
Torque values	1/4-20 SEMS 72 lb-in for strap-to-bus but ONLY 40 lb-in where into plastic (BL/BQD support bracket); #10-24 30 lb-in; #10-32 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1193-01 Rev. 00: MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above

Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00009 **MBKVA5262A** Siemens main-breaker-kit **CURRENT (2021)**

Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A

OEM part number	MBKVA5262A	A	S97, S375 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	A	S375 equivalent; pp. 1-4; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	3VA52 (MFAS, HFAS, CFAS), 3VA61 (MDAE, HDAE, CDAE), 3VA62 (MFAE, HFAE, CFAE)	A	S375 pp. 1-4; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
	Strap and barrier assembly; 5/16-18 x 3/4 socket head cap machine screws (177 lb-in); 2 #10-24 x 7/16 thread-forming (30 lb-in); 3VA52/3VA62 hardware kit BBKVA5262P2HW (nut keepers, bus extensions); neutral lug assembly; breaker escutcheon; 2 MAIN labels	A	S375 pp. 1-4; oem_spec
Torque values	Breaker to strap 5/16-18 SHCS 177 lb-in; strap to bus 72 lb-in; #8-32 breaker mounting 13 lb-in (per RP1 label)	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Requires (stated)	Older 250A/400A RP1 panels not listing this kit: replace all four deadfront supports with P1DFS250AFT (feed-through/main) or P1DFS250ANFT (non-feed-through) for 250A, P1DFS400A for 400A (8 gage steel, ~0.17 in); replace remaining main/subfeed blank fillers with DFFP01B (250A, Siemens 11-D-4612-01) or DFFP01C (400A main, 11-D-4600-01); replace all 1 in branch fillers with DFFP1A (not QF3 or DFFP1)	A	S375 pp. 1-4; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00010 **MBKVA5262B** Siemens main-breaker-kit **CURRENT (2021)**

Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A

OEM part number	MBKVA5262B	**A**	S97, S375 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	**A**	S375 equivalent; pp. 1-4; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	3VA52 (MFAS, HFAS, CFAS), 3VA61 (MDAE, HDAE, CDAE), 3VA62 (MFAE, HFAE, CFAE)	**A**	S375 pp. 1-4; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	**A**	same as above
	Strap and barrier assembly; 5/16-18 x 3/4 socket head cap machine screws (177 lb-in); 2 #10-24 x 7/16 thread-forming (30 lb-in); 3VA52/3VA62 hardware kit BBKVA5262P2HW (nut keepers, bus extensions); neutral lug assembly; breaker escutcheon; 2 MAIN labels	**A**	S375 pp. 1-4; oem_spec
Torque values	Breaker to strap 5/16-18 SHCS 177 lb-in; strap to bus 72 lb-in; #8-32 breaker mounting 13 lb-in (per RP1 label)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Status	current (2021)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Replacement / successor	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA) (Same mounting family, sold with breaker installed; listed for reference)	**A**	S97 p.11-14; oem_spec
Requires (stated)	Older 250A/400A RP1 panels not listing this kit: replace all four deadfront supports with P1DFS250AFT (feed-through/main) or P1DFS250ANFT (non-feed-through) for 250A, P1DFS400A for 400A (8 gage steel, ~0.17 in); replace remaining main/subfeed blank fillers with DFFP01B (250A, Siemens 11-D-4612-01) or DFFP01C (400A main, 11-D-4600-01); replace all 1 in branch fillers with DFFP1A (not QF3 or DFFP1)	**A**	S375 pp. 1-4; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00011 **MBKVA5363A** Siemens main-breaker-kit **CURRENT (2021)**

RP1 400A 3VA53/63 main strap kit, 1ph or 3ph

OEM part number	MBKVA5363A	**A**	S97, S376 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	Breaker-included versions: MBKVAM1300A, MBKVAM1400A, MBKVAH3300A, MBKVAH3400A, MBKVAM3300A, MBKVAM3400A	**A**	S376 equivalent; pp. 1-4; oem_spec

Description	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph; breaker not included	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	main only (400A kit is main only, not allowed for subfeed)	**A**	S97, S104 s1 p.11-13; s8 kit table footnote 1; oem_spec
	Main breaker, 400 A Revised P1; top feed (lugs at ON end) or bottom feed	**A**	S376 pp. 1-4; oem_spec
Installation location	Vertical 400A main position	**A**	S97 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	3VA53/3VA63	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	3VA53 / 3VA63 main breakers (purchased separately); line-side lug 3VA9473-0JJ23 (2) 2/0-600 kcmil ports (default; 2-port lugs in P1 restricted to 500 kcmil max); breaker kits include 3VA9373-0JJ23 connectors	**A**	S376 pp. 1-4; oem_spec
Current rating	400A max	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes MBKVA5363JD (large) filler; 'These new 400A kits include both small and large filler plates'	**A**	same as above
Dimensions	Breaker support location 11.23 in (top/bottom feed configurations, Fig. 2)	**A**	S376 pp. 1-4; oem_spec
Fasteners	Breaker connectors to section/main bus two 5/16-18 SEMS per joint; neutral 600 kcmil lug on 1/4-20 x 1 carriage bolt + anti-turn plate + Belleville nut; 350 kcmil neutral lug assembly under riser	**A**	same as above
Torque values	5/16-18 SEMS: 72 lb-in for 1/8 in Cu bus, 108 lb-in for 3/16 in Al bus; 3VA53/63 nutkeepers 354 lb-in (RP1 label)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1169-01 Rev. 02: MBKVA5363A 3VA Main Strap Kit Installation Instructions for P1-400 Panelboards	**A**	same as above
Status	current (2021)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00391	**MBKVAH3200A**	Siemens lineage	main-breaker-kit	**STATUS UNKNOWN**

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3200A)

OEM part number	MBKVAH3200A	**A**	S375 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAH3200A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00392	MBKVAH3250A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH3250A)

OEM part number	MBKVAH3250A	**A**	S375 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAH3250A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00387	MBKVAM3150A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3150A)

OEM part number	MBKVAM3150A	**A**	S375 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3150A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00388	MBKVAM3200A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3200A)

OEM part number	MBKVAM3200A	**A**	S375 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	**A**	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3200A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00389	MBKVAM3225A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3225A)

OEM part number	MBKVAM3225A	A	S375 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	A	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3225A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

EDH-SIE-00390	MBKVAM3250A	Siemens lineage	main-breaker-kit	STATUS UNKNOWN

Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM3250A)

OEM part number	MBKVAM3250A	A	S375 p. 1 (part number list); oem_spec
Alternate / superseded numbers	MBKVA5262B (strap kit without breaker) [equivalent]	A	same as above
Description	Kit that includes breaker factory-attached to MBKVA5262-type strap and barrier assembly (listed under 'Also for 3VA breaker kits with breaker INCLUDED')	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1059-01 Rev. 00: MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Current rating, Breaker compatibility		
Open question	*Confirm breaker frame/interrupting/ampere in MBKVAM3250A (M/H letter and 150-250 suffix inferred as interrupting class and ampere, not stated)*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00019	**4MLKA1A**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00023	**4MLKA1B**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00020	**4MLKA3A**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00024	**4MLKA3B**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00021	**4MLKC1A**	Revised P1 400A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00022	**4MLKC3A**	Revised P1 400A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00015	**MLKA1A**	Revised P1 250A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00016	**MLKA3A**	Revised P1 250A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00017	**MLKC1A**	Revised P1 250A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00018	**MLKC3A**	Revised P1 250A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)

EDH-SIE-00019	4MLKA1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1A	A	S97, S327 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above

Kit contents	1 MAIN label; 5/16-18 x 1 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); double lugs (2 for 1-ph, 3 for 3-ph); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 600 kcmil lug; 1 1/4-20 x 1 carriage bolt; interphase barrier (0 for 1-ph, 1 for 3-ph)	A	S327 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main (double) lug fastened to panel section/main bus with two 5/16-18 x 1 SEMS thread-forming screws; B-phase interphase barrier snapped into bus support slots before lug installation (3-ph)	A	S327 pp. 2-3; oem_spec
Torque values	Per deadfront label (RP1 P1-400 label: main lugs to phase bus 5/16-18 = 144 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1108-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00023 **4MLKA1B** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1B	A	S97, S329 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 main lug label; 1/4-20 x 3/4 thread-forming screws (4 for 1-ph, 6 for 3-ph); 750 kcmil main lugs (2/3); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 750 kcmil neutral lug; 1 1/4-20 x 1 carriage bolt	A	S329 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Max cable 750 kcmil aluminum; limited to 600 kcmil copper	A	S329 pp. 2-3; oem_spec
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main lug fastened with two 1/4-20 x 3/4 thread-forming screws	A	S329 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1110-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00020 **4MLKA3A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3A	A	S97, S327 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec

Alternate / superseded numbers	4MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 MAIN label; 5/16-18 x 1 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); double lugs (2 for 1-ph, 3 for 3-ph); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 600 kcmil lug; 1 1/4-20 x 1 carriage bolt; interphase barrier (0 for 1-ph, 1 for 3-ph)	A	S327 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main (double) lug fastened to panel section/main bus with two 5/16-18 x 1 SEMS thread-forming screws; B-phase interphase barrier snapped into bus support slots before lug installation (3-ph)	A	S327 pp. 2-3; oem_spec
Torque values	Per deadfront label (RP1 P1-400 label: main lugs to phase bus 5/16-18 = 144 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1108-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00024	4MLKA3B	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3B	A	S97, S329 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 main lug label; 1/4-20 x 3/4 thread-forming screws (4 for 1-ph, 6 for 3-ph); 750 kcmil main lugs (2/3); 1 blank filler; 1 350 kcmil lug assembly; 2 1/4-20 Belleville washer nuts; 1 anti-turn plate; 1 750 kcmil neutral lug; 1 1/4-20 x 1 carriage bolt	A	S329 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Max cable 750 kcmil aluminum; limited to 600 kcmil copper	A	S329 pp. 2-3; oem_spec
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Each main lug fastened with two 1/4-20 x 3/4 thread-forming screws	A	S329 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1110-01 Rev. 01: P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00021	4MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 1-ph

OEM part number	4MLKC1A	A	S97, S328 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 400A MAIN LUG label; 5/16-18 x 3/4 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); main lug pad assemblies (2/3); 1 blank filler; 1 service ground electrode lug assembly; 1/4-20 Belleville washer nuts (5/6); 1 1/4-20 x 1 carriage bolt; 1 neutral lug pad assembly; 600 kcmil lugs (3 for 1-ph, 4 for 3-ph)	A	S328 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Single 600 kcmil max copper conductor only	A	S328 pp. 2-3; oem_spec
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S328 pp. 2-3; oem_spec

Fasteners	Each main lug pad assembly fastened with two 5/16-18 x 3/4 SEMS screws; 600 kcmil lug on pad stud with 1/4-20 Belleville nut; neutral lug pad on riser via carriage bolt (half-shear acts as anti-turn)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1109-01 Rev. 00: P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00022 **4MLKC3A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 400A CU main/feed-thru lug kit, 3-ph

OEM part number	4MLKC3A	A	S97, S328 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	1 400A MAIN LUG label; 5/16-18 x 3/4 SEMS thread-forming screws (4 for 1-ph, 6 for 3-ph); main lug pad assemblies (2/3); 1 blank filler; 1 service ground electrode lug assembly; 1/4-20 Belleville washer nuts (5/6); 1 1/4-20 x 1 carriage bolt; 1 neutral lug pad assembly; 600 kcmil lugs (3 for 1-ph, 4 for 3-ph)	A	S328 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Wire range	Single 600 kcmil max copper conductor only	A	S328 pp. 2-3; oem_spec
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S328 pp. 2-3; oem_spec
Fasteners	Each main lug pad assembly fastened with two 5/16-18 x 3/4 SEMS screws; 600 kcmil lug on pad stud with 1/4-20 Belleville nut; neutral lug pad on riser via carriage bolt (half-shear acts as anti-turn)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1109-01 Rev. 00: P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00015 **MLKA1A** Siemens main-lug-kit **CURRENT (2021)**

Revised P1 250A AL main/feed-thru lug kit, 1-ph

OEM part number	MLKA1A	A	S97, S324 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 250A AL main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above

	Main lugs (remove pressed-in main stud if installed) or feed-thru lugs (panels with feed-thru/subfeed space only)	A	S324 pp. 2-3; oem_spec
Breaker compatibility	n/a (lug kit)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Current rating	250A	A	same as above
	Labels supplied to mark main lug ampacity 125 A or 250 A	A	S324 pp. 2-3; oem_spec
Kit contents	1 main lug assembly set (qty per phase: 2 for 1-ph, 3 for 3-ph Belleville nuts), blank filler, 125A and 250A main lug labels, 1 neutral lug assembly, 1/4-20 Belleville washer nuts (qty 2 1-ph / 3-ph 3) plus 1 for neutral	A	same as above
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Main lug assemblies have pressed-in studs that pass through the main bus from underneath; fastened with 1/4-20 Belleville washer nuts. Neutral lug assembly under neutral cross bar, stud through bus, 1/4-20 Belleville nut.	A	S324 pp. 2-3; oem_spec
Torque values	Per deadfront Hardware Tightening Torque label (RP1 label: main copper lugs to phase bus 1/4-20 = 72 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1105-01 Rev. 00: P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00016	MLKA3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A AL main/feed-thru lug kit, 3-ph

OEM part number	MLKA3A	A	S97, S324 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 250A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
	Main lugs (remove pressed-in main stud if installed) or feed-thru lugs (panels with feed-thru/subfeed space only)	A	S324 pp. 2-3; oem_spec
Breaker compatibility	n/a (lug kit)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Current rating	250A	A	same as above
	Labels supplied to mark main lug ampacity 125 A or 250 A	A	S324 pp. 2-3; oem_spec
Kit contents	1 main lug assembly set (qty per phase: 2 for 1-ph, 3 for 3-ph Belleville nuts), blank filler, 125A and 250A main lug labels, 1 neutral lug assembly, 1/4-20 Belleville washer nuts (qty 2 1-ph / 3-ph 3) plus 1 for neutral	A	same as above
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Fasteners	Main lug assemblies have pressed-in studs that pass through the main bus from underneath; fastened with 1/4-20 Belleville washer nuts. Neutral lug assembly under neutral cross bar, stud through bus, 1/4-20 Belleville nut.	A	S324 pp. 2-3; oem_spec

Torque values	Per deadfront Hardware Tightening Torque label (RP1 label: main copper lugs to phase bus 1/4-20 = 72 lb-in)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1105-01 Rev. 00: P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00017	MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A CU main/feed-thru lug kit, 1-ph

OEM part number	MLKC1A	A	S97, S325 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Main lug assemblies (2 for 1-ph, 3 for 3-ph); 1 blank filler; 125A and 250A main lug labels; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS assembly screws (2 for 1-ph, 3 for 3-ph); 1 5/16-18 x 3/4 slotted hex washer thread-forming screw	A	S325 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S325 pp. 2-3; oem_spec
Fasteners	Main lug assemblies placed under exposed main bus, fastened with 1/4-20 x 1/2 hex head SEMS screws; neutral lug on top of neutral cross bus with 5/16-18 thread-forming screw	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1: main Cu lugs to phase bus 1/4-20 = 72 lb-in; Cu/compression neutral lugs to cross bus 5/16-18 = 72 lb-in Cu / 108 lb-in Al)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1106-01 Rev. 00: P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
	Insulating barrier on B-phase only; caution: barrier must not be clamped in bolted joint	A	S325 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00018	MLKC3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A CU main/feed-thru lug kit, 3-ph

OEM part number	MLKC3A	A	S97, S325 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above

Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Main lug assemblies (2 for 1-ph, 3 for 3-ph); 1 blank filler; 125A and 250A main lug labels; 1 neutral lug assembly; 1/4-20 x 1/2 hex head SEMS assembly screws (2 for 1-ph, 3 for 3-ph); 1 5/16-18 x 3/4 slotted hex washer thread-forming screw	A	S325 pp. 2-3; oem_spec
	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
	Copper lugs	A	S325 pp. 2-3; oem_spec
Fasteners	Main lug assemblies placed under exposed main bus, fastened with 1/4-20 x 1/2 hex head SEMS screws; neutral lug on top of neutral cross bus with 5/16-18 thread-forming screw	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1: main Cu lugs to phase bus 1/4-20 = 72 lb-in; Cu/compression neutral lugs to cross bus 5/16-18 = 72 lb-in Cu / 108 lb-in Al)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1106-01 Rev. 00: P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions	A	same as above
Status	current (2021)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
	Insulating barrier on B-phase only; caution: barrier must not be clamped in bolted joint	A	S325 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00097	**P1CONACPHAL**	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	BL / BQD / GB type breakers, 1-ph or 3-ph A	unknown - may be discontinued (only CU A/C kit listed 2021,
EDH-SIE-00088	**P1CONACPHCU**	RP1 A/C-phase replacement copper branch connectors	BL / BQD / GB type breakers, 1-ph or 3-ph A	listed (2021)
EDH-SIE-00089	**P1CONBPHAL**	RP1 B-phase replacement aluminum branch connectors	BL / BQD / GB type breakers, 3-phase A	listed (2021)
EDH-SIE-00090	**P1CONBPHCU**	RP1 B-phase replacement copper branch connectors	BL / BQD / GB type breakers, 3-phase A	listed (2021)

EDH-SIE-00097	P1CONACPHAL	Siemens	connector-strap	UNKNOWN - MAY BE DISCO

RP1 A/C-phase replacement aluminum branch connectors, kit of 6

OEM part number	P1CONACPHAL	A	S97, S335 oem_spec
Description	A- or C-phase aluminum connector kit, 6 pieces (search-summary of a Siemens spec sheet) (Not present in SpeedFax 2021 p.11-21 table; reported in a web search summary of stoneway.com Siemens spec sheet (page returned HTML, not retrievable))	C	S97 distributor
Breaker compatibility	BL / BQD / GB type breakers, 1-ph or 3-ph	A	S335 pp. 2-3; oem_spec
Kit contents	6 A/C-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	same as above
Material	aluminum connector (suffix AL)	A	same as above
Torque values	#10-24 connector to bus: 25 lb-in (1/8 in Cu bus), 30 (3/16 in Al), 50 (3/16 in Cu), 30 (1/4 in Al); #10-32 breaker SEMS 20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1119-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions	A	same as above
Status	unknown - may be discontinued (only CU A/C kit listed 2021, 'Also can be used to replace AL A/C-Phase Connectors')	C	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		
Open question	*Confirm P1CONACPHAL exists as an OEM catalog number*		

EDH-SIE-00088	P1CONACPHCU	Siemens	connector-strap	LISTED (2021)

RP1 A/C-phase replacement copper branch connectors

OEM part number	P1CONACPHCU	A	S97, S335 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 A/C-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware; can also replace AL A/C-phase connectors	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL / BQD / GB type breakers, 1-ph or 3-ph	A	S335 pp. 2-3; oem_spec
	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S97 p.11-16; inference
Kit contents	qty/kit 6	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	6 A/C-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	S335 pp. 2-3; oem_spec
Material	copper	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	copper connector (suffix CU)	A	S335 pp. 2-3; oem_spec
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Torque values	#10-24 connector to bus: 25 lb-in (1/8 in Cu bus), 30 (3/16 in Al), 50 (3/16 in Cu), 30 (1/4 in Al); #10-32 breaker SEMS 20 lb-in	A	S335 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1119-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions	A	same as above
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2572-02	A	same as above

Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		
Open question	*Connector geometry differs between A/C and B phase; is AL A/C-phase kit (P1CONACPHAL) still offered? Earlier web listings name P1CONACPHAL but 2021 SpeedFax omits it.*		

EDH-SIE-00089 **P1CONBPHAL** Siemens connector-strap **LISTED (2021)**

RP1 B-phase replacement aluminum branch connectors

OEM part number	P1CONBPHAL	A	S97, S336 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement aluminum branch connectors, kit of 6 pcs plus mounting hardware	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL / BQD / GB type breakers, 3-phase	A	S336 pp. 2-3; oem_spec
	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S97 p.11-16; inference
Kit contents	qty/kit 6	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	6 B-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	S336 pp. 2-3; oem_spec
Material	aluminum	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Torque values	#10-24 to bus 25 (1/8 Cu) / 30 (3/16 Al) / 50 (3/16 Cu) / 30 (1/4 Al) lb-in; #10-32 SEMS 20 lb-in	A	S336 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1122-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions	A	same as above
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-01	A	same as above
	Anti-turn feature on bottom of each B-phase connector; aluminum and copper versions mount differently (Fig. 1 Al, Fig. 2 Cu)	A	S336 pp. 2-3; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00090 **P1CONBPHCU** Siemens connector-strap **LISTED (2021)**

RP1 B-phase replacement copper branch connectors

OEM part number	P1CONBPHCU	A	S97, S336 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL / BQD / GB type breakers, 3-phase	A	S336 pp. 2-3; oem_spec
	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S97 p.11-16; inference

Kit contents	qty/kit 6	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	6 B-phase connectors; 6 #10-24 x 9/16 hex washer head screws; 12 #10-32 x 5/16 hex head SEMS screws	A	S336 pp. 2-3; oem_spec
Material	copper	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Torque values	#10-24 to bus 25 (1/8 Cu) / 30 (3/16 Al) / 50 (3/16 Cu) / 30 (1/4 Al) lb-in; #10-32 SEMS 20 lb-in	A	S336 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1122-01 Rev. 00: P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions	A	same as above
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-02	A	same as above
	Anti-turn feature on bottom of each B-phase connector; aluminum and copper versions mount differently (Fig. 1 Al, Fig. 2 Cu)	A	S336 pp. 2-3; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00339	**2NLK30A**	Revised P1-250 200% neutral lug kit, 30-circuit	—	unknown
EDH-SIE-00340	**2NLK42A**	Revised P1-250 200% neutral lug kit, 42-circuit	—	unknown
EDH-SIE-00040	**2NLK42B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00341	**2NLK54A**	Revised P1-250 200% neutral lug kit, 54-circuit	—	unknown
EDH-SIE-00041	**2NLK54B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00342	**42NLK30A**	Revised P1-400 200% neutral kit, 30-circuit	—	unknown
EDH-SIE-00343	**42NLK42A**	Revised P1-400 200% neutral kit, 42-circuit	—	unknown
EDH-SIE-00344	**42NLK54A**	Revised P1-400 200% neutral kit, 54-circuit	—	unknown
EDH-SIE-00042	**42NLK54B**	RP1 400A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00333	**CNLK30A**	Revised P1-250 copper neutral lug kit, 30-circuit (250 A, Cu cable only)	—	unknown
EDH-SIE-00334	**CNLK42A**	Revised P1-250 copper neutral lug kit, 42-circuit (250 A, Cu cable only)	—	unknown
EDH-SIE-00038	**CNLK42B**	RP1 CU neutral lug kit 42B	—	current (2021); Revised P1 only
EDH-SIE-00335	**CNLK54A**	Revised P1-250 copper neutral lug kit, 54-circuit (250 A, Cu cable only)	—	unknown
EDH-SIE-00039	**CNLK54B**	RP1 CU neutral lug kit 54B	—	current (2021); Revised P1 only
EDH-SIE-00336	**LNLK30A**	Revised P1 2/0 neutral lug (strip) kit, 30-circuit	—	unknown
EDH-SIE-00337	**LNLK42A**	Revised P1 2/0 neutral lug (strip) kit, 42-circuit	—	unknown
EDH-SIE-00035	**LNLK4X11B**	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long	—	current (2021); Revised P1 only
EDH-SIE-00338	**LNLK54A**	Revised P1 2/0 neutral lug (strip) kit, 54-circuit	—	unknown
EDH-SIE-00033	**LNLK5X12A**	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00036	**LNLK6X17B**	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	—	current (2021); Revised P1 only
EDH-SIE-00034	**LNLK7X18A**	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	—	current (2021); Revised P1 only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00037	**LNLK7X20B**	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	—	current (2021); Revised P1 only

EDH-SIE-00339	**2NLK30A**	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 200% neutral lug kit, 30-circuit

OEM part number	2NLK30A	A	S323 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1-250 (harmonic loads); requires doubled line cables/connectors.	A	same as above
Kit contents	Neutral connector strips (Cu cable only) qty 2 or 4; #10-24 x 1-1/8 socket head cap thread-forming screws qty 4 or 8; 2 neutral lug assemblies; 2 1/4-20 Belleville washer nuts; 1 200% neutral label	A	same as above
Fasteners	Lug sub-assembly under neutral cross bus, exposed stud from beneath, 1/4-20 Belleville washer nut	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1104-01 Rev. 00: P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00340	**2NLK42A**	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 200% neutral lug kit, 42-circuit

OEM part number	2NLK42A	A	S323 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1-250 (harmonic loads); requires doubled line cables/connectors.	A	same as above
Kit contents	Neutral connector strips (Cu cable only) qty 2 or 4; #10-24 x 1-1/8 socket head cap thread-forming screws qty 4 or 8; 2 neutral lug assemblies; 2 1/4-20 Belleville washer nuts; 1 200% neutral label	A	same as above
Fasteners	Lug sub-assembly under neutral cross bus, exposed stud from beneath, 1/4-20 Belleville washer nut	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1104-01 Rev. 00: P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00040	**2NLK42B**	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK42B	A	S97, S386 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	2NLK42B for 18/30/42 ckt; 2NLK54B for 54/66 ckt; 200% neutral requires doubled line cables	A	S386 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	same as above

	4 RP1-250 copper neutral riser extensions; 8 #10-24 x 9/16 HWH thread-forming; 8 #10-24 x 1-1/8 socket cap thread-forming; 2 250A neutral lug assemblies; 200% neutral label; copper neutral strip lugs short (2 / 0) and long (2 / 4) for 2NLK42B / 2NLK54B	A	S386 pp. 2-3; oem_spec
Material	copper neutral strips	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper riser extensions and strip lugs	A	S386 pp. 2-3; oem_spec
Torque values	#10-24: 30 lb-in (3/16 in Al), 25 lb-in (1/8 in Cu); 250A neutral lug Belleville nut 72 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1034-01 Rev. 00: 2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00341	2NLK54A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 200% neutral lug kit, 54-circuit

OEM part number	2NLK54A	A	S323 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1-250 (harmonic loads); requires doubled line cables/connectors.	A	same as above
Kit contents	Neutral connector strips (Cu cable only) qty 2 or 4; #10-24 x 1-1/8 socket head cap thread-forming screws qty 4 or 8; 2 neutral lug assemblies; 2 1/4-20 Belleville washer nuts; 1 200% neutral label	A	same as above
Fasteners	Lug sub-assembly under neutral cross bus, exposed stud from beneath, 1/4-20 Belleville washer nut	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1104-01 Rev. 00: P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00041	2NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK54B	A	S97, S386 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	2NLK42B for 18/30/42 ckt; 2NLK54B for 54/66 ckt; 200% neutral requires doubled line cables	A	S386 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A (54, 66 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	same as above
	4 RP1-250 copper neutral riser extensions; 8 #10-24 x 9/16 HWH thread-forming; 8 #10-24 x 1-1/8 socket cap thread-forming; 2 250A neutral lug assemblies; 200% neutral label; copper neutral strip lugs short (2 / 0) and long (2 / 4) for 2NLK42B / 2NLK54B	A	S386 pp. 2-3; oem_spec

Material	copper neutral strips	**A**	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper riser extensions and strip lugs	**A**	S386 pp. 2-3; oem_spec
Torque values	#10-24: 30 lb-in (3/16 in Al), 25 lb-in (1/8 in Cu); 250A neutral lug Belleville nut 72 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-B-1034-01 Rev. 00: 2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)	**A**	same as above
Status	current (2021); Revised P1 only	**A**	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00342	42NLK30A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-400 200% neutral kit, 30-circuit

OEM part number	42NLK30A	**A**	S326 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1 400 A; provides a second 600 kcmil neutral line lug for doubled cabling (42NLK54A also for 66 ckt).	**A**	same as above
Kit contents	Branch neutral connector strips (Cu only) qty 2 (30/42) or 4 (54); 1 600 kcmil neutral lug; 1 service ground electrode lug; 2 #10-24 x 9/16 thread-forming screws; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut; 1 anti-turn plate; #10-24 x 1-1/8 socket head thread-forming screws qty 4 or 8; 1 200% label	**A**	same as above
Fasteners	600 kcmil lug on 1/4-20 x 1 carriage bolt through square hole of neutral riser with anti-turn plate and 1/4-20 Belleville nut; strips to risers with #10-24 x 1-1/8	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1107-01 Rev. 01: P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00343	42NLK42A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-400 200% neutral kit, 42-circuit

OEM part number	42NLK42A	**A**	S326 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1 400 A; provides a second 600 kcmil neutral line lug for doubled cabling (42NLK54A also for 66 ckt).	**A**	same as above
Kit contents	Branch neutral connector strips (Cu only) qty 2 (30/42) or 4 (54); 1 600 kcmil neutral lug; 1 service ground electrode lug; 2 #10-24 x 9/16 thread-forming screws; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut; 1 anti-turn plate; #10-24 x 1-1/8 socket head thread-forming screws qty 4 or 8; 1 200% label	**A**	same as above
Fasteners	600 kcmil lug on 1/4-20 x 1 carriage bolt through square hole of neutral riser with anti-turn plate and 1/4-20 Belleville nut; strips to risers with #10-24 x 1-1/8	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1107-01 Rev. 01: P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00344	42NLK54A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-400 200% neutral kit, 54-circuit

OEM part number	42NLK54A	A	S326 pp. 2-3; oem_spec
Description	200% rated neutral kit for Revised P1 400 A; provides a second 600 kcmil neutral line lug for doubled cabling (42NLK54A also for 66 ckt).	A	same as above
Kit contents	Branch neutral connector strips (Cu only) qty 2 (30/42) or 4 (54); 1 600 kcmil neutral lug; 1 service ground electrode lug; 2 #10-24 x 9/16 thread-forming screws; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut; 1 anti-turn plate; #10-24 x 1-1/8 socket head thread-forming screws qty 4 or 8; 1 200% label	A	same as above
Fasteners	600 kcmil lug on 1/4-20 x 1 carriage bolt through square hole of neutral riser with anti-turn plate and 1/4-20 Belleville nut; strips to risers with #10-24 x 1-1/8	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1107-01 Rev. 01: P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00042	42NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 400A 200% neutral lug kit

OEM part number	42NLK54B	A	S97, S387 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	42NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	42NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
	42NLK54A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	30, 42, 54 or 66 circuit P1-400 panels (only 2 of the 4 strip lugs used on 30-circuit); provides second 600 kcmil neutral line lug	A	S387 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	same as above
	4 copper neutral strip lugs, long; 8 #10-24 x 1-1/8 socket cap thread-forming; 1 1/4-20 x 1 carriage bolt; 1 anti-turn plate; 1 1/4-20 Belleville washer nut; 1 600 kcmil lug with anti-turn; 1 service ground electrode assembly; 2 #10-24 x 9/16 HWH thread-forming; 1 200% neutral label	A	S387 pp. 2-3; oem_spec
Material	copper neutral strips	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24: 30 lb-in (1/4 in Al) / 50 lb-in (3/16 in Cu); Belleville nut 72 lb-in	A	S387 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1035-01 Rev. 00: 42NLK54B 200% Neutral Lug Kit for 30, 42, 54 or 66 Circuit P1-400 Panels (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00333	CNLK30A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 copper neutral lug kit, 30-circuit (250 A, Cu cable only)

OEM part number	CNLK30A	A	S321 pp. 2-3; oem_spec
Description	Optional copper (mechanical connector) neutral kit for Revised P1 (catalog ends N or T) 1-ph 3-w / 3-ph 4-w; CNLK**A kits cover 18/30/42/54/66 circuits (CNLK30A also for 18-ckt, CNLK54A also for 66-ckt). Also usable at P1-400 subfeed end.	A	same as above
Kit contents	1 line lug assembly (Cu cable only); neutral connector strips (Cu only) qty 2 (18/30/42 ckt) or 4 (54/66 ckt); 1 5/16-18 hex washer head thread-forming screw; #10-24 socket cap head thread-forming screws qty 4 or 8; 1 anti-turn plate; 1 1/4-20 x 1/2 hex washer head thread-forming screw; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut	A	same as above
Material	Copper (for copper cable only)	A	same as above
Fasteners	P1-250: lug sub-assembly on top of neutral cross bus with 5/16-18 thread-forming screw; P1-400 subfeed: lug under riser on 1/4-20 x 1 carriage bolt + anti-turn plate + 1/4-20 Belleville nut, 1/4-20 x 1/2 screw through anti-turn plate into riser; strips with #10-24 thread-forming screws	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront (see RP1 torque label 11-D-1030-01)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1102-01 Rev. 00: P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00334	CNLK42A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1-250 copper neutral lug kit, 42-circuit (250 A, Cu cable only)

OEM part number	CNLK42A	A	S321 pp. 2-3; oem_spec
Description	Optional copper (mechanical connector) neutral kit for Revised P1 (catalog ends N or T) 1-ph 3-w / 3-ph 4-w; CNLK**A kits cover 18/30/42/54/66 circuits (CNLK30A also for 18-ckt, CNLK54A also for 66-ckt). Also usable at P1-400 subfeed end.	A	same as above
Kit contents	1 line lug assembly (Cu cable only); neutral connector strips (Cu only) qty 2 (18/30/42 ckt) or 4 (54/66 ckt); 1 5/16-18 hex washer head thread-forming screw; #10-24 socket cap head thread-forming screws qty 4 or 8; 1 anti-turn plate; 1 1/4-20 x 1/2 hex washer head thread-forming screw; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut	A	same as above
Material	Copper (for copper cable only)	A	same as above
Fasteners	P1-250: lug sub-assembly on top of neutral cross bus with 5/16-18 thread-forming screw; P1-400 subfeed: lug under riser on 1/4-20 x 1 carriage bolt + anti-turn plate + 1/4-20 Belleville nut, 1/4-20 x 1/2 screw through anti-turn plate into riser; strips with #10-24 thread-forming screws	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront (see RP1 torque label 11-D-1030-01)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1102-01 Rev. 00: P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00038	CNLK42B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 42B

OEM part number	CNLK42B	A	S97, S385 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	CNLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above

	RP1-250: CNLK42B for 18/30/42 ckt, CNLK54B for 54/66 ckt; RP1-400: CNLK54B for all circuit sizes	A	S385 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	same as above
	4 RP1-250 copper neutral riser extensions; #10-24 x 9/16 HWH thread-forming (8 / 10); 8 #10-24 x 1-1/8 socket cap thread-forming; 1/4-20 x 1/2 HWH thread-forming; 1/4-20 x 1 carriage bolt; anti-turn plate; 1/4-20 Belleville washer nut; 600 kcmil copper lug assembly (RP1-400); RP1 service ground electrode assembly; 250A copper lug assembly (RP1-250); copper neutral strip lugs long and short	A	S385 pp. 2-3; oem_spec
Material	copper neutral strips	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper	A	S385 pp. 2-3; oem_spec
Torque values	#10-24: 30 (Al 3/16, 1/4), 25 (Cu 1/8), 50 (Cu 3/16) lb-in; 1/4-20 x 1/2: 30/50/50/72; Belleville nut 72; 5/16-18 thread-forming 108 (Al) / 72 (Cu) lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1033-01 Rev. 00: CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Identification features	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser	A	S385 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00335 CNLK54A — Siemens lineage — neutral-assembly — STATUS UNKNOWN

Revised P1-250 copper neutral lug kit, 54-circuit (250 A, Cu cable only)

OEM part number	CNLK54A	A	S321 pp. 2-3; oem_spec
Description	Optional copper (mechanical connector) neutral kit for Revised P1 (catalog ends N or T) 1-ph 3-w / 3-ph 4-w; CNLK**A kits cover 18/30/42/54/66 circuits (CNLK30A also for 18-ckt, CNLK54A also for 66-ckt). Also usable at P1-400 subfeed end.	A	same as above
Kit contents	1 line lug assembly (Cu cable only); neutral connector strips (Cu only) qty 2 (18/30/42 ckt) or 4 (54/66 ckt); 1 5/16-18 hex washer head thread-forming screw; #10-24 socket cap head thread-forming screws qty 4 or 8; 1 anti-turn plate; 1 1/4-20 x 1/2 hex washer head thread-forming screw; 1 1/4-20 x 1 carriage bolt; 1 1/4-20 Belleville washer nut	A	same as above
Material	Copper (for copper cable only)	A	same as above
Fasteners	P1-250: lug sub-assembly on top of neutral cross bus with 5/16-18 thread-forming screw; P1-400 subfeed: lug under riser on 1/4-20 x 1 carriage bolt + anti-turn plate + 1/4-20 Belleville nut, 1/4-20 x 1/2 screw through anti-turn plate into riser; strips with #10-24 thread-forming screws	A	same as above
Torque values	Per Hardware Tightening Torque label on rear of deadfront (see RP1 torque label 11-D-1030-01)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1102-01 Rev. 00: P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00039 CNLK54B — Siemens — neutral-assembly — CURRENT (2021); REVISE

RP1 CU neutral lug kit 54B

OEM part number	CNLK54B	A	S97, S385 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Alternate / superseded numbers	CNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
	RP1-250: CNLK42B for 18/30/42 ckt, CNLK54B for 54/66 ckt; RP1-400: CNLK54B for all circuit sizes	A	S385 pp. 2-3; oem_spec
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66) and 250A 54/66 ckt	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	same as above
	4 RP1-250 copper neutral riser extensions; #10-24 x 9/16 HWH thread-forming (8 / 10); 8 #10-24 x 1-1/8 socket cap thread-forming; 1/4-20 x 1/2 HWH thread-forming; 1/4-20 x 1 carriage bolt; anti-turn plate; 1/4-20 Belleville washer nut; 600 kcmil copper lug assembly (RP1-400); RP1 service ground electrode assembly; 250A copper lug assembly (RP1-250); copper neutral strip lugs long and short	A	S385 pp. 2-3; oem_spec
Material	copper neutral strips	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	Copper	A	S385 pp. 2-3; oem_spec
Torque values	#10-24: 30 (Al 3/16, 1/4), 25 (Cu 1/8), 50 (Cu 3/16) lb-in; 1/4-20 x 1/2: 30/50/50/72; Belleville nut 72; 5/16-18 thread-forming 108 (Al) / 72 (Cu) lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1033-01 Rev. 00: CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Identification features	For 3VA41/xGB RP1-250 panels, aluminum neutral riser extensions are replaced by the copper ones in the kit; BL/BQD/older xGB RP1-250 and all RP1-400 mount strips directly on riser	A	S385 pp. 2-3; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00336 LNLK30A Siemens lineage neutral-assembly STATUS UNKNOWN

Revised P1 2/0 neutral lug (strip) kit, 30-circuit

OEM part number	LNLK30A	A	S322 pp. 2-3; oem_spec
Description	Optional neutral kit replacing neutral connector strips with 2/0 mechanical connector strips in Revised P1 (P1-250 and P1-400); 18/30/42/54/66 circuits (LNLK30A for 18, LNLK54A for 66).	A	same as above
Kit contents	2/0 neutral connector strips qty 2 (18/30/42 ckt) or 4 (54/66); #10-24 x 1-1/8 socket head cap thread-forming screws; 1/4-20 x 1-1/8 hex washer head screws (P1-400 upper hole); 1/4-20 x 1 hex washer head screws (P1-250 upper hole)	A	same as above
Fasteners	Lower hole #10-24 x 1-1/8 (both P1-250 and P1-400); upper hole 1/4-20 x 1 (P1-250) or 1/4-20 x 1-1/8 (P1-400)	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1 label: 2/0 neutral strips to risers 1/4-20 = 50 lb-in Cu bus / 30 lb-in Al bus)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1103-01 Rev. 00: P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00337	LNLK42A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1 2/0 neutral lug (strip) kit, 42-circuit

OEM part number	LNLK42A	A	S322 pp. 2-3; oem_spec
Description	Optional neutral kit replacing neutral connector strips with 2/0 mechanical connector strips in Revised P1 (P1-250 and P1-400); 18/30/42/54/66 circuits (LNLK30A for 18, LNLK54A for 66).	A	same as above
Kit contents	2/0 neutral connector strips qty 2 (18/30/42 ckt) or 4 (54/66); #10-24 x 1-1/8 socket head cap thread-forming screws; 1/4-20 x 1-1/8 hex washer head screws (P1-400 upper hole); 1/4-20 x 1 hex washer head screws (P1-250 upper hole)	A	same as above
Fasteners	Lower hole #10-24 x 1-1/8 (both P1-250 and P1-400); upper hole 1/4-20 x 1 (P1-250) or 1/4-20 x 1-1/8 (P1-400)	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1 label: 2/0 neutral strips to risers 1/4-20 = 50 lb-in Cu bus / 30 lb-in Al bus)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1103-01 Rev. 00: P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00035	LNLK4X11B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long

OEM part number	LNLK4X11B	A	S97, S383 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2/0 mechanical neutral strip lugs replacing existing strips in Revised P1 or P3 (kit restricted by longest size that fits the neutral riser extensions); 1-ph 3-w / 3-ph 4-w	A	S383 pp. 2-3; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Installation location	RP1-250 with neutral riser extensions: strips mount on extensions; RP1-250 without extensions and RP1-400: directly on neutral riser; P3 per Fig. 3	A	S383 pp. 2-3; oem_spec
	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	same as above
	2 2/0 neutral strip lugs; RP1 bag: 2 #10-24 x 1-1/8 socket cap thread-forming (both RP1-250/400), 2 1/4-20 x 1 hex washer head (RP1-250), 2 1/4-20 x 1-1/8 (RP1-400); P3 bag: 2 #10-24 x 1-3/8 socket cap thread-forming, 2 1/4-20 x 1-3/8 hex washer head thread-forming	A	S383 pp. 2-3; oem_spec
Dimensions	strip length 6.17 in	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 (3/16 Al), 30 (1/4 Al), 25 (1/8 Cu), 50 (3/16 Cu) lb-in; 1/4-20 x 1 (RP1-250): 30 Al 3/16, 50 Cu 1/8; 1/4-20 x 1-1/8 (RP1-400): 50 Al 1/4, 72 Cu 3/16; P3 #10-24 x 1-3/8: 30 Al 1/4 / 50 Cu 1/4; P3 1/4-20 x 1-3/8: 50 Al 1/4 / 72 Cu 1/4 (lb-in by bus material and thickness)	A	S383 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1032-01 Rev. 00: LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00338	LNLK54A	Siemens lineage	neutral-assembly	STATUS UNKNOWN

Revised P1 2/0 neutral lug (strip) kit, 54-circuit

OEM part number	LNLK54A	A	S322 pp. 2-3; oem_spec
Description	Optional neutral kit replacing neutral connector strips with 2/0 mechanical connector strips in Revised P1 (P1-250 and P1-400); 18/30/42/54/66 circuits (LNLK30A for 18, LNLK54A for 66).	A	same as above
Kit contents	2/0 neutral connector strips qty 2 (18/30/42 ckt) or 4 (54/66); #10-24 x 1-1/8 socket head cap thread-forming screws; 1/4-20 x 1-1/8 hex washer head screws (P1-400 upper hole); 1/4-20 x 1 hex washer head screws (P1-250 upper hole)	A	same as above
Fasteners	Lower hole #10-24 x 1-1/8 (both P1-250 and P1-400); upper hole 1/4-20 x 1 (P1-250) or 1/4-20 x 1-1/8 (P1-400)	A	same as above
Torque values	Per Hardware Tightening Torque label (RP1 label: 2/0 neutral strips to risers 1/4-20 = 50 lb-in Cu bus / 30 lb-in Al bus)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1103-01 Rev. 00: P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00033	LNLK5X12A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]

OEM part number	LNLK5X12A	A	S97, S384 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
	2 1/0 neutral strip lugs; 4 #10-24 x 1-1/8 socket cap thread-forming screws	A	S384 pp. 2-3; oem_spec
Dimensions	strip length 5.80 in	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 lb-in (3/16 or 1/4 in Al bus), 25 (1/8 in Cu), 50 (3/16 in Cu)	A	S384 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1036-01 Rev. 00: LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00036	LNLK6X17B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long

OEM part number	LNLK6X17B	A	S97, S383 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Alternate / superseded numbers	LNLK42A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2/0 mechanical neutral strip lugs replacing existing strips in Revised P1 or P3 (kit restricted by longest size that fits the neutral riser extensions); 1-ph 3-w / 3-ph 4-w	A	S383 pp. 2-3; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Installation location	RP1-250 with neutral riser extensions: strips mount on extensions; RP1-250 without extensions and RP1-400: directly on neutral riser; P3 per Fig. 3	A	S383 pp. 2-3; oem_spec
	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	same as above
	2 2/0 neutral strip lugs; RP1 bag: 2 #10-24 x 1-1/8 socket cap thread-forming (both RP1-250/400), 2 1/4-20 x 1 hex washer head (RP1-250), 2 1/4-20 x 1-1/8 (RP1-400); P3 bag: 2 #10-24 x 1-3/8 socket cap thread-forming, 2 1/4-20 x 1-3/8 hex washer head thread-forming	A	S383 pp. 2-3; oem_spec
Dimensions	strip length 8.67 in	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 (3/16 Al), 30 (1/4 Al), 25 (1/8 Cu), 50 (3/16 Cu) lb-in; 1/4-20 x 1 (RP1-250): 30 Al 3/16, 50 Cu 1/8; 1/4-20 x 1-1/8 (RP1-400): 50 Al 1/4, 72 Cu 3/16; P3 #10-24 x 1-3/8: 30 Al 1/4 / 50 Cu 1/4; P3 1/4-20 x 1-3/8: 50 Al 1/4 / 72 Cu 1/4 (lb-in by bus material and thickness)	A	S383 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1032-01 Rev. 00: LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00034	LNLK7X18A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]

OEM part number	LNLK7X18A	A	S97, S384 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
	2 1/0 neutral strip lugs; 4 #10-24 x 1-1/8 socket cap thread-forming screws	A	S384 pp. 2-3; oem_spec
Dimensions	strip length 8.14 in	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 lb-in (3/16 or 1/4 in Al bus), 25 (1/8 in Cu), 50 (3/16 in Cu)	A	S384 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1036-01 Rev. 00: LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00037	LNLK7X20B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long

OEM part number	LNLK7X20B	A	S97, S383 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2/0 mechanical neutral strip lugs replacing existing strips in Revised P1 or P3 (kit restricted by longest size that fits the neutral riser extensions); 1-ph 3-w / 3-ph 4-w	A	S383 pp. 2-3; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Installation location	RP1-250 with neutral riser extensions: strips mount on extensions; RP1-250 without extensions and RP1-400: directly on neutral riser; P3 per Fig. 3	A	S383 pp. 2-3; oem_spec
	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec

Kit contents	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	same as above
	2 2/0 neutral strip lugs; RP1 bag: 2 #10-24 x 1-1/8 socket cap thread-forming (both RP1-250/400), 2 1/4-20 x 1 hex washer head (RP1-250), 2 1/4-20 x 1-1/8 (RP1-400); P3 bag: 2 #10-24 x 1-3/8 socket cap thread-forming, 2 1/4-20 x 1-3/8 hex washer head thread-forming	A	S383 pp. 2-3; oem_spec
Dimensions	strip length 9.92 in	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Torque values	#10-24 x 1-1/8: 30 (3/16 Al), 30 (1/4 Al), 25 (1/8 Cu), 50 (3/16 Cu) lb-in; 1/4-20 x 1 (RP1-250): 30 Al 3/16, 50 Cu 1/8; 1/4-20 x 1-1/8 (RP1-400): 50 Al 1/4, 72 Cu 3/16; P3 #10-24 x 1-3/8: 30 Al 1/4 / 50 Cu 1/4; P3 1/4-20 x 1-3/8: 50 Al 1/4 / 72 Cu 1/4 (lb-in by bus material and thickness)	A	S383 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1032-01 Rev. 00: LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	A	same as above
Status	current (2021); Revised P1 only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00099	**ECGK**	Copper equipment ground bus kit	—	current (2021)
EDH-SIE-00098	**EGK**	Al/Cu equipment ground bus kit	—	current (2021)
EDH-SIE-00101	**ICGK**	Insulated copper ground bus kit	—	current (2021)
EDH-SIE-00100	**IGK**	Insulated Al/Cu ground bus kit	—	current (2021)

EDH-SIE-00099 **ECGK** Siemens ground-bar **CURRENT (2021)**

Copper equipment ground bus kit

OEM part number	ECGK	A	S97, S426, S319 pp.11-20, 11-22; oem_spec
Description	Copper equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes); CU cable only	A	S97 pp.11-20, 11-22; oem_spec
	Cu ground bus, 44 connections	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
	Left or right gutter	A	S426 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S426 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

EDH-SIE-00098	EGK	Siemens	ground-bar	CURRENT (2021)

Al/Cu equipment ground bus kit

OEM part number	EGK	A	S97, S426, S319 pp.11-20, 11-22; oem_spec
Description	Al/Cu equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes)	A	S97 pp.11-20, 11-22; oem_spec
	Al ground bus, 44 connections	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
	Left or right gutter	A	S426 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S426 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

EDH-SIE-00101	ICGK	Siemens	ground-bar	CURRENT (2021)

Insulated copper ground bus kit

OEM part number	ICGK	A	S97, S426, S319 pp.11-20, 11-22; oem_spec
Description	Insulated copper ground bus kit (bar on Glastic insulator), 21 holes	A	S97 pp.11-20, 11-22; oem_spec
	Insulated Cu ground bus	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
	Left or right gutter; IGK/ICGK bar attached to Glastic insulator with 2 screws before mounting	A	S426 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S426 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

EDH-SIE-00100	IGK	Siemens	ground-bar	CURRENT (2021)

Insulated Al/Cu ground bus kit

OEM part number	IGK	A	S97, S426, S319 pp.11-20, 11-22; oem_spec
Description	Insulated Al/Cu ground bus kit (bar on Glastic insulator), 21 holes	A	S97 pp.11-20, 11-22; oem_spec
	Insulated Al ground bus	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
	Left or right gutter; IGK/ICGK bar attached to Glastic insulator with 2 screws before mounting	A	S426 single sheet; oem_spec
Wire range	21 holes: (6) #14-1/0 large and (15) #14-6 small; small hole 1-2 x #14-12, 1 x #10, 1 x #8-#6; large hole 1-3 x #14-#10, 1 x #8, 1 x #6-#4, 1 x #3-1/0 (multiple wires only as equipment ground)	A	same as above
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
	45 lb-in for three No. 10 AWG solid copper in large holes; other combinations per panelboard torque label	A	S426 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet : Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	A	same as above
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		
Open question	*Confirm 'C' in ECGK/ICGK denotes copper (not stated in sheet)*		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00357	**K-11-D-2550-01**	Revised P1 250A OEM chassis, 18 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00358	**K-11-D-2550-02**	Revised P1 250A OEM chassis, 30 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00359	**K-11-D-2550-03**	Revised P1 250A OEM chassis, 42 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00360	**K-11-D-2550-04**	Revised P1 250A OEM chassis, 54 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00361	**K-11-D-2550-05**	Revised P1 250A OEM chassis, 66 circuit, Cu 1-ph bus	—	unknown
EDH-SIE-00347	**K-11-D-2551-01**	Revised P1 250A OEM chassis, 18 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00348	**K-11-D-2551-02**	Revised P1 250A OEM chassis, 30 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00349	**K-11-D-2551-03**	Revised P1 250A OEM chassis, 42 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00350	**K-11-D-2551-04**	Revised P1 250A OEM chassis, 54 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00351	**K-11-D-2551-05**	Revised P1 250A OEM chassis, 66 circuit, Al 1-ph bus	—	unknown
EDH-SIE-00362	**K-11-D-2552-01**	Revised P1 250A OEM chassis, 18 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00363	**K-11-D-2552-02**	Revised P1 250A OEM chassis, 30 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00364	**K-11-D-2552-03**	Revised P1 250A OEM chassis, 42 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00365	**K-11-D-2552-04**	Revised P1 250A OEM chassis, 54 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00366	**K-11-D-2552-05**	Revised P1 250A OEM chassis, 66 circuit, Cu 3-ph bus	—	unknown
EDH-SIE-00352	**K-11-D-2553-01**	Revised P1 250A OEM chassis, 18 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00353	**K-11-D-2553-02**	Revised P1 250A OEM chassis, 30 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00354	**K-11-D-2553-03**	Revised P1 250A OEM chassis, 42 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00355	**K-11-D-2553-04**	Revised P1 250A OEM chassis, 54 circuit, Al 3-ph bus	—	unknown
EDH-SIE-00356	**K-11-D-2553-05**	Revised P1 250A OEM chassis, 66 circuit, Al 3-ph bus	—	unknown

EDH-SIE-00357	K-11-D-2550-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-01	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00358	K-11-D-2550-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-02	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00359	K-11-D-2550-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-03	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00360	K-11-D-2550-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-04	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00361	K-11-D-2550-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Cu 1-ph bus

OEM part number	K-11-D-2550-05	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Cu 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00347	K-11-D-2551-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-01	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00348	K-11-D-2551-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-02	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00349	K-11-D-2551-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-03	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00350	K-11-D-2551-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-04	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00351	K-11-D-2551-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Al 1-ph bus

OEM part number	K-11-D-2551-05	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Al 1-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00362	K-11-D-2552-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-01	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00363	K-11-D-2552-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-02	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00364	K-11-D-2552-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-03	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00365	K-11-D-2552-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-04	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00366	K-11-D-2552-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Cu 3-ph bus

OEM part number	K-11-D-2552-05	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Cu 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00352	K-11-D-2553-01	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 18 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-01	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 18 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00353	K-11-D-2553-02	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 30 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-02	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 30 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00354	K-11-D-2553-03	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 42 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-03	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 42 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00355	K-11-D-2553-04	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 54 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-04	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 54 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

EDH-SIE-00356	K-11-D-2553-05	Siemens lineage	interior	STATUS UNKNOWN

Revised P1 250A OEM chassis, 66 circuit, Al 3-ph bus

OEM part number	K-11-D-2553-05	A	S334 pp. 2-3; oem_spec
Description	Revised P1 OEM chassis (bus interior) 66 circuit Al 3-ph; neutrals NOT provided; deadfront by customer; will NOT directly replace Original P1 chassis	A	same as above
Voltage rating	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	A	same as above
Current rating	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	A	same as above
Dimensions	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1117-01 Rev. 01: 250A OEM Chassis Instructions (Revised P1)	A	same as above
Interrupting ratings	200 kA max or lowest rated device; 22 kA if interior has subfeed/feed-through lugs and no protective device	A	S334 pp. 2-3; oem_spec
Cross-links	Families: RP1		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00092	**P1DFS250AFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00093	**P1DFS250ANFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00094	**P1DFS400A**	P1 400A deadfront support (new for 3VA)	—	listed (2021)

EDH-SIE-00092	P1DFS250AFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250AFT	A	S97, S422 p.11-20; oem_spec
Description	P1 250A deadfront support, feed-thru interiors only (4 per interior); part 11-D-3323-01 replaces 11-D-3212-01	A	S97 p.11-20; oem_spec
Kit contents	qty/kit 1	A	same as above
	4 RP1-250 deadfront supports and 8 mounting screws (#10-24 hex washer head)	A	S422 single sheet; oem_spec
Material	8 gage steel (approx 0.17 in) per 11-B-1059-01	A	same as above
Torque values	Deadfront-to-support screws 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1196-01 Rev. 00: P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00093	P1DFS250ANFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250ANFT	**A**	S97, S422 p.11-20; oem_spec
Description	P1 250A deadfront support, non-feed-thru interiors only (4 per interior); part 11-D-3323-02 replaces 11-D-3212-02	**A**	S97 p.11-20; oem_spec
Kit contents	qty/kit 1	**A**	same as above
	4 RP1-250 deadfront supports and 8 mounting screws (#10-24 hex washer head)	**A**	S422 single sheet; oem_spec
Material	8 gage steel (approx 0.17 in) per 11-B-1059-01	**A**	same as above
Torque values	Deadfront-to-support screws 30 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1196-01 Rev. 00: P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports	**A**	same as above
Status	listed (2021)	**A**	S97 p.11-20; oem_spec
Identification features	Drawing ref 11-D-3323	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

EDH-SIE-00094	P1DFS400A	Siemens	mounting-bracket	LISTED (2021)

P1 400A deadfront support (new for 3VA)

OEM part number	P1DFS400A	**A**	S97, S423 p.11-20; oem_spec
Description	P1 400A deadfront support (new for 3VA), FT and NFT interiors; 11-D-3315-01 replaces 11-D-3004-01 (4 per interior)	**A**	S97 p.11-20; oem_spec
Kit contents	qty/kit 1	**A**	same as above
	4 RP1-400 deadfront support brackets and 8 mounting screws (#10-24 hex washer head)	**A**	S423 single sheet; oem_spec
Material	8 gage steel (approx 0.17 in) per 11-B-1059-01	**A**	same as above
Torque values	30 lb-in	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1190-01 Rev. 00: P1DFS400A RP1-400 Panel Deadfront Supports	**A**	same as above
Status	listed (2021)	**A**	S97 p.11-20; oem_spec
Identification features	Drawing ref 11-D-3315	**A**	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00231	**SEBKP1P2P3V1**	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	Vertically mounted JD in Revised P1; JD, LD, CJD or CLD in P2 (with/wi **A**	unknown
EDH-SIE-00224	**SEBKRP1V1**	SEB kit for RP1 with FD, QJ or QR horizontal main	FD, QJ or QR main breaker **A**	unknown
EDH-SIE-00225	**SEBKRP1V2**	SEB kit for RP1 with ED horizontal main	ED main breaker **A**	unknown
EDH-SIE-00226	**SEBKRP1V3**	SEB kit for RP1 with back-fed BL/BQD main in unit space	Back-fed BL or BQD main (any of four corners) **A**	unknown
EDH-SIE-00227	**SEBKRP1V4**	SEB kit for RP1 with back-fed xGB main in unit space	Back-fed xGB main (top left top-fed / bottom right bottom-fed only) **A**	unknown
EDH-SIE-00228	**SEBKRP1V5**	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	BL, BQD or GB main outside unit space (flap between shunt trip and bre **A**	unknown
EDH-SIE-00229	**SEBKRP1V6**	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	BL, BQD, xGB or 3VA41 main outside unit space (remove perforated tab o **A**	unknown
EDH-SIE-00230	**SEBKRP1V7**	SEB kit for RP1 with 3VA52/61/62 horizontal main	Horizontally-mounted 3VA52/61/62 main (tear tab off if communications **A**	unknown

EDH-SIE-00231	SEBKP1P2P3V1	Siemens	barrier	STATUS UNKNOWN

SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main

OEM part number	SEBKP1P2P3V1	A	S97, S398, S319 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
	JD, LD service entrance barrier kit (RP1, P1, P2, P3)	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S398 single sheet; oem_spec
Breaker compatibility	Vertically mounted JD in Revised P1; JD, LD, CJD or CLD in P2 (with/without SEM3) or P3	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S97 p.11-67; oem_spec
	1 barrier assembly; 6 #8-32 x 3/8 IHWHSW (6 P3 / 4 P2); 4 #10-24 x 7/16 SHWHSW (RP1 only); 2 P3 adaptors	A	S398 single sheet; oem_spec
Mounting-hole pattern	Mounting hole legend: RP1 holes A&D #10-24; P2 std A&D #8-32; P2 SEM3 A&B #8-32; P3 C&E #8-32 (symmetrical both sides); offsets 1 in (JD), 1.5 in (CJD/CLD), 2 in (LD); 2.50 in (JD/CJD) or 3.00 in (LD/CLD); SEM3 P2: remove perforated ~1-7/8 x 6-1/8 in piece	A	same as above
Torque values	#8-32 20 lb-in; RP1 #10-24 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1157-01 Rev. 00: SEBKP1P2P3V1 Service Entrance Barrier Kit for Revised P1, P2 or P3	A	same as above
Identification features	Drawing ref 11-A-1157-01 / 11-D-2740-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-SIE-00224	SEBKRP1V1	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with FD, QJ or QR horizontal main

OEM part number	SEBKRP1V1	A	S97, S388 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with FD, QJ or QR horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S388 single sheet; oem_spec
Installation location	On deadfront support nearest service terminals (upper left top-fed / lower right bottom-fed); half-shear into hole nearest 90 deg bend, screw in hole nearest 45 deg bend	A	same as above
Breaker compatibility	FD, QJ or QR main breaker	A	same as above
Kit contents	1 barrier support assembly (pre-assembled); 1 #10-24 x 7/16 SHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	Barrier support to deadfront support 30 lb-in; deadfront support mounting screw 30 lb-in	A	S388 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1148-01 Rev. 00: SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1148-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00225	SEBKRP1V2	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with ED horizontal main

OEM part number	SEBKRP1V2	A	S97, S388 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with ED horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S388 single sheet; oem_spec
Breaker compatibility	ED main breaker	A	same as above
Kit contents	1 barrier support assembly; 1 #10-24 x 7/16 SHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	30 lb-in	A	S388 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1148-01 Rev. 00: SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1148-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00226	SEBKRP1V3	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed BL/BQD main in unit space

OEM part number	SEBKRP1V3	A	S97, S389 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed BL/BQD main in unit space; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S389 single sheet; oem_spec
Breaker compatibility	Back-fed BL or BQD main (any of four corners)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 large plastic ribbed shank rivet; 2 #10-24 x 7/16 SHWHSW screws	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Mounting-hole pattern	Bracket mounts to pair of base-rail holes 2 in apart at interior corner; OUTER bracket holes for BL/BQD, INNER for xGB	A	S389 single sheet; oem_spec
Torque values	Both screws 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1149-01 Rev. 00: SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1149-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-SIE-00227	SEBKRP1V4	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed xGB main in unit space

OEM part number	SEBKRP1V4	A	S97, S389 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed xGB main in unit space; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S389 single sheet; oem_spec
Breaker compatibility	Back-fed xGB main (top left top-fed / bottom right bottom-fed only)	A	same as above
Kit contents	1 barrier support bracket; 1 barrier assembly; 1 large plastic rivet; 2 #10-24 x 7/16 SHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Mounting-hole pattern	Inner pair of bracket holes aligned to base-rail holes 2 in apart	A	S389 single sheet; oem_spec
Torque values	30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1149-01 Rev. 00: SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1149-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Material		

EDH-SIE-00228	SEBKRP1V5	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets

OEM part number	SEBKRP1V5	A	S97, S390 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S390 single sheet; oem_spec
Breaker compatibility	BL, BQD or GB main outside unit space (flap between shunt trip and breaker if fitted)	A	same as above
Kit contents	1 barrier support assembly; 1 #10-24 x 7/16 SHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	30 lb-in	A	S390 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1165-01 Rev. 00: SEBKRP1V5 Service Entrance Barrier Kit for Revised P1 Panelboards	A	same as above
Identification features	Drawing ref 11-A-1165-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00229	SEBKRP1V6	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit

OEM part number	SEBKRP1V6	A	S97, S391 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S391 single sheet; oem_spec
Breaker compatibility	BL, BQD, xGB or 3VA41 main outside unit space (remove perforated tab on accessory side for xGB/BQD with accessory)	A	same as above
Kit contents	1 barrier support assembly; 1 #10-24 x 7/16 SHWHSW	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	30 lb-in	A	S391 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1194-01 Rev. 00: SEBKRP1V6 Service Entrance Barrier Kit for Revised P1 Panelboard	A	same as above
Identification features	Drawing ref 11-A-1194-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00230	SEBKRP1V7	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with 3VA52/61/62 horizontal main

OEM part number	SEBKRP1V7	A	S97, S392 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	S392 single sheet; oem_spec
Breaker compatibility	Horizontally-mounted 3VA52/61/62 main (tear tab off if communications T-connector at cable end)	A	same as above
Kit contents	1 service barrier assembly; 1 #10-24 IHWHSW screw	A	same as above
	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Torque values	30 lb-in	A	S392 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1060-01 Rev. 00: SEBKRP1V7 Service Entrance Barrier Kit for RP1 Panelboard	A	same as above
Identification features	Drawing ref 11-B-1060-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00396	**DFFP01A**	Revised P1 deadfront main blank or subfeed filler plate	—	unknown
EDH-SIE-00064	**DFFP01B**	P1 main or subfeed 250A blank filler plate	—	listed (2021)
EDH-SIE-00065	**DFFP01C**	Revised P1 400A main blank filler plate	—	listed (2021)
EDH-SIE-00062	**DFFP1A**	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 a A	current (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00070	**DFFPFD01**	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	—	listed (2021)
EDH-SIE-00071	**DFFPJD01**	JD main filler plate (plastic)	—	listed (2021)
EDH-SIE-00072	**DFFPJD02**	JD main filler plate for Revised P1 400A with large MB opening only	—	listed (2021)
EDH-SIE-00073	**DFFPQJ01**	QJ main filler plate	—	listed (2021)
EDH-SIE-00074	**DFFPQJ02**	QJ main filler plate	—	listed (2021)
EDH-SIE-00397	**DFFPV5363A**	Revised P1 deadfront 3VA53/63 main breaker filler plate	—	unknown
EDH-SIE-00066	**DFFPVA41A**	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	—	listed (2021)
EDH-SIE-00067	**DFFPVA5262A**	RP1 main or subfeed filler	—	listed (2021)
EDH-SIE-00068	**DFFPVA5363A**	RP1 400A main filler for 3VA53/63	—	listed (2021)
EDH-SIE-00075	**MBKQRFK**	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	—	listed (2021)

EDH-SIE-00396 — DFFP01A

Siemens lineage · filler-plate · **STATUS UNKNOWN**

Revised P1 deadfront main blank or subfeed filler plate

OEM part number	DFFP01A	**A**	S407 single sheet; oem_spec
Kit contents	1 filler plate, Siemens piece no. 11-D-4560-01 / 11-D-4607-01 / 11-D-4612-01 (one of)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	**A**	same as above
Identification features	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00064 — DFFP01B

Siemens · filler-plate · **LISTED (2021)**

P1 main or subfeed 250A blank filler plate

OEM part number	DFFP01B	**A**	S97, S407 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP01A	**A**	S97 supersedes; p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	11-D-4560-01 [supersedes]	**A**	same as above
	12-A-1801-01 [supersedes]	**A**	same as above
Description	P1 main or subfeed 250A blank filler plate, 1 piece (Original or Revised P1; also S1/S2/SE); installs vertical for 400A main w/ small DF opening	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4612-01 (per 11-B-1059-01; sheet lists 11-D-4560-01/4607-01/4612-01 for DFFP01A or B)	**A**	S407 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	**A**	same as above
Status	listed (2021)	**A**	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4612-01	**A**	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	**A**	S407 single sheet; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00065	DFFP01C	Siemens	filler-plate	LISTED (2021)

Revised P1 400A main blank filler plate

OEM part number	DFFP01C	A	S97, S407 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	Revised P1 400A main blank filler plate, 1 piece, for large MB opening only	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4600-01	A	S407 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4600-01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S407 single sheet; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00062	DFFP1A	Siemens	filler-plate	CURRENT (2021)

1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)

OEM part number	DFFP1A	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP1 (Earlier number; DFFP1 fits tighter in the opening than QF3 (stronger spring tabs))	A	S97 supersedes; pp.11-23, 11-67, 11-96; oem_spec
	12-1800-01 (old reference/drawing number)	A	S97 alias; p.11-20; oem_spec
	11-D-4554-01 [alias] (old eng. ref; current eng ref 11-D-4613-01)	A	same as above
	QF3 (QF3 is approved in all panelboards/switchboards and is the only one approved in residential products; slides out when P1-P3 deadfront removed)	A	S97 equivalent; p.11-23 footnotes a,b; oem_spec
Description	Blank filler, 1 inch snap-in; replaced old QF3 and DFFP1 in Systems products	A	S97 p.11-20; oem_spec
Application	blank 1in branch positions; also fills void where a 2-pole breaker is installed in a 3-pole position	A	S97 p.11-23 footnote a; oem_spec
Installation location	Deadfront branch openings (horizontal or vertical)	A	S97 p.11-23 row A1; oem_spec
Breaker compatibility	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 and DFFP1 in P1-P5 panelboards and switchboards	A	S97 p.11-23; oem_spec
Status	current (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng. ref 11-D-4613-01; snap-in with small spring side tabs	A	S97 pp.11-20, 11-23; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3, P4, P5, SB · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Exact outline dimensions of DFFP1A vs QF3 (distributor s13 gives QF3 12.9in x 5.2in which is likely packaging)*		

EDH-SIE-00070	DFFPFD01	Siemens	filler-plate	LISTED (2021)

FD main filler plate (plastic) for 1-ph and 3-ph P1 panels

OEM part number	DFFPFD01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels; also P2/P3 and S1/S2/SE	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S97 p.11-53; oem_spec
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1803-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00071	DFFPJD01	Siemens	filler-plate	LISTED (2021)

JD main filler plate (plastic)

OEM part number	DFFPJD01	A	S97, S407 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate (plastic), 1-ph and 3-ph P1, small MB opening; also P2/P3 and S1/S2	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4522-01 or 11-D-4598-01	A	S407 single sheet; oem_spec
Material	plastic	A	S97 p.11-53; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	S407 single sheet; oem_spec
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4522-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S407 single sheet; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Torque values		

EDH-SIE-00072	DFFPJD02	Siemens	filler-plate	LISTED (2021)

JD main filler plate for Revised P1 400A with large MB opening only

OEM part number	DFFPJD02	A	S97, S407 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate for Revised P1 400A with large MB opening only	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4522-01 or 11-D-4598-01	A	S407 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4598-01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	A	S407 single sheet; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00073	DFFPQJ01	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 3-phase (3-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00074	DFFPQJ02	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ02	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 1-phase (2-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-62	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00397	DFFPV5363A	Siemens lineage	filler-plate	STATUS UNKNOWN

Revised P1 deadfront 3VA53/63 main breaker filler plate

OEM part number	DFFPV5363A	**A**	S407 single sheet; oem_spec
Kit contents	1 filler plate, Siemens piece no. 11-D-4599-01	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	**A**	same as above
Identification features	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	**A**	same as above
Cross-links	Families: RP1		

EDH-SIE-00066	DFFPVA41A	Siemens	filler-plate	LISTED (2021)

RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max

OEM part number	DFFPVA41A	**A**	S97, S407 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPED01	**A**	S97 supersedes; p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	12-A-1802-01 [supersedes]	**A**	same as above
Description	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Kit contents	1 filler plate, Siemens piece no. 11-D-4604-01	**A**	S407 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1180-01 Rev. 01: DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	**A**	same as above
Status	listed (2021)	**A**	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4604-01	**A**	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Snap-in plastic filler with rear clasp; squeeze clasp at rear edge and swing out of rectangular deadfront hole to remove; JD filler has offset hole	**A**	S407 single sheet; oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41, ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00067	DFFPVA5262A	Siemens	filler-plate	LISTED (2021)

RP1 main or subfeed filler

OEM part number	DFFPVA5262A	A	S97, S408 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 main or subfeed filler, single mount 3VA52/61/62 (150-250A)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Kit contents	1 3VA52/61/62 breaker filler plate, Siemens piece no. 11-D-4617-01	A	S408 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-B-1061-01 Rev. 00: DFFPVA5262A Filler Plate Kit replacement filler plate (3VA52/61/62)	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4617-01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
	Hook end and snap end; 'ON', 'GUTTER' and 'BRANCH' markings; break-off wall section 'REMOVE FOR 3VA61 OR 3VA62 BREAKERS' (leave intact for 3VA5x)	A	S408 single sheet; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00068	DFFPVA5363A	Siemens	filler-plate	LISTED (2021)

RP1 400A main filler for 3VA53/63

OEM part number	DFFPVA5363A	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 400A main filler for 3VA53/63, large MB opening only (also used in P2/P3)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00075	MBKQRFK	Siemens	filler-plate	LISTED (2021)

P1 / Revised P1 deadfront filler for 1PH/3PH QR main

OEM part number	MBKQRFK	A	S97, S382 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	P1 / Revised P1 deadfront filler for 1PH/3PH QR main, horizontal mount only	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
	Original P1 and/or Revised P1, 1-ph or 3-ph, main or subfeed, horizontal mount only; do NOT use if breaker mounting screw heads are covered by factory epoxy (order MBKQR1A/MBKQR3A strap kit + breaker or breaker-included kit instead)	A	S382 single sheet; oem_spec
Kit contents	QR plastic filler; MAIN label; SERVICE DISCONNECT label	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1134-01 Rev. 00: MBKQRFK P1 / RP1 Filler Kit for QR Breaker Installation Instructions	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00415	**B74FLR**	74 in panelboard box (floor) accepting 26-74 in interiors	—	unknown
EDH-SIE-00240	**EWK1**	End wall kit with knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00243	**EWK1B**	End wall kit without knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00241	**EWK2**	End wall kit with knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00244	**EWK2B**	End wall kit without knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00242	**EWK3**	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	—	unknown

EDH-SIE-00415	B74FLR	Siemens lineage	box/enclosure	STATUS UNKNOWN

74 in panelboard box (floor) accepting 26-74 in interiors

OEM part number	B74FLR	A	S420 single sheet; oem_spec
Description	Box with upper and bottom 1/4-20 x 1 mounting studs for 74 in interior; bag of bottom mounting bolts (shorter pair for RP1, longer for P2) to mount 68/62/56/50/44/38/32/26 in interiors 6-48 in higher; open endwall can be moved to lowest position (8 screws)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1129-01 Rev. 00: B74FLR preparation for installation instructions (74 in box)	A	same as above
Cross-links	Families: RP1, P2		

EDH-SIE-00240	EWK1	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1	A	S97, S417 p.11-34; oem_spec
Description	End wall kit with knockouts (20in W x 5.75in D), Type 1 only	A	S97 p.11-34; oem_spec
Kit contents	2 box end walls and mounting hardware (16 screws, half used at each end)	A	S417 single sheet; oem_spec
Dimensions	20in W x 5.75in D	A	S97 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S417 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00243	EWK1B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1B	A	S97, S417 p.11-34; oem_spec
Description	End wall kit without knockouts (20in W x 5.75in D), Type 1 only	A	S97 p.11-34; oem_spec
Kit contents	2 box end walls and mounting hardware (16 screws, half used at each end)	A	S417 single sheet; oem_spec
Dimensions	20in W x 5.75in D	A	S97 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S417 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00241	EWK2	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2	A	S97, S417, S319 p.11-34; oem_spec
Description	End wall kit with knockouts (24in W x 7.75in D), Type 1 only	A	S97 p.11-34; oem_spec
	End wall kit with knockouts (24 in W x 7.75 in deep)	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Kit contents	2 box end walls and mounting hardware (20 screws, half used at each end)	A	S417 single sheet; oem_spec
Dimensions	24in W x 7.75in D	A	S97 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	A	S417 single sheet; oem_spec
Identification features	Notched end of end wall faces front	A	same as above
Cross-links	Families: RP1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00244	EWK2B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2B	**A**	S97, S417 p.11-34; oem_spec
Description	End wall kit without knockouts (24in W x 7.75in D), Type 1 only	**A**	S97 p.11-34; oem_spec
Kit contents	2 box end walls and mounting hardware (20 screws, half used at each end)	**A**	S417 single sheet; oem_spec
Dimensions	24in W x 7.75in D	**A**	S97 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1004-01 Rev. 01: EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	**A**	S417 single sheet; oem_spec
Identification features	Notched end of end wall faces front	**A**	same as above
Cross-links	Families: RP1, P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00242	EWK3	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in

OEM part number	EWK3	**A**	S97, S418 p.11-34; oem_spec
Description	End wall kit - open center space - ref B74FLR (20in W x 5.75in D), Type 1 only	**A**	S97 p.11-34; oem_spec
Kit contents	Open endwall and 8 screws; replaces blank endwall, mounted in lowest position	**A**	S418 single sheet; oem_spec
Dimensions	20in W x 5.75in D	**A**	S97 p.11-34; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1143-01 Rev. 00: EWK3 instructions for special open endwall	**A**	S418 single sheet; oem_spec
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00096	**BK1A**	Revised P1 bonding kit including service disconnect label	—	listed (2021)
EDH-SIE-00095	**IMK1**	Interior mounting kit with adjustment provisions for P1/P2/P3	—	listed (2021)
EDH-SIE-00014	**MBKBFA**	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	BL, BQD, GB (back-fed, installed in the unit space; breaker purchased **A**	unknown

EDH-SIE-00096	BK1A	Siemens	hardware-kit	LISTED (2021)

Revised P1 bonding kit including service disconnect label

OEM part number	BK1A	A	S97, S450 p.11-20; oem_spec
Alternate / superseded numbers	UPC 887621572570	A	S450 alias; card 11-A-1096-01; oem_spec
Description	Revised P1 bonding kit including service disconnect label	A	S97 p.11-20; oem_spec
Kit contents	qty/kit 1	A	same as above
	Bonding screw (green head)	A	S450 card 11-A-1096-01; oem_spec
Torque values	72 lb-in	A	same as above
OEM instruction document	Ensure thru-holes through neutral bus and barrier are aligned; drive bonding screw into base rail; tighten to 72 lb-in	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

EDH-SIE-00095	IMK1	Siemens	hardware-kit	LISTED (2021)

Interior mounting kit with adjustment provisions for P1/P2/P3

OEM part number	IMK1	A	S97, S449, S319 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	Interior mounting kit with adjustment provisions for P1/P2/P3	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	Interior adjusting kit	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Application	Install on every panel; leveling provision at each corner of P1, P2, P3 & S3 base rails and S1, S2, SE brackets (alternate location)	A	S449 card 11-A-1002-01; oem_spec
Kit contents	qty/kit 1	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	4 leveling screws; 4 wing nuts	A	S449 card 11-A-1002-01; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1002-01 Rev. 4: Mounting and Leveling Kit IMK1 instruction card	A	same as above
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		

EDH-SIE-00014	MBKBFA	Siemens	hardware-kit	STATUS UNKNOWN

P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)

OEM part number	MBKBFA	A	S105, S332 oem_spec
Description	KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER; field installable kit	A	S105 oem_spec
Application	main (back-fed breaker in unit space; uses 2 or 3 positions of unit space)	A	S97 p.11-7 note 1; oem_spec
	Main in panels rated 250 A or less	A	S332 pp. 2-3; oem_spec
Breaker compatibility	BL, BQD, GB (back-fed, installed in the unit space; breaker purchased separately). GB mains only in panels with GB branches and 3-phase only; BL/BQD mains only in panels intended for BL/BQD branches.	A	same as above
Kit contents	1 blank filler; 1 MAIN label; 1 neutral lug assembly; 1 1/4-20 Belleville washer nut	A	same as above
	'MAIN' label and instructions for back-fed BL/BQD or GB main (s8 table: 'Label Kit # MBKBFA ... MAIN label and'; s7 lists 'MBKDFA - Back Fed Main Breaker Label and Instructions for BL/BQD or GB breaker' (likely typo of MBKBFA))	B	S104, S103 oem_spec
Fasteners	Breaker hooks onto barrier fingers by rear notch; stabs secured to phase bus with #10-32 SEMS screws as for branch breakers	A	S332 pp. 2-3; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1114-01 Rev. 00: P1-250 Panelboard Kit MBKBFA for BL/BQD/GB Main Breaker Installation Instructions	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material, Torque values		
Open question	*Is 'MBKDFA' in the flyer (s7) a typo of MBKBFA?*		
Open question	*Does the kit include a hold-down/retaining clip as required for back-fed breakers? Not stated.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00442	**LPJSPDNUT01**	Panelboard trim J-type speed nut kit (25)	—	unknown
EDH-SIE-00091	**P1SCRWS**	P1 branch breaker mounting screws	—	listed (2021)

EDH-SIE-00442	LPJSPDNUT01	Siemens lineage	fastener	STATUS UNKNOWN

Panelboard trim J-type speed nut kit (25)

OEM part number	LPJSPDNUT01	A	S461 single sheet; oem_spec
Installation location	Edge of deadfront or enclosure flange, depending on front/trim style	A	same as above
Kit contents	25 J-type speed nuts, Siemens piece no. 11-A-1820-01	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1176-01 Rev. 00: LPJSPDNUT01 J-type speed nut replacement kit	A	same as above
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00091	P1SCRWS	Siemens	fastener	LISTED (2021)

P1 branch breaker mounting screws

OEM part number	P1SCRWS	A	S97, S320 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	P1 branch breaker mounting screws, pack of 42 (part 11-A-1505-03), 10-32 x 0.312in hex washer head - do not substitute	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
	Replacement special 10-32 x 9/32 in pre-assembled screw / cup washer fasteners used to install branch breakers in P1 panelboards; screws not used should be installed in all open breaker positions	A	S320 single page; oem_spec
Kit contents	qty/kit 42	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Fasteners	10-32 x 0.312in hex washer head screw, part 11-A-1505-03	A	same as above
	10-32 x 9/32 in pre-assembled screw with cup washer	A	S320 single page; oem_spec
Torque values	20 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1072-01 Rev. 1: P1SCRWS Branch Connector Screw Kit Instructions	A	same as above
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-A-2010-01	A	same as above
Cross-links	Families: RP1, P1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00013	**MBKVA5363JD**	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	—	'to be available 2021' / 'tbd - being developed'

EDH-SIE-00013	MBKVA5363JD	Siemens	conversion-kit	'TO BE AVAILABLE 2021'

RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)

OEM part number	MBKVA5363JD	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Allows 3VA53/63 in old 400A RP1 with small deadfront opening; no access to breaker adjustments without removing deadfront	A	same as above
Application	main (400A)	A	same as above
Status	'to be available 2021' / 'tbd - being developed'	A	S97 pp.11-13, 11-20; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Was MBKVA5363JD ever released? SpeedFax 2021 lists it as tbd/being developed*		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00411	**LPDC01**	Panelboard directory cards (10)	—	unknown
EDH-SIE-00412	**LPLOCK01A**	Replacement panelboard trim door lock (14 gage doors)	—	unknown
EDH-SIE-00413	**LPLOCK02A**	Replacement panelboard trim door lock (12 gage doors)	—	unknown
EDH-SIE-00416	**NBK01A**	Revised P1 circuit numbering strip kit 1-60	—	unknown
EDH-SIE-00417	**NBK02A**	Revised P1 circuit numbering strip kit 61-120	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00418	**NBK03A**	Revised P1 circuit numbering strip kit 121-240	—	unknown

EDH-SIE-00411	LPDC01	Siemens lineage	other	STATUS UNKNOWN

Panelboard directory cards (10)

OEM part number	LPDC01	A	S415 single sheet; oem_spec
	LPDC01	A	S319 p. 11-48 (revised 05/15/18); oem_spec
Description	Directory card, pack of 10 (ref. 12-1110-01)	A	same as above
Kit contents	10 white card-stock directory cards 12-1110-01 (5 in W x 11 in H, NEMA numbering one side, vertical/custom other)	A	S415 single sheet; oem_spec
OEM instruction document	Siemens instruction sheet 11-A-1184-01 Rev. 00: LPDC01 panelboard directory card kit	A	same as above
Requires (stated)	LPDC02 vinyl pouch if storage missing	A	S415 single sheet; oem_spec
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00412	LPLOCK01A	Siemens lineage	other	STATUS UNKNOWN

Replacement panelboard trim door lock (14 gage doors)

OEM part number	LPLOCK01A	A	S416 single sheet; oem_spec
Kit contents	1 replacement lock (11-1895-01, -02 or -03) and 2 keys B363A	A	same as above
Dimensions	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1175-01 Rev. 00: LPLOCK01A / LPLOCK02A replacement panelboard door locks	A	same as above
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00413	LPLOCK02A	Siemens lineage	other	STATUS UNKNOWN

Replacement panelboard trim door lock (12 gage doors)

OEM part number	LPLOCK02A	A	S416 single sheet; oem_spec
Kit contents	1 replacement lock (11-1895-01, -02 or -03) and 2 keys B363A	A	same as above
Dimensions	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1175-01 Rev. 00: LPLOCK01A / LPLOCK02A replacement panelboard door locks	A	same as above
Cross-links	Families: RP1, P2, P3		

EDH-SIE-00416	NBK01A	Siemens lineage	other	STATUS UNKNOWN

Revised P1 circuit numbering strip kit 1-60

OEM part number	NBK01A	A	S421 single sheet; oem_spec
Description	Adhesive circuit number label strips 1-60; NEMA or Standard patterns; 1/2 in tall numbers for BT breakers, 1 in for 1 in unit space; apply above 40 F	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1197-00 Rev. 00: NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00417	NBK02A	Siemens lineage	other	STATUS UNKNOWN

Revised P1 circuit numbering strip kit 61-120

OEM part number	NBK02A	A	S421 single sheet; oem_spec
Description	Adhesive circuit number label strips 61-120; NEMA or Standard patterns; 1/2 in tall numbers for BT breakers, 1 in for 1 in unit space; apply above 40 F	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1197-00 Rev. 00: NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	A	same as above
Cross-links	Families: RP1		

EDH-SIE-00418	NBK03A	Siemens lineage	other	STATUS UNKNOWN

Revised P1 circuit numbering strip kit 121-240

OEM part number	NBK03A	A	S421 single sheet; oem_spec
Description	Adhesive circuit number label strips 121-240; NEMA or Standard patterns; 1/2 in tall numbers for BT breakers, 1 in for 1 in unit space; apply above 40 F	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1197-00 Rev. 00: NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	A	same as above
Cross-links	Families: RP1		

6.11 S1/S2 — Type S1 / S2 lighting panelboards

FAM-SIE-003 · panelboard · aka S1, S2, Sentron S1, Sentron S2 · markings: Siemens

Earlier Siemens (Sentron-era) bolt-on lighting panelboards preceding P1/P2. SpeedFax states that all original P1 kits for 250A-and-below panels work in 250A-max S1/S2 panels; 400/600A S1/S2 use the SMBK* strap kits. Revised P1 kits will not work in S1/S2.

Attribute	Value	Cl.	Sources
Status	discontinued; some kits available	A	S97 pp.11-15, 11-20; oem_spec
Successor	P1 / P2 (Implied by SpeedFax grouping; not stated explicitly)	C	S97 inference

Breaker families associated: BL, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, MLKC1, MLKC3, 4MLKA1, 4MLKA3, 4MLKC1, 4MLKC3, MBKBL1, MBKBL3, MBKBC3, MBKNB1, MBKNB3, MBKED1, MBKED3, MBKQR1, MBKQR3, MBKFD1, MBKFD3, DFFP1A, DFFP01B, DFFPFD01, DFFPJD01, IMK1

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00056	**SMBKED1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	2-pole ED2, ED4, ED6, HED4, HHED6 A	listed (2021)
EDH-SIE-00057	**SMBKED3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	3-pole ED2, ED4, ED6, HED4, HHED6 A	listed (2021)
EDH-SIE-00058	**SMBKFD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	2-pole FXD6, FD6, HFXD6, HFD6 A	listed (2021)
EDH-SIE-00059	**SMBKFD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	3-pole FXD6, FD6, HFXD6, HFD6 A	listed (2021)
EDH-SIE-00060	**SMBKJD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	2-pole JD6, JXD6, HJD6, HJXD6 A	listed (2021)
EDH-SIE-00061	**SMBKJD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	3-pole JD6, JXD6, HJD6, HJXD6 A	listed (2021)

EDH-SIE-00056	SMBKED1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph

OEM part number	SMBKED1	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00057	SMBKED3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph

OEM part number	SMBKED3	**A**	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	3-pole ED2, ED4, ED6, HED4, HHED6	**A**	same as above
Current rating	125A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00058	SMBKFD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph

OEM part number	SMBKFD1	**A**	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole FXD6, FD6, HFXD6, HFD6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	2-pole FXD6, FD6, HFXD6, HFD6	**A**	same as above
Current rating	250A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00059	SMBKFD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph

OEM part number	SMBKFD3	**A**	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole FXD6, FD6, HFXD6, HFD6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	3-pole FXD6, FD6, HFXD6, HFD6	**A**	same as above
Current rating	250A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00060	SMBKJD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph

OEM part number	SMBKJD1	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00061	SMBKJD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph

OEM part number	SMBKJD3	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00393	**MBKQRC1FK**	Column (C1) panelboard filler kit for vertically mounted 225A QR main/subfeed	—	unknown

EDH-SIE-00393	MBKQRC1FK	Siemens lineage	filler-plate	STATUS UNKNOWN

Column (C1) panelboard filler kit for vertically mounted 225A QR main/subfeed

OEM part number	MBKQRC1FK	A	S379 single sheet; oem_spec
Application	Vertically-mounted 225A MAX QR2 breaker (limited to 10 kA interrupting) in column panelboards, 1-ph or 3-ph, main or subfeed	A	same as above
Kit contents	QR deadfront plate for vertical C1; 4 #10-24 hex washer head screws; 4 #10 narrow washers; MAIN label; SERVICE DISCONNECT label; blank filler (used in place of plate when breaker not installed)	A	same as above
OEM instruction document	Siemens instruction sheet 11-A-1137-01 Rev. 00: MBKQRC1FK C1 Filler Kit for QR Breaker Installation Instructions	A	same as above
Cross-links	Families: S1/S2		

6.12 SE — Type SE panelboard

FAM-SIE-004 · panelboard · aka SE panels · markings: Siemens

Legacy Siemens panelboard type grouped with S1/S2 in SpeedFax replacement tables. SMBK* strap kits fit all SE panels; only AL 250A MLO kits (MLKA1/MLKA3) available for SE. Construction details unknown.

Attribute	Value	Cl.	Sources
Status	discontinued	A	S97 p.11-15; oem_spec

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, SMBKED1, SMBKED3, SMBKFD1, SMBKFD3, SMBKJD1, SMBKJD3, DFFP01B, DFFPFD01, IMK1

6.13 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)

FAM-SIE-010 · switchboard · aka CDP-5, CDP-6, CDP6, Class II, FC-1, FC-20, FC-I, FC-II, FC20, FCI, FCII, FCRS, SPP6, VB, VB-5, VB-6 · markings: Gould ITE, ITE, Siemens, Siemens-Allis

Legacy distribution panelboard and switchboard lines served by the Series 6 connecting strap kits (6E62, 6F62, 6JJ62, 6LL61...) and 6FPB blank plates. 2005 Siemens price list states these kits fit 'switchboards manufactured since 1974'. Equipment lineage (ITE/Gould-ITE/Siemens-Allis) for each type not confirmed in OEM documents in this batch.

Evidence record for existing CDP6 family: dealer kits 5EH2 (EE/EH/EF/HE twin), 5FJ2 (FJ3 twin) and 5JJ2 (JD3/JJ3/JL3/HJ3 twin) list panel type 'FC20 VB'; CDPFJ3, 6CLJ6 and NEB65K list 'FC1, FCII, SB1-3, CDP-5, CDP-6, S5, P5'. The 1990 NEC committee roster shows 'I-T-E Elec. Prod. Div. of Siemens-Allis Inc.'

Attribute	Value	Cl.	Sources
Status	discontinued equipment; strap kits still catalogued (Canada) (Equipment status inferred from absence in current US SpeedFax)	B	S98 p.11-15; oem_spec
Era of manufacture	Strap kits fit switchboards manufactured since 1974	A	S99 p.8-13; oem_spec
Ite breakers	ITE breaker types EE, EH, EF, HE (150 A), FJ3 (225 A), JD3/JJ3/JL3/HJ3 (400 A) used on FC20/VB	C	S251 surplus_listing

Breaker families associated: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), ITE EE / EH / EF / HE breakers, ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers, JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QJ2 / QJH2 / QJ2-H / HQJ2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S98 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S99 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio; S251 Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 it
Also fits this family (entry printed elsewhere): SDGD, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, SSJ1D, 6E62, 6F62, 6CLF1, 6JJ61, 6JJ62, 6CLJ1, 6SJL1, 6LL61, 6CLL1, 6SLL1, 6SCL1, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, 6FPB15, CD62JJ2

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00314	**5EH2**	ITE twin mounting kit for FC20 / VB panels, EE/EH/EF/HE breakers, 150 A	EE, EH, EF, HE C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00315	**5FJ2**	ITE twin mounting kit for FC20 / VB panels, FJ3/FJ breakers, 225 A	FJ3, FJ C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00316	**5JJ2**	ITE twin mounting kit, J-frame (JD3/JJ3/JL3/HJ3), 400 A	JD3, JJ3, JL3, HJ3, JD, JJ, JL C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00201	**6BL2C**	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	BQ, BQH, HB, BL, BLH, HBL [s2] A	listed in Siemens Canada catalogue 2025
EDH-SIE-00321	**6CLJ6**	Mounting hardware to mount CJD (CLD) into FC-1 panel, single, 600 A	CLD / CJD C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00203	**6M61C**	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2] A	listed in Siemens Canada catalogue 2025
EDH-SIE-00204	**6N61C**	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2] A	listed in Siemens Canada catalogue 2025
EDH-SIE-00189	**6QJ2**	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	QJ2, QJH2, QJ2-H [s3] A	listed in 2005 price list
EDH-SIE-00196	**6SCJ1**	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s3] A	listed in 2005 price list
EDH-SIE-00202	**6SCL61C**	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s2] A	listed in Siemens Canada catalogue 2025

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00320	**CDPFJ3**	Mounting hardware for FJ3 breaker in CDP panelboard (twin, 225 A)	FJ3 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00317	**EH3K**	Twin mounting hardware kit for FC20/VB, EE/EH/EF/HE, 150 A (possibly aftermarket equivalent of 5EH2)	EE, EH, EF, HE C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00318	**FJ3K**	Twin mounting hardware kit for FC20/VB, FJ3, 225 A (possibly aftermarket equivalent of 5FJ2)	FJ3 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00319	**JJ3K**	Twin mounting hardware kit for FC20/VB, JD3/JJ3/JL3/HJ3, 400 A (possibly aftermarket equivalent of 5JJ2)	JD3, JJ3, JL3, HJ3 C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00323	**NEB64K**	Twin mounting hardware kit for NEB/HEB breakers, 125 A (S4/P4/SPP/F1)	NEB, HEB C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00322	**NEB65K**	Twin mounting hardware kit for NEB/HEB breakers, 125 A (Series 5/6 deep panels)	NEB, HEB C	Discontinued OEM item traded new-surplus / recertified by de
EDH-SIE-00332	**VB610**	ITE Vacu-Break mounting hardware straps	Vacu-Break fusible switch C	Discontinued OEM item traded new-surplus / recertified by de

EDH-SIE-00314 **5EH2** ITE / Siemens branch-connector-kit **DISCONTINUED OEM ITEM**

ITE twin mounting kit for FC20 / VB panels, EE/EH/EF/HE breakers, 150 A

OEM part number	5EH2	C	S251 surplus_listing
Description	Twin Mounting Kit for FC20, VB panels, mounts EE, EH, EF, HE breakers	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	EE, EH, EF, HE	C	same as above
Current rating	150 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE EE / EH / EF / HE breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00315 **5FJ2** ITE / Siemens branch-connector-kit **DISCONTINUED OEM ITEM**

ITE twin mounting kit for FC20 / VB panels, FJ3/FJ breakers, 225 A

OEM part number	5FJ2	C	S251 surplus_listing
Description	Twin Mounting Kit for FC20, VB panels, mounts FJ3, FJ breakers	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	FJ3, FJ	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00316	5JJ2	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE twin mounting kit, J-frame (JD3/JJ3/JL3/HJ3), 400 A

OEM part number	5JJ2	C	S251 surplus_listing
Description	Twin Mounting Kit for NAB, NHB panels (title) - spec block panel type 'FC20 VB'; mounts JD3, JJ3, JL3, HJ3, JD, JJ, JL	C	same as above
Application	branch (twin)	C	same as above
Installation location	Title: NAB, NHB panels; spec: FC20, VB (conflict)	C	same as above
Breaker compatibility	JD3, JJ3, JL3, HJ3, JD, JJ, JL	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6, NLAB · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*Title says NAB/NHB panels but spec says FC20/VB - which ITE equipment?*		

EDH-SIE-00201	6BL2C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)

OEM part number	6BL2C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for BQ, BQH, HB, BL, BLH, HBL branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	BQ, BQH, HB, BL, BLH, HBL [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (footnote e) (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: BQ / BQH / HBQ (bolt-on, legacy), BL		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Distributor listings disagree on breaker list (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB) - Canadian OEM table lists 'BQ, BQH, HB, BL, BLH, HBL'*		

EDH-SIE-00321	6CLJ6	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Mounting hardware to mount CJD (CLD) into FC-1 panel, single, 600 A

OEM part number	6CLJ6	C	S251 surplus_listing
Description	Mounting hardware to mount CJD into FC-1 Panel	C	same as above
Application	branch (single)	C	same as above
Installation location	FC1, FCII, SB1-3, CDP-5, CDP-6, S5, P5	C	same as above
Breaker compatibility	CLD / CJD	C	same as above
Current rating	600 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00203	6M61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)

OEM part number	6M61C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00204	6N61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)

OEM part number	6N61C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for NXD6, ND6, HND6, CND6, SHND6, SCND6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00189	6QJ2	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)

OEM part number	6QJ2	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for QJ2, QJH2, QJ2-H branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin (D)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	QJ2, QJH2, QJ2-H [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $1529.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00196	6SCJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCJ1 connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCJ1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCJD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00202	6SCL61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6SCL61C connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCL61C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SCJD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00320	CDPFJ3	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Mounting hardware for FJ3 breaker in CDP panelboard (twin, 225 A)

OEM part number	CDPFJ3	C	S251 surplus_listing
Description	Mounting hardware for FJ3 breaker in CDP pnlbd	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC1, FCII, SB1, SB2, SB3, CDP-5, CDP-6, S5, P5	C	same as above
Breaker compatibility	FJ3	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00317	EH3K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for FC20/VB, EE/EH/EF/HE, 150 A (possibly aftermarket equivalent of 5EH2)

OEM part number	EH3K	C	S251 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 150A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	EE, EH, EF, HE	C	same as above
Current rating	150 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE EE / EH / EF / HE breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*OEM or aftermarket (IEM-style 'K' suffix)?*		

EDH-SIE-00318	FJ3K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for FC20/VB, FJ3, 225 A (possibly aftermarket equivalent of 5FJ2)

OEM part number	FJ3K	C	S251 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 225A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	FJ3	C	same as above
Current rating	225 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*OEM or aftermarket?*		

EDH-SIE-00319	JJ3K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for FC20/VB, JD3/JJ3/JL3/HJ3, 400 A (possibly aftermarket equivalent of 5JJ2)

OEM part number	JJ3K	C	S251 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 400A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC20, VB	C	same as above
Breaker compatibility	JD3, JJ3, JL3, HJ3	C	same as above
Current rating	400 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6 · Breakers: ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		
Open question	*OEM or aftermarket?*		

EDH-SIE-00323	NEB64K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for NEB/HEB breakers, 125 A (S4/P4/SPP/F1)

OEM part number	NEB64K	C	S251 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 125A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	S4, P4, SPP, F1	C	same as above
Breaker compatibility	NEB, HEB	C	same as above
Current rating	125 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00322	NEB65K	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

Twin mounting hardware kit for NEB/HEB breakers, 125 A (Series 5/6 deep panels)

OEM part number	NEB65K	C	S251 surplus_listing
Description	Siemens; Twin Mounting Hardware Kit; 125A Max	C	same as above
Application	branch (twin)	C	same as above
Installation location	FC1, FCII, CDP-5, CDP-6, SB1-3, S5, P5, SPP/FPP	C	same as above
Breaker compatibility	NEB, HEB	C	same as above
Current rating	125 A	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

EDH-SIE-00332	VB610	ITE / Siemens	branch-connector-kit	DISCONTINUED OEM ITEM

ITE Vacu-Break mounting hardware straps

OEM part number	VB610	C	S251 surplus_listing
Description	Vacu-Break mounting hardware straps	C	same as above
Installation location	VB / FC switchboards (inference)	C	same as above
Breaker compatibility	Vacu-Break fusible switch	C	same as above
Status	Discontinued OEM item traded new-surplus / recertified by dealers	C	same as above
Cross-links	Families: CDP6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Material, oem_status_confirmation		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00063	**QF3**	QF3 1-pole plastic filler plate (load center / legacy switchboard)	—	still approved in panelboards/switchboards; only QF3 approve

EDH-SIE-00063	QF3	Siemens	filler-plate	STILL APPROVED IN PANE

QF3 1-pole plastic filler plate (load center / legacy switchboard)

OEM part number	QF3	A	S99 oem_spec
Alternate / superseded numbers	DFFP1A	A	S97 superseded_by; p.11-20; oem_spec
	12-1800-01 ('sub no. 12-1800-01')	C	S109 alias; distributor
Description	Filler plate, per pole, for BQ, BQH, HBQ, E2, E4, E6, HE4, HE6, E2-A..HE6-A and ED2, ED4, ED6, HED4, HED6 frames in Series 5/6 CDP panelboards and FC-20, Class II, FCI, FCII, SB1, SB2, SB3 switchboards	A	S99 p.8-13 'Filler Plates'; oem_spec
Application	blank 1-pole branch positions	A	S99 p.8-13; oem_spec
Status	still approved in panelboards/switchboards; only QF3 approved for residential load centers, meter combos	A	S97 p.11-23 footnote b-c; oem_spec
Cross-links	Families: CDP6, SB, P1, P2, P3 · Breakers: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00373	**11-5570-01**	Series 5 adaptor kit (adapts Series 6 mounting kits to Series 5 / CDP-5 / VB-5 / FC20 bus with 0.406 in holes)	—	unknown
EDH-SIE-00374	**11-5570-02**	Series 5 adaptor kit (12 sets) for JD twin mounting kits	—	unknown

EDH-SIE-00373	11-5570-01	Siemens lineage	conversion-kit	STATUS UNKNOWN

Series 5 adaptor kit (adapts Series 6 mounting kits to Series 5 / CDP-5 / VB-5 / FC20 bus with 0.406 in holes)

OEM part number	11-5570-01	A	S351 BOM 11-5570-01 Rev 3 (image); oem_spec
Application	For use in adapting Series 6 mounting kits to Series 5 type panel construction (Series 5 construction has 0.406 in dia holes in interior horizontal bus)	A	same as above
Kit contents	5/16 insert 11-1620-04 x6; 5/16 flat washer 11-1615-06 x6; 5/16 lock washer 11-1618-04 x6; 5/16-18 x 1-1/4 HHMS 11-1566-07 x6; fast latch screw bag 11-A-1821-01 x1; ID card 31-1160-01	A	same as above
Torque values	5/16-18 HHMS 13 ft-lb	A	same as above
OEM instruction document	(1) Use 5/16-18 insert in bus, flange pulled up flush with back of bus bar; (2) drill out appropriate holes in branch bus minimum 0.344 in dia to accommodate 5/16-18 bolts	A	same as above
Cross-links	Families: CDP6		

EDH-SIE-00374	11-5570-02	Siemens lineage	conversion-kit	STATUS UNKNOWN

Series 5 adaptor kit (12 sets) for JD twin mounting kits

OEM part number	11-5570-02	**A**	S352 BOM 11-5570-02 Rev 3 (image); oem_spec
Application	Adapting Series 6 mounting kits to Series 5 construction (0.406 in dia holes in interior horizontal bus); drill branch bus to min 0.344 in for 5/16-18 bolts	**A**	same as above
Kit contents	5/16 insert 11-1620-04 x12; 5/16 flat washer 11-1615-06 x12; 5/16 lock washer 11-1618-04 x12; 5/16-18 x 1-1/4 HHMS 11-1566-07 x12; fast latch screw bag 11-A-1821-01; ID card 31-1160-02	**A**	same as above
Torque values	5/16-18 HHMS 13 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1169-01 Rev. 3: CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	**A**	same as above
Cross-links	Families: CDP6		

6.14 SB — Type SB1 / SB2 / SB3 distribution switchboards

FAM-SIE-009 · switchboard · aka SB1, SB2, SB3, SB4 (blank plates only) · markings: Siemens

Siemens front-accessible distribution switchboards. Branch MCCBs mount in distribution sections via 'Connection Strap Kits' (same D-suffix kits as P5: SBLBD, SE6D, SF6D, SJ1D, SMND etc. plus S3VA*TD kits), unit space covered with 6FPB blank plates.

Attribute	Value	Cl.	Sources
Status	current	**A**	S98 p.11-2; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQ / BQH / HBQ (bolt-on, legacy), BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S98 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S99 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio

Also fits this family (entry printed elsewhere): DFFP1A, QF3, SBL, S3VA41T, SGB2, S3VA52T, SDGD, SQR, SFG, S3VA53T, SJG, S3VA54T, SLG, MG1, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, SCED, SQRD, S3VA53T2D, SSJ1D, S3VA54T2D, S3VA55TD, S3VA57TD, 6QJ2, 6JJ61, 6SJL1, 6SCJ1, 6LL61, 6SLL1, 6BL2C, 6SCL61C, 6M61C, 6N61C, S3VA52PR, SQRC, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00191	**6CLF1**	6CLF1 connecting strap kit - CFD6 (5in, single)	CFD6 [s3]; CFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00194	**6CLJ1**	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	CJD6 [s3]; CJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00198	**6CLL1**	6CLL1 connecting strap kit - CLD6 (8.75in, single)	CLD6 [s3]; CLD6, SCLD [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00188	**6E62**	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00190	**6F62**	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00193	**6JJ62**	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00200	**6SCL1**	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	SCLD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00369	**SDG**	SB1/SB2/SB3 & P4/P5 branch mounting kit for Sentron VL DG frame breakers (shallow)	Siemens VL DG frame electronic-trip breakers **A**	unknown
EDH-SIE-00367	**SEB**	Switchboard/power panel branch kit for EB breakers, shallow (P4)	Siemens EB circuit breakers **A**	unknown
EDH-SIE-00368	**SEBD**	Switchboard/power panel branch kit for EB breakers, deep (P5 / switchboard)	Siemens EB circuit breakers **A**	unknown
EDH-SIE-00370	**SLM1**	Switchboard/power panel branch kit SLM1 for Sentron LMD / VL MG frame breakers	Sentron LMD and VL MG frame breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00371	**SNB**	Switchboard/P4/P5 branch kit for GB breakers (shallow)	Type GB (NGB, HGB, LGB); 3-ph 3/4-w **A**	unknown
EDH-SIE-00372	**SNBD**	Switchboard/P4/P5 branch kit for GB breakers (deep)	Type GB (NGB, HGB, LGB); 3-ph 3/4-w **A**	unknown
EDH-SIE-00184	**SSCJD**	SSCJD connecting strap kit - SCJD (8.75in, single)	SCJD [s2] **A**	listed in Siemens Canada catalogue 2025

EDH-SIE-00191	**6CLF1**	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLF1 connecting strap kit - CFD6 (5in, single)

OEM part number	6CLF1	**A**	S99, S395 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLF1C	**A**	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CFD6 branch breaker(s), single (s) mount, 5in unit height	**A**	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	**A**	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	**A**	S395 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CFD6 [s3]; CFD6 [s2]	**A**	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	CFD6 frame branch breaker single mounted 70-250 A; I-T-E type CLF, CFD6	**A**	S395 single sheet drawing + BOM (scanned image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S99, S98 p.8-13 | p.11-15; oem_spec
	BOM 11-5383-03: breaker support bracket 15-B-3020-02; phase A/B/C connector bus 12-7144-01 / 12-7145-01 / 12-7146-01; phase A/B/C branch bus 12-7143-01 / -02 / -03; bus support bracket 12-6257-01; stand-off insulator 11-1800-01 x3; branch bus barrier 11-7715-01; 5 in front plate 12-6029-02; circuit ID card; card holder; 1/4-20 x 3/8 SHWHSW x9; strap-bus hardware kit 11-B-2022-05 x2 (+2 item 26); 1/4-20 x 1-7/16 SHWHSW 11-1553-13 x3; 1/4-20 x 4 SRHMS 11-1542-19 x2; neutral lug assembly 12-B-2105-03; blank filler 12-5531-10; 10-24 x 5/8 RHSNB 11-1630-02 x2; 10-24 lock nut 11-1821-02 x2; Series 5 conversion kit 11-5570-02; instruction sheet 31-1154-01	**A**	S395 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	copper only; Canadian catalogue lists as 6CLF1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S98 p.11-15; oem_spec
	Copper branch bus	**A**	S395 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	**A**	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	5.000 in unit; 1.000/1.500/1.250/1.750 in; 0.625 in	**A**	S395 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Items 16/17: 50 in-lb Al / 72 in-lb Cu; Series 5 adaptor 13 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1154-01 Rev. 00: SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	**A**	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	**A**	S99, S98 oem_spec

Identification features	2005 list price $1553.00	**A**	S99 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00194	6CLJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLJ1 connecting strap kit - CJD6 (8.75in, single)

OEM part number	6CLJ1	**A**	S99, S442 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLJ1C	**A**	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CJD6 branch breaker(s), single (s) mount, 8.75in unit height	**A**	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	**A**	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5/6 distribution sections (CDP-5/6, VB-5/6, FCI, FCII, SB1-3) - PC -01 assembly of drawing used on strap kit 6CLJ1	**A**	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CJD6 [s3]; CJD6 [s2]	**A**	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	ITE breaker types CLJ, CJD6, 400 A breaker	**A**	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S99, S98 p.8-13 | p.11-15; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6194-02; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only). Column quantities per -01/-02 read from scan - verify	**A**	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	copper only; Canadian catalogue lists as 6CLJ1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S98 p.11-15; oem_spec
	Copper branch bus	**A**	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	**A**	S442 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1225-01 Rev. 1: CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'	**A**	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	**A**	S99, S98 oem_spec

Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00198	6CLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLL1 connecting strap kit - CLD6 (8.75in, single)

OEM part number	6CLL1	A	S99, S444 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLL1C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5/6 distribution sections (CDP-5/6, VB-5/6, FCI, FCII, SB1-3); PC -01 assembly of drawing 12-5720 used on strap kit 6CLL1	A	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	CLD6 [s3]; CLD6, SCLD [s2]	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	ITE breaker types CLL, CLD6, 600 A breaker	A	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
	Drawing BOM (same structure as 12-5719/12-5772): mounting bracket 16-6114-01; support bracket 16-6120-02; AC jitney 17-6768-02 x2; B jitney 17-6769-02; AC long connector 12-6776-06; B connector 12-6776-05; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulators 11-1800-02 x4; barriers 11-7721-01, 11-6415-02; cover plate 12-6194-02; strap-bus hardware kit 11-B-2022-05 x2; 5/16-18 inserts, flat and lock washers; 5/16-18 x 1 and x 1-1/4 HHMS; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / -06; 3/8-16 x 1 RHSNB 11-1580-02; 3/8-16 Belleville washer nut 11-1622-01; 1/4-20 x 3/8 SHWHSW 11-1553-02; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01). Column quantities read from scan - verify	A	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	copper only; Canadian catalogue lists as 6CLL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
	Copper branch bus	A	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 in; 5.63 / 3.75 / 3.13 / 1.25 in	A	S444 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Item 16 (strap-bus hardware) 72 in-lb; item 29 20 ft-lb; items 20/21 12 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1229-01 Rev. 2: CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec

Cross-links	Families: SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00188	6E62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)

OEM part number	6E62	A	S99, S350 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for ED2, ED4, ED6, HED4, HED6 branch breaker(s), twin (d) mount, 3.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	A	S350 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2]	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	E-2-4-6 frame branch breaker 15-125 A, double mounting: ITE E2, E4, E6, HE4, HE6; E2-A, E4-A, E6-A, HE4-A, HE6-A; ED2, ED4, ED6, HED4, HED6	A	S350 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
	BOM 11-5079-05: (1) E2-4-6 phase AC branch bus 11-7140-01 x2; (2) phase B branch bus 11-7141-01 x1; (3) E2-4-6 line connector 11-7138-01 x3; (4) interphase barrier 15-7505-01 x2; (5) E2-4-6 mounting bracket 15-B-3014-02 x2; (6) 3.750 E2-4-6 cover plate 12-6024-01 x1; (7) circuit ID card 11-7505-01 x2; (8) card holder 11-7506-01 x2; (9) 1/4-20 x 3/8 SHWHSW 11-1553-02 x2; (10) strap-bus hardware kit 11-B-2022-05 x1; (11) 10-24 x 5/8 ISHDWHSW 11-1576-07 x12; (13) 1/4-20 x 5/8 SHWHSW 11-1553-06 x8; (14) neutral lug assembly 12-B-2105-02 x1; (16) blank filler 12-5531-09 x2; (27) Series 5 conversion kit 11-5570-01 x1; instruction sheet 31-1143-01; carton 48001056	A	S350 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
	Copper branch bus	A	S350 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Location dimensions: BOM -01/-03 A 3.75 / B 0.63 / C 1.25 in; BOM -02/-04 A 6.25 / B 1.88 / C 2.50 in; 2.50 in shown	A	S350 drawing 11-5079-00 / BOM 11-5079-05 (image, read visually); oem_spec
Torque values	Item 10 strap-bus hardware: 50 in-lb Al / 72 in-lb Cu; item 11 10-24 screws: 30 in-lb Al / 50 in-lb Cu	A	same as above
OEM instruction document	Siemens instruction sheet 31-1143-01 Rev. 4: CAT. NO. 6E62 instruction sheet with drawing 11-5079-00 Rev 10 'ED2, ED4 & ED6 Mounting Series 6 Branch Bus' and BOM 11-5079-05 Rev 8	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $845.00	A	S99 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern		

Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00190	6F62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)

OEM part number	6F62	A	S99, S351 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for FXD6, FD6, HFD6 branch breaker(s), twin (d) mount, 5in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	A	S351 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Breaker compatibility	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2]	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	FD6 frame branch breaker, twin mounted, 70-250 A: FJ6, F6, HF6, FXD6, FD6, HFD6 (sheet front panel header reads 'for use with CLE-6 frame' - apparent sheet error)	A	S351 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
	BOM 11-5098-04: F6 phase AC front branch bus 12-7031-01 x2; F6 phase AC rear branch bus 12-7032-01 x2; F6 phase B branch bus 12-7033-01 x1; F6 phase B heat sink 11-6846-01 x2; F6 mounting bracket 15-B-3018-02 x2; 5 in F6 cover plate 12-6028-01 x1; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; 1/4-20 x 3/8 SHWHSW 11-1553-02 x4; strap-bus hardware kit (A & C phases) 11-B-2023-05 x1; 8-32 x 5/8 IHWHSW 11-1512-07 x4; 1/4-20 x 1 SHWHSW 11-1553-09 x6; 1/4-20 x 4 SRHMS 11-1542-19 x4; 1/4-20 x 5/8 SHWHSW 11-1553-06 x2; blank filler 12-5531-10 x2; neutral lug assembly 12-B-2105-03 x2; phase B barrier (for provisions) 11-7548-02 x4; Series 5 conversion kit 11-5570-01 x1; strap-bus hardware kit (B phase) 11-B-2022-05 x1	A	S351 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
	Copper branch bus	A	S351 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	5.00 in unit; location dims 3.75, 1.25, 0.63 in	A	S351 drawing 11-5098-00 / BOM 11-5098-04 (image, read visually); oem_spec
Torque values	Strap-bus hardware: 50 in-lb Al / 72 in-lb Cu. Series 5 adaptor kit: 5/16-18 x 1-1/4 HHMS 13 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1145-01 Rev. 4: CAT. NO. 6F62 instruction sheet with drawing 11-5098-00 Rev 6 'FD Frame Mounting Series 6 Branch Bus', BOM 11-5098-04 Rev 8, Series 5 adaptor kit 11-5570-01 Rev 3	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $1529.00	A	S99 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00193	6JJ62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)

OEM part number	6JJ62	A	S99, S352 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 double branch branch breaker(s), twin (d) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Installation location	Series 5 or 6 distribution sections: CDP-5, CDP-6, VB-5, VB-6, FCI, FCII, SB1, SB2 & SB3. Existing CDP-5/VB-5/FC20 vertical bus pre-punched 0.406 in dia holes -> use Series 5 adaptor kit furnished; CDP-6/VB-6/FCI/FCII vertical bus pre-punched 0.228 in dia holes -> Series 6 branch bus parts list	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2]	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	ITE breaker types JD2, JJ6, JL6, HJ6, HJD6, JXD2, JXD6, JD6, HHJD6 (400 A)	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
	Mounting bracket 11-6398-01 x2; phase AC branch bus 16-6974-01 x2; phase B branch bus 16-6949-02 x1; 5/16-18 x 1-1/4 HHMS 11-1566-07 x6; 5/16 lock washer 11-1618-04 x6; 5/16 flat washer 11-1615-06 x6; 5/16-18 insert 11-1620-04 x6; front plate 12-6139-01; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; strap-bus hardware kit 11-B-2022-05 x2; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; filler plate assembly 12-5531-11; circuit ID card 11-7505-01 x2; card holder 11-7506-01 x2; (-02/SJ2D column only) 1/4-20 x 5/8 HHMS 11-1546-03 x4 with 1/4 lock and flat washers, instruction sheet 31-1223-01; 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01 listed (quantities not legible); (-01/6JJ62 column only) Series 5 conversion kit 11-5570-02 and instruction sheet 31-1169-01; neutral lug assembly 12-B-2105-04 (6JJ62) / 12-B-2105-06 (SJ2D). Column assignment read from a scanned drawing - verify	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
	Branch bus layout 3.75 / 8.75 / 3.13 in	A	S352 drawing 12-5721 Rev 11 (image, read visually); oem_spec
Torque values	Item 4 (5/16-18 x 1-1/4 HHMS) 12 ft-lb; item 10 strap-bus hardware 72 in-lb; Series 5 adaptor 5/16-18 bolts 13 ft-lb	A	same as above
OEM instruction document	Siemens instruction sheet 31-1169-01 Rev. 3: CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	A	same as above
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2349.00	A	S99 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00200	6SCL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCL1 connecting strap kit - SCLD6 (8.75in, single)

OEM part number	6SCL1	**A**	S99, S443 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCLD6 branch breaker(s), single (s) mount, 8.75in unit height	**A**	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single (S)	**A**	S99 p.8-13 (2005) (s3); oem_spec
Installation location	Series 5/6 distribution sections (CDP-5/6, VB-5/6, FCI, FCII, SB1-3) - PC -01 assembly of drawing used on strap kit 6SCL1	**A**	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Breaker compatibility	SCLD6 [s3]	**A**	S99 p.8-13 (2005) (s3); oem_spec
	ITE breaker types SCLD6, 600 A breaker	**A**	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	**A**	S99 p.8-13; oem_spec
	Drawing BOM: mounting bracket 16-6114-01; support bracket 16-6120-02; phase AC jitney 17-6768-02 x2; phase B jitney 17-6769-02; AC long connector 12-6776-05; B connector 12-6776-06; AC short connector 12-6776-04; pad connector 17-6770-02 x3; 1-1/4 in insulator 11-1800-02 x4; barrier 11-7721-01; barrier 11-6415-02; cover plate 12-6487-01; circuit ID card 11-7505-01; card holder 11-7506-01; strap-bus hardware kit 11-B-2022-05 x2; 5/12-18 (sic) insert 11-1620-04, 5/16 flat washers 11-1615-06, 5/16 lock washers 11-1618-04 (x12 for -01 Series 5 conversion); 5/16-18 x 1 HHMS 11-1566-05 x6; 5/16-16 x 1-1/4 HHMS 11-1566-07 x6; 1/4 flat/lock washers; 1/4-20 x 1/2 and 7/8 HHMS; 1/4-20 x 2-3/4 SRHMS 11-1542-14 x4; neutral lug assemblies 12-B-2105-04 / 12-B-2105-06; 1/4-20 x 3/8 SHWHSW 11-1553-02 x6; filler plate assembly 12-5531-11; auxiliary mounting bracket 16-6115-01; Series 5 conversion kit 11-5570-02 (-01 only); 3/8-16 x 1 RHSNB 11-1580-02 and 3/8-16 Belleville washer nut 11-1622-01. Column quantities per -01/-02 read from scan - verify	**A**	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Material	copper straps	**A**	S99 p.8-13; oem_spec
	Copper branch bus	**A**	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S99 p.8-13 (2005) (s3); oem_spec
	Branch layout 8.75 / 6.88 / 4.38 / 1.88 / 0.00 in; 5.63 / 3.75 / 3.13 / 1.25 in	**A**	S443 single sheet drawing + BOM (scanned image, read visually); oem_spec
Torque values	Strap-bus hardware (item 16) 72 in-lb; item 29 20 ft-lb; items 20/21 (5/16 HHMS) 12 ft-lb	**A**	same as above
OEM instruction document	Siemens instruction sheet 31-1230-01 Rev. 1: CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'	**A**	same as above
Status	listed in 2005 price list	**A**	S99 oem_spec
Identification features	2005 list price $2525.00	**A**	S99 p.8-13; oem_spec
Cross-links	Families: SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern		

EDH-SIE-00369	SDG	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

SB1/SB2/SB3 & P4/P5 branch mounting kit for Sentron VL DG frame breakers (shallow)

OEM part number	SDG	A	S339 pp. 1-4; oem_spec
Installation location	Switchboard (SB1, SB2, SB3) or shallow/deep panelboards (P4, P5); 3-ph 3-w or 4-w	A	same as above
Breaker compatibility	Siemens VL DG frame electronic-trip breakers	A	same as above
Dimensions	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers	A	same as above
Mounting-hole pattern	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link	A	same as above
Torque values	Per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1023-01 Rev. 1: Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00367	SEB	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/power panel branch kit for EB breakers, shallow (P4)

OEM part number	SEB	A	S337 pp. 1-3; oem_spec
Installation location	Switchboard or shallow/deep panelboard (P4/P5) branch, 3-ph 3-w or 3-ph 4-w	A	same as above
Breaker compatibility	Siemens EB circuit breakers	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	same as above
Mounting-hole pattern	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector	A	same as above
Torque values	All hardware per torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1020-01 Rev. 1: SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00368	SEBD	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/power panel branch kit for EB breakers, deep (P5 / switchboard)

OEM part number	SEBD	A	S337 pp. 1-3; oem_spec
Installation location	Switchboard or shallow/deep panelboard (P4/P5) branch, 3-ph 3-w or 3-ph 4-w	A	same as above
Breaker compatibility	Siemens EB circuit breakers	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	same as above
Mounting-hole pattern	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector	A	same as above
Torque values	All hardware per torque label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1020-01 Rev. 1: SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00370	SLM1	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/power panel branch kit SLM1 for Sentron LMD / VL MG frame breakers

OEM part number	SLM1	A	S342 p. 4; oem_spec
Breaker compatibility	Sentron LMD and VL MG frame breakers	A	same as above
Kit contents	Two types of branch neutral lug assemblies; breaker cover plates: rectangular cutout for thermal-magnetic (TMTU) breakers, 'T' cutout for electronic-trip (ETU) breakers	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1016-01 Rev. 3: Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	A	same as above
Cross-links	Families: SB, P4, P5		
Not yet documented	Dimensions, Mounting-hole pattern		

EDH-SIE-00371	SNB	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/P4/P5 branch kit for GB breakers (shallow)

OEM part number	SNB	A	S349 pp. 1-3; oem_spec
Breaker compatibility	Type GB (NGB, HGB, LGB); 3-ph 3/4-w	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	same as above
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws	A	same as above
Torque values	All hardware per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1019-01 Rev. 01: Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00372	SNBD	Siemens lineage	branch-connector-kit	STATUS UNKNOWN

Switchboard/P4/P5 branch kit for GB breakers (deep)

OEM part number	SNBD	A	S349 pp. 1-3; oem_spec
Breaker compatibility	Type GB (NGB, HGB, LGB); 3-ph 3/4-w	A	same as above
Dimensions	Requires 3-3/4 in of unit space	A	same as above
Mounting-hole pattern	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws	A	same as above
Torque values	All hardware per label on rear of deadfront	A	same as above
OEM instruction document	Siemens instruction sheet 11-B-1019-01 Rev. 01: Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers	A	same as above
Cross-links	Families: SB, P4, P5		

EDH-SIE-00184	SSCJD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSCJD connecting strap kit - SCJD (8.75in, single)

OEM part number	SSCJD	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	SCJD [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00394	**SEBPPVA1**	Switchboard / P4 / P5 service entrance barrier kit - horizontal 3VA53/63/54/64	Three-phase single horizontally-mounted 3VA53, 3VA63, 3VA54, 3VA64 (to A	unknown

EDH-SIE-00394	SEBPPVA1	Siemens lineage	barrier	STATUS UNKNOWN

Switchboard / P4 / P5 service entrance barrier kit - horizontal 3VA53/63/54/64

OEM part number	SEBPPVA1	A	S405 single sheet; oem_spec
Application	Service entrance barrier covering service-terminal (line) end of the service main; 1-ph and 3-ph, top or bottom fed	A	same as above
Breaker compatibility	Three-phase single horizontally-mounted 3VA53, 3VA63, 3VA54, 3VA64 (top or bottom fed)	A	same as above
Kit contents	1 barrier; 1 P4 barrier bracket; 1 P5/switchboard barrier bracket; 1 service entrance barrier label; 2 plastic tree rivets; 3 1/4-20 x 7/16 screws (30 lb-in)	A	same as above
Torque values	1/4-20 30 lb-in	A	same as above
OEM instruction document	Siemens instruction sheet 15-A-1081-01 Rev. 00: SEBPPVA1 Service Entrance Barrier Kit for Switchboard or P4/P5 (3VA53/63/54/64)	A	same as above
Cross-links	Families: SB, P4, P5		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00216	**6FPB15**	6FPB15 blank plate, 15in unit space	—	unknown

EDH-SIE-00216	6FPB15	Siemens	filler-plate	STATUS UNKNOWN

6FPB15 blank plate, 15in unit space

OEM part number	6FPB15	A	S98 p.11-15; oem_spec
Description	Blank filler plate 15.00in (381mm) for distribution switch or circuit breaker (CSA SMP / FCI / FCII)	A	S98 p.11-15 Table 17; oem_spec
Dimensions	15.00in (381mm)	A	S98 p.11-15; oem_spec
Cross-links	Families: SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00206	**S3VA53PR**	3VA53/63/54/64 single-mount breaker provision hardware kit	—	unknown

EDH-SIE-00206 **S3VA53PR** Siemens hardware-kit **STATUS UNKNOWN**

3VA53/63/54/64 single-mount breaker provision hardware kit

OEM part number	S3VA53PR	**A**	S98 p.11-14; oem_spec
Description	Provision kit for single mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers on factory-provisioned configurations	**A**	same as above
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00207	**3VA9233-0QA00**	3VA52 250A nut keeper kit (3)	—	unknown
EDH-SIE-00208	**3VA9243-0QA00**	3VA61/62 150A/250A nut keeper kit (3)	—	unknown
EDH-SIE-00209	**3VA9473-0QA00**	3VA5, 3VA6 400A/600A nut keeper kit (3)	—	unknown

EDH-SIE-00207 **3VA9233-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA52 250A nut keeper kit (3)

OEM part number	3VA9233-0QA00	**A**	S98 p.11-14; oem_spec
Description	3VA52 250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00208 **3VA9243-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA61/62 150A/250A nut keeper kit (3)

OEM part number	3VA9243-0QA00	**A**	S98 p.11-14; oem_spec
Description	3VA61/62 150A/250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00209 **3VA9473-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA5, 3VA6 400A/600A nut keeper kit (3)

OEM part number	3VA9473-0QA00	**A**	S98 p.11-14; oem_spec
Description	3VA5, 3VA6 400A/600A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.15 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family BQ / BQH / HBQ / BQXD bolt-on

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00247	**TA1Q1**	Siemens TA1Q1 line-side lug, BQ 45-125A	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versi A	current
EDH-SIE-00245	**TC1Q1**	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD lin A	current

EDH-SIE-00247 **TA1Q1** Siemens lug **CURRENT**

Siemens TA1Q1 line-side lug, BQ 45-125A

OEM part number	TA1Q1	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side	A	S135 s6 p. 7-153; oem_spec
Breaker compatibility	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versions)	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #8-#1 AWG Cu / #6-#1/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00245 **TC1Q1** Siemens lug **CURRENT**

Siemens TC1Q1 line-side lug, BQ 15-40A (steel)

OEM part number	TC1Q1	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug, steel body; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side (BQ family; load-side lugs are integral)	A	S135 s6 p. 7-153; oem_spec
Breaker compatibility	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD line side; NGG/HGG/LGG 15-30 A	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #14-#6 AWG Cu / #12-#6 AWG Al (BQXD table: #16-#6 Cu)	A	same as above
Material	{'value': 'Steel', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-153'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on, NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00252	**BQFS2**	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	Type BQ/BQXD A	current

EDH-SIE-00252	BQFS2	Siemens	barrier	CURRENT

Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)

OEM part number	BQFS2	A	S135, S136 s6 p. 7-39 and accessories page; oem_spec
Alternate / superseded numbers	BQFS1K (Bulk pack of 1000 pieces)	A	S135 equivalent; s6 p. 7-39; oem_spec
Description	Finger safe terminal shield: protects against accidental contact with lugs, 1 per lug; fits line and load end	A	S135, S136 s6 p. 7-39 and accessories page; oem_spec
Application	accessory	A	same as above
Installation location	Over each lug, line or load end	A	S135 p. 7-39; oem_spec
Breaker compatibility	Type BQ/BQXD	A	S135, S136 s6 p. 7-39 and accessories page; oem_spec
Kit contents	2 pieces	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family NGG / HGG / LGG (G-frame bolt-on/lug)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00248	**3TC1GG20**	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	NGG, HGG, LGG 35-125 A A	current
EDH-SIE-00246	**3TC1Q1**	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	NGG, HGG, LGG 15-30 A A	current

EDH-SIE-00248	3TC1GG20	Siemens	lug-kit	CURRENT

Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A

OEM part number	3TC1GG20	A	S135, S136 s6 p. 7-153; oem_spec
Description	Pack of 3 lugs	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 35-125 A	A	same as above
Kit contents	pkg of 3; wire range #8-#1/0 AWG Cu / #8-#2/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00246	3TC1Q1	Siemens	lug-kit	CURRENT

Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A

OEM part number	3TC1Q1	A	S135, S136 s6 p. 7-153; oem_spec
Description	Pack of 3 TC1Q1-type lugs for NGG/HGG/LGG 15-30 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-30 A	A	same as above
Kit contents	pkg of 3; wire range #14-#6 AWG Cu / #12-#6 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00250	**TA6GG04**	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	NGG, HGG, LGG 15-125 A, 1/2/3-pole **A**	current

EDH-SIE-00250	TA6GG04	Siemens	lug	CURRENT

Siemens TA6GG04 distribution lug, NGG/HGG/LGG

OEM part number	TA6GG04	**A**	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector, not for general use	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A, 1/2/3-pole	**A**	same as above
Kit contents	1 lug per kit; wire range #6-#4 Al / #14-#4 Cu, 6 wires per lug	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00251	**TSSG3A**	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	HGG, LGG, NGG 3-pole **A**	current

EDH-SIE-00251	TSSG3A	Siemens	barrier	CURRENT

Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole

OEM part number	TSSG3A	**A**	S135, S136 s6 p. 7-160; oem_spec
Description	Terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	HGG, LGG, NGG 3-pole	**A**	same as above
Kit contents	std pkg 1	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00249	**TNKG3**	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	NGG, HGG, LGG 15-125 A **A**	current

EDH-SIE-00249	TNKG3	Siemens	hardware-kit	CURRENT

Siemens TNKG3 nut keeper plate (pkg of 3), NGG

OEM part number	TNKG3	**A**	S135, S136 s6 p. 7-153; oem_spec
Description	Nut keeper plate; one nut keeper plate is required with each lug on the NGG breaker	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A	**A**	same as above
Kit contents	pkg of 3	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00256	**TA1Q300**	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet) C	unknown

EDH-SIE-00256 **TA1Q300** Siemens lug-kit **UNKNOWN**

Siemens TA1Q300 3-lug kit, QJ2 (distributor data)

OEM part number	TA1Q300	C	S137 distributor
Description	3-lug kit for QJ breakers; accepts Al or Cu, single wire up to 300 kcmil	C	same as above
Application	accessory	C	same as above
Breaker compatibility	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet)	C	same as above
Kit contents	3 lugs; wire range single wire up to 300 kcmil Al/Cu	C	same as above
Status	unknown (Not in SPEEDFAX 2017. The QJ2 frame is not in the current catalog.)	D	same as above
Cross-links	Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Find an OEM ITE/Siemens table for QJ2 lugs (an older SPEEDFAX of about 1995-2008 or the QJ2 instruction)*		
Open question	*Did TA1Q300 supersede, or is it superseded by, 3TA1QR300?*		

Breaker family QR2 / QRH2 / HQR2 (250A frame)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00253	**3TA1QR300**	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	QR2, QR2H, HQR2, HQR2H 100-250 A A	current
EDH-SIE-00254	**3TC1QR250**	Siemens 3TC1QR250 copper lug kit (3), QR2	QR2, QR2H, HQR2, HQR2H 100-250 A A	current

EDH-SIE-00253 **3TA1QR300** Siemens lug-kit **CURRENT**

Siemens 3TA1QR300 lug kit (3), QR2 100-250A

OEM part number	3TA1QR300	A	S135, S136 s6 p. 7-40; s6 p. 7-154; oem_spec
Description	Aluminum-body lugs, 3 per kit; load-side lugs mounted and included with QR2 (line+load with suffix 'L')	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	A	same as above
Kit contents	3 lugs; wire range #3-300 kcmil Al/Cu	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00254	3TC1QR250	Siemens	lug-kit	CURRENT

Siemens 3TC1QR250 copper lug kit (3), QR2

OEM part number	3TC1QR250	A	S135, S136 s6 p. 7-40; s6 p. 7-155; oem_spec
Alternate / superseded numbers	3TC1QR2520 (Printed '3TC1QR2520' on p. 7-155 but '3TC1QR250' on p. 7-40. It may be a footnote run-in or a typo.)	B	S135 alias; s6 p. 7-155; oem_spec
Description	Optional copper lugs, 3 per kit	A	S135, S136 s6 p. 7-40; s6 p. 7-155; oem_spec
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	A	same as above
Kit contents	3 lugs; wire range #3-300 kcmil Cu only	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which is the correct orderable number, 3TC1QR250 or 3TC1QR2520?*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00255	**CCQ250**	Siemens CCQ250 compression lug, QR2	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole A	current

EDH-SIE-00255	CCQ250	Siemens	lug	CURRENT

Siemens CCQ250 compression lug, QR2

OEM part number	CCQ250	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug (lug and necessary hardware per kit)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole	A	same as above
Kit contents	1 lug per kit; wire range #6-350 kcmil Al/Cu	A	same as above
Material	{'value': 'Compression (CMP)', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 'p. 7-40'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker family Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00263	**CCE125**	Siemens CCE125 compression lug, ED 15-125A	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole A	current
EDH-SIE-00260	**LD1E060**	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	ED, HED 1-pole 30-60 A; CED6 A	current
EDH-SIE-00261	**LD1E100**	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	ED, HED 1-pole 70-100 A A	current
EDH-SIE-00258	**LN1E100**	Siemens LN1E100 lug, ED 30-100A	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A A	current
EDH-SIE-00257	**SA1E025**	Siemens SA1E025 lug, ED 2/3-pole 15-25A	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A A	current
EDH-SIE-00259	**TA1E6125**	Siemens TA1E6125 lug, ED 110-125A	ED/HED/HHED 110-125 A, 2- and 3-pole A	current
EDH-SIE-00264	**TA6ED06**	Siemens TA6ED06 distribution lug, ED	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00262	**TC1ED6150**	Siemens TC1ED6150 copper-body lug, ED 30-125A	ED, HED 1-, 2-, 3-pole 30-125 A A	current

EDH-SIE-00263	CCE125	Siemens	lug	CURRENT

Siemens CCE125 compression lug, ED 15-125A

OEM part number	CCE125	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #2/0 AWG Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00260	LD1E060	Siemens	lug	CURRENT

Siemens LD1E060 load-side lug, ED 1-pole 30-60A

OEM part number	LD1E060	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Load-side lug	A	same as above
Application	accessory	A	same as above
Installation location	Load side	A	S135 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 30-60 A; CED6	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Kit contents	1 lug; wire range #10-#4 Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00261	LD1E100	Siemens	lug	CURRENT

Siemens LD1E100 load-side lug, ED 1-pole 70-100A

OEM part number	LD1E100	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Load-side lug	A	same as above
Application	accessory	A	same as above
Installation location	Load side	A	S135 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 70-100 A	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Kit contents	1 lug; wire range #4-#1/0 Cu/Al (ED page: #6-#1/0)	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00258	LN1E100	Siemens	lug	CURRENT

Siemens LN1E100 lug, ED 30-100A

OEM part number	LN1E100	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body lug, line side (all poles) and load side (2/3-pole)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A	A	same as above
Kit contents	1 lug; wire range #10-1/0 Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00257	SA1E025	Siemens	lug	CURRENT

Siemens SA1E025 lug, ED 2/3-pole 15-25A

OEM part number	SA1E025	A	S135, S136 s6 p. 7-154; oem_spec
Description	Lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A	A	same as above
Kit contents	1 lug; wire range #14-#10 AWG Cu / #12-#10 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00259	TA1E6125	Siemens	lug	CURRENT

Siemens TA1E6125 lug, ED 110-125A

OEM part number	TA1E6125	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body line/load lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED/HED/HHED 110-125 A, 2- and 3-pole	A	same as above
Kit contents	1 lug; wire range #3-3/0 Cu / #1-2/0 Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00264	TA6ED06	Siemens	lug	CURRENT

Siemens TA6ED06 distribution lug, ED

OEM part number	TA6ED06	A	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A	A	same as above
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00262	TC1ED6150	Siemens	lug	CURRENT

Siemens TC1ED6150 copper-body lug, ED 30-125A

OEM part number	TC1ED6150	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-155; oem_spec
Description	Optional copper-body mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED, HED 1-, 2-, 3-pole 30-125 A	A	same as above
Kit contents	1 lug; wire range #10-#1/0 Cu only	A	same as above
Material	{'value': 'Copper body', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00301	**RS2641**	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	All ED (100 A) A	current
EDH-SIE-00302	**RS2642**	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	All ED (100 A) A	current
EDH-SIE-00299	**RS2643**	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	All ED (100 A) A	current
EDH-SIE-00300	**RS2644**	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	All ED (100 A) A	current

EDH-SIE-00301	RS2641	Siemens	breaker-accessory	CURRENT

Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in

OEM part number	RS2641	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 4.88 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00302	RS2642	Siemens	breaker-accessory	CURRENT

Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in

OEM part number	RS2642	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 4.88 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00299	RS2643	Siemens	breaker-accessory	CURRENT

Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in

OEM part number	RS2643	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 2.38 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00300	RS2644	Siemens	breaker-accessory	CURRENT

Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in

OEM part number	RS2644	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 2.38 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00267	**CCF250**	Siemens CCF250 compression lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole A	current
EDH-SIE-00265	**TA1FD350A**	Siemens TA1FD350A lug, FD 70-250A	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A A	current
EDH-SIE-00268	**TA6FD04**	Siemens TA6FD04 distribution lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole A	current
EDH-SIE-00266	**TC1FD350**	Siemens TC1FD350 copper lug, FD 70-250A	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A A	current

EDH-SIE-00267	CCF250	Siemens	lug	CURRENT

Siemens CCF250 compression lug, FD

OEM part number	CCF250	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range 350 kcmil Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00265	TA1FD350A	Siemens	lug	CURRENT

Siemens TA1FD350A lug, FD 70-250A

OEM part number	TA1FD350A	A	S135, S136 s6 FD page; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug; supplied with FD6/HFD6/HHFD6 complete breakers. Suffix 'L' = lugs installed.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A	A	same as above
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu / #4 AWG-350 kcmil Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00268	TA6FD04	Siemens	lug	CURRENT

Siemens TA6FD04 distribution lug, FD

OEM part number	TA6FD04	A	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00266	TC1FD350	Siemens	lug	CURRENT

Siemens TC1FD350 copper lug, FD 70-250A

OEM part number	TC1FD350	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A	A	same as above
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00304	**RS4755**	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	All FD (250 A) A	current
EDH-SIE-00303	**RS4756**	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	All FD (250 A) A	current

EDH-SIE-00304 **RS4755** Siemens breaker-accessory **CURRENT**

Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in

OEM part number	RS4755	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All FD (250 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 7.06 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00303 **RS4756** Siemens breaker-accessory **CURRENT**

Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in

OEM part number	RS4756	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All FD (250 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 3.12 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00274	**CCL600**	Siemens CCL600 compression lug, JD/LD	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6- A	current
EDH-SIE-00273	**TA1L6750**	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	LD/JD family 250-600 A (Q155 row) A	current
EDH-SIE-00270	**TA2J630**	Siemens TA2J630 lug, SJD6-B 65-200A	SJD6-B, SHJD6-B, SCJD6-B 65-200 A A	current
EDH-SIE-00269	**TA2J6500**	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SH A	current
EDH-SIE-00275	**TA6JD20**	Siemens TA6JD20 distribution lug, JD/LD	JD/LD families 200-600 A, 2/3-pole A	current
EDH-SIE-00271	**TC1J6600**	Siemens TC1J6600 copper lug, JD/LD (100% rated)	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00272	**TC2J6500**	Siemens TC2J6500 copper lug, JD/LD (100% rated)	JD/LD frames 200-600 A **A**	current

EDH-SIE-00274 **CCL600** Siemens lug **CURRENT**

Siemens CCL600 compression lug, JD/LD

OEM part number	CCL600	**A**	S135, S136 s6 p. 7-155; JD page; oem_spec
Description	Compression lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6-B, L(X)D6-A, HL(X)D6-A, CLD6, SLD6-B, SHLD6-B, SCLD6-B 200-600 A, 2/3-pole	**A**	same as above
Kit contents	1 lug per kit; wire range 500 kcmil (JD page: 1 pc #1/0-500 kcmil Cu/Al)	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00273 **TA1L6750** Siemens lug **CURRENT**

Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil

OEM part number	TA1L6750	**A**	S135, S136 s6 p. 7-155; JD/LD pages; oem_spec
Description	Optional aluminum mechanical lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LD/JD family 250-600 A (Q155 row)	**A**	same as above
Kit contents	1 lug; wire range 1 x 500-750 kcmil Al or 1 x 500-600 kcmil Cu	**A**	same as above
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00270 **TA2J630** Siemens lug **CURRENT**

Siemens TA2J630 lug, SJD6-B 65-200A

OEM part number	TA2J630	**A**	S135, S136 s6 p. 7-154; JD page; oem_spec
Description	Aluminum-body lug, 1-2 cables	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SJD6-B, SHJD6-B, SCJD6-B 65-200 A	**A**	same as above
Kit contents	1 lug; wire range 1-2 cables #4 AWG-3/0 Cu or Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00269	TA2J6500	Siemens	lug	CURRENT

Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil

OEM part number	TA2J6500	A	S135, S136 s6 JD/LD pages; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug for JD and LD frames; six lugs per 3-pole breaker; suffix 'L' = lugs installed	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SHJD6-B, CJD6, SCJD6-B (200-400 A); LXD6(A), LD6(A), SLD6-B, HLD6(A), HLXD6(A), HHLXD6, HHLD6, SHLD6-B, CLD6, SCLD6-B (250-600 A)	A	same as above
Kit contents	1 lug (6 per 3-pole breaker); wire range 1-2 cables, 3/0-500 kcmil Cu / 4/0-500 kcmil Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00275	TA6JD20	Siemens	lug	CURRENT

Siemens TA6JD20 distribution lug, JD/LD

OEM part number	TA6JD20	A	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD/LD families 200-600 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #14-2/0 AWG Cu / #6-2/0 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00271	TC1J6600	Siemens	lug	CURRENT

Siemens TC1J6600 copper lug, JD/LD (100% rated)

OEM part number	TC1J6600	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD frame breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A), SHLD6-B, CJD6, CLD6 200-600 A	A	same as above
Kit contents	1 lug; wire range 1 x 3/0-600 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00272	TC2J6500	Siemens	lug	CURRENT

Siemens TC2J6500 copper lug, JD/LD (100% rated)

OEM part number	TC2J6500	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD/LD frames 200-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00313	**CLRSJL3**	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	CJD, SCJD, CLD, SCLD **A**	current
EDH-SIE-00276	**JDTERMSHIELD**	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	JD, LD 3-pole **A**	current

EDH-SIE-00313	CLRSJL3	Siemens	barrier	CURRENT

Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD

OEM part number	CLRSJL3	A	S135, S136 s6 p. 7-165; oem_spec
Description	Required shield kit to add with rear-connecting studs on CJD, SCJD, CLD, SCLD	A	same as above
Application	accessory	A	same as above
Breaker compatibility	CJD, SCJD, CLD, SCLD	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What does the CLRSJL3 kit contain?*		

EDH-SIE-00276	JDTERMSHIELD	Siemens	barrier	CURRENT

Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole

OEM part number	JDTERMSHIELD	A	S135, S136 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD, LD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00306	**RS5773**	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	All JD (400 A) **A**	current
EDH-SIE-00305	**RS5774**	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	All JD (400 A) **A**	current

EDH-SIE-00306	RS5773	Siemens	breaker-accessory	CURRENT

Siemens RS5773 rear-connecting stud, All JD, long 11.20 in

OEM part number	RS5773	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD (400 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00305	RS5774	Siemens	breaker-accessory	CURRENT

Siemens RS5774 rear-connecting stud, All JD, short 5.85 in

OEM part number	RS5774	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD (400 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00308	**RS5783**	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	All LD (600 A) A	current
EDH-SIE-00307	**RS5784**	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	All LD (600 A) A	current

EDH-SIE-00308	RS5783	Siemens	breaker-accessory	CURRENT

Siemens RS5783 rear-connecting stud, All LD, long 11.20 in

OEM part number	RS5783	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All LD (600 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00307	RS5784	Siemens	breaker-accessory	CURRENT

Siemens RS5784 rear-connecting stud, All LD, short 5.85 in

OEM part number	RS5784	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All LD (600 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00277	**TA2K500**	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6- **A**	current
EDH-SIE-00278	**TA3K500**	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	LMD/MD families; MD 700-800 A **A**	current
EDH-SIE-00279	**TC2K500**	Siemens TC2K500 copper lug, MD 500-600A	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A **A**	current

EDH-SIE-00277	TA2K500	Siemens	lug	CURRENT

Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500

OEM part number	TA2K500	A	S135, S136 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6-B, HMD6, HMXD6, SHMD6-B, CMD6, SCMD6-B 500-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x #1-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00278	TA3K500	Siemens	lug	CURRENT

Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500

OEM part number	TA3K500	A	S135, S136 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug; standard line/load lug on MD/LMD (suffix 'L' = lugs installed)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LMD/MD families; MD 700-800 A	A	same as above
Kit contents	1 lug; wire range 1-3 x 1/0-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00279	TC2K500	Siemens	lug	CURRENT

Siemens TC2K500 copper lug, MD 500-600A

OEM part number	TC2K500	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x #1 AWG-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00310	**RS5787**	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	LM(X)D6, HLM(X)D6 (800 A) A	current
EDH-SIE-00309	**RS5788**	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	LM(X)D6, HLM(X)D6 (800 A) A	current

EDH-SIE-00310	RS5787	Siemens	breaker-accessory	CURRENT

Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in

OEM part number	RS5787	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00309	RS5788	Siemens	breaker-accessory	CURRENT

Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in

OEM part number	RS5788	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00281	**2TA2N8750**	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00283	**2TA3N8750**	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00285	**2TA4N8500**	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00287	**2TA4P8500**	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00282	**3TA2N8750**	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00284	**3TA3N8750**	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00286	**3TA4N8500**	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00288	**3TA4P8500**	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00290	**CCM800K2**	Siemens CCM800K2 compression lug kit, MD 2-pole	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole **A**	current
EDH-SIE-00291	**CCM800K3**	Siemens CCM800K3 compression lug kit, MD 3-pole	MD family 500-800 A, 3-pole **A**	current

EDH-SIE-00281 **2TA2N8750** Siemens lug-kit **CURRENT**

Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA2N8750	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	**A**	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	**A**	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00283 **2TA3N8750** Siemens lug-kit **CURRENT**

Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA3N8750	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	**A**	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	**A**	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00285	2TA4N8500	Siemens	lug-kit	CURRENT

Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4N8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00287	2TA4P8500	Siemens	lug-kit	CURRENT

Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4P8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00282	3TA2N8750	Siemens	lug-kit	CURRENT

Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA2N8750	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00284	3TA3N8750	Siemens	lug-kit	CURRENT

Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA3N8750	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00286	3TA4N8500	Siemens	lug-kit	CURRENT

Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4N8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00288	3TA4P8500	Siemens	lug-kit	CURRENT

Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4P8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00290	CCM800K2	Siemens	lug-kit	CURRENT

Siemens CCM800K2 compression lug kit, MD 2-pole

OEM part number	CCM800K2	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole	A	same as above
Kit contents	6 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00291	CCM800K3	Siemens	lug-kit	CURRENT

Siemens CCM800K3 compression lug kit, MD 3-pole

OEM part number	CCM800K3	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD family 500-800 A, 3-pole	A	same as above
Kit contents	9 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00280	**TA2N750**	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	MD family 500-800 A (100% rated) A	current

EDH-SIE-00280	TA2N750	Siemens	lug	CURRENT

Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil

OEM part number	TA2N750	A	S135, S136 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-2 cables; used for 100% rated MD/ND frame breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD family 500-800 A (100% rated)	A	same as above
Kit contents	1 lug; wire range 1-2 x 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*What is the relationship between TA2N750 (single, p. 7-154) and the 2TA2N8750/3TA2N8750 kits (MD page, p. 7-155)?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00298	**MDTERMSHIELD**	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	MD, ND, PD, RD 3-pole A	current
EDH-SIE-00289	**NDTS**	Siemens NDTS wire lug shield / end barrier, MD/ND	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families A	current

EDH-SIE-00298	MDTERMSHIELD	Siemens	barrier	CURRENT

Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole

OEM part number	MDTERMSHIELD	A	S135, S136 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD, ND, PD, RD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00289	NDTS	Siemens	barrier	CURRENT

Siemens NDTS wire lug shield / end barrier, MD/ND

OEM part number	NDTS	A	S135, S136 s6 MD/ND pages; s6 p. 7-154; oem_spec
Description	Wire lug shield (NDTS); required when oversized lugs are used; included in the 2TA*/3TA* connector kits as the 'NDTS end barrier'. Breaker length increases to 24 in with lug shields (MD/ND dimension table).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families	A	same as above
Dimensions	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25)	A	S135 MD page dimension table; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S135, S136 s6 MD/ND pages; s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is NDTS orderable on its own, or only as part of the kits?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00312	**RS5785**	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	All MD, ND (1200 A) A	current
EDH-SIE-00311	**RS5786**	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	All MD, ND (1200 A) A	current

EDH-SIE-00312	RS5785	Siemens	breaker-accessory	CURRENT

Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in

OEM part number	RS5785	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND (1200 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 8.00 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00311	RS5786	Siemens	breaker-accessory	CURRENT

Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in

OEM part number	RS5786	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND (1200 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.50 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00292	**CCN1200K2**	Siemens CCN1200K2 compression lug kit, ND 2-pole	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole A	current
EDH-SIE-00293	**CCN1200K3**	Siemens CCN1200K3 compression lug kit, ND 3-pole	ND family 900-1200 A, 3-pole A	current

EDH-SIE-00292	CCN1200K2	Siemens	lug-kit	CURRENT

Siemens CCN1200K2 compression lug kit, ND 2-pole

OEM part number	CCN1200K2	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole	A	same as above
Kit contents	8 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00293	CCN1200K3	Siemens	lug-kit	CURRENT

Siemens CCN1200K3 compression lug kit, ND 3-pole

OEM part number	CCN1200K3	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ND family 900-1200 A, 3-pole	A	same as above
Kit contents	12 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00297	**TA4P750**	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00294	**TA5P600**	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00295	**TA6R600**	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2 **A**	current

EDH-SIE-00297 **TA4P750** Siemens lug **CURRENT**

Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)

OEM part number	TA4P750	**A**	S135, S136 s6 p. 7-155; oem_spec
Description	Optional aluminum lug, built to order (6-8 weeks)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A	**A**	same as above
Kit contents	1 lug; wire range 1-4 x 600-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00294 **TA5P600** Siemens lug **CURRENT**

Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil

OEM part number	TA5P600	**A**	S135, S136 s6 p. 7-154; PD page; oem_spec
Description	Aluminum-body lug; standard PD frame lug, 6 required per breaker	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A	**A**	same as above
Kit contents	1 lug (6 required); wire range 1-5 x 300-600 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00295 **TA6R600** Siemens lug **CURRENT**

Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil

OEM part number	TA6R600	**A**	S135, S136 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-6 cables	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2000 A	**A**	same as above
Kit contents	1 lug; wire range 1-6 x 300-600 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00296	**TC5R600**	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6 **A**	current

EDH-SIE-00296	TC5R600	Siemens	lug	CURRENT

Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)

OEM part number	TC5R600	**A**	S135, S136 s6 p. 7-155; PD page; oem_spec
Description	Copper mechanical lug; standard RD frame lug; required for 100% rated PD breakers	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6	**A**	same as above
Kit contents	1 lug (6 per breaker); wire range 1-5 x 300-600 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron RD (RD6, RXD6, HRD6, HRXD6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

6.16 General / family not yet assigned

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00414	**BxxCVR**	Panelboard box extension cover (catalog pattern B<06-48><S|F>CVR)	—	unknown

EDH-SIE-00414	BxxCVR	Siemens lineage	trim	STATUS UNKNOWN

Panelboard box extension cover (catalog pattern B<06-48><S|F>CVR)

OEM part number	BxxCVR	**A**	S419 single sheet; oem_spec
Kit contents	Extension cover; J-clips and mounting screws (4 each for 6-24 in covers, 6 each for 30-48 in covers)	**A**	same as above
OEM instruction document	Siemens instruction sheet 11-A-1144-01 Rev. 00: BXXCVR extension cover mounting instructions	**A**	same as above
Oem part number pattern	BXXCVR: XX = cover size 06, 12, 18, 24, 30, 36, 42, 48 in; type S = surface, F = flush	**A**	S419 single sheet; oem_spec

7 Federal Pacific Electric

Lineage / brand markings: Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)

Family	Type	Status	Era	Entries	Pg
BDP FPE BDP distribution panelboard (double-hole bus)	panelboard	Obsolete; OEM-numbered kits KBDP1C-KBDP5C and aftermarket NEF3K/NEJ3K/NJL3K still traded	—	6	1134
CDP FPE CDP distribution panelboard (single-hole bus)	panelboard	Obsolete; aftermarket/replacement kits and recertified breakers still sold by FPE-successor (Circuit Breaker Sales / fpeparts.com) and surplus dealers	Advertised May 1962: distribution panelboards types NHDP and CDP with rotary-handle breakers 15-800 A	10	1137
FDP FPE FDP fusible distribution panelboard / QMQB switchboard	panelboard	Obsolete; QMQB switches and KFDP/KQB strap/link kits still traded as recertified/new-surplus	—	19	1141
NA1B FPE NA1B / NH1B lighting and appliance panelboards	panelboard	Obsolete	—	5	1148
NBLP FPE NBLP / NQLP bolt-on lighting panelboards	panelboard	Obsolete; Schneider Electric states it no longer offers replacement breakers for Federal Pacific switchboards/panelboards	—	1	1150
NDP FPE NDP panelboard	panelboard	Obsolete	—	2	1151
FPE-SWBD FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	switchboard	Obsolete; recertified NJL/NJJ/NM/NP breakers and NN switches sold for legacy FPE switchboards	—	6	1152

7.1 BDP — FPE BDP distribution panelboard (double-hole bus)

FAM-FPE-002 · panelboard · aka BDP panel board, BDP Spectra bolt-on (as listed by Superbreakers - likely erroneous) · markings: Federal Pacific, FPE

FPE BDP is a distribution panelboard with a 'double hole bus' (Superbreakers) using twin bus-connection kits KBDP1C-KBDP5C per breaker frame. Breaker King sells PCS aftermarket assemblies NEF3K/NEJ3K/NJL3K replacing KBDP1C/KBDP2C/KBDP4C. Superbreakers labels KBDP1C as 240 V 100 A for 'BDP Spectra Bolt-on' panelboards - the 'Spectra' wording appears to be a listing error (Spectra is a GE name).

Attribute	Value	Cl.	Sources
Status	Obsolete; OEM-numbered kits KBDP1C-KBDP5C and aftermarket NEF3K/NEJ3K/NJL3K still traded	C	S138, S140, S141 distributor
Branch breakers accepted	NE/NEF/HEG (KBDP1C), NEJ/NEJH/HEJ (KBDP2C), [KBDP3C frame not stated], NJL/HJL (KBDP4C), NM/HNM (KBDP5C)	C	S138, S141 distributor
History	Federal Pacific Electric (Newark NJ); Stab-Lok trademark registered c.1950-51; Reliance Electric bought FPE from UV Industries in 1979; in 1986 Reliance exited breakers: breaker business to American Circuit Breaker Corp (ACBC), non-breaker parts to Electro-Mechanical Corp, Federal name -> Challenger Electric; aftermarket plant (Newark->Linden NJ) passed Challenger -> Westinghouse -> Cutler-Hammer; closed 1995 and inventory bought by John Cifrodella forming Federal Pacific Equipment Inc.; Circuit Breaker Sales (Matthews NC) acquired Federal Pacific Equipment (2007 per Wikipedia, uncited) including equipment and technical documents.	C	S146, S145 other

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class), NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S138 Breaker Mounting Kits :: Federal Pacific Electric (category listing); S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S145 About Federal Pacific Electric Equipment (history); S146 Federal Pacific Electric Corporation
Also fits this family (entry printed elsewhere): KFDP-5C

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00007	**KBDP1C**	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	Two NE/NEF/HEG frame breakers; 'three pole and twin mount' C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00008	**KBDP2C**	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	NEJ, NEJH, HEJ frames C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00009	**KBDP3C**	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	Twin mount into BDP (double hole bus); frame not stated by source C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00010	**KBDP4C**	FPE BDP twin bus-connection kit, NJL/HJL frame	Two NJL/HJL frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00011	**KBDP5C**	FPE BDP mounting kit, NM/HNM frame	NM and HNM breaker types C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00007	KBDP1C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NE/NEF/HEG frame

OEM part number	KBDP1C	C	S138, S140, S141, S147 distributor
Alternate / superseded numbers	KBDP-1C	C	S140 alias; distributor
	NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	C	S138, S140 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	C	S138, S140, S141, S147 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141, S147 inference
Breaker compatibility	Two NE/NEF/HEG frame breakers; 'three pole and twin mount'	C	S138, S140, S141, S147 distributor
Voltage rating	240 V (Superbreakers) (Conflicts with 600 V class of family; NEF breakers are 480 V)	D	S141 distributor
Current rating	100 A	C	S141, S140 distributor
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141, S147 distributor
Cross-links	Families: BDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00008	KBDP2C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame

OEM part number	KBDP2C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KBDP-2C	C	S140 alias; distributor
	NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	C	S138, S140 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	NEJ, NEJH, HEJ frames	C	S138, S140, S141 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	225 A	C	S141, S140 distributor
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: BDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00009	KBDP3C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)

OEM part number	KBDP3C	C	S140, S141 distributor
Alternate / superseded numbers	KBDP-3C	C	S140 alias; distributor
	NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern [equivalent]	D	same as above
Description	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140, S141 inference
Breaker compatibility	Twin mount into BDP (double hole bus); frame not stated by source	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: BDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm KBDP3C is the NFJ/HFJ kit (pattern 1=NE,2=NEJ,3=NFJ,4=NJL,5=NM).*		

EDH-FPE-00010	KBDP4C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NJL/HJL frame

OEM part number	KBDP4C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KBDP-4C	C	S140 alias; distributor
	NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	C	S138, S140 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NJL/HJL frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	Two NJL/HJL frame breakers	C	S138, S140, S141 distributor
Current rating	400 A max (per NJL3K)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: BDP · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00011	KBDP5C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP mounting kit, NM/HNM frame

OEM part number	KBDP5C	C	S141 distributor
Description	FPE BDP mounting kit, NM/HNM frame	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S141 inference
Breaker compatibility	NM and HNM breaker types	C	S141 distributor
Voltage rating	600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: BDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

7.2 CDP — FPE CDP distribution panelboard (single-hole bus)

FAM-FPE-001 · panelboard · aka CDP panel board, CDP panelboard, NHDP · markings: American (ACBC), FPE, Federal Pacific

FPE CDP is a commercial/industrial distribution panelboard using a 'single hole bus' (per Superbreakers description) onto which pairs of N-frame bolt-on molded-case breakers are mounted with OEM bus connection ('link') kits KCDP1C through KCDP5C, one kit per breaker frame family. Each kit (per Breaker King) includes screws, brackets and a deadfront cover plate and mounts two breakers (twin). Aftermarket equivalents NEF1K, NEJ1K, NFJ1K, NJL1K are cross-referenced to the OEM kits. NN-frame switches (e.g., NN633120NA) are also described as fitting CDP panelboards.

Evidence record: 1962 FPE advertisement - NHDP and CDP distribution panelboards with individually lockable rotary-handle breakers 15-800 A, all-steel front panel, individually grounded cover plates.

Attribute	Value	Cl.	Sources
Status	Obsolete; aftermarket/replacement kits and recertified breakers still sold by FPE-successor (Circuit Breaker Sales / fpeparts.com) and surplus dealers	C	S144, S138, S141 distributor
Era of manufacture	Advertised May 1962: distribution panelboards types NHDP and CDP with rotary-handle breakers 15-800 A	A	S262 ECM May 1962 FPE ad; oem_spec
	FPE commercial distribution panelboard line; obsolete. Exact production years not documented in sources found.	D	S144, S138 inference

Attribute	Value	Cl.	Sources
Successor	No direct OEM successor. Parts support: Federal Pacific Equipment -> Circuit Breaker Sales (fpeparts.com); aftermarket kits NEF1K/NEJ1K/NFJ1K/NJL1K (PCS) replace OEM KCDP1C-KCDP4C.	C	S138, S144, S145 distributor
Voltage rating	600 V class (kits KCDP1C, KCDP5C listed 600 V)	C	S141 distributor
Branch breakers accepted	FPE rotary-handle molded case breakers 15-800 A (1962)	A	S262 oem_spec
	NE/NEF (KCDP1C), NEJ/HEJ (KCDP2C), NFJ/HFJ (KCDP3C), NJL/HJL (KCDP4C), NM/NN (KCDP5C) twin-mounted via bus connection kits	C	S138, S140, S141 distributor
Bus type	single hole bus (CDP) vs double hole bus (BDP)	C	S141 Superbreakers KCDP3C/KCDP4C/KBDP3C/KBDP4C descriptions; distributor
History	Federal Pacific Electric (Newark NJ); Stab-Lok trademark registered c.1950-51; Reliance Electric bought FPE from UV Industries in 1979; in 1986 Reliance exited breakers: breaker business to American Circuit Breaker Corp (ACBC), non-breaker parts to Electro-Mechanical Corp, Federal name -> Challenger Electric; aftermarket plant (Newark->Linden NJ) passed Challenger -> Westinghouse -> Cutler-Hammer; closed 1995 and inventory bought by John Cifrodella forming Federal Pacific Equipment Inc.; Circuit Breaker Sales (Matthews NC) acquired Federal Pacific Equipment (2007 per Wikipedia, uncited) including equipment and technical documents.	C	S146, S145 other

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class), NF / NFJ / HFJ / NFS (N-frame 225 A class), NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S138 Breaker Mounting Kits :: Federal Pacific Electric (category listing); S139 Federal Pacific CDP [BCDPNJLFPE] product page; S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S144 Federal Pacific Electric panelboard connector kits; S145 About Federal Pacific Electric Equipment (history); S146 Federal Pacific Electric Corporation; S262 sim_ecm_1962-05_61_5 Electrical Construction and Maintenance, Vol 61 No 5, May 1962 - Federal Pacific Electric
Also fits this family (entry printed elsewhere): NM34, NM36, NM38, N32

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00001	**KCDP1C**	FPE CDP twin bus-connection kit, NE/NEF frame	Two NE/NEF frame breakers (Breaker King); 'twin mount ... single hole C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00002	**KCDP2C**	FPE CDP twin bus-connection kit, NEJ/HEJ frame	Two NEJ/HEJ frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00003	**KCDP3C**	FPE CDP twin bus-connection kit, NFJ/HFJ frame	Two NFJ/HFJ frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00004	**KCDP4C**	FPE CDP twin bus-connection kit, NJL/HJL frame	Two NJL/HJL frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00005	**KCDP5C**	FPE CDP link kit, NM/NN frame	NM and NN breaker/switch frames in CDP panel ('CDP LINK KIT NM NN BREA C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00001	KCDP1C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NE/NEF frame

OEM part number	KCDP1C	C	S138, S140, S141, S147 distributor
Alternate / superseded numbers	KCDP-1C	C	S140 alias; distributor
	NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE) (aftermarket assembly; not OEM)	C	S138, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NE/NEF frame	C	S138, S140, S141, S147 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141, S147 inference
Breaker compatibility	Two NE/NEF frame breakers (Breaker King); 'twin mount ... single hole bus Federal Pacific CDP panel board' (Superbreakers); 600 V tag	C	S138, S140, S141, S147 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	100 A max (per NEF1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141, S147 distributor
Cross-links	Families: CDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00002	KCDP2C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NEJ/HEJ frame

OEM part number	KCDP2C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KCDP-2C	C	S140 alias; distributor
	NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	C	S138, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NEJ/HEJ frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	Two NEJ/HEJ frame breakers	C	S138, S140, S141 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	225 A max (per NEJ1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: CDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00003	KCDP3C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NFJ/HFJ frame

OEM part number	KCDP3C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KCDP-3C	C	S140 alias; distributor
	NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	C	S138, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NFJ/HFJ frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	Two NFJ/HFJ frame breakers	C	S138, S140, S141 distributor
Current rating	225 A max (per NFJ1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: CDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00004	KCDP4C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NJL/HJL frame

OEM part number	KCDP4C	C	S138, S139, S140, S141 distributor
Alternate / superseded numbers	KCDP-4C	C	S140 alias; distributor
	NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	C	S138, S139, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NJL/HJL frame	C	S138, S139, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S139, S140, S141 inference
Breaker compatibility	Two NJL/HJL frame breakers	C	S138, S139, S140, S141 distributor
Current rating	400 A max (per NJL1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Dimensions	Shipping weight 7 lb (aftermarket NJL1K equivalent)	C	S139 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S139, S140, S141 distributor
Cross-links	Families: CDP · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00005	KCDP5C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP link kit, NM/NN frame

OEM part number	KCDP5C	C	S140, S141 distributor
Alternate / superseded numbers	KCDP-5C	C	S140 alias; distributor
Description	FPE CDP link kit, NM/NN frame	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140, S141 inference
Breaker compatibility	NM and NN breaker/switch frames in CDP panel ('CDP LINK KIT NM NN BREAKERS')	C	S140, S141 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	225 A (Superbreakers tag - doubtful for NM/NN frames) (Rating looks inconsistent with 400-1200 A NM/NN frames)	D	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S140, S141 distributor
Cross-links	Families: CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is KCDP5C single- or twin-mount? NM frames are typically single-mount.*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00043	**NFHARDWARE**	NF frame custom panel hardware (dealer item)	—	unknown

EDH-FPE-00043	NFHARDWARE	Federal Pacific Electric	breaker-mounting-kit	STATUS UNKNOWN

NF frame custom panel hardware (dealer item)

Description	'NF FRAME CUSTOM PANEL HARDWARE' - dealer-assigned item, not an OEM number	C	S140 surplus
Cross-links	Families: CDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Kit contents, Material, Torque values		

7.3 FDP — FPE FDP fusible distribution panelboard / QMQB switchboard

FAM-FPE-003 · panelboard · aka QMQB panelboard, QMQB switchboard, Federal Pacific QMQB · markings: Federal Pacific, American

FDP is FPE's fusible distribution panelboard family built around QMQB bolt-on fusible switch units ('used for QMQB and FDP style panel boards and switchgear distribution systems'). Switch units connect to the vertical bus through KFDP-series link/strap kits (KFDP2C, 3C, 4C (200 A), 46C (400 A), 66C (600 A), 7C (1200 A), plus D/S/V variants KFDPD16C, KFDPS16C, KFDPD26C, KFDPS26C, KFDPV7C) and KQB-series kits (KQB3C 15-100 A, KQB4C, KQB46C, KQB66C, KQB86C 700-800 A).

Attribute	Value	Cl.	Sources
Status	Obsolete; QMQB switches and KFDP/KQB strap/link kits still traded as recertified/new-surplus	C	S141, S140 distributor
Branch breakers accepted	QMQB fusible panelboard switches 30-1200 A, 240 V (QMQB..32..) and 600 V (QMQB..36..), 200 kA with class R/J/K/H/L fuses; single and dual/twin configurations	C	S141 distributor

Breaker families associated: QMQB fusible panelboard switch

Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S144 Federal Pacific Electric panelboard connector kits

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00015	**KFDP2C**	FPE FDP link/strap kit KFDP2C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00016	**KFDP3C**	FPE FDP link/strap kit KFDP3C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00018	**KFDP46C**	FPE FDP link/strap kit KFDP46C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (400 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00017	**KFDP4C**	FPE FDP link/strap kit KFDP4C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (200 A, 600 V; sin C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00026	**KFDP-5C**	FPE FDP link kit (QMQB4036R into BDP switchgear)	'QMQB4036R INTO BDP SWITCHGEAR' (relectric) - i.e., QMQB 400 A 600 V s C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00019	**KFDP66C**	FPE FDP link/strap kit KFDP66C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (600 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00020	**KFDP7C**	FPE FDP link/strap kit KFDP7C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00021	**KFDPD16C**	FPE FDP link/strap kit KFDPD16C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00023	**KFDPD26C**	FPE FDP link/strap kit KFDPD26C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00022	**KFDPS16C**	FPE FDP link/strap kit KFDPS16C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00024	**KFDPS26C**	FPE FDP link/strap kit KFDPS26C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00025	**KFDPV7C**	FPE FDP link/strap kit KFDPV7C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00027	**KQB3C**	FPE QMQB switch strap/link kit KQB3C	15-100 A, 600 V, dual/twin branch mounting, panelboard switch strap ki C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00029	**KQB46C**	FPE QMQB switch strap/link kit KQB46C	QMQB link kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00028	**KQB4C**	FPE QMQB switch strap/link kit KQB4C	QMQB link kit; 200 A (relectric KQB-4C) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00030	**KQB66C**	FPE QMQB switch strap/link kit KQB66C	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00031	**KQB86C**	FPE QMQB switch strap/link kit KQB86C	700-800 A, 600 V QMQB panel board switch strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00032	**KQB-D26C**	FPE QMQB switch strap/link kit KQB-D26C	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00033	**PK103T**	FPE QMQB switch strap/link kit PK103T	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00015	KFDP2C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP2C for QMQB switch units

OEM part number	KFDP2C	C	S140, S141 distributor
Alternate / superseded numbers	KFDP-2C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP2C for QMQB switch units	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00016	KFDP3C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP3C for QMQB switch units

OEM part number	KFDP3C	C	S140, S141 distributor
Alternate / superseded numbers	KFDP-3C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP3C for QMQB switch units	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00018	KFDP46C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP46C for QMQB switch units

OEM part number	KFDP46C	C	S140, S141 distributor
Alternate / superseded numbers	KFDP-46C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP46C for QMQB switch units	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (400 A, 600 V)	C	S140, S141 distributor
Current rating	400 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00017	KFDP4C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP4C for QMQB switch units

OEM part number	KFDP4C	C	S140, S141, S147 distributor
Alternate / superseded numbers	KFDP-4C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP4C for QMQB switch units	C	S140, S141, S147 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141, S147 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches)	C	S140, S141, S147 distributor
Current rating	200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00026	KFDP-5C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link kit (QMQB4036R into BDP switchgear)

OEM part number	KFDP-5C	C	S140 distributor
Description	FPE FDP link kit (QMQB4036R into BDP switchgear)	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	'QMQB4036R INTO BDP SWITCHGEAR' (relectric) - i.e., QMQB 400 A 600 V switch mounted in BDP	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP, BDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00019	KFDP66C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP66C for QMQB switch units

OEM part number	KFDP66C	C	S141 distributor
Description	FPE FDP link/strap kit KFDP66C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (600 A, 600 V)	C	S141 distributor
Current rating	600 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00020	KFDP7C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP7C for QMQB switch units

OEM part number	KFDP7C	C	S141 distributor
Description	FPE FDP link/strap kit KFDP7C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V)	C	S141 distributor
Current rating	1200 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00021	KFDPD16C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPD16C for QMQB switch units

OEM part number	KFDPD16C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPD16C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V)	C	S141 distributor
Current rating	100 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00023	KFDPD26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPD26C for QMQB switch units

OEM part number	KFDPD26C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPD26C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00022	KFDPS16C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPS16C for QMQB switch units

OEM part number	KFDPS16C	C	S141, S140 distributor
Description	FPE FDP link/strap kit KFDPS16C for QMQB switch units	C	S141 distributor
	FPE FDP link kit for QMQB (relectric listing)	C	S140 distributor
Application	branch	C	S141, S140 distributor
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V)	C	S141 distributor
	QMQB	C	S140 distributor
Current rating	100 A, 600 V	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S141, S140 distributor
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		
Open question	*Same as KFDPS16C?*		

EDH-FPE-00024	KFDPS26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPS26C for QMQB switch units

OEM part number	KFDPS26C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPS26C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00025	KFDPV7C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPV7C for QMQB switch units

OEM part number	KFDPV7C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPV7C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V)	C	S141 distributor
Current rating	1200 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00027	KQB3C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB3C

OEM part number	KQB3C	C	S140, S141 distributor
Description	FPE QMQB switch strap/link kit KQB3C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140, S141 inference
Breaker compatibility	15-100 A, 600 V, dual/twin branch mounting, panelboard switch strap kit; relectric 'QMQB LINK KIT; 60A' (KQB3C) vs 'QMQB LINK KIT; 200A' (KQB-3C) - conflicting	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00029	KQB46C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB46C

OEM part number	KQB46C	C	S140, S141 distributor
Description	FPE QMQB switch strap/link kit KQB46C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140, S141 inference
Breaker compatibility	QMQB link kit	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00028	KQB4C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB4C

OEM part number	KQB4C	C	S140, S141 distributor
Description	FPE QMQB switch strap/link kit KQB4C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140, S141 inference
Breaker compatibility	QMQB link kit; 200 A (relectric KQB-4C)	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00030	KQB66C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB66C

OEM part number	KQB66C	C	S141 distributor
Description	FPE QMQB switch strap/link kit KQB66C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S141 inference
Breaker compatibility	QMQB strap kit	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00031	KQB86C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB86C

OEM part number	KQB86C	C	S141 distributor
Description	FPE QMQB switch strap/link kit KQB86C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S141 inference
Breaker compatibility	700-800 A, 600 V QMQB panel board switch strap kit	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00032	KQB-D26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB-D26C

OEM part number	KQB-D26C	C	S140 distributor
Description	FPE QMQB switch strap/link kit KQB-D26C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140 inference
Breaker compatibility	QMQB strap kit	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00033	PK103T	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit PK103T

OEM part number	PK103T	C	S140 distributor
Description	FPE QMQB switch strap/link kit PK103T	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140 inference
Breaker compatibility	QMQB strap kit	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

7.4 NA1B — FPE NA1B / NH1B lighting and appliance panelboards

FAM-FPE-005 · panelboard · aka NAIB, NH1B, NHIB, NA-type panel, NH-type panel, NAB, NHB · markings: Federal Pacific, Federal Noark, Stab-Lok

NA1B ('NAIB') and NH1B ('NHIB') are FPE lighting/appliance panelboard types. A used kit KCDP-1A is labelled 'For NE/NEF frame circuit breakers, for NH1B/NA1B type panels, for (2) 3 pole breakers'. relectric lists NAIB-NEF 'NE/NEF twin kit for NA1B panel' and Superbreakers lists KNA1B1C lug kit. fpeparts.com lists 'NAIB panel board kit' and 'NHIB panel board kit'. By analogy with FPE breaker naming (NA=Stab-Lok 120/240 plug-in; NE/NEF=bolt-on 240/480 V) NA1B is likely the 120/240 or 208Y/120 panel and NH1B the 480Y/277 panel, but this is unverified.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	S142, S140, S144 surplus
Branch breakers accepted	Stab-Lok NA/NB branch breakers (assumed for NA1B); NE/NEF twin-mounted feeders/mains via KCDP-1A / NAIB-NEF kit	D	S142, S140 Branch breaker type for NH1B (probably NE/NEF bolt-on, 480Y/277V) not confirmed; inference

Breaker families associated: NA / NC (Stab-Lok plug-in), NE / NEF / NEG / HEF / HEG (N-frame 100 A class)
Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S142 Federal Pacific KCDP-1A Kit (for NH/NA-Type Panel, NE/NEF Frame); S144 Federal Pacific Electric panelboard connector kits

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00034	**KNA1B1C**	FPE NA1B panelboard lug kit	—	discontinued

EDH-FPE-00034 **KNA1B1C** Federal Pacific Electric main-lug-kit **DISCONTINUED**

FPE NA1B panelboard lug kit

OEM part number	KNA1B1C	C	S141 distributor
Description	Lug kit (Superbreakers: 'used for molded case circuit breaker'); tagged Lugs; numbering suggests NA1B panel kit	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: NA1B		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		
Open question	*Is KNA1B1C a main lug kit for NA1B panels or a breaker lug kit?*		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00006	**KCDP-1A**	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	(2) 3-pole NE/NEF frame breakers in NH1B / NA1B type panels (label) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00014	**NAIB-NEF**	FPE NE/NEF twin kit for NA1B panel	NE/NEF twin kit for NA1B panel C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00006 **KCDP-1A** Federal Pacific Electric branch-connector-kit **DISCONTINUED (OEM); TR**

FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels

OEM part number	KCDP-1A	C	S142 distributor
Description	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S142 inference
Breaker compatibility	(2) 3-pole NE/NEF frame breakers in NH1B / NA1B type panels (label)	C	S142 distributor
Dimensions	Shipping package 4 x 3 x 3 in, 1 lb (listing; not part dimensions)	C	S142 surplus
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S142 distributor
Identification features	Label text includes 'J25 (HM1)' and 'LA25037' (meaning unknown)	C	S142 surplus
Cross-links	Families: NA1B · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is KCDP-1A an earlier revision of KCDP1C or a distinct NA1B/NH1B kit? Same as relectric NAIB-NEF?*		

EDH-FPE-00014	NAIB-NEF	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NE/NEF twin kit for NA1B panel

OEM part number	NAIB-NEF	C	S140 distributor
Description	FPE NE/NEF twin kit for NA1B panel	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	NE/NEF twin kit for NA1B panel	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: NA1B · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Same item as KCDP-1A?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00042	**NCFS**	FPE filler plate for thin NC breaker space	—	unknown

EDH-FPE-00042	NCFS	Federal Pacific Electric	filler-plate	STATUS UNKNOWN

FPE filler plate for thin NC breaker space

OEM part number	NCFS	C	S141 distributor
Description	Load center filler plate used for thin type NC circuit breaker	C	same as above
Cross-links	Families: NA1B · Breakers: NA / NC (Stab-Lok plug-in)		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00041	**1LOK**	FPE handle lock for 1-pole NA/NB breakers	—	available as new (listing)

EDH-FPE-00041	1LOK	Federal Pacific Electric	handle-lock	AVAILABLE AS NEW (LIST

FPE handle lock for 1-pole NA/NB breakers

OEM part number	1LOK	C	S141 distributor
Description	Handle lock 15-50 A for 1-pole NA and NB circuit breakers	C	same as above
Status	available as new (listing)	C	same as above
Cross-links	Families: NA1B, NBLP · Breakers: NA / NC (Stab-Lok plug-in), NB (Stab-Lok bolt-on)		
Not yet documented	Dimensions, Material		

7.5 NBLP — FPE NBLP / NQLP bolt-on lighting panelboards

FAM-FPE-006 · panelboard · aka NQLP, NB panelboard · markings: Federal Pacific, Federal Pioneer (Canada)

NBLP panelboards take NB-type bolt-on Stab-Lok-style breakers (Schneider FAQ snippet; Superbreakers NB100 'installs into Federal Pacific NB and NBLP panelboards'). NQ breakers are described as fitting NBLP and NQLP panelboards. Federal Pioneer (Canadian FPE subsidiary, sold to Schneider Canada in 1988) used the same Stab-Lok NB/NBLP nomenclature; that lineage is coded SQD in this catalogue.

Attribute	Value	Cl.	Sources
Status	Obsolete; Schneider Electric states it no longer offers replacement breakers for Federal Pacific switchboards/panelboards	C	S149, S141 Schneider statement from search snippet only (page blocked); oem_web
Branch breakers accepted	NB bolt-on miniature breakers (NBLP); NQ breakers (NQLP, e.g., NQ111050)	C	S141, S149 distributor

Breaker families associated: NB (Stab-Lok bolt-on)
Key documents: S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S146 Federal Pacific Electric Corporation; S149 Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards;
Also fits this family (entry printed elsewhere): 1LOK

7.6 NDP — FPE NDP panelboard

FAM-FPE-004 · panelboard · aka NHDP (related?) · markings: Federal Pacific

NDP is an FPE panelboard type supported by twin mounting strap kits NDPNE and NDPNEJ (relectric). fpeparts.com also lists 'NHDP panel board kit' and 'LDP panel board kit' families; relationship of NDP/NHDP/LDP to CDP/BDP not documented.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	S140, S143 surplus
Branch breakers accepted	NE/NEF and NEJ/NEJH/HEJ twin-mounted with strap kits NDPNE, NDPNEJ	C	same as above

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class)
Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S143 NDPNEJ mounting hardware strap kit detail; S144 Federal Pacific Electric panelboard connector kits

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00013	**NDPNE**	FPE NDP twin mounting strap kit, NE/NEF	NE frame breakers, dual/twin branch mounting (relectric description du C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00012	**NDPNEJ**	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	NEJ, NEJH, HEJ frames, dual/twin branch mounting C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00013 NDPNE — Federal Pacific Electric — branch-connector-kit — DISCONTINUED (OEM); TR

FPE NDP twin mounting strap kit, NE/NEF

OEM part number	NDPNE	C	S140 distributor
Description	FPE NDP twin mounting strap kit, NE/NEF	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	NE frame breakers, dual/twin branch mounting (relectric description duplicates NEJ text)	C	S140 distributor
Current rating	100 A / 240 V per search snippet of relectric NDPNE page	D	S140 surplus
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S140 distributor
Cross-links	Families: NDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00012 NDPNEJ — Federal Pacific Electric — branch-connector-kit — DISCONTINUED (OEM); TR

FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ

OEM part number	NDPNEJ	C	S140, S143 distributor
Description	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140, S143 inference
Breaker compatibility	NEJ, NEJH, HEJ frames, dual/twin branch mounting	C	S140, S143 distributor
Voltage rating	600 V max	C	S143 surplus
Current rating	225 A max	C	same as above
Material	copper	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S140, S143 distributor
Cross-links	Families: NDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*relectric spec table lists Panel Type 'CDP' for NDPNEJ while description says NDP - clarify.*		

7.7 FPE-SWBD — FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)

FAM-FPE-007 · switchboard · aka Federal Pacific switchgear, Fusematic, HCB, VCB · markings: American, FPE, Federal Pacific

FPE switchboards used N-frame bolt-on breakers (NJL 'designed for direct installation into legacy Federal Pacific switchboards and panelboards that accept N-frame bolt-on breakers'), larger NM (400-800 A with trip units NM031400/500/600/800, lugs NM34/NM36/NM38) and NP frames (to 1600 A), and the Fusematic line (XF breakers, XJL current limiters). Group-mounting hardware for switchboards not identified beyond the panelboard KCDP/KBDP kits.

Evidence record: 1962 FPE advertisement - 600 V AC switchboards types HCB (main distributor sections through 2000 A, small buildings) and VCB (through 6000 A, medium-to-large buildings); branch rotary-handle breakers through 800 A.

Attribute	Value	Cl.	Sources
Status	Obsolete; recertified NJL/NJJ/NM/NP breakers and NN switches sold for legacy FPE switchboards	C	S141, S140 distributor
Main ampacity	HCB through 2000 A; VCB through 6000 A	A	S262 oem_spec
Branch breakers accepted	NJL/HJL, NJJ, NM/HM (trip units NM03xxxx), NN switches, NP (to 1600 A); Fusematic X-frame XF/XJL current-limiting units	C	S141, S140 distributor

Breaker families associated: Fusematic XF / XM / XKL / XJL, NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S262 sim_ecm_1962-05_61_5 Electrical Construction and Maintenance, Vol 61 No 5, May 1962 - Federal Pacific Electric

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00038	**N32**	Lug kit for NN breaker	—	discontinued
EDH-FPE-00035	**NM34**	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	—	discontinued
EDH-FPE-00036	**NM36**	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	—	discontinued
EDH-FPE-00037	**NM38**	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	—	discontinued

EDH-FPE-00038 **N32** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug kit for NN breaker

OEM part number	N32	C	S140 surplus
Description	Lug kit for NN breaker	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00035 **NM34** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A

OEM part number	NM34	C	S140 surplus
Description	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00036 **NM36** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A

OEM part number	NM36	C	S140 surplus
Description	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00037	NM38	Federal Pacific Electric	lug-kit	DISCONTINUED

Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A

OEM part number	NM38	C	S140 surplus
Description	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00039	**RP211002**	FPE handle extension for NM 800/1000 A breakers	—	unknown
EDH-FPE-00040	**RP212001**	FPE handle kit for NP frame	—	unknown

EDH-FPE-00039	RP211002	Federal Pacific Electric	breaker-accessory	STATUS UNKNOWN

FPE handle extension for NM 800/1000 A breakers

OEM part number	RP211002	C	S141 distributor
Description	Circuit breaker handle extension used for NM 800 A and 1000 A breakers	C	same as above
Cross-links	Families: FPE-SWBD · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material		

EDH-FPE-00040	RP212001	Federal Pacific Electric	breaker-accessory	STATUS UNKNOWN

FPE handle kit for NP frame

OEM part number	RP212001	C	S141 distributor
Description	Handle kit used for NP frame molded case circuit breaker	C	same as above
Cross-links	Families: FPE-SWBD · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material		

8 Zinsco / Sylvania

Lineage / brand markings: Zinsco, GTE-Sylvania

Family	Type	Status	Era	Entries	Pg
ZIN-DIST Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	panelboard	Obsolete; recertified QSF switches and DSL*/QSF* mounting kits traded	—	21	1154
ZIN-Q Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	panelboard	Obsolete; Connecticut Electric (UBI) makes UBIZ replacement breakers and UBIZRBK12 tin/copper replacement bus kit	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus until early 1960s then aluminum; GTE-Sylvania from 1973; renamed Challenger 1978; new Zinsco-frame panels ended c.1981 with Challenger 200 A panels using Zinsco-frame mains 1982-1994; T&B made breakers from Zinsco molds until 2005	4	1159

8.1 ZIN-DIST — Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)

FAM-ZIN-002 · panelboard · aka QSF panelboard, Sylvania S-line panelboard, double slot, single slot split buss · markings: Zinsco, Sylvania, GTE Sylvania

Zinsco/Sylvania commercial distribution panelboards used two bus/kit styles: 'Double Slot' (Zinsco kits QSF100DS-QSF600DS and DSL* breaker kits) and 'Single Slot ... Split Buss' (Sylvania QSF100SB/200SB/400SB). DSL kits exist for FPE frames (DSLNET, DSLNEJT, DSLNFT, DSLNJT, DSLNM) supporting a forum report that FPE breakers were used in Zinsco/Sylvania equipment above 240 V; Sylvania also lists FPENEFT 'twin mounting hardware for NEF breaker'. Sylvania-branded SEH/SF/SJK bolt-on breakers are sold as fitting Sylvania, Challenger and Zinsco panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; recertified QSF switches and DSL*/QSF* mounting kits traded	C	S164, S165, S153 surplus
Voltage rating	240 V (QSF..33) and 600 V (QSF..53) switch units	C	S153, S174 distributor
Branch breakers accepted	QSF fusible switches 30-600 A (T-prefix = twin); bolt-on breakers QB, QFB; FPE N-frame breakers NE/NEF, NEJ, NF, NJ, NM in 'DSL' double-slot kits; Sylvania SE/SEH/SC?/SJD/SKM breakers	C	S164, S165, S153 surplus

Breaker families associated: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM), Zinsco / Sylvania QSF fusible panelboard switch, Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)

Key documents: S153 Superbreakers Zinsco + Sylvania collections (Shopify products.json); S164 Zinsco Breaker Parts & Accessories Catalog; S165 Sylvania Breaker Parts & Accessories Catalog; S174 Midwest Switchgear: Zinsco/Sylvania QSF fusible panelboard switch listings (QSFT1033B, QSF

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00008	**DSLNEJT**	Zinsco double slot twin mounting hardware, NEJ type	—	discontinued; recertified/new-surplus
EDH-ZIN-00007	**DSLNET**	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00009	**DSLNFT**	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00010	**DSLNJT**	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00011	**DSLNM**	Zinsco double slot mounting hardware for FPE NM (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00012	**DSLNMS**	Zinsco DSLNM mounting hardware (single?)	—	discontinued; recertified/new-surplus
EDH-ZIN-00005	**DSLQB**	Zinsco double slot breaker mounting hardware for QB	—	discontinued; recertified/new-surplus
EDH-ZIN-00006	**DSLQFB**	Zinsco double slot breaker mounting hardware for QFB	—	discontinued; recertified/new-surplus
EDH-ZIN-00021	**FPENEFT**	Sylvania twin mounting hardware for FPE NEF breaker	—	discontinued; recertified/new-surplus

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00001	**QSF100DS**	Zinsco QSF switch kit 100 A, double slot, mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00014	**QSF100SB**	Sylvania QSF single slot switch kit, split buss, 100 A	—	discontinued; recertified/new-surplus
EDH-ZIN-00013	**QSF100SS**	Sylvania QSF 100 A twin kit	—	discontinued; recertified/new-surplus
EDH-ZIN-00002	**QSF200DS**	Zinsco QSF 200 A double slot mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00015	**QSF200SB**	Sylvania QSF single slot switch kit, split buss, 200 A	—	discontinued; recertified/new-surplus
EDH-ZIN-00003	**QSF400DS**	Zinsco/Sylvania QSF 400 A switch kit, double slot	—	discontinued; recertified/new-surplus
EDH-ZIN-00016	**QSF400SB**	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)	—	discontinued; recertified/new-surplus
EDH-ZIN-00004	**QSF600DS**	Zinsco QSF 600 A double slot mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00018	**SECT**	Sylvania 225 A twin kit (for SC? frame, inferred)	—	discontinued; recertified/new-surplus
EDH-ZIN-00017	**SEHT**	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	—	discontinued; recertified/new-surplus
EDH-ZIN-00019	**SJD4T**	Sylvania 400 A twin kit (SJD frame)	—	discontinued; recertified/new-surplus
EDH-ZIN-00020	**SKM8S**	Sylvania 800 A single kit (SKM frame)	—	discontinued; recertified/new-surplus

EDH-ZIN-00008 **DSLNEJT** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware, NEJ type

OEM part number	DSLNEJT	C	S164 surplus
Description	Zinsco double slot twin mounting hardware, NEJ type	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00007 **DSLNET** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)

OEM part number	DSLNET	C	S164 surplus
Description	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm frame (NE/NEF) - description only repeats part number*		

EDH-ZIN-00009 **DSLNFT** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)

OEM part number	DSLNFT	C	S164 surplus
Description	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00010	DSLNJT	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)

OEM part number	DSLNJT	C	S164 surplus
Description	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00011	DSLNM	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot mounting hardware for FPE NM (inferred from name)

OEM part number	DSLNM	C	S164 surplus
Description	Zinsco double slot mounting hardware for FPE NM (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00012	DSLNMS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco DSLNM mounting hardware (single?)

OEM part number	DSLNMS	C	S164 surplus
Description	Zinsco DSLNM mounting hardware (single?)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Difference between DSLNM and DSLNMS (S=single?)*		

EDH-ZIN-00005	DSLQB	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot breaker mounting hardware for QB

OEM part number	DSLQB	C	S164 surplus
Description	Zinsco double slot breaker mounting hardware for QB	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00006	DSLQFB	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot breaker mounting hardware for QFB

OEM part number	DSLQFB	C	S164 surplus
Description	Zinsco double slot breaker mounting hardware for QFB	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00021	FPENEFT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania twin mounting hardware for FPE NEF breaker

OEM part number	FPENEFT	C	S165 surplus
Description	Sylvania twin mounting hardware for FPE NEF breaker	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00001	QSF100DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF switch kit 100 A, double slot, mounting hardware

OEM part number	QSF100DS	C	S164 surplus
Description	Zinsco QSF switch kit 100 A, double slot, mounting hardware	C	same as above
Application	branch (QSF fusible switch)	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00014	QSF100SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss, 100 A

OEM part number	QSF100SB	C	S165 surplus
Description	Sylvania QSF single slot switch kit, split buss, 100 A	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00013	QSF100SS	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF 100 A twin kit

OEM part number	QSF100SS	C	S165 surplus
Description	Sylvania QSF 100 A twin kit	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00002	QSF200DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF 200 A double slot mounting hardware

OEM part number	QSF200DS	C	S164 surplus
Description	Zinsco QSF 200 A double slot mounting hardware	C	same as above
Current rating	200 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00015	QSF200SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss, 200 A

OEM part number	QSF200SB	C	S165 surplus
Description	Sylvania QSF single slot switch kit, split buss, 200 A	C	same as above
Current rating	200 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00003	QSF400DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco/Sylvania QSF 400 A switch kit, double slot

OEM part number	QSF400DS	C	S164, S165 surplus
Description	Zinsco/Sylvania QSF 400 A switch kit, double slot	C	same as above
Current rating	400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00016	QSF400SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)

OEM part number	QSF400SB	C	S165 surplus
Description	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)	C	same as above
Current rating	listed '200A' - probably 400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Ampacity conflict 200 vs 400 A*		

EDH-ZIN-00004	QSF600DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF 600 A double slot mounting hardware

OEM part number	QSF600DS	C	S164 surplus
Description	Zinsco QSF 600 A double slot mounting hardware	C	same as above
Current rating	600 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00018	SECT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 225 A twin kit (for SC? frame, inferred)

OEM part number	SECT	C	S165 surplus
Description	Sylvania 225 A twin kit (for SC? frame, inferred)	C	same as above
Current rating	225 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00017	SEHT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 100 A twin kit (for SE/SEH breakers, inferred)

OEM part number	SEHT	C	S165 surplus
Description	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00019	SJD4T	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 400 A twin kit (SJD frame)

OEM part number	SJD4T	C	S165 surplus
Description	Sylvania 400 A twin kit (SJD frame)	C	same as above
Current rating	400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00020	SKM8S	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 800 A single kit (SKM frame)

OEM part number	SKM8S	C	S165, S175 surplus
Description	Sylvania 800 A single kit (SKM frame)	C	same as above
Current rating	800 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

8.2 ZIN-Q — Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)

FAM-ZIN-001 · panelboard · aka Magnatrip, ML12, MLB20, MOB20, MTMB20, MT12MBB, Q-frame · markings: Zinsco, Magnatrip, Sylvania, GTE-Sylvania, GTE Sylvania Zinsco, Challenger (Zinsco-frame), Kearney (look-alike)

Zinsco (and Sylvania-labelled) panels use breakers with deep slots that clip onto flat on-edge bus bars; plug-in Q/QC/R38 branch breakers and QFP/QFL/QFB main breakers. Commercial versions with 3-phase 240 V and bolt-on QB/QCB breakers exist (QB243040 'for obsolete Zinsco commercial and industrial panelboards'). Known failure mode: loosened breaker-bus contact on aluminium bus causing arcing/fusing. Aftermarket: Connecticut Electric UBIZ breakers (10 kAIC) and UBIZRBK12 125 A replacement bus kit.

Attribute	Value	Cl.	Sources
Status	Obsolete; Connecticut Electric (UBI) makes UBIZ replacement breakers and UBIZRBK12 tin/copper replacement bus kit	C	S151, S154, S155 distributor
Era of manufacture	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus until early 1960s then aluminum; GTE-Sylvania from 1973; renamed Challenger 1978; new Zinsco-frame panels ended c.1981 with Challenger 200 A panels using Zinsco-frame mains 1982-1994; T&B made breakers from Zinsco molds until 2005	C	S151 Wikipedia; largely uncited, cites InterNACHI 2007 history; other
Successor	No OEM successor (tooling: GTE-Sylvania -> Challenger -> Westinghouse/Eaton; Zinsco breaker molds to Thomas & Betts, closed 2005). Aftermarket: Connecticut Electric/UBI.	C	S151, S156 other
Voltage rating	120/240 V 1-ph and 240 V 3-ph (Q24/QFP24 3-pole mains)	C	S152, S153 distributor
Main ampacity	to 225 A (e.g., MLB20(..)C 225 A max; main lug blocks LK-15 150 A and LK-22 225 A)	C	S152 other

Attribute	Value	Cl.	Sources
Branch breakers accepted	Q, QC, QCN, Q24, R38/RC38 twin, HRGF; bolt-on QB/QCB; mains QFP/QFL/QFB/QFBL	C	S152, S153 distributor

Breaker families associated: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)
Key documents: S151 Zinsco; S152 GTE Sylvania Zinsco breaker & panel identification; S153 Superbreakers Zinsco + Sylvania collections (Shopify products.json); S154 Zinsco 125-Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers UBIZRBK12; S155 Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings; S156 Challenger / GTE / Zinsco ownership discussion

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00022	**QFP2T**	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	2-pole QFP mains with offset/staggered lug or standard lug; listed for C	discontinued; recertified/new-surplus

EDH-ZIN-00022 **QFP2T** Zinsco / Sylvania main-breaker-kit **DISCONTINUED; RECERTIF**

Zinsco QFP 2-pole main breaker mounting hardware / feet (base)

OEM part number	QFP2T	C	S167 surplus
Description	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	C	same as above
Installation location	Under main breaker, mounting it to panel	C	same as above
Breaker compatibility	2-pole QFP mains with offset/staggered lug or standard lug; listed for Zinsco, Sylvania, Westinghouse, Challenger panels	C	same as above
Dimensions	Listing package dims 4.25 x 4.5 x 1.125 in, 0.1 lb (may be item size)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-Q · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00023	**LK-15**	Zinsco main lug block 150 A	—	unknown
EDH-ZIN-00024	**LK-22**	Zinsco main lug block 225 A	—	unknown

EDH-ZIN-00023 **LK-15** Zinsco / Sylvania main-lug-kit **STATUS UNKNOWN**

Zinsco main lug block 150 A

OEM part number	LK-15	C	S152 reader-submitted panel label; photo
Description	Main lug block rated 150 A listed on Zinsco panel label alongside QFP24 main	C	S152 photo
Current rating	150 A	C	same as above
Cross-links	Families: ZIN-Q		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		

EDH-ZIN-00024 **LK-22** Zinsco / Sylvania main-lug-kit **STATUS UNKNOWN**

Zinsco main lug block 225 A

OEM part number	LK-22	C	S152 reader-submitted panel label; photo
Description	Main lug block rated 225 A listed on Zinsco panel label alongside QFP24 main	C	S152 photo
Current rating	225 A	C	same as above
Cross-links	Families: ZIN-Q		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		

Bus Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00025	**UBIZRBK12**	Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco load centers	—	current (aftermarket)

EDH-ZIN-00025	UBIZRBK12	Connecticut Electric / UBI	bus-assembly	CURRENT (AFTERMARKET)

Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco load centers

OEM part number	UBIZRBK12 (aftermarket, Connecticut Electric)	C	S154 distributor
Description	Replacement buss bar kit: 2 copper-plated buss bars, lugs, screws, insulators; Wikipedia describes as tin-coated copper	C	S154, S151 distributor
Current rating	125 A	C	S154 distributor
Status	current (aftermarket)	C	same as above
Aftermarket / reproduction	Aftermarket replacement - not Zinsco OEM; buyer review reports bars may need trimming to fit	C	same as above
Cross-links	Families: ZIN-Q · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Dimensions, listing basis, Torque values		
Open question	*Exact UL/ETL listing scope of UBIZRBK12 when installed in original Zinsco enclosures*		

9 Other manufacturers

Lineage / brand markings: Other / unassigned

Family	Type	Status	Era	Entries	Pg
COMMANDER Commander / CEB panels (Zinsco-type)	loadcenter	Obsolete; an electrician quoted by InspectAPedia says older Commander and CEB panels are 'really the same panel' as Sylvania/GTE-Sylvania (Zinsco design); newer Commander 200 A mains mounted differently	—	0	1162
FA Frank Adam Electric panelboards	panelboard	Obsolete, rare	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1950, possibly to 1970); patents 1906-1965	1	1162
KINNEY Kinney panelboards	panelboard	Company reportedly still in Elgin IL; legacy breaker support possibly via Eaton vintage products (forum)	—	0	1163
WADSWORTH Wadsworth panelboards and breakers	panelboard	Obsolete; reconditioned/NOS Wadsworth A- and B-series breakers sold by surplus dealers; Connecticut Electric replacements mentioned	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)	0	1163

9.1 COMMANDER — Commander / CEB panels (Zinsco-type)

FAM-OTH-003 · loadcenter · aka CEB · markings: Commander, CEB

Commander panels are reported (opinion only) to be Zinsco/Sylvania-design panels sold under another label; manufacturer identity unconfirmed.

Attribute	Value	Cl.	Sources
Status	Obsolete; an electrician quoted by InspectAPedia says older Commander and CEB panels are 'really the same panel' as Sylvania/GTE-Sylvania (Zinsco design); newer Commander 200 A mains mounted differently	D	S152 other

Key documents: S152 GTE Sylvania Zinsco breaker & panel identification

9.2 FA — Frank Adam Electric panelboards

FAM-OTH-001 · panelboard · aka Frank Adams, FAM, PULFUZSW, KLAMPSWFUZ · markings: Frank Adam, Frank Adam Electric Co., FA

Frank Adam Electric Co. (St. Louis) made panelboards, fused switches and breakers from c.1900; its west-coast branch became Zinsco. Labels include PULFUZSW and KLAMPSWFUZ fused main panels and Fuselok switches. InspectAPedia reports some Frank Adam panelboards used Zinsco-type QSF units. A surplus 'FAM CU-NFJ hardware kit' suggests late Frank Adam panelboards accepted FPE NFJ breakers (unverified).

Attribute	Value	Cl.	Sources
Status	Obsolete, rare	C	S151, S157 other
Era of manufacture	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1950, possibly to 1970); patents 1906-1965	C	same as above
Successor	No known successor; West-coast business became Zinsmeyer Co. (1929/30s) -> Zinsco (1943)	C	same as above
Branch breakers accepted	Fused switches (Fuselok, PULFUZSW, KLAMPSWFUZ); Zinsco-type QSF units in some Frank Adam panelboards; FPE NFJ breakers via kit CU-NFJ (surplus listing)	C	S157, S168 other

Breaker families associated: Zinsco / Sylvania QSF fusible panelboard switch
Key documents: S151 Zinsco; S157 Frank Adam Electrical Panels; S168 Frank Adams Breaker Parts & Accessories Catalog

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00001	**CU-NFJ**	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	—	discontinued; recertified/new-surplus

EDH-OTH-00001	CU-NFJ	Frank Adam	breaker-mounting-kit	DISCONTINUED; RECERTIF

Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)

OEM part number	CU-NFJ	C	S168 surplus
Description	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: FA · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

9.3 KINNEY — Kinney panelboards

FAM-OTH-004 · panelboard · markings: Kinney

Kinney (Elgin, IL) panelboards appear in older commercial buildings; breaker type and lineage unverified. Lead only.

Attribute	Value	Cl.	Sources
Status	Company reportedly still in Elgin IL; legacy breaker support possibly via Eaton vintage products (forum)	D	S173 forum

Key documents: S173 Kinney Panel (forum thread)

9.4 WADSWORTH — Wadsworth panelboards and breakers

FAM-OTH-002 · panelboard · aka Waddsworth · markings: Wadsworth, Wadsworth Electric Mfg. Co.

Wadsworth Electric (Covington KY) made residential and light commercial panels and plug-in breakers; 3-pole A-series up to at least 90 A suggests 3-phase panelboards. No mounting hardware part numbers found.

Attribute	Value	Cl.	Sources
Status	Obsolete; reconditioned/NOS Wadsworth A- and B-series breakers sold by surplus dealers; Connecticut Electric replacements mentioned	C	S172, S161 distributor
Era of manufacture	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)	D	S172 forum
Branch breakers accepted	Wadsworth A-series (A15NI, A20NI, A230NI, A240NI, A250NI, A260NI, A320, A360, A390) and B-series (B1515, B1530NI, B3020NI)	C	S172, S161 distributor

Breaker families associated: Wadsworth A / B series

Key documents: S161 Superbreakers Murray + Wadsworth collections (products.json); S172 Wadsworth breaker listings and forum discussion

10 Breaker Family Register

Breaker families referenced by the hardware entries. Mounting style and frame determine which connector and mounting kits apply.

BAB BRK-EAT-049 · Eaton lineage · aka QBHW, HQP, QPHW, BA, QBH, QBGF, QBHGF

Mounting	Bolt-on 1 in per pole; mounted on PRL1/PRL3 subchassis; KPRL1BAB connectors mount up to 12 poles	A	S14 p. 3; oem_spec
Replacement / successor	B10B/W10B/NQB BA -> BAB; NPLAB/NQP/Q10P/W10P QP -> HQP; W22B/Q22B QBH -> QBHW; W22P/Q22P QPH -> QPHW	A	S13 p. V12-T4-7; oem_spec
Used in	PRL1/PRL2, PRL3, NLAB		

BR BRK-EAT-051 · Eaton lineage · aka BW, BWH, BD, BQ, BQC

Mounting	1 in plug-on Type BR loadcenter breakers	A	S20 p. V12-T5-14; oem_spec
Used in	BR		

CA BRK-EAT-041 · Eaton lineage · aka CAH, HCA

Ampere range	100-225 A, 240 V; not recommended for motor loads	A	S14 p. 11 Table 15; oem_spec
Dimensions 3p	W 4.13 x H 6.50 x D 2.69 in; frame obsolete	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRL3, PRL4		

CA/CAH/HCA 225 A frame BRK-EAT-012 · Eaton lineage · aka CA, CAH, HCA

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-225 A	A	same as above
Voltage rating	240 Vac	A	same as above
Interrupting ratings	CA 10, CAH 22, HCA 42 kA	A	S5 p.11; oem_spec
Status	Legacy; not recommended for motor loads	A	S5 oem_spec
Used in	PRL3A, PRL4, PRL3, CDP		

Current-limiting FCL / LCL (and FDB+LFB) BRK-EAT-014 · Eaton lineage · aka FCL, LCL, LFB

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	FCL 100 A, LCL 400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FCL 15-100, LCL 125-400 A	A	same as above
Voltage rating	LCL 480 Vac	A	same as above
Interrupting ratings	LCL 200 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Cutler-Hammer CC / CCH / CHH BRK-EAT-067 · Eaton lineage · aka CC, CCH, CHH

Status	CC and CHH still listed as new breakers for PRL3a/PRL4B/PRL5P; CCH has no direct new breaker in the charts	A	S13 V12-T4-4/5/6; oem_spec
Used in	MP40, PH, EE, EP, NFB		

Cutler-Hammer CH / CHB BRK-EAT-066 · Eaton lineage · aka CH, CHB

Mounting	CH plug-on, CHB bolt-on	A	S13 V12-T4-4; oem_spec
Status	Current product (still used in PRL1a / PRL3a)	A	S13 oem_spec
Used in	CHP/CHB, PB, PH		

DA BRK-EAT-028 · Eaton lineage · aka Westinghouse DA

Ampere range	250-400 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C DK (KCDPDK)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

E BRK-EAT-036 · Eaton lineage · aka EA, EH, Westinghouse E-frame

Status	out of production; last manufactured 1974	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	E/EA: W 4.13 x H 6.00 x D 3.38 in; EH: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	Panelboard-only replacement breakers RE/REA (obsolete) -> REH (3-pole only)	A	S13 p. V12-T3-81; oem_spec
Used in	CDP, NAB		

EB BRK-EAT-020 · Eaton lineage · aka Westinghouse EB

Ampere range	15-100 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Still manufactured as a 'replacement circuit breaker' for exact replacement (frame listed obsolete; see cross-reference)	A	S13 p. V12-T3-10 note 1; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in (3-pole)	A	S13 p. V12-T3-10; oem_spec
Replacement / successor	Series C EHD; CDP retrofit kit KCDPEHD; same X space	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

ED BRK-EAT-040 · Eaton lineage · aka EDH, EDC, EDB, EDS

Ampere range	100-225 A (EDC 15-225 A); 240 V max	A	S14 p. 11 Table 15; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

EHB BRK-EAT-021 · Eaton lineage · aka Westinghouse EHB

Ampere range	15-100 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	same as above
Replacement / successor	Series C EHD (KCDPEHD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

EHD BRK-EAT-038 · Eaton lineage

Breaker frame	100 A frame (E-frame Series C)	A	S14 p. 11 Table 15; oem_spec
Ampere range	15-100 A	A	same as above
Interrupting ratings	1P 277 V 14 kA; 2/3P 240 V 18 kA, 480 V 14 kA	A	same as above
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

F BRK-EAT-037 · Eaton lineage · aka FA, HF, HFA, Westinghouse F-frame

Status	out of production; last manufactured 1974	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	F/HF: W 4.13 x H 9.38 x D 4.06 in; FA/HFA: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	RHF (F/HF), RHFA (FA/HFA), three-pole only	A	S13 p. V12-T3-81; V12-T4-4; oem_spec
Used in	CDP, NAB		

FB BRK-EAT-022 · Eaton lineage · aka Westinghouse FB

Ampere range	15-150 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S13 p. V12-T3-10, p. V12-T3-11; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	Series C FDB (KCDPFDB); PRL4B replacement FDB	A	S14, S13 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP, WEB, WF/WRP		

FD BRK-EAT-039 · Eaton lineage · aka FDB, HFD, FDC, FD-frame

Breaker frame	225 A F-frame Series C (FDB 15-225, FD/HFD/FDC 15-225)	A	S14 p. 11 Table 15; oem_spec
Interrupting ratings	FDB 480 V 14 kA; FD 25 kA; HFD 65 kA; FDC 100 kA at 480 V	A	same as above
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

GB BRK-EAT-050 · Eaton lineage · aka GHB, GHBS

Mounting	Bolt-on; PRL2 subchassis via KPRL2GHB; GB/GHB cannot be mixed on same subchassis as BAB/QBH	A	S14 p. 3; V12-T4-16 note 3; oem_spec
Used in	PRL1/PRL2, PRL3		

GHB family (480Y/277 bolt-on) BRK-EAT-003 · Eaton lineage · aka GB, GHB, GHQ, GHBS, HGHB, GHBGFEP, GHQRSP

Mounting	Bolt-on	A	S7 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-100 A	A	S7 Table 22.2-2; oem_spec
Voltage rating	277 V 1-pole, 480Y/277 Vac multi-pole; 125/250 Vdc	A	S7 oem_spec
Interrupting ratings	GHB 65 kA @240, 14 kA @480Y/277; HGHB 25 kA @277	A	same as above
Status	Current	B	S6, S7 oem_spec
Used in	PRL2A, PRL2X, PRL3A, PRL3X, PRL1/PRL2		

HFB BRK-EAT-023 · Eaton lineage · aka Westinghouse HFB

Ampere range	15-150 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured	A	S13 p. V12-T3-10; oem_spec
Dimensions 3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	Series C FD (KCDPFD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

JA BRK-EAT-026 · Eaton lineage · aka Westinghouse JA

Ampere range	70-225 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C KDB (KCDPKDB); when upgrading JA to Series C K-frame in panelboard, order TAD3 spacer kit	A	S14, S13 RP01400002E p. 13 Table 18; Vol12 Tab 3 JA note; oem_spec
Used in	CDP		

JB BRK-EAT-027 · Eaton lineage · aka Westinghouse JB

Ampere range	70-250 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JDB (KCDPJDB)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

JD BRK-EAT-042 · Eaton lineage · aka JDB, HJD, JDC

Ampere range	70-250 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 4.13 x H 10.00 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

KA BRK-EAT-024 · Eaton lineage · aka HKA, Westinghouse KA

Ampere range	70-225 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11 note 2; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	KA -> KD (KCDPKD); HKA -> HKD (KCDPHKD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KB BRK-EAT-025 · Eaton lineage · aka HKB, Westinghouse KB

Ampere range	70-250 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JD (KCDPJD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KD BRK-EAT-043 · Eaton lineage · aka DK, KDB, HKD, KDC, CKD, CHKD

Ampere range	KD/KDB/HKD/KDC 100-400 A; DK 250-400 A 240 V	A	S14 p. 11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Adapter	Requires TAD3 adapter/spacer kit when mounted onto existing LB-frame connectors or when upgrading HLB/LBB/JA in a panelboard	A	S14, S13 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Used in	CDP, PRLC, PRL4		

LA BRK-EAT-029 · Eaton lineage · aka HLA, LAB, Westinghouse LA

Ampere range	250-600 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame (HLA still in panelboard-only list)	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD); LAB -> LDB	A	S14, S13 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP		

LB BRK-EAT-030 · Eaton lineage · aka LBB, HLB, Westinghouse LB

Ampere range	LB 70-400 A; LBB/HLB 125-400 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	LB/HLB -> KD (KCDPKD); LBB -> KDB (KCDPKDB); Series C K-family requires TAD3 adapter kit when mounting on existing LB connectors	A	S14 RP01400002E p. 13 Table 18 and note; oem_spec
Used in	CDP		

LC BRK-EAT-031 · Eaton lineage · aka HLC, Westinghouse LC

Ampere range	300-600 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	replacement breaker still manufactured (LC obsolete per note 2)	A	S13 p. V12-T3-11; oem_spec
Dimensions 3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

LD BRK-EAT-044 · Eaton lineage · aka HLD, LDC, LDB, CLD

Ampere range	300-600 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 8.25 x H 10.75 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

MA BRK-EAT-032 · Eaton lineage · aka HMA, Westinghouse MA

Ampere range	125-800 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	MA obsolete; HMA replacement breaker	A	S13 p. V12-T3-12; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 4.06 in	A	same as above
Replacement / successor	Series C MDL (KCDPMDL)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MC BRK-EAT-033 · Eaton lineage · aka HMC, MCC, Westinghouse MC

Ampere range	400-800 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Replacement / successor	Series C MDL (KCDPMDL)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MDL BRK-EAT-045 · Eaton lineage · aka HMDL, CMDL

Ampere range	300-800 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 4.06 in	A	S13 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

NB BRK-EAT-034 · Eaton lineage · aka HNB, Westinghouse NB

Ampere range	700-1200 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 5.50 in	A	same as above
Replacement / successor	Series C ND (KCDPND)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

NC BRK-EAT-035 · Eaton lineage · aka HNC, Westinghouse NC

Ampere range	600-1200 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Replacement / successor	Series C ND (KCDPND)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Box depth	In MP40 panels only NC/HNC require 11.38 in deep box (standard 10.50 in)	A	S13 p. V12-T4-12 note 3; oem_spec
Used in	CDP		

ND BRK-EAT-046 · Eaton lineage · aka HND, NDC, CND

Ampere range	600-1200 A	A	S14 p. 11; oem_spec
Dimensions 3p	W 8.25 x H 16.00 x D 5.50 in	A	S13 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

Power Defense frame 2 (PDG2 / PDD2) BRK-EAT-015 · Eaton lineage · aka PDG2, PD2, PG2, PDG2xF, PDG2xG, PDG2xM, PDG2xP, PDD2xG

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	S6 oem_spec
Voltage rating	600 Vac class	C	S6 inference
Status	Current	A	S6 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frame 3 (PDG3 / PDF3 / PDD3) BRK-EAT-016 · Eaton lineage · aka PDG3, PD3, PG3, PF3, PDG3A, PDG3B, PDF3

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	400 A and 600 A frames	A	S1 p.32 Table 46; oem_spec
Poles	3	A	S1 oem_spec
Ampere range	up to 600 A	A	same as above
Status	Current	A	S6 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) BRK-EAT-017 · Eaton lineage · aka PDG4, PDG5, PG4, PF4, PG5, PF5

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	800 A (4) / 1200 A (5)	A	S1 p.34 Table 49; oem_spec
Poles	3	A	S1 oem_spec
Ampere range	300-1200 A	A	same as above
Status	Current	A	S6 oem_spec
Used in	PRL4X		

QUICKLAG bolt-on (BAB/QBHW family) BRK-EAT-001 · Eaton lineage · aka BA, BAB, QBH, QBHW, QBGF, QBHGF, QBGFEP, QBHGFEP, BABRP, BABRSP, BAB-D, BAB-C, QBCAF, QBHCAF

Mounting	Bolt-on (horizontal on PRL1a/1X branch connector assemblies; 100 A BAB/QBH mains also horizontal)	A	S7 p.22.1-1; oem_spec
Breaker frame	QUICKLAG 1 in per pole	C	S7 inference
Poles	1, 2, 3	A	S7 oem_spec
Ampere range	15-100 A	A	S7 Table 22.1-2; oem_spec
Voltage rating	120/240 Vac	A	S7 oem_spec
Interrupting ratings	BAB 10 kA; QBHW 22 kA at 240 Vac	A	S7 Table 22.1-2; oem_spec
Status	Current	B	S6, S7 oem_spec
Used in	PRL1A, PRL1X, PRL3A, PRL3X, PRL1/PRL2		

QUICKLAG plug-on (HQP/QPHW family) BRK-EAT-002 · Eaton lineage · aka HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP

Mounting	Plug-on (2C11642 connector assemblies)	A	S1 p.9; oem_spec
Poles	1, 2, 3	A	S7 oem_spec
Ampere range	15-100 A	A	same as above
Voltage rating	120/240 Vac	A	same as above
Interrupting ratings	HQP 10 kA; QPHW 22 kA	A	S7 Table 22.1-2; oem_spec
Status	Current	B	S6, S7 oem_spec
Used in	PRL1A, PRL1X		

RD BRK-EAT-047 · Eaton lineage · aka RG

Ampere range	1600/2000/2500 A	A	S13 p. V12-T3-12; oem_spec
Dimensions 3p	W 15.50 x H 16.00 x D 9.75 in	A	same as above
Replacement / successor	RD replaces PC, PCC and PB breakers for 2000 and 2500 A only	A	S13 p. V12-T3-12 note 1; oem_spec
Used in	PRLC, WF/WRP		

Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) BRK-EAT-005 · Eaton lineage · aka ED, EDB, EDS, EDH, EDC

Mounting	Bolt-on; single mount 175-225 A in PRL3a	A	S1 oem_spec
Breaker frame	225 A frame	A	S7 oem_spec
Poles	2, 3	A	S5 oem_spec
Ampere range	100-225 A	A	same as above
Voltage rating	240 Vac	A	same as above
Interrupting ratings	ED 65, EDH 100, EDC 200, EDB 22, EDS 42 kA @240 V	A	S5, S7 oem_spec
Status	Legacy	C	 inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL3, CDP		

Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) BRK-EAT-052 · Eaton lineage · aka FD, HFD, FDC, EHD, FDB, FDE, HFDE, FDCE, ED, EDH, EDC

Breaker frame	F-Frame	A	S116 pp.12-85..12-91; oem_spec
Ampere range	10-225 A	A	same as above

Series C F-frame (EHD/FDB/FD/HFD/FDC) BRK-EAT-004 · Eaton lineage · aka EHD, FDB, FD, HFD, FDC, FDE, HFDE, FDCE, LFD, FD/LFD

Mounting	Bolt-on to panel connectors	A	S1 oem_spec
Breaker frame	F-frame 100/150/225 A	A	S7 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	same as above
Voltage rating	FD/HFD/FDC 600 Vac; EHD 480 Vac; FDB 600 Vac	A	S5 p.11 Table 15; oem_spec
Interrupting ratings	EHD 18/14 kA; FD 65/25(35)/18; HFD 100/65/25; FDC 200/100/35 kA (240/480/600)	A	S5, S7 oem_spec
Status	Series C legacy; replaced in Xpert panels by Power Defense PDG2	B	S1, S6 inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL3, CDP, PRL5P		

Series C G-Frame (GD/GHC/GHB) BRK-EAT-059 · Eaton lineage · aka GD, GHC, GHB, GDB

Breaker frame	G-Frame	A	S116 p.12-243..12-248; oem_spec
Ampere range	15-100 A	A	same as above

Series C J-Frame (JD/HJD/JDC/JDB) BRK-EAT-053 · Eaton lineage · aka JD, HJD, JDC, JDB, JDB250

Breaker frame	J-Frame	A	S117 pp.12-87..12-91; oem_spec
Ampere range	70-250 A	A	same as above

Series C J-frame (JD/JDB/HJD/JDC) BRK-EAT-006 · Eaton lineage · aka JD, JDB, HJD, JDC, HJDDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	250 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	70-250 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	JD 65/35/18; HJD 100/65/25; JDC 200/100/35 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, CDP		

Series C K-Frame (KD/HKD/KDC/KDB) BRK-EAT-054 · Eaton lineage · aka KD, HKD, KDC, KDB, CKD, CHKD

Breaker frame	K-Frame	A	S116 p.12-113; oem_spec
Ampere range	70-400 A	A	same as above

Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) BRK-EAT-007 · Eaton lineage · aka DK, KD, KDB, HKD, KDC, CKD, CHKD, CKDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	400 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	100-400 A (DK 250-400)	A	same as above
Voltage rating	600 Vac (DK 240 Vac)	A	same as above
Interrupting ratings	KD 65/35/25; HKD 100/65/35; KDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, CDP		

Series C L-Frame (LD/HLD/LDC/LDB) BRK-EAT-055 · Eaton lineage · aka LD, HLD, LDC, LDB, HLDDC

Breaker frame	L-Frame	A	S118 V4-T2-188/190; oem_spec
Ampere range	300-600 A	A	same as above

Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) BRK-EAT-008 · Eaton lineage · aka LD, LDB, HLD, LDC, CLD, CHLD, CLDC, LC, LCY, HLC, LCC, HLCC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	600 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LD 65/35/25; HLD 100/65/35; LDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Series C M-Frame (MDL/HMDL/MDLB) BRK-EAT-056 · Eaton lineage · aka MDL, HMDL, MDLB, HMDLB

Breaker frame	M-Frame	A	S116 p.12-140; oem_spec
Ampere range	up to 800 A	A	same as above

Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) BRK-EAT-010 · Eaton lineage · aka MDL, HMDL, CMDL, CHMDL, MC, MCY, HMC, MCC, HMCC, MDS, MDSC, MA, HMA

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	800 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	MDL 65/50/25; HMDL 100/65/35 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL4, CDP, PRL5P		

Series C N-Frame (ND/HND/NDC/NB) BRK-EAT-057 · Eaton lineage · aka ND, HND, NDC, NB, NBDC

Breaker frame	N-Frame	A	S116 p.12-162; oem_spec
Ampere range	up to 1200 A	A	same as above

Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) BRK-EAT-011 · Eaton lineage · aka ND, HND, NDC, CND, CHND, CNDC, NGS, NGH, NGC, NHH, NC, NCY, HNC, NB, HNB

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	1200 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	600-1200 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	ND 65/35/25; HND 100/65/35; NDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL4, CDP, PRL5P		

Series C R-Frame (RD/RDC) BRK-EAT-058 · Eaton lineage · aka RD, RDC

Breaker frame	R-Frame	A	S116 p.12-181; oem_spec
Ampere range	800-2500 A	A	same as above

Series G E-frame (EGB/EGS/EGH) BRK-EAT-018 · Eaton lineage · aka EGB, EGS, EGH, EGE

Mounting	Bolt-on	A	S7 oem_spec
Breaker frame	125 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-125 A	A	same as above
Voltage rating	480 Vac	A	same as above
Interrupting ratings	EGB 25/18; EGS 85/35; EGH 100/65 kA (240/480)	A	S7 Table 22.3-9; oem_spec
Status	Current	C	inference
Used in	PRL3E		

Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) BRK-EAT-060 · Eaton lineage · aka EGB, EGE, EGS, EGH, EGC, EG

Breaker frame	EG-Frame	A	S119 V4-T2-16..27; oem_spec
Ampere range	15-125 A (160 A IEC)	A	same as above

Series G JG-Frame (JGE/JGS/JGH/JGC) BRK-EAT-061 · Eaton lineage · aka JGE, JGS, JGH, JGC, JG

Breaker frame	JG-Frame	A	S116 p.12-28; oem_spec
Ampere range	63-250 A	A	same as above

Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH BRK-EAT-009 · Eaton lineage · aka LGE, LGS, LGH, LGC, LGU, LHH

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	600 A frame (LHH 400 A)	A	S7 oem_spec
Poles	3	A	S1 oem_spec
Ampere range	up to 600 A	A	S7 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LGE 65/35/18; LGH 100/65/35; LGC/LGU 200 kA @240	A	same as above
Status	Current/legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL4X		

Series G LG-Frame (LGE/LGS/LGH/LGC) BRK-EAT-062 · Eaton lineage · aka LGE, LGS, LGH, LGC, LG

Breaker frame	LG-Frame	A	S116 p.12-37; oem_spec
Ampere range	250-630 A (600 A UL/CSA)	A	same as above

Series G NG-Frame BRK-EAT-063 · Eaton lineage · aka NGS, NGH, NGC, NG

Breaker frame	NG-Frame	A	S116 p.12-48; oem_spec
Ampere range	up to 1250/1600 A	A	same as above

TRI-PAC integrally fused (FB-P, LA-P, NB-P) BRK-EAT-013 · Eaton lineage · aka FB-P, LA-P, NB-P

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	FB-P 100 A, LA-P 400 A, NB-P 800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	15-800 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	200 kA	A	S5 p.11; oem_spec
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Tri-Pac BRK-EAT-048 · Eaton lineage · aka FB-P, LA-P, NB-P, TRI-PAC

Ampere range	FB-P 15-100 A; LA-P 70-400 A; NB-P 300-800 A; 200 kA at 600 V	A	S14 p. 11 Table 15; oem_spec
Used in	CDP, PRL4		

Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) BRK-EAT-065 · Eaton lineage · aka AB De-ion, E frame, EB, EHB

Ampere range	15-800 A (CDP 1957)	A	S261 oem_spec
Voltage rating	Up to 600 V AC / 250 V DC	A	same as above
Used in	CDP, NAB, MP40, NFB		

Westinghouse Quicklag (QC / QL / QP) lighting breakers BRK-EAT-064 · Eaton lineage · aka Quicklag, QC, QL, QP

Mounting	Plug-in (Quicklag in NLAB); QC listed for Westinghouse NLAB, QL for Cutler-Hammer NLAB, QP for NPLAB/NQP	A	S243, S13 V12-T4-4, V12-T4-7; oem_spec
Status	Out of production; NLAB connectors not available	A	S13 oem_spec
Used in	NLAB		

Westinghouse pre-Series C industrial MCCBs BRK-EAT-019 · Eaton lineage · aka EB, EHB, FB, HFB, KA, HKA, KB, HKB, JA, JB, DA, LA, HLA, LB, LBB, HLB, LC, HLC, MA, HMA, MC, NB, HNB, NC, HNC

Mounting	Bolt-on to CDP chassis connectors	A	S5 oem_spec
Breaker frame	Various	A	same as above
Ampere range	15-1200 A	A	S5 p.13 Table 18; oem_spec
Status	Obsolete; Eaton cross-references each to a Series C retrofit kit using same X space	A	S5 p.13; oem_spec
Used in	CDP		

Fusematic XF / XM / XKL / XJL BRK-FPE-009 · Federal Pacific Electric · aka Fusematic, XF, XM, XKL, XJL

Mounting	bolt-on	C	S141 distributor
Ampere range	to 225 A (XJL225 limiter)	C	same as above
Voltage rating	600 VAC	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	FPE-SWBD		

NA / NC (Stab-Lok plug-in) BRK-FPE-002 · Federal Pacific Electric · aka NA (thick, 1 in/pole), NC (thin), Stab-Lok

Mounting	plug-in Stab-Lok	C	S141, S155 distributor
Ampere range	15-100 A	C	same as above
Voltage rating	120/240 VAC	C	same as above
Interrupting ratings	10 kA	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIF series (e.g., UBIF15N = NA115, UBIF20N = NA120, UBIF0230N = NC230), 10 kAIC ETL	C	S155, S141 distributor
Used in	NA1B		

NB (Stab-Lok bolt-on) BRK-FPE-001 · Federal Pacific Electric · aka NB Stab-Lok, UBIF...NB (Connecticut Electric replacement)

Mounting	bolt-on (NBLP panelboards)	C	S141, S149 distributor
Ampere range	15-100 A (e.g., NB100 2P 100 A)	C	same as above
Voltage rating	120/240 VAC	C	same as above
Interrupting ratings	10 kA (listing)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	NBLP		

NE / NEF / NEG / HEF / HEG (N-frame 100 A class) BRK-FPE-003 · Federal Pacific Electric · aka NE, NEF, NEG, HEF, HEG, NES (stab), NEF4.., NEF6..

Mounting	bolt-on; NES variants stab-type	C	S141, S138, S160 distributor
Breaker frame	NE frame (same physical size for NE/NEF per JRL Electric explainer)	C	same as above
Ampere range	15-100 A	C	same as above
Voltage rating	NE: 240 VAC/250 VDC; NEF: 480 VAC (2-3P) / 277 V (1P); HEF/HEG: 600 VAC	C	same as above
Interrupting ratings	NE 18 kA@240 (listing); NEF 14 kA@480; HEF 25 kA@480; HEF213020 1P 22 kA@277	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	Twin kits: KCDP1C (CDP), KBDP1C (BDP), NDPNE (NDP), NAIB-NEF / KCDP-1A (NA1B/NH1B)	C	S138, S140, S142 distributor
Used in	CDP, BDP, NDP, NA1B		

NEJ / NEJH / HEJ (N-frame 225 A class) BRK-FPE-004 · Federal Pacific Electric · aka NEJ, NEJH, HEJ

Mounting	bolt-on	C	S141, S138, S143 distributor
Ampere range	to 225 A (NEJ233200, NEJH223225, HEJ222200)	C	same as above
Voltage rating	240 V (NEJ) / higher-IC and 600 V variants (H-prefix)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP2C (CDP), KBDP2C (BDP), NDPNEJ (NDP)	C	S138, S141, S143 distributor
Used in	CDP, BDP, NDP		

NF / NFJ / HFJ / NFS (N-frame 225 A class) BRK-FPE-005 · Federal Pacific Electric · aka NF, NFJ, HFJ, NFS (stab-in)

Mounting	bolt-on; NFS stab-in	C	S141, S138 distributor
Ampere range	15-225 A	C	same as above
Voltage rating	600 VAC	C	same as above
Interrupting ratings	NFJ 18 kA@480 (listing)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP3C / NFJ1K (CDP); NFJ3K (BDP-style, OEM equivalent not stated)	C	S138, S140 distributor
Used in	CDP		

NJL / HJL / NJ / NJJ (N-frame 400 A class) BRK-FPE-006 · Federal Pacific Electric · aka NJL, HJL, NJ, NJJ, XJL (current limiter)

Mounting	bolt-on	C	S141, S138 distributor
Ampere range	to 400 A	C	same as above
Voltage rating	600 VAC	C	same as above
Interrupting ratings	NJ 30 kA@480; HJL 22 kA@600; NJJ 22 kA (listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP4C / NJL1K (CDP); KBDP4C / NJL3K (BDP)	C	S138, S141 distributor
Used in	CDP, BDP, FPE-SWBD		

NM / HM / NN / NP / NK (large N-frames) BRK-FPE-007 · Federal Pacific Electric · aka NM, HNM, HM, NN (switch), NP, NK

Mounting	bolt-on	C	S141, S140 distributor
Ampere range	NM 400-800 A (trip units NM031400-NM031800); NN 1200 A switch; NP to 1600 A	C	same as above
Voltage rating	600 VAC	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Kits	KCDP5C (CDP, NM/NN) and KBDP5C (BDP, NM/HNM)	C	same as above
Lugs	NM34 (1) #1/0-600 kcmil 125-300 A; NM36 (2) 3/0-600 kcmil 350-600 A; NM38 (3) 250-500 kcmil 700-800 A; N32 lug kit for NN	C	S140 surplus
Used in	CDP, BDP, FPE-SWBD		

QMQB fusible panelboard switch BRK-FPE-008 · Federal Pacific Electric · aka QMQB

Mounting	bolt-on fusible switch unit (FDP)	C	S141 distributor
Ampere range	30-1200 A	C	same as above
Voltage rating	240 V (..32..) / 600 V (..36..)	C	same as above
Interrupting ratings	200 kA with class R/J/K/L fuses	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	FDP		

E150 line (TEB, TED, THED, TEC) BRK-GEA-017 · GE / ABB lineage · aka E-150, E150, TEB, TED, THED, TEC, THLC1, TB1

Breaker frame	E150 (150 A)	A	S130 p. 6-34 and 6-102; oem_spec
Ampere range	10-150 A	A	same as above

F225 line (TFJ, TFK, THFK, TFC) BRK-GEA-018 · GE / ABB lineage · aka F225, TFJ, TFK, THFK, TFC, THLC2

Breaker frame	F225 (225/250 A)	A	S130 p. 6-101 to 6-102; oem_spec

GE / Trumbull Type AT and ATB breakers BRK-GEA-030 · GE / ABB lineage · aka AT, ATB

Ampere range	AT 15-50 A branch in NAB/ABH; mains 50 A AT, 100 A ATB, 200 A AT in NLAB	A	S259 oem_spec
Used in	NHB, NLAB		

GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) BRK-GEA-031 · GE / ABB lineage · aka TB1, TB4, TB6, TB8

Mounting	Bolted with DPK (twin) / SPK (single) strap kits in CCB, QMR and AV1/AV2	C	S251 surplus_listing
Used in	CCB-QMR, AV-LINE		

GE TQ / TQL / TQC / TQB / TBQ lighting breakers BRK-GEA-029 · GE / ABB lineage · aka TQ, TQL, TQC, TQB, TBQ

Mounting	TQL: plug-in, quick-make quick-break, thermal-magnetic (first plug-in QMQB breaker per Trumbull 1951-52); TQ in NLAB (formerly NTQ)	A	S259, S268 oem_spec
Ampere range	Standard ratings 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100 A (GEG-13610B); TQL 15-50 A 1-pole and common-trip 2/3-pole (1957)	A	S260, S261 oem_spec
Used in	NLAB		

J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) BRK-GEA-019 · GE / ABB lineage · aka J400, J600, TJJ, TJK, THJK, TJD, TJC, TB4, TLB4, THLC4

Breaker frame	J400 / J600	A	S130 p. 6-36 to 6-37 and 6-102; oem_spec
Ampere range	200-600 A	A	same as above

K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) BRK-GEA-020 · GE / ABB lineage · aka K1200, TKM, TKMA, THKMA, TK4V, TB6, TB8

Breaker frame	K1200	A	S130, S132 p. 6-102; oem_spec
Ampere range	300-1200 A	A	same as above

Record Plus FB (FBV/FBN/FBH/FBL) BRK-GEA-010 · GE / ABB lineage · aka FB

Mounting	bolt-on	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

Record Plus FB 100 BRK-GEA-025 · GE / ABB lineage · aka FB100, FBN, FBV, FBH

Breaker frame	FB 100	A	S130 p. 6-68 to 6-73; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FC (FCS/FCV/FCN/FCH/FCL) BRK-GEA-011 · GE / ABB lineage · aka FC, FD

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 100 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FC 100 BRK-GEA-026 · GE / ABB lineage · aka FC100

Breaker frame	FC 100	A	S130 p. 6-74 to 6-78; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FE 250 BRK-GEA-027 · GE / ABB lineage · aka FE250

Breaker frame	FE 250	A	S130 p. 6-79 to 6-81; oem_spec
Ampere range	25-250 A	A	same as above

Record Plus FG (FGV/FGN/FGH/FGL/FGP) BRK-GEA-012 · GE / ABB lineage · aka FG

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 600 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FG 600 BRK-GEA-028 · GE / ABB lineage · aka FG600

Breaker frame	FG 600	A	S130 p. 6-83 to 6-88; oem_spec
Ampere range	100-600 A	A	same as above

Spectra RMS SE150 BRK-GEA-021 · GE / ABB lineage · aka SE150, SED, SEH, SEL, SEP, SE1

Breaker frame	SE150	A	S130 p. 6-44, 6-103; oem_spec
Ampere range	15-150 A	A	same as above

Spectra RMS SF250 BRK-GEA-022 · GE / ABB lineage · aka SF250, SFH, SFL, SFP

Breaker frame	SF250	A	S130 p. 6-46, 6-103; oem_spec
Ampere range	70-250 A	A	same as above

Spectra RMS SG600 BRK-GEA-023 · GE / ABB lineage · aka SG600, SG400, SGD, SGH, SGL, SGP

Breaker frame	SG600 (400/600 A)	A	S130 p. 6-48, 6-103; oem_spec
Ampere range	125-600 A	A	same as above

Spectra RMS SK1200 BRK-GEA-024 · GE / ABB lineage · aka SK1200, SK800, SKH, SKL, SKP, SKD

Breaker frame	SK1200	A	S130 p. 6-51, 6-103; oem_spec
Ampere range	300-1200 A	A	same as above

Spectra SE (SEDA/SEHA/SELA/SEPA) BRK-GEA-006 · GE / ABB lineage · aka SE-frame, Spectra RMS E

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

Spectra SF (SFHA/SFLA/SFPA) BRK-GEA-007 · GE / ABB lineage · aka SF-frame

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	70-250 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

Spectra SG (SGDA/SGHA/SGLA/SGPA) BRK-GEA-008 · GE / ABB lineage · aka SG-frame

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	125-600 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, SCP-PLUS		

Spectra SK (SKHA/SKLA/SKPA) BRK-GEA-009 · GE / ABB lineage · aka K, SK-frame

Mounting	single-mounted / center-mounted	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TEB / TED / THED / TED4 / TED6 BRK-GEA-005 · GE / ABB lineage · aka E-frame, EB

Mounting	bolt-on	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR, NHB		

TEY / TEYF / TEYD / TEYH / TEYL BRK-GEA-003 · GE / ABB lineage · aka E-frame TEY, EY

Mounting	bolt-on (AE/AEP; Spectra double-branch; ReliaGear neXT)	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A (110/125 A TEYD/H/L in AS)	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

TFJ / TFK / THFK / TFL BRK-GEA-013 · GE / ABB lineage · aka F-frame, FJ

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 225 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, CCB-QMR		

THQB / THHQB / TXQB BRK-GEA-001 · GE / ABB lineage · aka Q-line bolt-on, QB

Mounting	bolt-on (A-Series AQ; Spectra double-branch)	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A, 1-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

THQL / THHQL / TXQL BRK-GEA-002 · GE / ABB lineage · aka Q-line plug-in

Mounting	plug-in (A-Series AL)	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES		

TJD / TJJ / TJK / THJK BRK-GEA-014 · GE / ABB lineage · aka J-frame, JK

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	250-600 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TKM / THKM BRK-GEA-015 · GE / ABB lineage · aka K-frame, KM

Mounting	single-mounted	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	SPECTRA-PP, CCB-QMR		

TQD / THQD BRK-GEA-004 · GE / ABB lineage · aka Q-frame QD

Mounting	bolt-on via strap kits / branch bases	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	100-225 A, 2-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

TQD / THQD (Q-Line 225A) BRK-GEA-016 · GE / ABB lineage · aka TQD, THQD, TQC 70-100A

Breaker frame	Q-Line 225 A	A	S130 p. 6-102; oem_spec

Wadsworth A / B series BRK-OTH-001 · Other manufacturers · aka A15NI, A360, B1515

Mounting	plug-in (assumed)	C	S172, S161 distributor
Ampere range	15-90 A	C	same as above
Voltage rating	120/240 V (3-pole versions exist)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	WADSWORTH		

3VA41 BRK-SIE-004 · Siemens lineage · aka 3VA41

Breaker frame	1in per pole (1-pole 1in wide; 2P 2in; 3P 3in)	A	S97 pp.11-18, 11-19; oem_spec
Ampere range	15-125A	A	S97 p.11-18; oem_spec
Interrupting ratings	SEAB/MEAB/HEAB: 25/35/65kA @277V-480Y/277V	A	S97 pp.11-18, 11-19; oem_spec
Used in	RP1, P2, P3, P4, P5, SB		

3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)

BRK-SIE-012 · Siemens lineage · aka 3VA52, 3VA53, 3VA54, 3VA61, 3VA62, 3VA63, 3VA64

Used in	RP1, P2, P3, P4, P5, SB		

BL BRK-SIE-001 · Siemens lineage · aka BL, BLH, HBL, BLF, BLE, BAF, BT twin (B1515/B2020)

Mounting	bolt-on	A	S97 p.11-16; oem_spec
Breaker frame	1in per pole bolt-on	A	same as above
Ampere range	15-100A	A	same as above
Voltage rating	120/240V	A	same as above
Interrupting ratings	BL 10kA, BLH 22kA, HBL 65kA	A	same as above
Used in	RP1, P1, S1/S2, P2, P3, P4, P5, SB		

BQ / BQH / HBQ (bolt-on, legacy) BRK-SIE-015 · Siemens lineage · aka BQ, BQH, HBQ, HB

Status	unknown	D	S97 inference
Used in	CDP6, SB		

BQ / BQH / HBQ / BQXD bolt-on BRK-SIE-016 · Siemens lineage · aka BQ, BQH, HBQ, BQHF, BQE, BQF, BL, BLH, HBL, BQXD

Ampere range	15-125 A	A	S135 p. 7-39, 7-153; oem_spec

BQD BRK-SIE-002 · Siemens lineage · aka BQD, BQD6

Mounting	bolt-on, 1in per pole	A	S97 p.11-16; oem_spec
Ampere range	15-100A	A	same as above
Voltage rating	480Y/277V	A	same as above
Interrupting ratings	14kA @480Y/277V, 65kA @240V	A	same as above
Used in	RP1, P1, P2, P3, P4, P5, SB		

BQD / CQD (incl. BQD6, CQD6) BRK-SIE-017 · Siemens lineage · aka BQD, CQD, BQD6, CQD6

Ampere range	15-100 A	A	S135 p. 7-153; oem_spec
Note	SPEEDFAX p. 7-153 says the lugs are integral (line and load for BQD; line side for CQD/CQD6, load side for both). No separate lug kit is listed.	A	same as above

ED (ED2/ED4/ED6/HED4/HHED6) and CED6 BRK-SIE-005 · Siemens lineage · aka ED2, ED4, ED6, HED4, HED6, HHED6, CED6, E2, E4, E6, HE4, HE6

Ampere range	15-125A	A	S97 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P2, P4, P5, SB, CDP6		

FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) BRK-SIE-008 · Siemens lineage · aka FXD6, FD6, HFD6, HFXD6, HHFD6, HHFXD6, CFD6

Ampere range	70-250A	A	S97 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' BRK-SIE-003 · Siemens lineage · aka xGB, NGB, HGB, LGB, xGB2, NGB2, HGB2, LGB2

Ampere range	15-125A	A	S97 p.11-16; oem_spec
Voltage rating	480Y/277V; 600Y/347V 14kA	A	same as above
Interrupting ratings	NGB 25kA, HGB 35kA, LGB 65kA @480Y/277V; 100kA @240V	A	same as above
Used in	RP1, P2, P3, P4, P5		

ITE BQ / BQH / HBQ bolt-on (Canada) BRK-SIE-031 · Siemens lineage · aka BQ, BQH, HBQ

Mounting	Bolt-on	C	S247 distributor
Used in	NLAB		

ITE EE / EH / EF / HE breakers BRK-SIE-032 · Siemens lineage · aka EE, EH, EF, HE

Ampere range	150 A frame (kit max)	C	S251 surplus_listing
Used in	CDP6		

ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers BRK-SIE-033 · Siemens lineage · aka FJ3, JJ3, JD3, JL3, HJ3

Ampere range	FJ3 225 A; J-frame 400 A (kit max)	C	S251 surplus_listing
Used in	CDP6, CDP-ITE		

JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) BRK-SIE-009 · Siemens lineage · aka JXD2, JXD6, JD6, HJD6, HJXD6, HHJXD6, CJD6, SJD6, SHJD6, SCJD6

Ampere range	200-400A	A	S97 p.11-95; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) BRK-SIE-010 · Siemens lineage · aka LXD6, LD6, HLD6, HLXD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6

Ampere range	250-600A	A	S97 p.11-95; oem_spec
Used in	P4, P5, SB, CDP6		

MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 BRK-SIE-011 · Siemens lineage · aka MXD6, MD6, HMD6, CMD6, SMD6, SHMD6, SCMD6, NXD6, ND6, HND6, CND6, SND6, SHND6, SCND6, LMD6, HLMD6

Ampere range	MD to 800A, ND to 1200A (Frame ratings from strap kit table max-amp column)	B	S97 inference
Used in	P5, SB, CDP6		

NEB / HEB BRK-SIE-014 · Siemens lineage · aka NEB, HEB

Status	legacy (replacement parts only)	B	S97 p.11-53; inference
Used in	P3, P4, P5		

NGG / HGG / LGG (G-frame bolt-on/lug) BRK-SIE-018 · Siemens lineage · aka NGG, HGG, LGG

Ampere range	15-125 A	A	S135 p. 7-153; oem_spec

Pushmatic (Bulldog / ITE) BRK-SIE-030 · Siemens lineage · aka P-series, P1515 (condensed dual 15 A), UBIP (Connecticut Electric replacement)

Mounting	bolt-on push-button	C	S176, S155 distributor
Ampere range	15-? A (UBIP replacements 15-40+ A)	C	same as above
Voltage rating	120 / 120/240 V	C	same as above
Interrupting ratings	10 kA (UBIP)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIP115, UBIP130, UBIP240 etc. classified for Pushmatic and Bulldog loadcenters	C	S155 distributor
Used in	PUSHMATIC		

QJ2 / QJH2 / QJ2-H / HQJ2H BRK-SIE-006 · Siemens lineage · aka QJ2, QJH2, QJ2-H, HQJ2H

Ampere range	60-225A	A	S100 p.10-18; oem_spec
Status	discontinued; replaced by QR (QJ kits not available, use QR)	A	S97 p.11-53; oem_spec
Used in	P1, P2, P3, CDP6		

QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) BRK-SIE-020 · Siemens lineage · aka QJ2, QJH2, QJ2H, HQJ2H

Ampere range	60-225 A (from a superbreakers.com search snippet; not OEM-verified)	C	S137 distributor

QR2 / QRH2 / HQR2 (250A frame) BRK-SIE-019 · Siemens lineage · aka QR2, QRH2, HQR2, QR2H, HQR2H

Ampere range	100-250 A	A	S135 p. 7-40; oem_spec
Voltage rating	240 Vac	A	same as above

QR2 / QRH2 / HQR2 / HQR2H BRK-SIE-007 · Siemens lineage · aka QR, QR2, QRH2, HQR2, HQR2H

Ampere range	100-225A (QR rated 250A frame but limited to 225A in panelboard)	A	S97 pp.11-94, 11-96; oem_spec
Voltage rating	240V max	A	S102 oem_spec
Used in	RP1, P1, P2, P3, P4, P5, SB		

Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) BRK-SIE-021 · Siemens lineage · aka ED2, ED4, ED6, HED4, HHED6, CED6, ED

Ampere range	15-125 A	A	S135 ED pages; p. 7-154; oem_spec

Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) BRK-SIE-022 · Siemens lineage · aka FD6, FXD6, HFD6, HFXD6, HHFD6, HHFXD6, CFD6

Ampere range	70-250 A	A	S135 FD pages; p. 7-154; oem_spec

Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) BRK-SIE-023 · Siemens lineage · aka JD6, JXD2, JXD6, HJD6, HJXD6, HHJD6, HHJXD6, SJD6-B, SHJD6-B, SCJD6-B, CJD6

Ampere range	200-400 A	A	S135 p. 7-154; oem_spec

Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) BRK-SIE-024 · Siemens lineage · aka LD6, LXD6, HLD6, HLXD6, HHLD6, HHLXD6, SLD6-B, SHLD6-B, SCLD6-B, CLD6

Ampere range	250-600 A	A	S135 p. 7-154; oem_spec

Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) BRK-SIE-025 · Siemens lineage · aka LMD6, LMXD6, HLMD6, HLMXD6

Ampere range	500-800 A	A	S135 p. 7-154, 7-165; oem_spec

Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) BRK-SIE-026 · Siemens lineage · aka MD6, MXD6, HMD6, HMXD6, SMD6-B, SHMD6-B, SCMD6-B, CMD6

Ampere range	500-800 A	A	S135 p. 7-154; oem_spec

Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) BRK-SIE-027 · Siemens lineage · aka ND6, NXD6, HND6, HNXD6, SND6-B, SHND6-B, CND6, SCND6-B

Ampere range	800-1200 A	A	S135 p. 7-154; oem_spec

Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) BRK-SIE-028 · Siemens lineage · aka PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, CPD6

Ampere range	1200-1600 A	A	S135 p. 7-154; oem_spec

Sentron RD (RD6, RXD6, HRD6, HRXD6) BRK-SIE-029 · Siemens lineage · aka RD6, RXD6, HRD6, HRXD6

Ampere range	1600-2000 A	A	S135 p. 7-154 to 7-155; oem_spec

Sentron VL (DG, FG, JG, LG, MG, NG) BRK-SIE-013 · Siemens lineage · aka DG, FG, JG, LG, MG, NG, NF/HF/LF, NJ/HJ/LJ, NL/HL/LL, NM/HM/LM

Used in	P4, P5		

EDB / EGB / EJB (E-frame bolt-on) BRK-SQD-030 · Square D / Schneider Electric · aka ED, EG, EJ, EDB EPD

Mounting	bolt-on to NF branch connectors; EDB 3P 125 A can be back-fed as main with NFEDBS	A	S177 p. 9-31, 9-32; oem_spec
Poles	1, 2, 3	A	S177 p. 9-32; oem_spec
Ampere range	15-70 A (1P), 15-125 A (2P/3P)	A	same as above
Voltage rating	480Y/277 Vac (US); 600Y/347 Vac versions via se.com/ca	A	same as above
Interrupting ratings	EDB 18 kA, EGB 35 kA, EJB 65 kA @ 480Y/277 V	A	same as above
Status	current	A	S177 oem_spec
Used in	NF		

EH / EHB BRK-SQD-031 · Square D / Schneider Electric · aka EH plug-on, EHB bolt-on

Mounting	EH plug-on; EHB bolt-on	A	S236 oem_spec
Status	obsolete / no longer available	C	S240 oem_spec
Used in	NEHB		

FA / FH (I-Line) BRK-SQD-001 · Square D / Schneider Electric · aka FA, FH, FY, FA 240V, FA 480V

Mounting	I-Line plug-on (bolt-on version factory-only: 3rd character 'B')	A	S27, S26, S37 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	100 A	A	same as above
Poles	1 (277 V), 2, 3	A	same as above
Ampere range	15-100 A	A	same as above
Voltage rating	240/480/600 V	A	same as above
Interrupting ratings	FA 240V 10k@240; FA 480V 25k@240/18k@480; FH 65k@240/25k@480/18k@600	A	same as above
Group mount height	1.5 in. (1-pole); 3 in. (multi-pole) in QED-2 I-Line (Column alignment from text extraction; verify visually)	B	S26 p. 22; oem_spec
Bolt on	Bolt-on construction available only for FA/FH, LA/LH, FY, QB, QD, QG, Q4 (factory order; bus clamps torque 20 lb-in / 3 N-m)	A	S37 oem_spec
Used in	QED-2, I-LINE		

FI frame (legacy) BRK-SQD-038 · Square D / Schneider Electric · aka FI

Breaker frame	F (100 A)	A	S212 oem_spec
Used in	NF		

H-frame HD/HG/HJ/HL/HR (I-Line) BRK-SQD-002 · Square D / Schneider Electric · aka HD, HG, HJ, HL, HR, PowerPact H

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	150 A	A	same as above
Poles	2, 3 (HR 3)	A	same as above
Ampere range	15-150 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	HD 25k@240/18k@480; HG 65/35; HJ 100/65; HL 125/100; HR 200/200	A	same as above
Group mount height	4.5 in. (2- and 3-pole)	A	S26 p. 22; oem_spec
Class	Class 611	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

I-Limiter FI / KI / LI (I-Line) BRK-SQD-007 · Square D / Schneider Electric · aka FI, KI, LI, I-Limiter

Mounting	I-Line plug-on	A	S26 p. 22; oem_spec
Breaker frame	FI 100 A; KI 250 A; LI 600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FI 20-100 A; KI 110-250 A; LI 300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	200k@240/200k@480/100k@600	A	same as above
Group mount height	FI 4.5 in.; KI 4.5 in.; LI 7.5 in.	A	same as above
Swap fillers	Replacing an LI with a KI requires (1) HLW4BL plus HNM1BL and HLW1BL fillers	A	S34 oem_spec
Used in	QED-2, I-LINE		

J-frame JD/JG/JJ/JL/JR (I-Line) BRK-SQD-004 · Square D / Schneider Electric · aka JD, JG, JJ, JL, JR, PowerPact J

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	250 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	150-250 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	JD 25k@240/18k@480; JG 65/35; JJ 100/65; JL 125/100; JR 200/200	A	same as above
Group mount height	4.5 in.	A	S26 p. 22; oem_spec
Class	Class 611	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

KI / KC frame (legacy) BRK-SQD-037 · Square D / Schneider Electric · aka KI, KC, N250MKC

Breaker frame	K (225/250 A)	A	S188 oem_spec
Status	legacy (kits dated 2008-2009)	C	S188 inference
Used in	NQ, NF, NQOD		

LA / LH (I-Line) BRK-SQD-005 · Square D / Schneider Electric · aka LA, LH, LAL, LHL

Mounting	I-Line plug-on (bolt-on factory option)	A	S27 p. 8; oem_spec
Breaker frame	400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	125-400 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LA 42k@240/30k@480/22k@600; LH 65/35/25	A	same as above
Group mount height	6 in. (2- and 3-pole)	A	S26 p. 22; oem_spec
Class	Class 660	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

LA / LH (L-frame, legacy thermal-magnetic) BRK-SQD-035 · Square D / Schneider Electric · aka LAL, LHL, LAL36400MB

Mounting	NQMB4LA / N400M; order short-handle breaker (e.g. LAL36400MB)	A	S177 p. 9-9 fn; oem_spec
Breaker frame	LA/LH 125-400 A	A	S177 p. 9-9; oem_spec
Used in	NQ, NF, I-LINE		

LC (I-Line, 600 A) BRK-SQD-006 · Square D / Schneider Electric · aka LC

Mounting	I-Line plug-on	A	S26 p. 22; oem_spec
Breaker frame	600 A	A	same as above
Poles	3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	100k@240/65k@480/35k@600	A	same as above
Group mount height	7.5 in.	A	same as above
Used in	QED-2		

M-frame MG/MJ (I-Line) BRK-SQD-009 · Square D / Schneider Electric · aka MG, MJ, PowerPact M

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	MG 65k@240/35k@480/18k@600; MJ 100/65/25	A	same as above
Group mount height	9 in. (per QED-2 table, shared with P-frame row) (Column alignment in text extraction ambiguous)	C	S26 p. 22; oem_spec
Class	Class 612	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

P-frame PG/PJ/PK/PL (I-Line) BRK-SQD-010 · Square D / Schneider Electric · aka PG, PJ, PK, PL, PG-C, PJ-C, PK-C, PL-C, PowerPact P

Mounting	I-Line plug-on	A	S27, S26 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	1200 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-1200 A (catalog 600-1200 A in 2110CT9701)	A	same as above
Voltage rating	600 V (PL 480 V)	A	same as above
Interrupting ratings	PG 65k@240/35k@480; PJ 100/65; PK 65/50/50 (Canada); PL 125/100	A	same as above
Group mount height	9 in. (2-/3-pole)	A	S26 p. 22; oem_spec
Note 100pct	Cannot group mount 100% rated 1000 A and 1200 A P-frame; use R-frame	A	same as above
Used in	QED-2, I-LINE		

PowerPacT H-frame (HD/HG/HJ/HL/HR) BRK-SQD-033 · Square D / Schneider Electric · aka HDL, HGL, HJL, HLL, HRL

Mounting	NQ/NF vertical main or sub-feed via adapter kit; terminal kit S37444 with hard-bus connectors	A	S187, S211 oem_spec
Breaker frame	H (150 A max)	A	S187 oem_spec
Used in	NQ, NF, I-LINE		

PowerPacT J-frame (JD/JG/JJ/JL/JR) BRK-SQD-034 · Square D / Schneider Electric · aka JDL, JGL, JJL, JLL, JRL

Mounting	NQ/NF vertical main or sub-feed via adapter kit; terminal kit S37445	A	S187, S211 oem_spec
Breaker frame	J (250 A max)	A	S187 oem_spec
Used in	NQ, NF, I-LINE		

PowerPacT L-frame (LG/LJ/LL/LR) BRK-SQD-036 · Square D / Schneider Electric · aka PPL

Mounting	NQMB6PPL / N600MPPL kits; requires 8.75 in. deep D9 boxes; M10x25 connector screws 442 lb-in	A	S177, S230 oem_spec
Breaker frame	L 125-600 A	A	S177 oem_spec
Used in	NQ, NF, I-LINE		

PowerPacT M / P / R frame (I-Line) BRK-SQD-039 · Square D / Schneider Electric · aka MG, MJ, PG, PJ, PK, PL, RG, RJ, RK, RL

Breaker frame	M 800 A, P up to 1200 A, R 1200 A (Ampacity limits inferred from I-Line sub-feed table)	B	S177 oem_spec
Used in	I-LINE, NF		

PowerPacT Q-frame (QB/QD/QG/QJ) BRK-SQD-032 · Square D / Schneider Electric · aka QBL, QDL, QGL, QJL

Mounting	in NQ: vertical main/sub-feed on adapter pan (NQMB2Q/NQSFB2Q) with lug wires; I-Line plug-on in HCJ	A	S177, S185 p. 9-9; oem_spec
Breaker frame	Q	A	S177 oem_spec
Used in	NQ, I-LINE		

PowerPact B-frame BD/BG/BJ/BK (I-Line) BRK-SQD-012 · Square D / Schneider Electric · aka BD, BG, BJ, BK, PowerPact B

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	125 A	A	same as above
Poles	1, 2, 3 (BK 1, 2)	A	same as above
Ampere range	15-125 A (BK 15-30 A)	A	same as above
Voltage rating	600Y/347 V	A	same as above
Interrupting ratings	BD 25k@240/18k@480; BG 65/35; BJ 100/65; BK 100/65/65	A	same as above
Used in	I-LINE		

PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) BRK-SQD-008 · Square D / Schneider Electric · aka LD, LG, LJ, LL, LR, PowerPact L

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	250-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LD 25k@240/18k@480; LG 65/35; LJ 100/65; LL 125/100; LR 200/200	A	same as above
Mount screw	No orderable mounting screw for L-frame in I-Line; a 10-32 x 5/8 screw can be used	A	S40 oem_spec
Used in	QED-2, I-LINE		

Q-frame QB/QD/QG/QJ (I-Line) BRK-SQD-003 · Square D / Schneider Electric · aka QB, QD, QG, QJ, Q2, Q4

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	225 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	70-225 A	A	same as above
Voltage rating	240 V	A	same as above
Interrupting ratings	QB 10k, QD 25k, QG 65k, QJ 100k @240 V	A	same as above
Group mount height	3 in. (single value printed in the mounting-height columns for QB/QD/QG/QJ) (Text extraction column alignment ambiguous; which pole columns the 3 in. applies to needs PDF visual check)	C	S26 p. 22; oem_spec
Class	Class 734	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

QMB circuit breaker units (H-, J-, L-frame) BRK-SQD-013 · Square D / Schneider Electric · aka QMB breaker unit, QMB3400LA

Mounting	QMB plug-on unit with permanently attached mounting brackets	A	S28 pp. 17-18; oem_spec
Breaker frame	Twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A; single LA/LH 225-400 A	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Interrupting ratings	HD 25k@240/18k@480/14k@600; HG 65/35/18; JD 25/18/14; JG 65/35/18; LA 42/30/22; LH 65/35/25	A	same as above
Used in	QMB, QED-2		

QO (plug-on) BRK-SQD-028 · Square D / Schneider Electric · aka QO-VH, QO-H, QOH

Mounting	plug-on	A	S177 p. 9-9; oem_spec
Voltage rating	120/240 Vac; 48 Vdc where DC rated	A	same as above
Status	current	A	S177 oem_spec
Used in	NQ, NQOD		

QOB (bolt-on) BRK-SQD-029 · Square D / Schneider Electric · aka QOB-VH, QOB-H, QOB-HID

Mounting	bolt-on to NQ branch connectors; may also be used back-fed as 100-150 A main	A	S177 p. 9-9; oem_spec
Status	current	A	S177 oem_spec
Used in	NQ, NQOD		

R-frame RG/RJ/RK/RL (I-Line) BRK-SQD-011 · Square D / Schneider Electric · aka RG, RJ, RK, RL, RG-C, RJ-C, RK-C, RL-C, PowerPact R

Mounting	I-Line plug-on	A	S27, S26 s2 p. 9; s1 p. 22; oem_spec
Breaker frame	1200 A (2500 A frame per QED-2 table)	A	same as above
Poles	2, 3	A	same as above
Ampere range	1000-1200 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	RG 65k@240/35k@480; RJ 100/65; RK 65/65/65 (Canada); RL 125/100/50	A	same as above
Group mount height	15 in.	A	S26 p. 22; oem_spec
Used in	QED-2, I-LINE		

Square D EH / EHB (NEHB) BRK-SQD-041 · Square D / Schneider Electric · aka EH, EHB

Status	Discontinued, no replacement (search summary)	C	S266 oem_web

Used in	NEHB		

Square D FA/FH/FC/FI (F-frame 100/150 A) BRK-SQD-014 · Square D / Schneider Electric · aka FA, FAL, FH, FHL, FC, FCL, FI, FY

Breaker frame	F-Frame (FA family)	A	S114 p.3-28; oem_spec
Ampere range	15-150 A	A	same as above
Note	FY not listed in the lug tables found; alias recorded for search only.	A	same as above

Square D KA/KH/KC/KI (K-frame 250 A) BRK-SQD-015 · Square D / Schneider Electric · aka KA, KAL, KH, KHL, KC, KI, KIL

Breaker frame	K-Frame (KA family)	A	S114 p.3-28; oem_spec
Ampere range	110-250 A	A	same as above

Square D LA/LH (L-frame 400 A) BRK-SQD-016 · Square D / Schneider Electric · aka LA, LAL, LH, LHL

Breaker frame	L-Frame (LA family)	A	S114 p.3-28; oem_spec
Ampere range	125-400 A	A	same as above

Square D LC/LI/LE/LX/LXI (L-frame 600 A) BRK-SQD-018 · Square D / Schneider Electric · aka LC, LI, LE, LX, LXI

Breaker frame	L-Frame (LI family)	A	S114 p.3-28; oem_spec
Ampere range	100-600 A	A	same as above

Square D MA/MH/MX/ME (M-frame 1000 A) BRK-SQD-019 · Square D / Schneider Electric · aka MA, MH, MX, ME

Breaker frame	M-Frame (MA family)	A	S114 p.3-17; oem_spec
Ampere range	up to 1000 A	A	same as above
Note	Only control-wire tapped lugs AL900MAT/AL1000MAT found; standard MA lug kits not located (lead).	A	same as above

Square D ML breakers (MLN panels) BRK-SQD-042 · Square D / Schneider Electric · aka ML, ML-1

Status	Obsolete	A	S263 oem_web
Used in	MLN, NEHB		

Square D NA/NC/NX/NE (N-frame 1200 A) BRK-SQD-020 · Square D / Schneider Electric · aka NA, NC, NX, NE

Breaker frame	N-Frame (NA family)	A	S114 p.3-17; oem_spec
Ampere range	up to 1200 A	A	same as above

Square D PowerPact D-Frame (DG/DJ/DL) BRK-SQD-027 · Square D / Schneider Electric · aka DG, DJ, DL

Breaker frame	PowerPact D	A	S114 p.3-28; oem_spec
Ampere range	150-600 A	A	same as above

Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) BRK-SQD-021 · Square D / Schneider Electric · aka HD, HG, HJ, HL, HR, HDL, HGL, HJL, HLL, HRL, HDA

Breaker frame	PowerPact H	A	S112 p.124; oem_spec
Ampere range	15-150 A	A	same as above

Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) BRK-SQD-022 · Square D / Schneider Electric · aka JD, JG, JJ, JL, JR, JDL, JGL, JJL, JLL, JRL, JDA

Breaker frame	PowerPact J	A	S112 p.124; oem_spec
Ampere range	150-250 A	A	same as above

Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) BRK-SQD-023 · Square D / Schneider Electric · aka LD, LG, LJ, LL, LR, LDL, LGL, LJL, LLL, LRL, LGA

Breaker frame	PowerPact L	A	S112 p.124; oem_spec
Ampere range	250-600 A	A	same as above

Square D PowerPact M-Frame (MG/MJ) BRK-SQD-024 · Square D / Schneider Electric · aka MG, MJ

Breaker frame	PowerPact M	A	S114 p.3-17; oem_spec
Ampere range	up to 800 A	A	same as above

Square D PowerPact P-Frame (PG/PJ/PL) BRK-SQD-025 · Square D / Schneider Electric · aka PG, PJ, PL

Breaker frame	PowerPact P	A	S114 p.3-17; oem_spec
Ampere range	up to 1200 A	A	same as above

Square D PowerPact R-Frame (RG/RJ/RL) BRK-SQD-026 · Square D / Schneider Electric · aka RG, RJ, RL

Breaker frame	PowerPact R	A	S114 p.3-17; oem_spec
Ampere range	up to 3000 A (1200 A tapped lug listed)	A	same as above

Square D Q4 (400 A, LA-type lugs) BRK-SQD-017 · Square D / Schneider Electric · aka Q4, Q4L

Breaker frame	Q4	A	S114 p.3-28; oem_spec
Ampere range	125-400 A	A	same as above

Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB BRK-SQD-040 · Square D / Schneider Electric · aka QO, QOB, Q1, Q1B

Mounting	QO plug-on (NQO), QOB bolt-on (NQOB)	A	S245, S246 oem_spec
Ampere range	1P 15-50 A, 2P 15-70 A and 70-100 A, 3P 15-50 A and 70-100 A (1960)	A	S245 oem_spec
Voltage rating	AC only in NQO/NQOB (1960)	A	S246 oem_spec
Used in	NQOB		

Square D Y1B 1-pole (NY1B) BRK-SQD-043 · Square D / Schneider Electric · aka Y1B

Ampere range	1-pole 15-50 A	A	S264 oem_web
Status	Obsolete and no longer available	A	same as above
Used in	NEHB		

Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) BRK-ZIN-003 · Zinsco / Sylvania · aka SE, SEH, SF, SJD, SJK, SKM, Challenger SF

Mounting	bolt-on	C	S153, S165 distributor
Ampere range	15-800 A (SEH to 100 A; SF to 175 A; SJK 250-600 A; SKM 800 A)	C	same as above
Voltage rating	240/480/600 V	C	same as above
Interrupting ratings	SEH 18 kA@240/14 kA@480; SF 25 kA@480; SJK 30 kA@480 (listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Cross ref	Superbreakers lists SEH as fitting Eaton F-frame, Sylvania, Challenger and Westinghouse panelboards and crosses to Eaton EHD - sales claim only	D	S153 distributor
Used in	ZIN-DIST, CHA-PM4		

Zinsco / Sylvania QSF fusible panelboard switch BRK-ZIN-002 · Zinsco / Sylvania · aka QSF, QSF-T (twin), QSF-xx33 (240 V), QSF-xx53 (600 V)

Mounting	bolt-on panel mounted switch unit	C	S153, S174, S157 distributor
Ampere range	30-600 A	C	same as above
Voltage rating	240 V / 600 V	C	same as above
Interrupting ratings	200 kA (with RK1/RK5 fuses)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Numbering	Pattern appears to be QSF-<amp code: T3/T6 twin 30/60 A, 10=100, 20=200, 40=400, 60=600><3 poles><3=240 V, 5=600 V>	D	S153, S174 inference
Used in	ZIN-DIST, FA		

Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) BRK-ZIN-001 · Zinsco / Sylvania · aka Q, QC, QCN, Q24, QB, QCB, QCAL, QFP, QFL, QFB, QFBL, R38, RC38, Magnatrip, UBIZ (Connecticut Electric replacement)

Mounting	plug-in (Q/QC/R38, QFP mains) and bolt-on (QB/QCB/QFB) onto on-edge flat bus	C	S153, S152, S151 distributor
Ampere range	15-225 A	C	same as above
Voltage rating	120/240 V; 240 V 3-ph (Q24, QFP24, QB243xxx)	C	same as above
Interrupting ratings	10 kA (QFP24125, QCB30, QFL23225 listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIZ series (e.g., UBIZ2100 = QCAL100; UBIZ3150 = QFP24150; UBITBFP2002 = QFP2200T/QFBL2200; UBIZ243040 = QB243040)	C	S153, S155 distributor
Used in	ZIN-Q, ZIN-DIST		

11 Cross-Reference Tables

11.1 Supersession and alternate numbers

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
0080429	alias	K80429	EDH-EAT-00408	B	197
11-D-4554-01	alias	DFFP1A	EDH-SIE-00062	A	1073
11-D-4560-01	supersedes	DFFP01B	EDH-SIE-00064	A	1072
12-1800-01	alias	DFFP1A	EDH-SIE-00062	A	1073
12-1800-01	alias	QF3	EDH-SIE-00063	C	1095
12-A-1801-01	supersedes	DFFP01B	EDH-SIE-00064	A	1072
12-A-1802-01	supersedes	DFFPVA41A	EDH-SIE-00066	A	1076
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96619	EDH-EAT-00250	A	192
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96620	EDH-EAT-00251	A	192
1C96608G01..G63 (odd item numbers)	style_number	1C96608	EDH-EAT-00163	A	181
1C96609G01..G63 (same G scheme as 1C96608)	style_number	1C96609	EDH-EAT-00165	A	217
1C96647	supersedes	42C4050	EDH-EAT-00222	B	186
1C96650	supersedes	42C4051	EDH-EAT-00226	B	187
1C96653	supersedes	42C4052	EDH-EAT-00230	B	187
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	6554C01	EDH-EAT-00294	A	337
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	1C96652	EDH-EAT-00229	A	185
252B3638G1-G2	style_number	252B3638	EDH-GEA-00583	A	738
252B3638G3-G8	style_number	252B3638	EDH-GEA-00583	A	738
252B3638G9-G10	style_number	252B3638	EDH-GEA-00583	A	738
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	2C11642	EDH-EAT-00164	A	182
2NLK30A	supersedes	2NLK42B	EDH-SIE-00040	A	1046
2NLK42A	supersedes	2NLK42B	EDH-SIE-00040	A	1046
2NLK54A	supersedes	2NLK54B	EDH-SIE-00041	A	1047
36967	alias	S36967	EDH-SQD-00188	A	652
3TC1QR2520	alias	3TC1QR250	EDH-SIE-00254	B	1112
40517-407-01	style_number	HNM4BL	EDH-SQD-00138	A	606
40517-408-01	style_number	HNM1BL	EDH-SQD-00137	A	605
4176B68	supersedes	42C8076	EDH-EAT-00255	C	263
4178B06H01	supersedes	42C8083H01	EDH-EAT-00285	B	266
4178B08	supersedes	42C8078	EDH-EAT-00270	C	263
4179B39	supersedes	42C8079	EDH-EAT-00271	C	264
4179B40	supersedes	42C8080	EDH-EAT-00272	C	264
4179B41	supersedes	42C8082	EDH-EAT-00274	C	265
4179B42	supersedes	42C8081	EDH-EAT-00273	C	264
4180B03	supersedes	42C8072	EDH-EAT-00242	C	194

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
4180B05	supersedes	42C7982	EDH-EAT-00244	C	194
4180B61	supersedes	42C8073	EDH-EAT-00243	C	194
4180B93	supersedes	42C8077	EDH-EAT-00256	C	263
42C7982	superseded_by	4180B05	EDH-EAT-00247	C	193
42C8072	superseded_by	4180B03	EDH-EAT-00245	C	192
42C8073	superseded_by	4180B61	EDH-EAT-00246	C	193
42C8076	superseded_by	4176B68	EDH-EAT-00267	C	259
42C8077	superseded_by	4180B93	EDH-EAT-00268	C	262
42C8078	superseded_by	4178B08	EDH-EAT-00280	C	261
42C8079	superseded_by	4179B39	EDH-EAT-00281	C	261
42C8080	superseded_by	4179B40	EDH-EAT-00282	C	261
42C8081	superseded_by	4179B42	EDH-EAT-00284	C	262
42C8082	superseded_by	4179B41	EDH-EAT-00283	C	261
42C8083H01	superseded_by	4178B06H01	EDH-EAT-00286	B	266
42NLK30A	supersedes	42NLK54B	EDH-SIE-00042	A	1049
42NLK42A	supersedes	42NLK54B	EDH-SIE-00042	A	1049
42NLK54A	supersedes	42NLK54B	EDH-SIE-00042	A	1049
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	42C8079	EDH-EAT-00271	A	264
4MLKA1	equivalent	4MLKA1A	EDH-SIE-00019	A	1035
4MLKA3	equivalent	4MLKA3A	EDH-SIE-00020	A	1036
4MLKC1	equivalent	4MLKC1A	EDH-SIE-00021	A	1038
4MLKC3	equivalent	4MLKC3A	EDH-SIE-00022	A	1039
5158C05G06 (boxes 30 in and above)	style_number	5158C05G05	EDH-EAT-00237	A	121
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	4176B69	EDH-EAT-00278	A	260
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	42C8078	EDH-EAT-00270	A	263
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	4176B67	EDH-EAT-00277	A	259
6CLF1C	alias	6CLF1	EDH-SIE-00191	A	1097
6CLJ1C	alias	6CLJ1	EDH-SIE-00194	A	1098
6CLL1C	alias	6CLL1	EDH-SIE-00198	A	1099
6LL61C	alias	6LL61	EDH-SIE-00197	A	995
6QR2CAN	alias	6QR2	EDH-SIE-00157	A	961
6QR2CCAN	alias	6QR2	EDH-SIE-00157	A	961
6SJL1C	alias	6SJL1	EDH-SIE-00195	A	996
789A448G377 (as printed)	alias	789A448G3	EDH-GEA-00330	C	889
80025-067-01	supersedes	PKDFSCREW	EDH-SQD-00161	A	462
80034-187-02	style_number	HLW1BL	EDH-SQD-00142	A	603
80034-188-03	style_number	HLW4BL	EDH-SQD-00143	A	604
80121-651-01	style_number	HLN1BL	EDH-SQD-00139	A	602
80121-652-01	style_number	HLN4BL	EDH-SQD-00140	A	602
80121-653-01	style_number	HLW4EBL	EDH-SQD-00144	A	605
80121-752-01	style_number	HLN4EBL	EDH-SQD-00141	A	603
8450C62H39	equivalent	K80133	EDH-EAT-00406	C	197
ACSFPKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	712
ACSFPKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	712
ACSHKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	712
ACSHKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	712
ACTFPKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	712

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
ACTFPKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	713
ACTFPKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	713
ACTFPKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	713
ACTFPKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	714
ACTFPKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	714
ACTFPKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	714
ACTFPKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	715
ACTFPKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	715
ACTHKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	712
ACTHKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	713
ACTHKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	713
ACTHKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	713
ACTHKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	714
ACTHKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	714
ACTHKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	714
ACTHKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	715
ACTHKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	715
AL400L6IK3	alias	AL400L61K3	EDH-SQD-00221	A	641
AMB2120CAF	equivalent	AMB2120CA	EDH-GEA-00573	A	718
AMB2120DCAF	equivalent	AMB2120DCA	EDH-GEA-00581	A	719
AMB2120DMAF	equivalent	AMB2120DMA	EDH-GEA-00561	A	719
AMB2120DMCF	equivalent	AMB2120DMC	EDH-GEA-00559	A	720
AMB2120DNF	equivalent	AMB2120DN	EDH-GEA-00565	A	720
AMB2120MAF	equivalent	AMB2120MA	EDH-GEA-00556	A	721
AMB2120NF	equivalent	AMB2120N	EDH-GEA-00563	A	721
AMB2250CAF	equivalent	AMB2250CA	EDH-GEA-00567	A	722
AMB2250DCAF	equivalent	AMB2250DCA	EDH-GEA-00575	A	722
AMB2600CAF	equivalent	AMB2600CA	EDH-GEA-00569	A	723
AMB2600DCAF	equivalent	AMB2600DCA	EDH-GEA-00577	A	723
AMB2600MAF	equivalent	AMB2600MA	EDH-GEA-00552	A	724
AMB2600MCF	equivalent	AMB2600MC	EDH-GEA-00554	A	724
AMB2800CAF	equivalent	AMB2800CA	EDH-GEA-00571	A	725
AMB2800DCAF	equivalent	AMB2800DCA	EDH-GEA-00579	A	725
AMB3120CAF	equivalent	AMB3120CA	EDH-GEA-00574	A	726
AMB3120DCAF	equivalent	AMB3120DCA	EDH-GEA-00582	A	726
AMB3120DMAF	equivalent	AMB3120DMA	EDH-GEA-00562	A	727
AMB3120DMCF	equivalent	AMB3120DMC	EDH-GEA-00560	A	727
AMB3120DNF	equivalent	AMB3120DN	EDH-GEA-00566	A	728
AMB3120MAF	equivalent	AMB3120MA	EDH-GEA-00557	A	728
AMB3120MCF	equivalent	AMB3120MC	EDH-GEA-00558	A	729
AMB3120NF	equivalent	AMB3120N	EDH-GEA-00564	A	729
AMB3250CAF	equivalent	AMB3250CA	EDH-GEA-00568	A	730
AMB3250DCAF	equivalent	AMB3250DCA	EDH-GEA-00576	A	730
AMB3600CAF	equivalent	AMB3600CA	EDH-GEA-00570	A	731
AMB3600DCAF	equivalent	AMB3600DCA	EDH-GEA-00578	A	731
AMB3600MAF	equivalent	AMB3600MA	EDH-GEA-00553	A	732
AMB3600MCF	equivalent	AMB3600MC	EDH-GEA-00555	A	732
AMB3800CAF	equivalent	AMB3800CA	EDH-GEA-00572	A	733
AMB3800DCAF	equivalent	AMB3800DCA	EDH-GEA-00580	A	733
AMC2FGM	alias	AMC2FGMFP	EDH-GEA-00181	B	770
AMC2FJ	alias	AMC2FJFP	EDH-GEA-00179	B	770
AMC2FJFPTF	alias	AMC2FJFPTF	EDH-GEA-00178	B	771

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMC2FLS	alias	AMC2FLSFP	EDH-GEA-00184	B	772
AMC2GM	alias	AMC2GMFP	EDH-GEA-00182	B	773
AMC2JK	alias	AMC2JKFP	EDH-GEA-00180	B	773
AMC2KM	alias	AMC2KMFP	EDH-GEA-00183	B	774
AMC3FGM	alias	AMC3FGMFP	EDH-GEA-00162	B	775
AMC3FJ	alias	AMC3FJFP	EDH-GEA-00160	B	775
AMC3FJFPTF	alias	AMC3FJFPTF	EDH-GEA-00159	B	776
AMC3FLS	alias	AMC3FLSFP	EDH-GEA-00165	B	777
AMC3GM	alias	AMC3GMFP	EDH-GEA-00163	B	777
AMC3JK	alias	AMC3JKFP	EDH-GEA-00161	B	778
AMC3KM	alias	AMC3KMFP	EDH-GEA-00164	B	779
AMC4EB	alias	AMC4EBFP	EDH-GEA-00167	B	779
AMC4EBS	alias	AMC4EBSFP	EDH-GEA-00176	B	780
AMC4FDB	alias	AMC4FDBFP	EDH-GEA-00166	B	781
AMC4FDS	alias	AMC4FDSFP	EDH-GEA-00175	B	782
AMC4FGB	alias	AMC4FGBFP	EDH-GEA-00173	B	782
AMC4FJ	alias	AMC4FJFP	EDH-GEA-00171	B	782
AMC4FJFPTF	alias	AMC4FJFPTF	EDH-GEA-00170	B	783
AMC4FLS	alias	AMC4FLSFP	EDH-GEA-00177	B	784
AMC4GB	alias	AMC4GBFP	EDH-GEA-00174	B	785
AMC4JK	alias	AMC4JKFP	EDH-GEA-00172	B	785
AMC4QD	alias	AMC4QDFP	EDH-GEA-00169	B	786
AMC4SE	alias	AMC4SEFP	EDH-GEA-00168	B	787
AMC6EB	alias	AMC6EBFP	EDH-GEA-00149	B	788
AMC6EBS	alias	AMC6EBSFP	EDH-GEA-00157	B	788
AMC6EY	alias	AMC6EYFP	EDH-GEA-00146	B	789
AMC6FB	alias	AMC6FBFP	EDH-GEA-00147	B	791
AMC6FDB	alias	AMC6FDBFP	EDH-GEA-00148	B	791
AMC6FDSPF	alias	AMC6FDSPF	EDH-GEA-00156	B	792
AMC6FGB	alias	AMC6FGBFP	EDH-GEA-00154	B	792
AMC6FJ	alias	AMC6FJFP	EDH-GEA-00152	B	792
AMC6FJFPTF	alias	AMC6FJFPTF	EDH-GEA-00151	B	793
AMC6FLS	alias	AMC6FLSFP	EDH-GEA-00158	B	794
AMC6GB	alias	AMC6GBFP	EDH-GEA-00155	B	795
AMC6JK	alias	AMC6JKFP	EDH-GEA-00153	B	795
AMC6QB	alias	AMC6QBFP	EDH-GEA-00145	B	796
AMC6QD	alias	AMC6QDFP	EDH-GEA-00150	B	796
AMCB2FGM	alias	AMCB2FGMFP	EDH-GEA-00119	B	740
AMCB2FJ	alias	AMCB2FJFP	EDH-GEA-00117	B	742
AMCB2FJTF	alias	AMCB2FJFPTF	EDH-GEA-00118	B	742
AMCB2GM	alias	AMCB2GMFP	EDH-GEA-00120	B	744
AMCB2KM	alias	AMCB2KMFP	EDH-GEA-00126	B	745
AMCB3FGM	alias	AMCB3FGMFP	EDH-GEA-00123	B	745
AMCB3FJ	alias	AMCB3FJFP	EDH-GEA-00121	B	746
AMCB3FJFP	supersedes	SRFB3XT4FPX	EDH-GEA-00594	A	857
AMCB3FJFP	supersedes	SRFB3XT4FPK	EDH-GEA-00595	A	857
AMCB3FJTF	alias	AMCB3FJFPTF	EDH-GEA-00122	B	747
AMCB3GM	alias	AMCB3GMFP	EDH-GEA-00124	B	748
AMCB3GMFP	supersedes	SRFB3XT5MFPX	EDH-GEA-00598	A	858
AMCB3GMFP	supersedes	SRFB3XT5MFPK	EDH-GEA-00599	A	858
AMCB3KM	alias	AMCB3KMFP	EDH-GEA-00127	B	750
AMCB3KMFP	supersedes	SRFB3XT7MFPX	EDH-GEA-00600	A	859

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMCB3KMFP	supersedes	SRFB3XT7MFPK	EDH-GEA-00601	A	859
AMCB3LB	alias	AMCB3LBFP	EDH-GEA-00125	B	750
AMCB4EB	alias	AMCB4EBFP	EDH-GEA-00098	B	752
AMCB4EY	alias	AMCB4EYFP	EDH-GEA-00099	B	753
AMCB4FB	alias	AMCB4FBFP	EDH-GEA-00100	B	753
AMCB4FDB	alias	AMCB4FDBFP	EDH-GEA-00101	B	754
AMCB4FGB	alias	AMCB4FGBFP	EDH-GEA-00113	B	754
AMCB4FJ	alias	AMCB4FJFP	EDH-GEA-00109	B	756
AMCB4FJTF	alias	AMCB4FJFPTF	EDH-GEA-00111	B	756
AMCB4GB	alias	AMCB4GBFP	EDH-GEA-00114	B	758
AMCB4QD	alias	AMCB4QDFP	EDH-GEA-00102	B	758
AMCB4SE	alias	AMCB4SEFP	EDH-GEA-00103	B	760
AMCB6EB	alias	AMCB6EBFP	EDH-GEA-00104	B	761
AMCB6EBFP	supersedes	SRFB6XT1FPX	EDH-GEA-00590	A	860
AMCB6EBFP	supersedes	SRFB6XT1FPK	EDH-GEA-00591	A	860
AMCB6EY	alias	AMCB6EYFP	EDH-GEA-00105	B	762
AMCB6FB	alias	AMCB6FBFP	EDH-GEA-00106	B	763
AMCB6FDB	alias	AMCB6FDBFP	EDH-GEA-00107	B	764
AMCB6FGB	alias	AMCB6FGBFP	EDH-GEA-00115	B	764
AMCB6FJ	alias	AMCB6FJFP	EDH-GEA-00110	B	765
AMCB6FJFP	supersedes	SRFB6XT4FPX	EDH-GEA-00592	A	861
AMCB6FJFP	supersedes	SRFB6XT4FPK	EDH-GEA-00593	A	861
AMCB6FJTF	alias	AMCB6FJFPTF	EDH-GEA-00112	B	766
AMCB6GB	alias	AMCB6GBFP	EDH-GEA-00116	B	767
AMCB6GBFP	supersedes	SRFB6XT5BFPX	EDH-GEA-00596	A	862
AMCB6GBFP	supersedes	SRFB6XT5BFPK	EDH-GEA-00597	A	862
AMCB6QD	alias	AMCB6QDFP	EDH-GEA-00108	B	768
BBKVA5262S	alias	BBKVA5262P2S	EDH-SIE-00112	A	932
BBKVA52P3HW	alias	BBKVR52P3HW	EDH-SIE-00428	A	956
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	4176B79	EDH-EAT-00265	A	260
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B61	EDH-EAT-00260	A	259
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B51	EDH-EAT-00261	A	258
BQFS1K	equivalent	BQFS2	EDH-SIE-00252	A	1109
Breaker-included versions: MBKVAM1300A, MBKVAM1400A, MBKVAH3300A, MBKVAH3400A, MBKVAM3300A, MBKVAM3400A	equivalent	MBKVA5363A	EDH-SIE-00011	A	1032
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	MBKVA5262A	EDH-SIE-00009	A	1031
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	MBKVA5262B	EDH-SIE-00010	A	1031
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	6574C74	EDH-EAT-00298	A	336
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	6559C59	EDH-EAT-00254	A	265
CNLK30A	supersedes	CNLK42B	EDH-SIE-00038	A	1050

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
CNLK42A	supersedes	CNLK42B	EDH-SIE-00038	A	1050
CNLK54A	supersedes	CNLK54B	EDH-SIE-00039	A	1051
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	4180B91	EDH-EAT-00279	A	262
DFFP01A	supersedes	DFFP01B	EDH-SIE-00064	A	1072
DFFP1	supersedes	DFFP1A	EDH-SIE-00062	A	1073
DFFP1A	superseded_by	QF3	EDH-SIE-00063	A	1095
DFFPED01	supersedes	DFFPVA41A	EDH-SIE-00066	A	1076
DFFPVA41A	superseded_by	DFFPED01	EDH-SIE-00069	A	925
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	1C96638	EDH-EAT-00241	A	192
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	2C11296	EDH-EAT-00236	A	188
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	5158C05	EDH-EAT-00235	A	188
GCWTK	alias	5652B38G01	EDH-EAT-00576	A	419
GTIN 785901798019	alias	QMB15BLW	EDH-SQD-00092	A	540
H01	style_number	4176B57	EDH-EAT-00263	A	258
H01	style_number	42C8080	EDH-EAT-00272	A	264
H01	style_number	42C8081	EDH-EAT-00273	A	264
H01	style_number	42C8082	EDH-EAT-00274	A	265
H01	style_number	4176B66	EDH-EAT-00275	A	259
H01	style_number	4176B80	EDH-EAT-00276	A	260
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	4180B08	EDH-EAT-00249	A	195
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	5156C10	EDH-EAT-00289	A	121
H01 = 1X ... H12 = 12X	style_number	4176B72	EDH-EAT-00269	A	266
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	4176B60	EDH-EAT-00259	A	258
H01 FCL; H02 FB-P	style_number	4176B70	EDH-EAT-00262	A	260
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	4176B56	EDH-EAT-00264	A	258
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4176B68	EDH-EAT-00267	A	259
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4180B93	EDH-EAT-00268	A	262
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	5156C09	EDH-EAT-00290	A	121
H01 (top and bottom)	style_number	4180B03	EDH-EAT-00245	A	192
H01 (top and bottom)	style_number	4180B61	EDH-EAT-00246	A	193
H01 top, H02 bottom	style_number	42C8072	EDH-EAT-00242	A	194
H01 top, H02 bottom	style_number	42C7982	EDH-EAT-00244	A	194
H01 top, H02 bottom	style_number	4180B05	EDH-EAT-00247	A	193
H01 top, H02 bottom	style_number	4180B04	EDH-EAT-00248	A	193
H01 top, H02 bottom	style_number	42C8077	EDH-EAT-00256	A	263
H01 top, H02 bottom	style_number	42C8055	EDH-EAT-00258	A	296
H01 top, H02 bottom (same with/without lock-offs)	style_number	42C8076	EDH-EAT-00255	A	263
H01 top, H04 bottom	style_number	42C8073	EDH-EAT-00243	A	194

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	42C7980	EDH-EAT-00257	A	296
HC-2609-EXS	equivalent	HC-2609-EXF	EDH-SQD-00549	A	460
HC-2SN	alias	HC2SN	EDH-SQD-00462	A	441
HC-3209-EXS	equivalent	HC-3209-EXF	EDH-SQD-00550	A	460
HC-4112-DEXS	equivalent	HC-4112-DEXF	EDH-SQD-00552	A	460
HC-4112-EXS	equivalent	HC-4112-EXF	EDH-SQD-00551	A	460
HC-4SN	alias	HC4SN	EDH-SQD-00463	A	441
HC-6SN	alias	HC6SN	EDH-SQD-00464	A	442
HC-8SN	alias	HC8SN	EDH-SQD-00465	A	443
HCW-12SN	alias	HCW12SN	EDH-SQD-00470	A	447
HCW-4SN	alias	HCW4SN	EDH-SQD-00467	A	448
HCW-6SN	alias	HCW6SN	EDH-SQD-00468	A	449
HCW-8SN	alias	HCW8SN	EDH-SQD-00469	A	450
HLW-1BL	alias	HLW1BL	EDH-SQD-00142	A	603
HLW-3BL	alias	HLW-3BL	EDH-SQD-00555	A	459
HLW-4BL	alias	HLW4BL	EDH-SQD-00143	A	604
HNM-1BL	alias	HNM1BL	EDH-SQD-00137	A	605
HNM-3BL	alias	HNM-3BL	EDH-SQD-00554	A	459
HNM-4BL	alias	HNM4BL	EDH-SQD-00138	A	606
KBDP-1C	alias	KBDP1C	EDH-FPE-00007	C	1135
KBDP-2C	alias	KBDP2C	EDH-FPE-00008	C	1136
KBDP-3C	alias	KBDP3C	EDH-FPE-00009	C	1136
KBDP-4C	alias	KBDP4C	EDH-FPE-00010	C	1137
KCDP-1C	alias	KCDP1C	EDH-FPE-00001	C	1139
KCDP-2C	alias	KCDP2C	EDH-FPE-00002	C	1139
KCDP-3C	alias	KCDP3C	EDH-FPE-00003	C	1140
KCDP-4C	alias	KCDP4C	EDH-FPE-00004	C	1140
KCDP-5C	alias	KCDP5C	EDH-FPE-00005	C	1141
KCDPFD100H	alias	KCDPFB100-H	EDH-EAT-00423	C	79
KFDP-2C	alias	KFDP2C	EDH-FPE-00015	C	1143
KFDP-3C	alias	KFDP3C	EDH-FPE-00016	C	1143
KFDP-46C	alias	KFDP46C	EDH-FPE-00018	C	1143
KFDP-4C	alias	KFDP4C	EDH-FPE-00017	C	1144
KPRL45X	supersedes	KPRL45X1	EDH-EAT-00332	C	300
KPRL45X1	superseded_by	KPRL45X	EDH-EAT-00333	C	299
KPRL4ED	supersedes	KPRL4X32	EDH-EAT-00301	C	331
KPRL4ED2	supersedes	KPRL4X22	EDH-EAT-00300	C	330
KPRL4FD	supersedes	KPRL4X32	EDH-EAT-00301	C	331
KPRL4FD1	supersedes	KPRL4X12	EDH-EAT-00299	C	329
KPRL4FD2	supersedes	KPRL4X22	EDH-EAT-00300	C	330
KPRL4LC	superseded_by	KPRL4LD	EDH-EAT-00330	C	323
KPRL4LD	supersedes	KPRL4LC	EDH-EAT-00314	C	321
KPRL4MC	supersedes	KPRL4X34	EDH-EAT-00305	C	334
KPRL4ND	supersedes	KPRL4X35	EDH-EAT-00306	C	335
KPRL4X12	superseded_by	KPRL4FD1	EDH-EAT-00325	C	313
KPRL4X22	superseded_by	KPRL4FD2	EDH-EAT-00326	C	314
KPRL4X22	superseded_by	KPRL4ED2	EDH-EAT-00327	C	309
KPRL4X32	superseded_by	KPRL4FD	EDH-EAT-00328	C	311
KPRL4X32	superseded_by	KPRL4ED	EDH-EAT-00329	C	308
KPRL4X34	superseded_by	KPRL4MC	EDH-EAT-00316	C	325
KPRL4X35	superseded_by	KPRL4ND	EDH-EAT-00321	C	328

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	S3VA52T	EDH-SIE-00129	A	966
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	S3VA52TD	EDH-SIE-00156	A	967
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	S3VA53T	EDH-SIE-00135	A	968
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	S3VA53TD	EDH-SIE-00161	A	968
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	S3VA54T	EDH-SIE-00142	A	969
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	S3VA54TD	EDH-SIE-00168	A	970
LNLK30A	supersedes	LNLK4X11B	EDH-SIE-00035	A	1053
LNLK42A	supersedes	LNLK6X17B	EDH-SIE-00036	A	1054
LNLK54A	supersedes	LNLK7X20B	EDH-SIE-00037	A	1056
MBKBC1NBA	supersedes	MBKVA41A	EDH-SIE-00001	A	1029
MBKBC3NBA	supersedes	MBKVA41B	EDH-SIE-00002	A	1030
MBKBL1A	supersedes	MBKVA41A	EDH-SIE-00001	A	1029
MBKBL3A	supersedes	MBKVA41B	EDH-SIE-00002	A	1030
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	MBKED1A	EDH-SIE-00003	A	1023
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	MBKED3A	EDH-SIE-00004	A	1024
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	MBKFD1A	EDH-SIE-00007	A	1024
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	MBKFD3A	EDH-SIE-00008	A	1025
MBKJD1A	supersedes	MBKJD3B	EDH-SIE-00012	A	1027
MBKJD1*A, MBKJD12***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	MBKJD1A	EDH-SIE-00345	A	1026
MBKJD3A	supersedes	MBKJD3B	EDH-SIE-00012	A	1027
MBKJD3*A, MBKJD32***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	MBKJD3A	EDH-SIE-00346	A	1027
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3150A	EDH-SIE-00387	A	1034
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3200A	EDH-SIE-00388	A	1034
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3225A	EDH-SIE-00389	A	1035
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAM3250A	EDH-SIE-00390	A	1035
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAH3200A	EDH-SIE-00391	A	1033
MBKVA5262B (strap kit without breaker)	equivalent	MBKVAH3250A	EDH-SIE-00392	A	1034

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	5078A98	EDH-EAT-00220	A	267
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	4180B62	EDH-EAT-00219	A	198
MLKA1	equivalent	MLKA1A	EDH-SIE-00015	A	1039
MLKA3	equivalent	MLKA3A	EDH-SIE-00016	A	1040
MLKC1	equivalent	MLKC1A	EDH-SIE-00017	A	1041
MLKC3	equivalent	MLKC3A	EDH-SIE-00018	A	1041
MP40ED2253	alias	MP40ED225-3	EDH-EAT-00791	C	108
MP40KC2253	alias	MP40KC225-3	EDH-EAT-00790	C	109
MP40KF1003	alias	MP40KF100-3	EDH-EAT-00789	C	109
MP40KJ2253	alias	MP40KJ225-3	EDH-EAT-00792	C	110
MP40KK4003	alias	MP40KK400-3	EDH-EAT-00793	C	110
MP40KL4003	alias	MP40KL400-3	EDH-EAT-00794	C	111
MP40KM8003	alias	MP40KM800-3	EDH-EAT-00796	C	112
MP40KN12003	alias	MP40KN1200-3	EDH-EAT-00797	C	112
NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE)	equivalent	KCDP1C	EDH-FPE-00001	C	1139
NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	equivalent	KBDP1C	EDH-FPE-00007	C	1135
NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	equivalent	KCDP2C	EDH-FPE-00002	C	1139
NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	equivalent	KBDP2C	EDH-FPE-00008	C	1136
NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	equivalent	KCDP3C	EDH-FPE-00003	C	1140
NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern	equivalent	KBDP3C	EDH-FPE-00009	D	1136
NFNL6CR	equivalent	NFN6CR	EDH-SQD-00428	A	485
NFRPLMB63RPPL	equivalent	NFRPLMB6PPL	EDH-SQD-00424	A	489
NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	equivalent	KCDP4C	EDH-FPE-00004	C	1140
NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	equivalent	KBDP4C	EDH-FPE-00010	C	1137
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C04G01	EDH-EAT-00240	A	120
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G02	EDH-EAT-00438	A	119
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G01	EDH-EAT-00439	A	119

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G04	EDH-EAT-00440	A	120
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G03	EDH-EAT-00441	A	119
NQCUMN6	equivalent	NQALMN6	EDH-SQD-00340	A	509
NQMB2HJ14	equivalent	NQMB2HJ	EDH-SQD-00315	A	493
NQMB2Q14	equivalent	NQMB2Q	EDH-SQD-00313	A	494
NQN6CR / NQNL6CR	alias	NQN6CRUS	EDH-SQD-00339	A	512
NQNL6CRUS	equivalent	NQN6CRUS	EDH-SQD-00339	A	512
NQRPLMB63RPPL	equivalent	NQRPLMB6PPL	EDH-SQD-00374	A	521
NQSFL4L	equivalent	NQSFL4	EDH-SQD-00322	A	506
PJC7201	alias	PJC-7201	EDH-SQD-00451	A	461
PK-23GTA	alias	PK23GTA	EDH-SQD-00439	A	516
PK-27GTA	alias	PK27GTA	EDH-SQD-00433	A	517
PK-32DGTA	alias	PK32DGTA	EDH-SQD-00156	A	455
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	4180B79	EDH-EAT-00266	A	262
QF3	equivalent	DFFP1A	EDH-SIE-00062	A	1073
QMB200EK-1	alias	QMB200EK	EDH-SQD-00062	A	576
QMB200EK-2	alias	QMB200EK	EDH-SQD-00062	A	576
QMB300EK-1	alias	QMB300EK	EDH-SQD-00060	A	576
QMB300EK-2	alias	QMB300EK	EDH-SQD-00060	A	576
QMB-306-EX	alias	QMB306EX	EDH-SQD-00106	A	543
QMB-310-EX	alias	QMB310EX	EDH-SQD-00108	A	544
QMB-320-EX	alias	QMB320EX	EDH-SQD-00110	A	544
QMB322TD	alias	QMB322TW	EDH-SQD-00012	C	558
QMB323TD	alias	QMB323TW	EDH-SQD-00014	C	559
QMB362T	alias	QMB362TW	EDH-SQD-00031	C	565
QMB610EK-1	alias	QMB610EK	EDH-SQD-00061	A	577
QMB610EK-2	alias	QMB610EK	EDH-SQD-00061	A	577
S29348	alias	29348	EDH-SQD-00181	D	653
S32508	alias	32508	EDH-SQD-00268	D	628
S32510	alias	32510	EDH-SQD-00269	D	628
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	6554C02	EDH-EAT-00295	A	337
SG1BCK4 (as printed 2019)	alias	SG1BCK	EDH-GEA-00351	B	905
SK1LCK3 (as printed 2019)	alias	SK1LCK	EDH-GEA-00352	B	909
SKLVK6 / SKLVK8 (as printed)	alias	SKLVK	EDH-GEA-00333	B	889
SL-100	alias	SL100	EDH-SQD-00153	A	437
SL-225	alias	SL-225	EDH-SQD-00556	A	438
SL-400	alias	SL400	EDH-SQD-00147	A	594
SL-800	alias	SL800	EDH-SQD-00154	A	438
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	42C4050	EDH-EAT-00222	A	186
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	1C96645	EDH-EAT-00233	A	183
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	42C4051	EDH-EAT-00226	A	187
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	1C96653	EDH-EAT-00231	A	185

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	42C4052	EDH-EAT-00230	A	187
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	1C96650	EDH-EAT-00227	A	184
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	1C97022	EDH-EAT-00234	A	186
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	1C96647	EDH-EAT-00223	A	183
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	1C96646	EDH-EAT-00221	A	183
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	1C96649	EDH-EAT-00225	A	184
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	1C96654	EDH-EAT-00232	A	186
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	1C96648	EDH-EAT-00224	A	184
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	1C96651	EDH-EAT-00228	A	185
TA401LD	alias	2TA401LDK	EDH-EAT-00500	D	393
TA401LD	alias	3TA401LDK	EDH-EAT-00501	D	394
TA401LD	alias	4TA401LDK	EDH-EAT-00502	D	395
TA603LD	alias	2TA603LDK	EDH-EAT-00505	D	393
TA603LD	alias	3TA603LDK	EDH-EAT-00506	D	394
TA603LD	alias	4TA603LDK	EDH-EAT-00507	D	395
TC0416 / TC0414	alias	TC041	EDH-GEA-00303	B	883
TCAL1214 / TCAL1212	alias	TCAL121	EDH-GEA-00312	B	885
TCAL1225 / TCAL1223	alias	TCAL122	EDH-GEA-00316	B	885
TCAL1314 / TCAL1312	alias	TCAL131	EDH-GEA-00322	B	886
TCAL433	alias	TCAL43	EDH-GEA-00292	B	875
TCAL812 / TCAL811	alias	TCAL81	EDH-GEA-00308	B	887
TCAL912 / TCAL911	alias	TCAL91	EDH-GEA-00319	B	887
TCALK21214 / TCALK21212	alias	TCALK2121	EDH-GEA-00313	B	878
TCALK21225 / TCALK21223	alias	TCALK2122	EDH-GEA-00317	B	878
TCALK2812 / TCALK2811	alias	TCALK281	EDH-GEA-00309	B	879
TCALK2912 / TCALK2911	alias	TCALK291	EDH-GEA-00320	B	879
TCALK31214 / TCALK31212	alias	TCALK3121	EDH-GEA-00314	B	879
TCALK31225 / TCALK31223	alias	TCALK3122	EDH-GEA-00318	B	880
TCALK3812 / TCALK3811	alias	TCALK381	EDH-GEA-00310	B	881
TCALK3912 / TCALK3911	alias	TCALK391	EDH-GEA-00321	B	881
TCLK2652 / TCLK2651 (as printed)	alias	TCLK265	EDH-GEA-00339	B	903
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	TCLK365	EDH-GEA-00340	B	903
TCO121	alias	TC0121	EDH-GEA-00315	B	882
TCO18	alias	TC018	EDH-GEA-00354	B	897
TCO81A	alias	TC081A	EDH-GEA-00311	B	884
TJLVK8 (as printed)	alias	TJLVK	EDH-GEA-00334	B	877
UPC 782114795194	alias	KPRL4W11X	EDH-EAT-00338	A	301
UPC 782114795941	alias	KPRL4FD	EDH-EAT-00328	A	311
UPC 782114795996	alias	KPRL4KDS	EDH-EAT-00312	A	317
UPC 782114796030	alias	KPRL4JDS	EDH-EAT-00309	A	315

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 782114796078	alias	KPRL4ND	EDH-EAT-00321	A	328
UPC 782114796115	alias	KPRL4JDT	EDH-EAT-00310	A	316
UPC 782114796184	alias	KPRL44X	EDH-EAT-00331	A	298
UPC 782114796191	alias	KPRL4LC	EDH-EAT-00314	A	321
UPC 782114796207	alias	KPRL45XS	EDH-EAT-00334	A	300
UPC 782114796214	alias	KPRL45X	EDH-EAT-00333	A	299
UPC 782114796412	alias	KPRL4KDT	EDH-EAT-00313	A	318
UPC 782114798195	alias	KPRL4ED	EDH-EAT-00329	A	308
UPC 782114858813	alias	KPRL4LD	EDH-EAT-00330	A	323
UPC 782114858820	alias	KPRL4ED2	EDH-EAT-00327	A	309
UPC 782114887257	alias	KPRL3ABA06	EDH-EAT-00184	A	223
UPC 782114887271	alias	KPRL3ABA06-1	EDH-EAT-00185	A	223
UPC 782114887295	alias	KPRL3ABA12	EDH-EAT-00186	A	224
UPC 782114887301	alias	KPRL3ABA12-1	EDH-EAT-00187	A	225
UPC 782114887318	alias	KPRL3ABA18	EDH-EAT-00188	A	226
UPC 782114887332	alias	KPRL3ABA18-1	EDH-EAT-00189	A	226
UPC 782114887349	alias	KPRL3ABA24	EDH-EAT-00190	A	227
UPC 782114887363	alias	KPRL3AFD2	EDH-EAT-00206	A	230
UPC 782114887370	alias	KPRL3AFD3	EDH-EAT-00205	A	230
UPC 782114887387	alias	KPRL3AGB06	EDH-EAT-00192	A	231
UPC 782114887400	alias	KPRL3AGB12	EDH-EAT-00194	A	232
UPC 782114887417	alias	KPRL3AGB12-1	EDH-EAT-00195	A	233
UPC 782114887424	alias	KPRL3AGB18	EDH-EAT-00196	A	234
UPC 782114887431	alias	KPRL3AGB18-1	EDH-EAT-00197	A	235
UPC 782114887448	alias	KPRL3AGB24	EDH-EAT-00198	A	235
UPC 782114887462	alias	KPRL4CA	EDH-EAT-00308	A	305
UPC 782114887479	alias	KPRL4CKD	EDH-EAT-00322	A	306
UPC 782114887493	alias	KPRL4CND	EDH-EAT-00324	A	307
UPC 782114887509	alias	KPRL4FBP	EDH-EAT-00311	A	310
UPC 782114887516	alias	KPRL4FD1	EDH-EAT-00325	A	313
UPC 782114887523	alias	KPRL4FD2	EDH-EAT-00326	A	314
UPC 782114887530	alias	KPRL4LAP	EDH-EAT-00317	A	319
UPC 782114887547	alias	KPRL4LCL	EDH-EAT-00318	A	321
UPC 782114887554	alias	KPRL4MC	EDH-EAT-00316	A	325
UPC 782114887561	alias	KPRL4NBP	EDH-EAT-00319	A	326
UPC 782116654130	alias	KPRL4LG	EDH-EAT-00315	A	324
UPC 786676000499	alias	BRLW	EDH-EAT-00459	A	30
UPC 786676001762	alias	BRSF125	EDH-EAT-00448	A	27
UPC 786676001779	alias	BRSF150	EDH-EAT-00449	A	28
UPC 786676001786	alias	3BRSF150	EDH-EAT-00451	A	26
UPC 786676376228	alias	BRLW1	EDH-EAT-00460	A	30
UPC 786676460101	alias	BRL200	EDH-EAT-00453	A	25
UPC 786676461405	alias	BRS225	EDH-EAT-00450	A	27
UPC 786676461504	alias	3BRS225	EDH-EAT-00452	A	26
UPC 786679004203	alias	KPRL4W9X	EDH-EAT-00337	A	303
UPC 786689014650	alias	PRLSEBLGKD	EDH-EAT-00213	A	191
UPC 786689014674	alias	PRLSEBFD	EDH-EAT-00215	A	189
UPC 786689014681	alias	PRLSEBGHB	EDH-EAT-00216	A	189
UPC 786689040796	alias	KPRL3AED3	EDH-EAT-00208	A	229
UPC 786689242091	alias	PRLSEBPD2	EDH-EAT-00218	A	214
UPC 786689242107	alias	PRLSEBPD3	EDH-EAT-00217	A	215
UPC 786689242572	alias	KPRL4X22	EDH-EAT-00300	A	330

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
UPC 786689242589	alias	KPRL4X32	EDH-EAT-00301	A	331
UPC 786689242596	alias	KPRL4X334S	EDH-EAT-00302	A	331
UPC 786689242602	alias	KPRL4X334T	EDH-EAT-00303	A	332
UPC 786689242619	alias	KPRL4X336	EDH-EAT-00304	A	333
UPC 786689242626	alias	KPRL4X34	EDH-EAT-00305	A	334
UPC 786689242633	alias	KPRL4X35	EDH-EAT-00306	A	335
UPC 786689242640	alias	KPRL3X23	EDH-EAT-00200	A	239
UPC 786689242657	alias	KPRL3X23T	EDH-EAT-00202	A	240
UPC 786689242664	alias	KPRL3X22	EDH-EAT-00201	A	237
UPC 786689242671	alias	KPRL3X22T	EDH-EAT-00203	A	238
UPC 786689346935	alias	KPRL3XBA06	EDH-EAT-00168	A	241
UPC 786689346942	alias	KPRL3XBA12	EDH-EAT-00170	A	243
UPC 786689346959	alias	KPRL3XBA06-1	EDH-EAT-00169	A	242
UPC 786689346966	alias	KPRL3XBA12-1	EDH-EAT-00171	A	244
UPC 786689346973	alias	KPRL3XBA18	EDH-EAT-00172	A	245
UPC 786689346980	alias	KPRL3XBA18-1	EDH-EAT-00173	A	246
UPC 786689346997	alias	KPRL3XBA24	EDH-EAT-00174	A	247
UPC 786689347000	alias	KPRL3XGB06-1	EDH-EAT-00177	A	250
UPC 786689347017	alias	KPRL3XGB12	EDH-EAT-00178	A	251
UPC 786689347024	alias	KPRL3XGB12-1	EDH-EAT-00179	A	252
UPC 786689347031	alias	KPRL3XBA24-1	EDH-EAT-00175	A	248
UPC 786689347048	alias	KPRL3XGB06	EDH-EAT-00176	A	249
UPC 786689347062	alias	KPRL3XGB18	EDH-EAT-00180	A	253
UPC 786689347079	alias	KPRL3XGB18-1	EDH-EAT-00181	A	254
UPC 786689347086	alias	KPRL3XGB24	EDH-EAT-00182	A	255
UPC 786689347093	alias	KPRL3XGB24-1	EDH-EAT-00183	A	256
UPC 887621572570	alias	BK1A	EDH-SIE-00096	A	1081
VCEL021-14S1	alias	VCEL02114S1	EDH-SQD-00074	A	536
VCEL030-516H1	alias	VCEL030516H1	EDH-SQD-00071	A	537
VCEL050-12H1	alias	VCEL05012H1	EDH-SQD-00072	A	537
VCEL060-12H1	alias	VCEL06012H1	EDH-SQD-00079	A	537
VCEL075-12H1	alias	VCEL07512H1	EDH-SQD-00073	A	537
VCELC021-14S1	alias	VCELC02114S1	EDH-SQD-00075	A	538
VCELC030-38H1	alias	VCELC03038H1	EDH-SQD-00076	A	538
VCELC050-12H1	alias	VCELC05012H1	EDH-SQD-00077	A	538
VCELC075-12H1	alias	VCELC07512H1	EDH-SQD-00078	A	538
Westinghouse DA breaker	supersedes	KCDPDK	EDH-EAT-00361	A	80
Westinghouse EB, EHB breaker	supersedes	KCDPEHD	EDH-EAT-00353	A	81
Westinghouse FB breaker	supersedes	KCDPFDB	EDH-EAT-00354	A	83
Westinghouse HFB breaker	supersedes	KCDPFD	EDH-EAT-00355	A	82
Westinghouse HKA breaker	supersedes	KCDPHKD	EDH-EAT-00357	A	84
Westinghouse JA breaker	supersedes	KCDPKDB	EDH-EAT-00359	A	88
Westinghouse JB breaker	supersedes	KCDPJDB	EDH-EAT-00360	A	86
Westinghouse KA breaker	supersedes	KCDPKD	EDH-EAT-00356	A	87
Westinghouse KB, HKB breaker	supersedes	KCDPJD	EDH-EAT-00358	A	85
Westinghouse LA, HLA breaker	supersedes	KCDPLD	EDH-EAT-00362	A	89
Westinghouse MA, HMA breaker	supersedes	KCDPMDL	EDH-EAT-00363	A	90
Westinghouse NB, HNB breaker	supersedes	KCDPND	EDH-EAT-00364	A	91

11.2 Replacement and successor statements

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00803	EELD36600SB2	Eaton chart: EE LS / LS(A) / LS(E) / LS(B) -> PRL5P LD	A

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00343	KCDPCA	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00341	KCDPED225	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00340	KCDPFB100	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00342	KCDPFBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00344	KCDPKB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00346	KCDPLA400	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00347	KCDPLA600	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00345	KCDPLB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00348	KCDPLCL	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00349	KCDPMC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00351	KCDPNBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00350	KCDPNC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00329	KPRL4ED	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00327	KPRL4ED2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00328	KPRL4FD	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00325	KPRL4FD1	KPRL4X12 covers the same frames in the April 2021 table	D
EDH-EAT-00326	KPRL4FD2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00330	KPRL4LD	KPRL4LC covers the same frames in the April 2021 table	D
EDH-GEA-00163	AMC3GMFP	empower (ABB) lists AMC3GMFP as "REPLACED BY AMC3GM + AFP4SGS"	A
EDH-GEA-00146	AMC6EYFP	empower (ABB) lists AMC6EYFP as "REPLACED BY AMC6EY + AFP3EYD"	A
EDH-GEA-00152	AMC6FJFP	empower (ABB) lists AMC6FJFP as "CONSISTS OF AMC6FJ + AFP3SFD"	A
EDH-GEA-00121	AMCB3FJFP	ABB Tmax XT retrofit kit SRFB3XT4FPX (or SRFB3XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00124	AMCB3GMFP	ABB Tmax XT retrofit kit SRFB3XT5MFPX (or SRFB3XT5MFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00127	AMCB3KMFP	ABB Tmax XT retrofit kit SRFB3XT7MFPX (or SRFB3XT7MFPK with Kirk lock provision) for Tmax XT7, 1200 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00104	AMCB6EBFP	empower (ABB) lists AMCB6EBFP as "REPLCE BY AMCB6EB + AFP3SED"	A
EDH-GEA-00104	AMCB6EBFP	ABB Tmax XT retrofit kit SRFB6XT1FPX (or SRFB6XT1FPK with Kirk lock provision) for Tmax XT1, 125 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00106	AMCB6FBFP	empower (ABB) lists AMCB6FBFP as "REPLACED BY AMCB6FB + AFP3FBD"	A
EDH-GEA-00110	AMCB6FJFP	empower (ABB) lists AMCB6FJFP as "REPLACED BY AMCB6FJ + AFP3SFD"	A
EDH-GEA-00110	AMCB6FJFP	ABB Tmax XT retrofit kit SRFB6XT4FPX (or SRFB6XT4FPK with Kirk lock provision) for Tmax XT4, 250 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-GEA-00116	AMCB6GBFP	empower (ABB) lists AMCB6GBFP as "REPLCE BY AMCB6GB + AFP4SGD"	A
EDH-GEA-00116	AMCB6GBFP	ABB Tmax XT retrofit kit SRFB6XT5BFPX (or SRFB6XT5BFPK with Kirk lock provision) for Tmax XT5, 600 A breakers; breaker ordered separately; legacy Spectra breaker frames E/F/G/K served	A
EDH-SIE-00004	MBKED3A	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4)	A
EDH-SIE-00008	MBKFD3A	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6)	A
EDH-SIE-00005	MBKQR1A	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA)	A

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-SIE-00006	MBKQR3A	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2)	A
EDH-SIE-00010	MBKVA5262B	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA)	A
EDH-SIE-00129	S3VA52T	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A
EDH-SIE-00156	S3VA52TD	Panels with factory-installed provisions made before April 2021 lack bus extensions: add kit S3VA52PR (one per breaker). Nut keepers: 3VA9233-0QA00 (3VA52, kit of 3) or 3VA9243-0QA00 (3VA61/62, kit of 3)	A
EDH-SIE-00135	S3VA53T	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A
EDH-SIE-00161	S3VA53TD	Missing bus extensions on factory provisions: kit S3VA53PR; nut keepers 3VA9473-0QA00 (kit of 3) or factory-installed by '2' as 12th character of breaker order no.	A
EDH-SIE-00142	S3VA54T	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A
EDH-SIE-00168	S3VA54TD	S3VA53PR provision kit if bus extensions missing; nut keepers 3VA9473-0QA00	A
EDH-SQD-00317	NQMB2KI	NQMB2Q or NQMB2HJ with PowerPacT Q/H/J breaker	D
EDH-SQD-00101	QMB210T	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A
EDH-SQD-00104	QMB2240	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A
EDH-SQD-00135	QMB303T	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C
EDH-SQD-00136	QMB306T	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C
EDH-SQD-00100	QMB310T	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A
EDH-SQD-00103	QMB3240	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A
EDH-SQD-00105	QMB3260	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A
EDH-SQD-00099	QMB3606T	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A
EDH-SQD-00102	QMB3620	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A
EDH-SQD-00034	QMB363TW	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A
EDH-SQD-00134	QMB3640	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C
EDH-SQD-00042	QMB367W	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A
EDH-SQD-00522	SK4515	Replace complete panelboard with new I-Line	A
EDH-SQD-00523	SK4516	Replace complete panelboard with new I-Line	A
EDH-SQD-00524	SK4517	Replace complete panelboard with new I-Line	A
EDH-SQD-00525	SK4578	Replace complete panelboard with new I-Line	A
EDH-SQD-00355	SKNQOD225	No OEM replacement kit identified; NQOD interiors to be replaced by NQ (interior+box+trim)	B

11.3 Companion parts required for installation

Part	Requires
3TA631LK (EDH-EAT-00543)	LTS3K
4TA631LK (EDH-EAT-00544)	LTS4K
3T631LK (EDH-EAT-00545)	LTS3K
4T631LK (EDH-EAT-00546)	LTS4K
3TA632LK (EDH-EAT-00547)	LTS3K
4TA632LK (EDH-EAT-00548)	LTS4K
3T632LK (EDH-EAT-00549)	LTS3K
4T632LK (EDH-EAT-00550)	LTS4K
FCWTK (EDH-EAT-00617)	3T100FB

Part	Requires
ASPP6QD6D (EDH-GEA-00001)	139C5702AQDG1, 139C5702BQDG1, 139C5702CQDG1, 139C5500P81, 139C5503P64
ASPP6SE6D (EDH-GEA-00002)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5500P82, 139C5503P77
ASPP6SF3S (EDH-GEA-00003)	139C5702ASFG1, 139C5702BSFG1, 139C5702CSFG1, 139C5500P84, 139C5503P90
ASPP6SG3S (EDH-GEA-00004)	315A7046P7, 315A7046P8, 315A7046P9, 139C5500P83, 139C5503P103
ASPP6FB6D (EDH-GEA-00005)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5700P86, 139C5503P77
ASPP6QB6D (EDH-GEA-00006)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6QB12D (EDH-GEA-00007)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6EY6D (EDH-GEA-00008)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
ASPP6EY12D (EDH-GEA-00009)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
AMCB4QDFP (EDH-GEA-00102)	AFP2QDD
AMCB6QDFP (EDH-GEA-00108)	AFP3QDD
AFP6SKS (EDH-GEA-00144)	455C592P1, 455C592P2, 252B1768G1, 252B1768G2
AMC6EYFP (EDH-GEA-00146)	AFP3EYD
AMC6FBFP (EDH-GEA-00147)	AFP3FBD
AMC6EBFP (EDH-GEA-00149)	AFP3SED
AMC6QDFP (EDH-GEA-00150)	AFP3QDD
AMC6FJFPTF (EDH-GEA-00151)	AFP3TFD
AMC6FJFP (EDH-GEA-00152)	AFP3SFD
AMC6FGBFP (EDH-GEA-00154)	AFP4FGD
AMC6GBFP (EDH-GEA-00155)	AFP4SGD
AMC3FJFPTF (EDH-GEA-00159)	AFP3TFS
AMC3FJFP (EDH-GEA-00160)	AFP3SFS
AMC3FGMFP (EDH-GEA-00162)	AFP4FGS
AMC3GMFP (EDH-GEA-00163)	AFP4SGS
AMC3KMFP (EDH-GEA-00164)	AFP6SKS
AMC4EBFP (EDH-GEA-00167)	AFP2TED
AMC4SEFP (EDH-GEA-00168)	AFP3SED
AMC4QDFP (EDH-GEA-00169)	AFP2QDD
AMC4FJFPTF (EDH-GEA-00170)	AFP3TFD
AMC4FJFP (EDH-GEA-00171)	AFP3SFD
AMC4FGBFP (EDH-GEA-00173)	AFP4FGD
AMC4GBFP (EDH-GEA-00174)	AFP4SGD
AMC2FJFPTF (EDH-GEA-00178)	AFP3TFS
AMC2FJFP (EDH-GEA-00179)	AFP3SFS
AMC2FGMFP (EDH-GEA-00181)	AFP4FGS
AMC2GMFP (EDH-GEA-00182)	AFP4SGS
AMC2KMFP (EDH-GEA-00183)	AFP6SKS
TCAL61 (EDH-GEA-00304)	789A448G1
TC061 (EDH-GEA-00307)	789A448G1
TCAL81 (EDH-GEA-00308)	789A448G1
TC081A (EDH-GEA-00311)	789A448G1
TCAL121 (EDH-GEA-00312)	789A448G2
TC0121 (EDH-GEA-00315)	789A448G2
AMCB6EB (EDH-GEA-00439)	AHKBE1
AMCB4SE (EDH-GEA-00440)	AHKBE1
AMCB4EB (EDH-GEA-00441)	AHKBE1
AMCB6FJ (EDH-GEA-00442)	AHKBF1
AMCB3FJ (EDH-GEA-00443)	AHKBF1
AMCB2FJ (EDH-GEA-00444)	AHKBF1

Part	Requires
AMCB4FJ (EDH-GEA-00445)	AHKBF1
AMCB2GM (EDH-GEA-00446)	252B3618G13, 252B3618G14, 252B3618G15, 252B3576P1, 10083041P1, AHKBG1
AMCB3GM (EDH-GEA-00447)	252B3618G13, 252B3618G14, 252B3618G15, 252B3576P1, 10083041P1, AHKBG1
AMCB4GB (EDH-GEA-00448)	252B3618G10, 252B3618G11, 252B3575P1, 208C2291P1
AMCB6GB (EDH-GEA-00449)	252B3618G10, 252B3618G11, 252B3575P1, 208C2291P1
AMB2600MA (EDH-GEA-00552)	252B3638
AMB3600MA (EDH-GEA-00553)	252B3638
AMB2600MC (EDH-GEA-00554)	252B3638
AMB3600MC (EDH-GEA-00555)	252B3638
AMB2120MA (EDH-GEA-00556)	252B3638
AMB3120MA (EDH-GEA-00557)	252B3638
AMB3120MC (EDH-GEA-00558)	252B3638
AMB2120DMC (EDH-GEA-00559)	252B3638
AMB3120DMC (EDH-GEA-00560)	252B3638
AMB2120DMA (EDH-GEA-00561)	252B3638
AMB3120DMA (EDH-GEA-00562)	252B3638
AMB2120N (EDH-GEA-00563)	252B3638
AMB3120N (EDH-GEA-00564)	252B3638
AMB2120DN (EDH-GEA-00565)	252B3638
AMB3120DN (EDH-GEA-00566)	252B3638
AMB2250CA (EDH-GEA-00567)	252B3638
AMB3250CA (EDH-GEA-00568)	252B3638
AMB2600CA (EDH-GEA-00569)	252B3638
AMB3600CA (EDH-GEA-00570)	252B3638
AMB2800CA (EDH-GEA-00571)	252B3638
AMB3800CA (EDH-GEA-00572)	252B3638
AMB2120CA (EDH-GEA-00573)	252B3638
AMB3120CA (EDH-GEA-00574)	252B3638
AMB2250DCA (EDH-GEA-00575)	252B3638
AMB3250DCA (EDH-GEA-00576)	252B3638
AMB2600DCA (EDH-GEA-00577)	252B3638
AMB3600DCA (EDH-GEA-00578)	252B3638
AMB2800DCA (EDH-GEA-00579)	252B3638
AMB3800DCA (EDH-GEA-00580)	252B3638
AMB2120DCA (EDH-GEA-00581)	252B3638
AMB3120DCA (EDH-GEA-00582)	252B3638
P1CONACPHCU (EDH-SIE-00088)	P1SCRWS
P1CONBPHAL (EDH-SIE-00089)	P1SCRWS
P1CONBPHCU (EDH-SIE-00090)	P1SCRWS
P1CONACPHAL (EDH-SIE-00097)	P1SCRWS
BBKVA5262P2S (EDH-SIE-00112)	BBKVA5262P2HW
BBKVA52P3T (EDH-SIE-00114)	BBKVA52P3HW
TC1Q1 (EDH-SIE-00245)	TNKG3
3TC1Q1 (EDH-SIE-00246)	TNKG3
3TC1GG20 (EDH-SIE-00248)	TNKG3
AL150HD (EDH-SQD-00082)	S37446, S37447
AL175JD (EDH-SQD-00083)	S37448
AL250JD (EDH-SQD-00084)	S37448
S33930 (EDH-SQD-00152)	AL1200R53K
4051749901 (EDH-SQD-00159)	8011417101
YA060HD (EDH-SQD-00195)	S37449
YA150HD (EDH-SQD-00196)	S37449

Part	Requires
YA150JD (EDH-SQD-00197)	S37450
YA250J35 (EDH-SQD-00198)	S37450
CYA060HD (EDH-SQD-00208)	S37449
CYA150HD (EDH-SQD-00209)	S37449
CYA150JD (EDH-SQD-00210)	S37450
CYA250J3 (EDH-SQD-00211)	S37450
S432475 (EDH-SQD-00241)	S36967
S432476 (EDH-SQD-00242)	S36967
32508 (EDH-SQD-00268)	29348
NQMB2Q (EDH-SQD-00313)	NQHJQLLC
NQMB2HJ (EDH-SQD-00315)	NQHJQLLC, S37444, S37445
NQMB4LA (EDH-SQD-00318)	NQLALLC
NQMB6PPL (EDH-SQD-00319)	NQPPLLLC
NQN6CRUS (EDH-SQD-00339)	NFNQCRBOND46
N150MH (EDH-SQD-00375)	NFHJLLC, S37444
N250MJ (EDH-SQD-00376)	NFHJLLC, S37445
N400M (EDH-SQD-00377)	NFLALLC
N600MPPL (EDH-SQD-00378)	NFPPLLLC

12 Indexes

12.1 Manufacturer index

Code	Lineage	Brand markings	Families	Parts	Pg
EAT	Eaton lineage	Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant	41	901	22
SQD	Square D / Schneider Electric	Square D, Schneider Electric, Federal Pioneer (Canada)	14	577	433
GEA	GE / ABB lineage	General Electric Industrial Solutions; ABB from 2018; ReliaGear	12	610	659
SIE	Siemens lineage	Siemens, ITE, ITE Imperial, Gould, Murray	14	442	911
FPE	Federal Pacific Electric	Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)	7	43	1134
ZIN	Zinsco / Sylvania	Zinsco, GTE-Sylvania	2	25	1154
OTH	Other manufacturers	Other / unassigned	4	1	1162

12.2 Equipment family index (including aliases)

Name / alias	Family	Mfr	Type	ID	Pg
3FQS	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-041	268
5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	340
A Series	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
A-SERIES	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
A-Series Column Panelboards (ALC, AQC, AEC)	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	678
A-Series II	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
A-Series II Powerpanel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678
A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678
A-SERIES-COL	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	678
A-SERIES-PWR	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678
A1B	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	467
A2B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
ABH	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
ABH	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	701
AD	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AD Plus	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AD/AE/AQ Type P & N Power Panel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678
ADP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678

Name / alias	Family	Mfr	Type	ID	Pg
AE	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AEC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	678
AEF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AEP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678
AL	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
ALC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	678
APN	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
APNB	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
AQ	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AQC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	678
AQF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AQP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	678
AS	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
AV Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV-1	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV-2	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV-LINE	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV-Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV-Line switchboards (legacy)	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV1	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
AV2	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	866
BDP	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1134
BDP panel board	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1134
BDP Spectra bolt-on (as listed by Superbreakers - likely erroneous)	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1134
BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	24
Bryant BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	24
Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1020
Bulldog Pushmatic	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1020
CCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
CCB-QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64
CDP	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1137

Name / alias	Family	Mfr	Type	ID	Pg
CDP 5.25	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
CDP panel board	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1137
CDP panelboard	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1137
CDP pre-Series 5	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
CDP-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
CDP-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
CDP-7	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
CDP-ITE	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
CDP/HCDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64
CDP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
CDP7	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
CDP?	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
CEB	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	1162
CH lighting panel	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-036	98
CH-BR-RETRO	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	31
CHA-PM4	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	91
Challenger BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	24
Challenger distribution panelboards (PM4a / PM4b)	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	91
Challenger panelboard	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	91
CHB panelboard	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-036	98
CHP	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-036	98
CHP/CHB	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-036	98
Class 2110	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
Class 4620	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	532
Class II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
column panelboard	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
COMMANDER	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	1162
Commander / CEB panels (Zinsco-type)	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	1162
Converti-Fuse	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	701
CONVERTI-FUSE	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	701
Convertible Circuit Breaker panelboard	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
CPD	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64

Name / alias	Family	Mfr	Type	ID	Pg
Crouse-Hinds MP	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	912
Cutler-Hammer CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64
Cutler-Hammer CHP / CHB lighting panelboards	Cutler-Hammer CHP / CHB lighting panelboards	EAT	panelboard	FAM-EAT-036	98
Cutler-Hammer MP100 fusible distribution panelboard	Cutler-Hammer MP100 fusible distribution panelboard	EAT	panelboard	FAM-EAT-030	106
Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-031	349
Cutler-Hammer MP40 distribution panelboard	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-029	107
Cutler-Hammer NFB panelboard	Cutler-Hammer NFB panelboard	EAT	panelboard	FAM-EAT-037	114
Cutler-Hammer Type EE plug-in power panelboard / switchboard	Cutler-Hammer Type EE plug-in power panelboard / switchboard	EAT	panelboard	FAM-EAT-034	98
Cutler-Hammer Type EP plug-in power panelboard	Cutler-Hammer Type EP plug-in power panelboard	EAT	panelboard	FAM-EAT-035	99
Cutler-Hammer Type ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	348
Cutler-Hammer Type PB lighting panelboard	Cutler-Hammer Type PB lighting panelboard	EAT	panelboard	FAM-EAT-032	115
Cutler-Hammer Type PH / PH-L panelboard	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-033	115
DB	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
double slot	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1154
Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	31
EE	Cutler-Hammer Type EE plug-in power panelboard / switchboard	EAT	panelboard	FAM-EAT-034	98
Electra-Center	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1020
Electri-Center	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1020
EP	Cutler-Hammer Type EP plug-in power panelboard	EAT	panelboard	FAM-EAT-035	99
ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	348
ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	348
F1	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
F2	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
FA	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1162
FAM	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1162
FC-1	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FC-20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FC-I	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088

Name / alias	Family	Mfr	Type	ID	Pg
FC-II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FC20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FCI	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FCII	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FCRS	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
FDP	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	100
FDP	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1141
Federal Pacific QMQB	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1141
Federal Pacific switchgear	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1152
FPE BDP distribution panelboard (double-hole bus)	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	1134
FPE CDP distribution panelboard (single-hole bus)	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1137
FPE FDP fusible distribution panelboard / QMQB switchboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1141
FPE NA1B / NH1B lighting and appliance panelboards	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
FPE NBLP / NQLP bolt-on lighting panelboards	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1150
FPE NDP panelboard	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	1151
FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1152
FPE-SWBD	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1152
FPP (10in)	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
FPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
Frank Adam Electric panelboards	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1162
Frank Adams	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1162
Fusematic	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1152
GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
GE NLAB	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
GE-Trumbull	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	865
HCB	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1152
HCDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64

Name / alias	Family	Mfr	Type	ID	Pg
HCJ	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCM	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCN	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCP	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCP-SU	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCR-U	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCW	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HCWM	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
HNDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
HR-7	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	914
HWFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
I Line	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
I-LINE	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
I-Line Circuit Breaker Panelboard / I-Line distribution section	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
I-Line Combo (CP...)	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
IFS	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	348
IFS switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	348
ILine	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	434
Integrated Facility Switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	348
Integrated Facility System switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	348
ITE CDP	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	ITE CDP distribution panelboard (pre-Series 5, 5.25 in deep and CDP-7 variants)	SIE	panelboard	FAM-SIE-014	912
ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	914
KINNEY	Kinney panelboards	OTH	panelboard	FAM-OTH-004	1163
Kinney panelboards	Kinney panelboards	OTH	panelboard	FAM-OTH-004	1163
KLAMPSWFUZ	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1162
Legacy QMB distribution (pre-October-1984 QM and QW interiors)	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
Lincoln Flex Center retrofit	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	31
Magnatrip	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
MH Multibreaker	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
MH1B (OCR)	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	491

Name / alias	Family	Mfr	Type	ID	Pg
ML	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	463
ML-1	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	463
ML1	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	463
ML12	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
MLB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
MLN	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	463
MLW	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	463
MOB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
MP 40	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-029	107
MP-100	Cutler-Hammer MP100 fusible distribution panelboard	EAT	panelboard	FAM-EAT-030	106
MP-2	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-031	349
MP-200	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-031	349
MP-40	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-029	107
MP-HT	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	912
MP100	Cutler-Hammer MP100 fusible distribution panelboard	EAT	panelboard	FAM-EAT-030	106
MP2	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-031	349
MP200	Cutler-Hammer MP2 / MP-200 group-mounted switchboard (distribution section)	EAT	switchboard	FAM-EAT-031	349
MP40	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-029	107
MP50 (dealer usage)	Cutler-Hammer MP40 distribution panelboard	EAT	panelboard	FAM-EAT-029	107
MT12MBB	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
MTMB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
MURRAY	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	912
Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	912
Murray MP	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	912
NA	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	701
NA-1B	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	467
NA-type panel	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NA1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NA1B	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NA1B	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	467
NA1B-LX	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	467
NAB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113

Name / alias	Family	Mfr	Type	ID	Pg
NAB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NAB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	701
NAB / NHB bolt-on panelboards (legacy)	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	701
NAIB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NAIB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NAIB	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	467
NB panelboard	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1150
NBLP	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1150
NCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
NDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NDP	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	1151
NEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NEHB	NEHB panelboard	SQD	panelboard	FAM-SQD-010	467
NEHB lighting panelboard	NEHB panelboard	SQD	panelboard	FAM-SQD-010	467
NEHB panelboard	NEHB panelboard	SQD	panelboard	FAM-SQD-010	467
New Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
NextGen P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
NF	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-009	468
NF panelboard (Class 1670)	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-009	468
NF Series 0	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-009	468
NF Series E1	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-009	468
NFB	Cutler-Hammer NFB panelboard	EAT	panelboard	FAM-EAT-037	114
NFOM	NF panelboard (Class 1670)	SQD	panelboard	FAM-SQD-009	468
NH-type panel	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NH1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NH1B	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NH1B	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	491
NH1B-LX	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	491
NHB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NHB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148
NHB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	701
NHB	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	914
NHDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NHDP	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	1137
NHDP (related?)	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	1151
NHEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NHIB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
NHIB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	1148

Name / alias	Family	Mfr	Type	ID	Pg
NHIB	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	491
NLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NLAB	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
NLAB	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	914
NLAB single row	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NLAB-AB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NLAB-ABH	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NLAB-LX	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NLAB-LXX	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	914
NLAB?	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	701
NLABLX	ITE-Siemens (Canada) NLAB / NHB / HR-7 lighting panelboards	SIE	panelboard	FAM-SIE-013	914
NLTQ	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
NLTQX	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
NM/NMM	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
NM1B	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
NMIB	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
NMM	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
NOFUZE panelboard	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
NPLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NQ	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-006	492
NQ lighting panelboard	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-006	492
NQ panelboard (Class 1640)	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-006	492
NQ RTI	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-006	492
NQ0	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQ14 (14-inch-wide)	NQ panelboard (Class 1640)	SQD	panelboard	FAM-SQD-006	492
NQB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NQC	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NQH	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQHB	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQLP	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	1150
NQO	NQO / NQOB panelboard	SQD	panelboard	FAM-SQD-008	525
NQO	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQO / NQOB panelboard	NQO / NQOB panelboard	SQD	panelboard	FAM-SQD-008	525
NQO-LX	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQOB	NQO / NQOB panelboard	SQD	panelboard	FAM-SQD-008	525
NQOB	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525

Name / alias	Family	Mfr	Type	ID	Pg
NQOB column	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQOB-LX	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NQOD	NQOD panelboard (Class 1630)	SQD	panelboard	FAM-SQD-007	531
NQOD lighting panelboard	NQOD panelboard (Class 1630)	SQD	panelboard	FAM-SQD-007	531
NQOD panelboard (Class 1630)	NQOD panelboard (Class 1630)	SQD	panelboard	FAM-SQD-007	531
NQP	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
NTFB (basic NQOB bus)	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
NTQ	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
NY1B	NEHB panelboard	SQD	panelboard	FAM-SQD-010	467
NYIB	NEHB panelboard	SQD	panelboard	FAM-SQD-010	467
old style QMB	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
Original P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	915
P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	915
P1 (pre-2014/2015)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	915
P1...N	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
P1...T	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
P1R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
P1RB	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
P1RL	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
P2	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	925
P2R	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
P2RB	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
P2RL	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
P3	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	948
P4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
P5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
PB	Cutler-Hammer Type PB lighting panelboard	EAT	panelboard	FAM-EAT-032	115
PH	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-033	115
PH-L	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-033	115
PM4a	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	91
PM4b	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	91
Pow-R-Command	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	116
Pow-R-Command lighting control panelboard	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	116
POW-R-LINE	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
Pow-R-Line 1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
Pow-R-Line 1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	124
POW-R-LINE 1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	124
Pow-R-Line 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	200

Name / alias	Family	Mfr	Type	ID	Pg
Pow-R-Line 2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
Pow-R-Line 2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	216
Pow-R-Line 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	217
Pow-R-Line 3	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	218
Pow-R-Line 3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	220
Pow-R-Line 3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	267
Pow-R-Line 3FQS	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-041	268
Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-041	268
Pow-R-Line 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	295
Pow-R-Line 4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
Pow-R-Line 4B	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
Pow-R-Line 4D	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
Pow-R-Line 4F	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
Pow-R-Line 4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	339
Pow-R-Line 5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	340
Pow-R-Line 5P plug-on distribution panelboard	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	340
POW-R-LINE C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	349
Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	349
Pow-R-Line C switchboard	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	349
Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
Pow-R-Line CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	350
Pow-R-Line CS switchboard	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	350
Pow-R-Line i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	350
Pow-R-Line I	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	350
Pow-R-Line i switchboard	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	350
Pow-R-Line Retrofit	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
Pow-R-Line XD	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-039	350
Pow-R-Line XD switchboard	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-039	350
Pow-R-Line Xpert	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	200
Pow-R-Line Xpert 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	200
Pow-R-Line Xpert 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	217
Pow-R-Line Xpert 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	295
Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	339
Pow-R-Xpress PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	339
Power-Style QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590
Power-Style QED-2 Switchboard	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590

Name / alias	Family	Mfr	Type	ID	Pg
PRC	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	116
PRCE	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	116
PRL CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	350
PRL i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	350
PRL XD	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-039	350
PRL-1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	124
PRL-2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	216
PRL-3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	220
PRL-4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
PRL-C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	349
PRL-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
PRL-RETRO	Pow-R-Line Retrofit panelboards P1R / P2R (P1RL, P1RB, P2RL, P2RB)	EAT	panelboard	FAM-EAT-040	117
PRL1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
PRL1-LX	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
PRL1/PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
PRL1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	124
PRL1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	124
PRL1a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
PRL1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	200
PRL1x	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	200
PRL1X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
PRL2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	216
PRL2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	216
PRL2a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
PRL2x	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	217
PRL2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	217
PRL2X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	116
PRL3	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	218
PRL3-LX	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	218
PRL3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	220
PRL3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	220
PRL3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	267
PRL3e	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	267
PRL3FQS	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-041	268
PRL3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	295
PRL3x	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	295
PRL4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
PRL4B	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
PRL4D	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
PRL4DX	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	339

Name / alias	Family	Mfr	Type	ID	Pg
PRL4F	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
PRL4X	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	297
PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	339
PRL4x	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	339
PRL5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	340
PRLC	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	349
PRLCS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	350
PRLi	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	350
PRLXD	Pow-R-Line XD switchboard	EAT	switchboard	FAM-EAT-039	350
Pro-Stock	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	660
PULFUZSW	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	1162
PUSHMATIC	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1020
Pushmatic	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	1020
Q-frame	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
QED 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590
QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590
QED-2 Series 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590
QED-2/S	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590
QED2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	590
QM	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
QM interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
QMB	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	532
QMB fusible	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	532
QMB Fusible Panelboard / QMB distribution (current design, Series E1)	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	532
QMB Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
QMB Series 1-4	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
QMB switchboard	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	532
QMB-LEGACY	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
QMB-QMJ	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	532
QMQB panelboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1141
QMQB switchboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	1141
QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
QSCP	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-041	268
QSF panelboard	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1154

Name / alias	Family	Mfr	Type	ID	Pg
Quik-Spec Coordination Panelboard	Pow-R-Line 3FQS fusible (coordination) panelboard (ex Bussmann Quik-Spec Coordination Panelboard)	EAT	panelboard	FAM-EAT-041	268
QW	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
QW interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
RA/RB/RC/RD/RE/RAA retrofit kits	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	31
ReliaGear neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	710
ReliaGear neXT Power Panelboards	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	710
ReliaGear OEM neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	710
Retro Size A-E	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	31
Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
RG-NEXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	710
RP1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1085
S1/S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1085
S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1085
S4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
S5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
Safe-Converti-Fuse	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	701
Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
Saflex panelboard	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	580
SB	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1096
SB1	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1096
SB2	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1096
SB3	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1096
SB4 (blank plates only)	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1096
SCP	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	711
SCP+	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	711
SCP-PLUS	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	711
SE	Type SE panelboard	SIE	panelboard	FAM-SIE-004	1088
SE panels	Type SE panelboard	SIE	panelboard	FAM-SIE-004	1088
Sentron Deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
Sentron S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1085
Sentron S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1085
Sentron SPP shallow	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
single slot split buss	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1154
Spectra	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
Spectra Bolt-On (SBO)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716

Name / alias	Family	Mfr	Type	ID	Pg
Spectra Plug-In	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
Spectra Series	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
Spectra Series Type SCP Plus panelboards	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	711
SPECTRA-PP	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
SpectraRMS	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	716
Speed D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	610
SPEED-D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	610
Speed-D Merchandised Service Section Switchboard	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	610
SpeedD	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	610
SPP	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
SPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
SPP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
Square D MLN panelboards and switchboards (ML breakers)	Square D MLN panelboards and switchboards (ML breakers)	SQD	panelboard	FAM-SQD-013	463
Square D NA1B panelboard (E-frame bolted, AC/DC)	Square D NA1B panelboard (E-frame bolted, AC/DC)	SQD	panelboard	FAM-SQD-012	467
Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	Square D NH1B 480 V AC lighting panelboard (FY / FA breakers)	SQD	panelboard	FAM-SQD-014	491
Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	Square D NQO / NQOB lighting panelboards (QO plug-on / QOB bolt-on)	SQD	panelboard	FAM-SQD-011	525
Swing-WA	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	701
Swing-Wa	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	701
Sylvania S-line panelboard	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1154
TQLA	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
TQLP	GE / Trumbull NLAB, NLTQ, NLTQX and DB lighting panelboards (TQ / TQL / TQC / TQB breakers)	GEA	panelboard	FAM-GEA-011	702
Trumbell (misspelling)	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	865
TRUMBULL	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	865
Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	Trumbull / GE Converti-Fuse and Swing-Wa fusible distribution panelboards	GEA	panelboard	FAM-GEA-012	701
Trumbull Electric (Plainville CT) panelboards and switches	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	865

Name / alias	Family	Mfr	Type	ID	Pg
Type 1 Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	349
Type BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	24
Type BR loadcenter	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	24
Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	691
Type EE	Cutler-Hammer Type EE plug-in power panelboard / switchboard	EAT	panelboard	FAM-EAT-034	98
Type EP	Cutler-Hammer Type EP plug-in power panelboard	EAT	panelboard	FAM-EAT-035	99
Type ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	348
Type NFB	Cutler-Hammer NFB panelboard	EAT	panelboard	FAM-EAT-037	114
Type P1 (original)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	915
Type P1 (Revised P1)	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	1020
Type P2 panelboard	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	925
Type P3 panelboard	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	948
Type P4 / S4 / Sentron SPP (10in deep) power panelboard	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	957
Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	992
Type PB	Cutler-Hammer Type PB lighting panelboard	EAT	panelboard	FAM-EAT-032	115
Type PH	Cutler-Hammer Type PH / PH-L panelboard	EAT	panelboard	FAM-EAT-033	115
Type S1 / S2 lighting panelboards	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	1085
Type SB1 / SB2 / SB3 distribution switchboards	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	1096
Type SE panelboard	Type SE panelboard	SIE	panelboard	FAM-SIE-004	1088
Type WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
Type WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
VB	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
VB-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
VB-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	1088
VCB	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	1152
Waddsworth	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	1163
WADSWORTH	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	1163
Wadsworth panelboards and breakers	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	1163
WCA	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
WEB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
WEHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
Westinghouse CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64
Westinghouse CDP / HCDP distribution panelboard	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	64
Westinghouse FDP	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	100
Westinghouse FDP fusible distribution panelboard	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	100

Name / alias	Family	Mfr	Type	ID	Pg
Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	113
Westinghouse NLAB lighting panelboard	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	114
Westinghouse NM / NMM / NMIB Multibreaker panelboards	Westinghouse NM / NMM / NMIB Multibreaker panelboards	EAT	panelboard	FAM-EAT-038	115
Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	117
Westinghouse Pow-R-Line 3 (vintage)	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	218
Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
Westinghouse WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
WF/WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
WFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
WGB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
WGHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	348
WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	351
ZIN-DIST	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1154
ZIN-Q	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159
Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	1154
Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	1159

12.3 Part-number index (primary and alternate numbers)

Sorted by normalised number (punctuation and spaces removed). Search a partial number by its leading characters.

Number	Type	Mfr	Description	Catalogue ID	Pg
0080429	alias	EAT	T-handle lock	EDH-EAT-00408	197
0080429	primary	EAT	Panelboard trim lock — T-handle lock	EDH-EAT-00445	78
10083041P1	primary	GEA	GE Terminal cover, G-frame bolt-on (main/single-branch) - 10083041P1	EDH-GEA-00454	804
10085396G1	primary	GEA	Spectra ADF dead-front hardware kit 10085396G1	EDH-GEA-00588	847
113A5356P1	primary	GEA	GE circuit numbering tabs, circuits 1-24	EDH-GEA-00409	708
113A5357P1	primary	GEA	GE circuit numbering tabs, circuits 1-42	EDH-GEA-00410	708
114C247G01	primary	EAT	Vintage lighting/small power panel trim lock	EDH-EAT-00411	122
11-5570-01	primary	SIE	Series 5 adaptor kit (adapts Series 6 mounting kits to Series 5 / CDP-5 / VB-5 /	EDH-SIE-00373	1095
11-5570-02	primary	SIE	Series 5 adaptor kit (12 sets) for JD twin mounting kits	EDH-SIE-00374	1096
11-D-4554-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1073
11-D-4560-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1072
12-1800-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1073

Number	Type	Mfr	Description	Catalogue ID	Pg
12-1800-01	alias	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	1095
121B7147P1	primary	GEA	GE main lug 250-600 MCM, 400 A (1 per phase) / 600 A (2 per phase), NLAB/NLTQ/DB	EDH-GEA-00408	704
1253C72G01	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A	EDH-EAT-00683	356
1253C72G03	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A	EDH-EAT-00684	356
1253C73G01	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	EDH-EAT-00687	356
1253C73G03	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A	EDH-EAT-00685	356
1253C73G05	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	EDH-EAT-00688	357
1253C73G06	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	EDH-EAT-00686	357
1256C42G01	primary	EAT	BAB 2- and 3-pole lock-off	EDH-EAT-00422	199
1256C42G02	primary	EAT	BAB 1-pole lock-off	EDH-EAT-00421	199
1266C07G01	primary	EAT	Series C J-frame terminal shield 2/3-pole, line end	EDH-EAT-00635	370
12-A-1801-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1072
12-A-1802-01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	1076
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00250	192
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00251	192
139C5362P2	primary	GEA	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	EDH-GEA-00035	689
139C5500P81	primary	GEA	3P breaker support bracket (ASPP6QD6D)	EDH-GEA-00022	687
139C5500P82	primary	GEA	3P breaker support bracket (ASPP6SE6D)	EDH-GEA-00023	688
139C5500P83	primary	GEA	3P breaker support bracket (ASPP6SG3S)	EDH-GEA-00024	688
139C5500P84	primary	GEA	3P breaker support bracket (ASPP6SF3S)	EDH-GEA-00025	688
139C5503P103	primary	GEA	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	EDH-GEA-00033	690
139C5503P129	primary	GEA	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	EDH-GEA-00034	690
139C5503P64	primary	GEA	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	EDH-GEA-00030	690
139C5503P77	primary	GEA	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	EDH-GEA-00031	691
139C5503P90	primary	GEA	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	EDH-GEA-00032	691
139C5700P86	primary	GEA	3P breaker support bracket (ASPP6FB6D)	EDH-GEA-00026	688
139C5702AQDG1	primary	GEA	Branch base, A phase, TQD (A-Series II)	EDH-GEA-00010	683
139C5702ASEG1	primary	GEA	Branch base, A phase, SE/TED/FB (A-Series II)	EDH-GEA-00011	684
139C5702ASFG1	primary	GEA	Branch base, A phase, SF (A-Series II)	EDH-GEA-00012	684
139C5702BQDG1	primary	GEA	Branch base, B phase, TQD (A-Series II)	EDH-GEA-00013	684
139C5702BSEG1	primary	GEA	Branch base, B phase, SE/TED/FB (A-Series II)	EDH-GEA-00014	684
139C5702BSFG1	primary	GEA	Branch base, B phase, SF (A-Series II)	EDH-GEA-00015	685
139C5702CQDG1	primary	GEA	Branch base, C phase, TQD (A-Series II)	EDH-GEA-00016	685
139C5702CSEG1	primary	GEA	Branch base, C phase, SE/TED/FB (A-Series II)	EDH-GEA-00017	685
139C5702CSFG1	primary	GEA	Branch base, C phase, SF (A-Series II)	EDH-GEA-00018	685
139C5720G3	primary	GEA	A-Series AE front mounting kit	EDH-GEA-00090	675
139C5720G6	primary	GEA	A-Series AQ/AL front mounting kit	EDH-GEA-00091	676
139C5720G9	primary	GEA	A-Series AD front mounting kit	EDH-GEA-00092	676

Number	Type	Mfr	Description	Catalogue ID	Pg
168D1930P3	primary	GEA	GE Filler, TEDL double-branch 3X, for 36/40 in wide - 168D1930P3	EDH-GEA-00477	808
168D1930P4	primary	GEA	GE Filler, TEDL double-branch 3X, for 44/45 in wide - 168D1930P4	EDH-GEA-00478	808
192A6976P189	primary	GEA	GE Thread-forming screw #10-32 x 7/16 in - 192A6976P189	EDH-GEA-00455	853
1A32258H03	primary	EAT	Standard trim lock for PRL4X and PRL4 lighting and power panels	EDH-EAT-00404	338
1A85194G01	primary	EAT	EZ Trim lock keyed WEM-2	EDH-EAT-00410	196
1C96608	primary	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00163	181
1C96608G01..G63 (odd item numbers)	style_number	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00163	181
1C96609	primary	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00165	217
1C96609G01..G63 (same G scheme as 1C96608)	style_number	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00165	217
1C96619	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00250	192
1C96620	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00251	192
1C96638	primary	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00241	192
1C96645	primary	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00233	183
1C96646	primary	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00221	183
1C96647	supersedes	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	186
1C96647	primary	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00223	183
1C96648	primary	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00224	184
1C96649	primary	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00225	184
1C96650	supersedes	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	187
1C96650	primary	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00227	184
1C96651	primary	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00228	185
1C96652	primary	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00229	185
1C96653	supersedes	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	187
1C96653	primary	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00231	185
1C96654	primary	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00232	186
1C97022	primary	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00234	186
1LOK	primary	FPE	FPE handle lock for 1-pole NA/NB breakers	EDH-FPE-00041	1150
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00294	337
208B264H01	primary	EAT	Series C K-frame panelboard strap mounting bracket	EDH-EAT-00703	386
208B297H01	primary	EAT	Series C L-frame panelboard strap mounting bracket	EDH-EAT-00704	398
208B966G01	primary	EAT	Series C M-frame terminal shield	EDH-EAT-00643	405
208C1850P3	primary	GEA	Spectra breaker cover support 208C1850P3	EDH-GEA-00483	802
208C1850P4	primary	GEA	Spectra breaker cover support 208C1850P4	EDH-GEA-00484	803
208C1850P5	primary	GEA	Spectra breaker cover support 208C1850P5	EDH-GEA-00485	803

Number	Type	Mfr	Description	Catalogue ID	Pg
208C1850P6	primary	GEA	Spectra breaker cover support 208C1850P6	EDH-GEA-00486	803
208C2022P1	primary	GEA	Spectra ADF dead-front mounting post 208C2022P1	EDH-GEA-00587	804
208C2291P1	primary	GEA	GE Filler center, G-frame double-branch bolt-on - 208C2291P1	EDH-GEA-00466	808
208C4262G1	primary	GEA	Spectra breaker cover 208C4262G1 (TFJ..., single-branch, (3X))	EDH-GEA-00508	809
208C4262G10	primary	GEA	Spectra breaker cover 208C4262G10 (THQB..., double-branch, (4X))	EDH-GEA-00519	809
208C4262G11	primary	GEA	Spectra breaker cover 208C4262G11 (THQB..., double-branch, (4X))	EDH-GEA-00520	810
208C4262G12	primary	GEA	Spectra breaker cover 208C4262G12 (THQB..., double-branch, (4X))	EDH-GEA-00521	810
208C4262G13	primary	GEA	Spectra breaker cover 208C4262G13 (TEY, double-branch, (4X))	EDH-GEA-00522	810
208C4262G14	primary	GEA	Spectra breaker cover 208C4262G14 (TEY, double-branch, (4X))	EDH-GEA-00523	811
208C4262G15	primary	GEA	Spectra breaker cover 208C4262G15 (TEY, double-branch, (4X))	EDH-GEA-00524	811
208C4262G16	primary	GEA	Spectra breaker cover 208C4262G16 (SGDA..., single-branch, (4X))	EDH-GEA-00525	812
208C4262G17	primary	GEA	Spectra breaker cover 208C4262G17 (SGDA..., single-branch, (4X))	EDH-GEA-00526	812
208C4262G18	primary	GEA	Spectra breaker cover 208C4262G18 (SGDA..., single-branch, (4X))	EDH-GEA-00527	813
208C4262G19	primary	GEA	Spectra breaker cover 208C4262G19 (SGDA..., double-branch, (4X))	EDH-GEA-00529	813
208C4262G2	primary	GEA	Spectra breaker cover 208C4262G2 (TFJ..., single-branch, (3X))	EDH-GEA-00509	814
208C4262G20	primary	GEA	Spectra breaker cover 208C4262G20 (TQD..., double-branch, (2X))	EDH-GEA-00513	814
208C4262G21	primary	GEA	Spectra breaker cover 208C4262G21 (TQD..., double-branch, (2X))	EDH-GEA-00514	815
208C4262G22	primary	GEA	Spectra breaker cover 208C4262G22 (TQD..., double-branch, (2X))	EDH-GEA-00515	815
208C4262G23	primary	GEA	Spectra breaker cover 208C4262G23 (TQD..., double-branch, (3X))	EDH-GEA-00516	816
208C4262G24	primary	GEA	Spectra breaker cover 208C4262G24 (TQD..., double-branch, (3X))	EDH-GEA-00517	816
208C4262G25	primary	GEA	Spectra breaker cover 208C4262G25 (TQD..., double-branch, (3X))	EDH-GEA-00518	817
208C4262G26	primary	GEA	Spectra breaker cover 208C4262G26 (TEB..., double-branch, (2X))	EDH-GEA-00502	817
208C4262G27	primary	GEA	Spectra breaker cover 208C4262G27 (TEB..., double-branch, (2X))	EDH-GEA-00503	818
208C4262G28	primary	GEA	Spectra breaker cover 208C4262G28 (TEB..., double-branch, (2X))	EDH-GEA-00504	818
208C4262G29	primary	GEA	Spectra breaker cover 208C4262G29 (TEB..., double-branch, (3X))	EDH-GEA-00505	819
208C4262G3	primary	GEA	Spectra breaker cover 208C4262G3 (TFJ..., single-branch, (3X))	EDH-GEA-00510	819
208C4262G30	primary	GEA	Spectra breaker cover 208C4262G30 (TEB..., double-branch, (3X))	EDH-GEA-00506	820
208C4262G31	primary	GEA	Spectra breaker cover 208C4262G31 (TEB..., double-branch, (3X))	EDH-GEA-00507	820
208C4262G32	primary	GEA	Spectra breaker cover 208C4262G32 (SEDA..., double-branch, (3X))	EDH-GEA-00487	821
208C4262G33	primary	GEA	Spectra breaker cover 208C4262G33 (SEDA..., double-branch, (3X))	EDH-GEA-00488	821
208C4262G34	primary	GEA	Spectra breaker cover 208C4262G34 (SEDA..., double-branch, (3X))	EDH-GEA-00489	822

Number	Type	Mfr	Description	Catalogue ID	Pg
208C4262G35	primary	GEA	Spectra breaker cover 208C4262G35 (SEDA..., double-branch, (4X))	EDH-GEA-00490	822
208C4262G36	primary	GEA	Spectra breaker cover 208C4262G36 (SEDA..., double-branch, (4X))	EDH-GEA-00491	823
208C4262G49	primary	GEA	Spectra breaker cover 208C4262G49 (SGDA..., double-branch, (4X))	EDH-GEA-00528	823
208C4262G53	primary	GEA	Spectra breaker cover 208C4262G53 (SFHA..., single-branch, (3X))	EDH-GEA-00492	824
208C4262G54	primary	GEA	Spectra breaker cover 208C4262G54 (SFHA..., single-branch, (3X))	EDH-GEA-00493	824
208C4262G55	primary	GEA	Spectra breaker cover 208C4262G55 (SFHA..., single-branch, (3X))	EDH-GEA-00494	825
208C4262G56	primary	GEA	Spectra breaker cover 208C4262G56 (SFHA..., single-branch, (4X))	EDH-GEA-00495	825
208C4262G57	primary	GEA	Spectra breaker cover 208C4262G57 (SFHA..., single-branch, (4X))	EDH-GEA-00496	826
208C4262G58	primary	GEA	Spectra breaker cover 208C4262G58 (SFHA..., double-branch, (3X))	EDH-GEA-00497	826
208C4262G59	primary	GEA	Spectra breaker cover 208C4262G59 (SFHA..., double-branch, (3X))	EDH-GEA-00498	827
208C4262G6	primary	GEA	Spectra breaker cover 208C4262G6 (TFJ..., double-branch, (3X))	EDH-GEA-00511	827
208C4262G60	primary	GEA	Spectra breaker cover 208C4262G60 (SFHA..., double-branch, (3X))	EDH-GEA-00499	828
208C4262G61	primary	GEA	Spectra breaker cover 208C4262G61 (SFHA..., double-branch, (4X))	EDH-GEA-00500	828
208C4262G62	primary	GEA	Spectra breaker cover 208C4262G62 (SFHA..., double-branch, (4X))	EDH-GEA-00501	829
208C4262G7	primary	GEA	Spectra breaker cover 208C4262G7 (TFJ..., double-branch, (3X))	EDH-GEA-00512	829
2142720241	primary	SQD	QMB367W Series E1 renewal part: Load base mounting screw	EDH-SQD-00129	542
21427-20401	primary	SQD	QED cover screw 21427-20401	EDH-SQD-00163	607
2150720200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	EDH-SQD-00169	607
2152620361	primary	SQD	FA/FH I-Line breaker mounting bracket screw 2152620361	EDH-SQD-00158	461
21590-20241	primary	SQD	PowerPact H/J I-Line mounting bracket screw 21590-20241	EDH-SQD-00157	461
21593-20100	primary	SQD	I-Line blank filler mounting screw 21593-20100	EDH-SQD-00145	462
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00229	185
2271020200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set	EDH-SQD-00168	608
2300100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	EDH-SQD-00170	608
2330241601	primary	SQD	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	EDH-SQD-00120	542
2342702001	primary	SQD	QMB363TW Series E1 renewal part: Lug mounting nut	EDH-SQD-00125	542
2342702400	primary	SQD	QMB367W Series E1 renewal part: Lug mounting nut	EDH-SQD-00132	543
2370100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	EDH-SQD-00171	608
24WD56	primary	SIE	P3 box 24 in wide x 56 in high	EDH-SIE-00436	954
24WD62	primary	SIE	P3 box 24 in wide x 62 in high	EDH-SIE-00437	954
24WD68	primary	SIE	P3 box 24 in wide x 68 in high	EDH-SIE-00438	954

Number	Type	Mfr	Description	Catalogue ID	Pg
24WD74	primary	SIE	P3 box 24 in wide x 74 in high	EDH-SIE-00439	955
24WD80	primary	SIE	P3 box 24 in wide x 80 in high	EDH-SIE-00440	955
252B1667P1	primary	GEA	GE Barrier center - 252B1667P1	EDH-GEA-00479	805
252B1768G1	primary	GEA	GE End filler plate, K-frame, 44 in panelboard / 45 in switchboard - 252B1768G1	EDH-GEA-00542	829
252B1768G2	primary	GEA	GE End filler plate, K-frame, 40 in panelboard or switchboard - 252B1768G2	EDH-GEA-00543	830
252B2056P8	primary	GEA	GE Spacer plate TED6 with TEDL - 252B2056P8	EDH-GEA-00480	830
252B3575P1	primary	GEA	GE Circuit breaker mounting bracket, G-frame bolt-on double-branch - 252B3575P1	EDH-GEA-00457	804
252B3576P1	primary	GEA	GE Circuit breaker mounting bracket, G-frame bolt-on main/single-branch - 252B35	EDH-GEA-00456	804
252B3613P1	primary	GEA	GE Antiturn clip (for 1/4-20 carriage bolt in square bus hole) - 252B3613P1	EDH-GEA-00458	853
252B3618G10	primary	GEA	GE G frame double strap (bolt-on, double-branch) - 252B3618G10	EDH-GEA-00462	798
252B3618G11	primary	GEA	GE G frame double strap (bolt-on, double-branch) - 252B3618G11	EDH-GEA-00463	798
252B3618G13	primary	GEA	GE G frame single strap (bolt-on) - 252B3618G13	EDH-GEA-00459	798
252B3618G14	primary	GEA	GE G frame single strap (bolt-on) - 252B3618G14	EDH-GEA-00460	798
252B3618G15	primary	GEA	GE G frame single strap (bolt-on) - 252B3618G15	EDH-GEA-00461	798
252B3638	primary	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00583	738
252B3638G1-G2	style_number	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00583	738
252B3638G3-G8	style_number	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00583	738
252B3638G9-G10	style_number	GEA	Spectra main lug assembly drawing 252B3638 (G1-G10)	EDH-GEA-00583	738
252B3657P1	primary	GEA	GE Strap spacer, G-frame bolt-on - 252B3657P1	EDH-GEA-00464	864
252B3657P2	primary	GEA	GE Strap spacer, G-frame bolt-on - 252B3657P2	EDH-GEA-00465	865
2600D26G01	primary	EAT	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	EDH-EAT-00689	369
2600D26G02	primary	EAT	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	EDH-EAT-00690	369
286A8066G1	primary	GEA	GE 286A8066G1 lug cover, TH4V/THK9V	EDH-GEA-00331	888
29348	primary	SQD	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	EDH-SQD-00181	653
2A1690-1XX	primary	EAT	3FQS NEMA 1 box, 50 in tall (XX = endwall choice B blank / K knockout)	EDH-EAT-00844	290
2A1690-2XX	primary	EAT	3FQS NEMA 1 box, 59 in tall (XX = B/K endwalls)	EDH-EAT-00845	290
2A1690-3XX	primary	EAT	3FQS NEMA 1 box, 69 in tall (XX = B/K endwalls)	EDH-EAT-00846	290
2A1690-4XX	primary	EAT	3FQS NEMA 1 box, 33 in tall (XX = B/K endwalls)	EDH-EAT-00847	290
2A1906-1	primary	EAT	3FQS Branch deadfront kit, single KO, 18 positions	EDH-EAT-00854	283
2A1906-2	primary	EAT	3FQS Branch deadfront kit, single KO, 30 positions	EDH-EAT-00855	284
2A1906-3	primary	EAT	3FQS Branch deadfront kit, single KO, 42 positions	EDH-EAT-00856	284
2A1907-1	primary	EAT	3FQS Ground bar kit, non-isolated	EDH-EAT-00836	283
2A1907-2	primary	EAT	3FQS Ground bar kit, isolated	EDH-EAT-00837	283
2A1908-1	primary	EAT	3FQS Neutral bar kit, 200A unbonded	EDH-EAT-00838	282
2A1908-2	primary	EAT	3FQS Neutral bar kit, 400A unbonded	EDH-EAT-00839	282
2A1908-3	primary	EAT	3FQS Neutral bar kit, 200A bonded	EDH-EAT-00840	282
2A1908-4	primary	EAT	3FQS Neutral bar kit, 400A bonded	EDH-EAT-00841	282
2A1908-5	primary	EAT	3FQS Neutral bar kit, 800A unbonded	EDH-EAT-00842	282
2A1908-6	primary	EAT	3FQS Neutral bar kit, 800A bonded	EDH-EAT-00843	283
2A1909-1	primary	EAT	3FQS kit, compression lug 3-phase, 70-200A	EDH-EAT-00807	270
2A1909-10	primary	EAT	3FQS kit, compression lug 3-phase, 30-60A	EDH-EAT-00816	270
2A1909-11	primary	EAT	3FQS kit, mechanical lug 3-phase, 30-60A	EDH-EAT-00817	271
2A1909-12	primary	EAT	3FQS kit, compression lug 1-phase, 3 wire, 30-60A	EDH-EAT-00818	271
2A1909-13	primary	EAT	3FQS kit, mechanical lug 1-phase, 3 wire, 30-60A	EDH-EAT-00819	272

Number	Type	Mfr	Description	Catalogue ID	Pg
2A1909-14	primary	EAT	3FQS kit, compression lug 1-phase, 2 wire, 70-200A	EDH-EAT-00820	272
2A1909-15	primary	EAT	3FQS kit, mechanical lug 1-phase, 2 wire, 70-200A	EDH-EAT-00821	273
2A1909-16	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 30-200A	EDH-EAT-00822	279
2A1909-17	primary	EAT	3FQS kit, compression lug 1-phase, 2 wire, 30-60A	EDH-EAT-00823	273
2A1909-18	primary	EAT	3FQS kit, mechanical lug 1-phase, 2 wire, 30-60A	EDH-EAT-00824	274
2A1909-19	primary	EAT	3FQS kit, main disconnect 30-60A 1-phase, 2 wire	EDH-EAT-00825	268
2A1909-2	primary	EAT	3FQS kit, mechanical lug 3-phase, 70-200A	EDH-EAT-00808	274
2A1909-20	primary	EAT	3FQS kit, compression lug 3-phase, 225-400A	EDH-EAT-00826	275
2A1909-21	primary	EAT	3FQS kit, mechanical lug 3-phase, 225-400A	EDH-EAT-00827	275
2A1909-22	primary	EAT	3FQS kit, double/sub-feed lug 3-phase, 225-400A	EDH-EAT-00828	279
2A1909-23	primary	EAT	3FQS kit, compression lug 1-phase, 3 wire, 225-400A	EDH-EAT-00829	276
2A1909-24	primary	EAT	3FQS kit, mechanical lug 1-phase, 3 wire, 225-400A	EDH-EAT-00830	276
2A1909-25	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 225-400A	EDH-EAT-00831	280
2A1909-26	primary	EAT	3FQS kit, compression lug 1-phase, 2 wire, 225-400A	EDH-EAT-00832	277
2A1909-27	primary	EAT	3FQS kit, mechanical lug 1-phase, 2 wire, 225-400A	EDH-EAT-00833	277
2A1909-28	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 2 wire, 225-400A	EDH-EAT-00834	280
2A1909-29	primary	EAT	3FQS kit, main disconnect 225-400A	EDH-EAT-00835	268
2A1909-3	primary	EAT	3FQS kit, double/sub-feed lug 3-phase, 30-200A	EDH-EAT-00809	281
2A1909-4	primary	EAT	3FQS kit, main disconnect 70-200A	EDH-EAT-00810	269
2A1909-5	primary	EAT	3FQS kit, compression lug 1-phase, 3 wire, 70-200A	EDH-EAT-00811	278
2A1909-6	primary	EAT	3FQS kit, mechanical lug 1-phase, 3 wire, 70-200A	EDH-EAT-00812	278
2A1909-7	primary	EAT	3FQS kit, double/sub-feed lug 1-phase, 3 wire, 30-200A	EDH-EAT-00813	281
2A1909-8	primary	EAT	3FQS kit, main disconnect 30-60A 1-phase, 3 wire	EDH-EAT-00814	269
2A1909-9	primary	EAT	3FQS kit, main disconnect 30-60A 3-phase	EDH-EAT-00815	269
2A1910-1	primary	EAT	3FQS Kit, NEMA 3R replacement keys (2)	EDH-EAT-00860	293
2A1910-2	primary	EAT	3FQS Kit, NEMA 1 door lock and 2 keys	EDH-EAT-00861	293
2A1910-3	primary	EAT	3FQS Kit, NEMA 3R door lock and 2 keys	EDH-EAT-00862	294
2A1910-4	primary	EAT	3FQS Kit, NEMA 1 replacement keys (2)	EDH-EAT-00863	294
2A1912-1	primary	EAT	3FQS Lockout kit, 70-400A main	EDH-EAT-00864	292
2A1912-2	primary	EAT	3FQS Lockout kit, 30-60A main	EDH-EAT-00865	292
2A1912-3	primary	EAT	3FQS Branch lockout kit (3M Panelsafe), 18 position	EDH-EAT-00866	292
2A1912-4	primary	EAT	3FQS Branch lockout kit (3M Panelsafe), 30 position	EDH-EAT-00867	293
2A1912-5	primary	EAT	3FQS Branch lockout kit (3M Panelsafe), 42 position	EDH-EAT-00868	293
2A1915	primary	EAT	3FQS Kit, circuit number and fuse rating labels	EDH-EAT-00870	294
2A1916-1	primary	EAT	3FQS Kit, blank enclosure endwall (set of 2)	EDH-EAT-00852	290
2A1916-2	primary	EAT	3FQS Kit, knockout enclosure endwall (set of 2)	EDH-EAT-00853	291
2A1917-2	primary	EAT	3FQS Kit, CCPB hardware (10 screws)	EDH-EAT-00872	292
2A1918-1	primary	EAT	3FQS Kit, branch knockout covers, <=60A	EDH-EAT-00873	285
2A1918-2	primary	EAT	3FQS Kit, branch knockout covers, 70A-100A	EDH-EAT-00874	285
2A1919	primary	EAT	3FQS Kit, touch-up paint	EDH-EAT-00875	294
2A1960-1	primary	EAT	3FQS Branch deadfront kit, double KO, 18 positions	EDH-EAT-00857	284
2A1960-2	primary	EAT	3FQS Branch deadfront kit, double KO, 30 positions	EDH-EAT-00858	284
2A1960-3	primary	EAT	3FQS Branch deadfront kit, double KO, 42 positions	EDH-EAT-00859	284
2A1961-1	primary	EAT	3FQS Kit, spare fuse compartment TCF 1-100A	EDH-EAT-00876	294
2C11296	primary	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00236	188
2C11641G02	primary	EAT	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	EDH-EAT-00413	198
2C11642	primary	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00164	182
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00164	182
2NLK30A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	1046

Number	Type	Mfr	Description	Catalogue ID	Pg
2NLK30A	primary	SIE	Revised P1-250 200% neutral lug kit, 30-circuit	EDH-SIE-00339	1046
2NLK42A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	1046
2NLK42A	primary	SIE	Revised P1-250 200% neutral lug kit, 42-circuit	EDH-SIE-00340	1046
2NLK42B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	1046
2NLK54A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	1047
2NLK54A	primary	SIE	Revised P1-250 200% neutral lug kit, 54-circuit	EDH-SIE-00341	1047
2NLK54B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	1047
2T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00479	375
2T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2T400K)	EDH-EAT-00494	376
2T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00488	376
2TA2N8750	primary	SIE	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00281	1126
2TA3N8750	primary	SIE	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00283	1126
2TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00474	376
2TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2TA400K)	EDH-EAT-00491	377
2TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00482	377
2TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2TA401K)	EDH-EAT-00497	377
2TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	393
2TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00485	378
2TA4N8500	primary	SIE	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00285	1127
2TA4P8500	primary	SIE	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00287	1127
2TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	393
2TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (2TA603LDK)	EDH-EAT-00510	394
314C420G05	primary	EAT	Series C L-frame terminal shield	EDH-EAT-00642	399
314C960G01	primary	EAT	Series C M-frame rear connecting stud (225 A)	EDH-EAT-00667	406
314C960G04	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00668	406
314C960G05	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00669	406
314C960G06	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00670	407
314C960G07	primary	EAT	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	EDH-EAT-00664	399
314C960G08	primary	EAT	Series C L/M-frame rear connecting stud (L: 7.97 in)	EDH-EAT-00665	400
314C960G09	primary	EAT	Series C L/M-frame rear connecting stud (L: 10.47 in)	EDH-EAT-00666	400
314C960G10	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00671	407
314C960G11	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00672	407
314C960G12	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00673	408
314C996G01	primary	EAT	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	EDH-EAT-00695	404
314C996G02	primary	EAT	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	EDH-EAT-00696	404
314C996G03	primary	EAT	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	EDH-EAT-00697	405
315A7046P7	primary	GEA	SG breaker strap, A phase (A-Series II)	EDH-GEA-00019	686
315A7046P8	primary	GEA	SG breaker strap, B phase (A-Series II)	EDH-GEA-00020	686
315A7046P9	primary	GEA	SG breaker strap, C phase (A-Series II)	EDH-GEA-00021	686
315A7048P20	primary	GEA	Center (B phase) strap (THQB/TEY, A-Series II)	EDH-GEA-00028	687
315A7049P10	primary	GEA	A & C phase 200A strap (THQB/TEY, A-Series II)	EDH-GEA-00027	687
315C270H01	primary	EAT	Series C M/N-frame panelboard strap mounting bracket	EDH-EAT-00705	405
32508	primary	SQD	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	EDH-SQD-00268	628

Number	Type	Mfr	Description	Catalogue ID	Pg
32510	primary	SQD	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	EDH-SQD-00269	628
331A3329P2	primary	GEA	GE Steel drive rivet #10 x 1/2 in - 331A3329P2	EDH-GEA-00481	853
3456B35H01	primary	EAT	Vintage PRL1/PRL2 blank cover 6.00 in	EDH-EAT-00292	122
3456B99H01	primary	EAT	Vintage PRL1/PRL2 blank cover 3.00 in	EDH-EAT-00291	122
3456B99H05	primary	EAT	Vintage PRL1/PRL2 blank cover 15.00 in	EDH-EAT-00293	122
3457B16G01	primary	EAT	Vintage lighting and small panel standard trim lock	EDH-EAT-00412	123
359L481G1	primary	GEA	GE panelboard trim clamps, package of 4	EDH-GEA-00413	706
36965	primary	SQD	PowerPact D-frame terminal shield 3P	EDH-SQD-00270	629
36967	alias	SQD	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	EDH-SQD-00188	652
373B375G03	primary	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00678	412
373B375G04	primary	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00677	412
374D883G01	primary	EAT	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	EDH-EAT-00654	363
374D883G02	primary	EAT	Series C F-frame rear connecting stud, 225 A long stud	EDH-EAT-00655	363
3BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00452	26
3BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00451	26
3T100FB	primary	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00462	352
3T125EF	primary	EAT	Series G EG-frame line/load terminals, 125 A, Cu	EDH-EAT-00536	416
3T150FB	primary	EAT	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	EDH-EAT-00466	352
3T20FB	primary	EAT	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	EDH-EAT-00461	352
3T225FD	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	EDH-EAT-00468	353
3T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00480	378
3T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3T400K)	EDH-EAT-00495	378
3T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00489	379
3T631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00545	425
3T632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00549	425
3T632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 3P, copper	EDH-EAT-00556	426
3TA100FD	primary	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00465	353
3TA100G3K	primary	EAT	Series C G-frame multiwire connector, 3 wires/terminal	EDH-EAT-00620	366
3TA100G6K	primary	EAT	Series C G-frame multiwire connector, 6 wires/terminal	EDH-EAT-00621	367
3TA125E3K	primary	EAT	Series G EG-frame multiwire connector	EDH-EAT-00577	416
3TA125E6K	primary	EAT	Series G EG-frame multiwire connector	EDH-EAT-00578	416
3TA125EF	primary	EAT	Series G EG-frame line/load terminals, 125 A, Cu/Al	EDH-EAT-00537	416
3TA150EF	primary	EAT	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EDH-EAT-00538	417
3TA150F3K	primary	EAT	Series C F-frame multiwire connector, 3 wires/terminal	EDH-EAT-00622	353
3TA150F6K	primary	EAT	Series C F-frame multiwire connector, 6 wires/terminal	EDH-EAT-00623	354
3TA150FB	primary	EAT	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	EDH-EAT-00469	354
3TA160EFK	primary	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00539	417
3TA1QR300	primary	SIE	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	EDH-SIE-00253	1111
3TA225FD	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00463	354
3TA225FDK	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00467	355
3TA250FJ3	primary	EAT	Series G JG-frame multiwire connector	EDH-EAT-00579	421
3TA250FJ6	primary	EAT	Series G JG-frame multiwire connector	EDH-EAT-00580	421
3TA250J3K	primary	EAT	Series C J-frame multiwire connector, 3 wires/terminal	EDH-EAT-00624	368
3TA250J6K	primary	EAT	Series C J-frame multiwire connector, 6 wires/terminal	EDH-EAT-00625	368
3TA2N8750	primary	SIE	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00282	1127
3TA3N8750	primary	SIE	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00284	1128
3TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00475	379

Number	Type	Mfr	Description	Catalogue ID	Pg
3TA400K3K	primary	EAT	Series C K-frame multiwire connector, 3 wires/terminal	EDH-EAT-00626	379
3TA400K6K	primary	EAT	Series C K-frame multiwire connector, 6 wires/terminal	EDH-EAT-00627	380
3TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3TA400K)	EDH-EAT-00492	380
3TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00483	380
3TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3TA401K)	EDH-EAT-00498	381
3TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	394
3TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00486	381
3TA4N8500	primary	SIE	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00286	1128
3TA4P8500	primary	SIE	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00288	1128
3TA50FB	primary	EAT	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	EDH-EAT-00464	355
3TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	394
3TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (3TA603LDK)	EDH-EAT-00511	395
3TA631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00543	426
3TA632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00547	426
3TA632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 3P, aluminum	EDH-EAT-00554	427
3TC1GG20	primary	SIE	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	EDH-SIE-00248	1109
3TC1Q1	primary	SIE	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	EDH-SIE-00246	1109
3TC1QR250	primary	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	1112
3TC1QR2520	alias	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	1112
3VA9233-0QA00	primary	SIE	3VA52 250A nut keeper kit (3)	EDH-SIE-00207	1107
3VA9243-0QA00	primary	SIE	3VA61/62 150A/250A nut keeper kit (3)	EDH-SIE-00208	1107
3VA9473-0QA00	primary	SIE	3VA5, 3VA6 400A/600A nut keeper kit (3)	EDH-SIE-00209	1107
4020506501	primary	SQD	QMB363TW Series E1 renewal part: Load base mounting screw	EDH-SQD-00122	543
40251-016-51	primary	SQD	QMB/QMJ switch terminal lug 40251-016-51	EDH-SQD-00063	534
40251-018-50	primary	SQD	QMB/QMJ switch terminal lug 40251-018-50	EDH-SQD-00065	534
4025101851	primary	SQD	QMB363TW Series E1 renewal part: Lug assembly	EDH-SQD-00124	534
40251-162-50	primary	SQD	QMB/QMJ switch terminal lug 40251-162-50	EDH-SQD-00067	535
40251-287-50	primary	SQD	QMB/QMJ switch terminal lug 40251-287-50	EDH-SQD-00069	599
40256-014-50	primary	SQD	QMB/QMJ switch terminal lug 40256-014-50	EDH-SQD-00066	535
40256-034-50	primary	SQD	QMB/QMJ switch terminal lug 40256-034-50	EDH-SQD-00064	535
40256-039-50	primary	SQD	QMB/QMJ switch terminal lug 40256-039-50	EDH-SQD-00070	536
4028343250	primary	SQD	QMB367W Series E1 renewal part: Switch mounting hardware kit:	EDH-SQD-00133	541
4028343550	primary	SQD	QMB367W Series E1 renewal part: Handle knob kit	EDH-SQD-00131	541
4028343750	primary	SQD	QMB363TW Series E1 renewal part: Handle knob kit	EDH-SQD-00123	542
40517-407-01	style_number	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	606
40517-408-01	style_number	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	605
4051749901	primary	SQD	I-Line deadfront (trim) support bracket 4051749901	EDH-SQD-00159	455
4052017302	primary	SQD	QMB363TW Series E1 renewal part: Arc shield	EDH-SQD-00119	579
4052021450	primary	SQD	QMB363TW Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00118	579
4052021650	primary	SQD	QMB363TW Series E1 renewal part: Load base assembly	EDH-SQD-00121	579
4052031850	primary	SQD	QMB367W Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00126	579
4052036750	primary	SQD	QMB367W Series E1 renewal part: Load base assembly	EDH-SQD-00128	580
4052085601	primary	SQD	QMB367W Series E1 renewal part: Arc shield	EDH-SQD-00127	580
4052098601	primary	SQD	QMB367W Series E1 renewal part: Load base side insulator	EDH-SQD-00130	539
40560-270-50	primary	SQD	QMB/QMJ switch terminal lug 40560-270-50	EDH-SQD-00068	536
414A380G01	primary	EAT	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	EDH-EAT-00446	123
414A380G02	primary	EAT	Trim clamp for CDP, FDP and NQB	EDH-EAT-00420	79

Number	Type	Mfr	Description	Catalogue ID	Pg
4176B51	primary	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00261	258
4176B56	primary	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00264	258
4176B57	primary	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00263	258
4176B60	primary	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00259	258
4176B61	primary	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00260	259
4176B66	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00275	259
4176B67	primary	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00277	259
4176B68	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	263
4176B68	primary	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	259
4176B69	primary	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00278	260
4176B70	primary	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00262	260
4176B72	primary	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00269	266
4176B79	primary	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00265	260
4176B80	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00276	260
4178B06H01	supersedes	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00285	266
4178B06H01	primary	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00286	266
4178B08	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	263
4178B08	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00280	261
4179B39	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	264
4179B39	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00281	261
4179B40	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	264
4179B40	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00282	261
4179B41	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	265
4179B41	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00283	261
4179B42	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	264
4179B42	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00284	262
4180B03	supersedes	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	194
4180B03	primary	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	192
4180B04	primary	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00248	193
4180B05	supersedes	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	194
4180B05	primary	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	193

Number	Type	Mfr	Description	Catalogue ID	Pg
4180B08	primary	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00249	195
4180B52H01	primary	EAT	PRL1a/2a filler cover for F, J, K frame vertical device spaces	EDH-EAT-00252	195
4180B61	supersedes	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	194
4180B61	primary	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	193
4180B62	primary	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00219	198
4180B79	primary	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00266	262
4180B91	primary	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00279	262
4180B93	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	263
4180B93	primary	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	262
4210B95G01	primary	EAT	Series C F-frame special terminal shield 3-pole for use with electrical operator	EDH-EAT-00633	359
4210B95G02	primary	EAT	Series C F-frame special terminal shield 4-pole for use with electrical operator	EDH-EAT-00634	359
4212B77G01	primary	EAT	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	EDH-EAT-00692	385
4212B78G02	primary	EAT	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	EDH-EAT-00691	386
42C1129H02	primary	EAT	Chassis mounting hardware, PRL1a/2a/3a	EDH-EAT-00416	199
42C4050	primary	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	186
42C4051	primary	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	187
42C4052	primary	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	187
42C7980	primary	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00257	296
42C7982	primary	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	194
42C7982	superseded_by	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	193
42C8055	primary	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00258	296
42C8072	primary	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	194
42C8072	superseded_by	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	192
42C8073	primary	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	194
42C8073	superseded_by	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	193
42C8076	primary	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	263
42C8076	superseded_by	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	259
42C8077	primary	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	263
42C8077	superseded_by	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	262
42C8078	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	263
42C8078	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00280	261
42C8079	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	264

Number	Type	Mfr	Description	Catalogue ID	Pg
42C8079	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00281	261
42C8080	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	264
42C8080	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00282	261
42C8081	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	264
42C8081	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00284	262
42C8082	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	265
42C8082	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00283	261
42C8083H01	primary	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00285	266
42C8083H01	superseded_by	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00286	266
42NLK30A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1049
42NLK30A	primary	SIE	Revised P1-400 200% neutral kit, 30-circuit	EDH-SIE-00342	1048
42NLK42A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1049
42NLK42A	primary	SIE	Revised P1-400 200% neutral kit, 42-circuit	EDH-SIE-00343	1048
42NLK54A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1049
42NLK54A	primary	SIE	Revised P1-400 200% neutral kit, 54-circuit	EDH-SIE-00344	1049
42NLK54B	primary	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	1049
451D874G01	primary	EAT	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	EDH-EAT-00652	363
451D874G02	primary	EAT	Series C F-frame rear connecting stud, 100 A long stud	EDH-EAT-00653	364
455C592P1	primary	GEA	GE Lug cover, TKM/THKM - 455C592P1	EDH-GEA-00540	863
455C592P2	primary	GEA	GE Lug cover, TK4V/TKL4V - 455C592P2	EDH-GEA-00541	863
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	264
4MLKA1	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	1035
4MLKA1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00029	922
4MLKA1A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	1035
4MLKA1B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00023	1036
4MLKA3	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	1036
4MLKA3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00030	922
4MLKA3A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	1036
4MLKA3B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00024	1038
4MLKC1	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	1038
4MLKC1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00031	922
4MLKC1A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	1038
4MLKC3	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	1039
4MLKC3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00032	923
4MLKC3A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	1039
4T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00481	381
4T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4T400K)	EDH-EAT-00496	382
4T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00490	382
4T631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00546	427
4T632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00550	427
4T632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 4P, copper	EDH-EAT-00557	428
4TA160EFK	primary	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00540	417
4TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00476	382

Number	Type	Mfr	Description	Catalogue ID	Pg
4TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4TA400K)	EDH-EAT-00493	383
4TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00484	383
4TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4TA401K)	EDH-EAT-00499	383
4TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00502	395
4TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00487	384
4TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	395
4TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (4TA603LDK)	EDH-EAT-00512	396
4TA631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00544	428
4TA632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00548	428
4TA632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 4P, aluminum	EDH-EAT-00555	429
5010D23G01	primary	EAT	Series C J-frame rear connecting stud, 250 A short stud	EDH-EAT-00656	372
5010D23G02	primary	EAT	Series C J-frame rear connecting stud, 250 A long stud	EDH-EAT-00657	373
50552-108-01	primary	SQD	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	EDH-SQD-00164	609
505C606G04	primary	EAT	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	EDH-EAT-00698	410
505C606G05	primary	EAT	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	EDH-EAT-00699	411
505C606G06	primary	EAT	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	EDH-EAT-00700	411
506C052G01	primary	EAT	Series C L-frame panelboard connecting strap, outside pole, 600 A	EDH-EAT-00694	398
5078A98	primary	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00220	267
5081A08G02	primary	EAT	PRL4 chassis mounting hardware	EDH-EAT-00417	338
5081A09G02	primary	EAT	PRL4 gutter cover mounting hardware	EDH-EAT-00418	338
5155C62H01	primary	EAT	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	EDH-EAT-00253	195
5155C81G01	primary	EAT	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	EDH-EAT-00403	196
5155C81G03	primary	EAT	EZ Trim lock, 24-48 in	EDH-EAT-00409	196
5156C09	primary	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00290	121
5156C10	primary	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00289	121
5157C83G06	primary	EAT	Trim screws	EDH-EAT-00414	199
5158C03	primary	EAT	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	EDH-EAT-00239	119
5158C03G01	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00439	119
5158C03G02	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00438	119
5158C03G03	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00441	119
5158C03G04	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00440	120
5158C04G01	primary	EAT	Vintage PRL1/PRL2 400/600 A neutral bar	EDH-EAT-00240	120
5158C05	primary	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00235	188
5158C05G01	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00443	120
5158C05G02	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00442	120
5158C05G05	primary	EAT	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	EDH-EAT-00237	121
5158C05G06	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00444	121
5158C05G06 (boxes 30 in and above)	style_number	EAT	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	EDH-EAT-00237	121
5652B38G01	primary	EAT	Series G Series G / G-frame control wire terminal kit (package of 12); for steel	EDH-EAT-00576	419

Number	Type	Mfr	Description	Catalogue ID	Pg
5EH2	primary	SIE	ITE twin mounting kit for FC20 / VB panels, EE/EH/EF/HE breakers, 150 A	EDH-SIE-00314	1089
5FJ2	primary	SIE	ITE twin mounting kit for FC20 / VB panels, FJ3/FJ breakers, 225 A	EDH-SIE-00315	1089
5JJ2	primary	SIE	ITE twin mounting kit, J-frame (JD3/JJ3/JL3/HJ3), 400 A	EDH-SIE-00316	1090
5PCGBLD600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	EDH-EAT-00398	346
5PCGBLUG1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	EDH-EAT-00401	347
5PCGBLUG400S	primary	EAT	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	EDH-EAT-00396	347
5PCGBLUG600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	EDH-EAT-00397	347
5PCGBLUG800S	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	EDH-EAT-00399	347
5PCGBMD800T	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	EDH-EAT-00400	347
5PCGBND1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	EDH-EAT-00402	348
5PFP1S	primary	EAT	PRL5P 1X deadfront filler plate, single-bus chassis	EDH-EAT-00384	343
5PFP1T	primary	EAT	PRL5P 1X deadfront filler plate, double-bus chassis	EDH-EAT-00385	343
5PFP2S	primary	EAT	PRL5P 2X deadfront filler plate, single-bus chassis	EDH-EAT-00386	344
5PFP2T	primary	EAT	PRL5P 2X deadfront filler plate, double-bus chassis	EDH-EAT-00387	344
5PFP3S	primary	EAT	PRL5P 3X deadfront filler plate, single-bus chassis	EDH-EAT-00388	344
5PFP3T	primary	EAT	PRL5P 3X deadfront filler plate, double-bus chassis	EDH-EAT-00389	344
5PFP4S	primary	EAT	PRL5P 4X deadfront filler plate, single-bus chassis	EDH-EAT-00390	345
5PFP4T	primary	EAT	PRL5P 4X deadfront filler plate, double-bus chassis	EDH-EAT-00391	345
5PFP5S	primary	EAT	PRL5P 5X deadfront filler plate, single-bus chassis	EDH-EAT-00392	345
5PFP5T	primary	EAT	PRL5P 5X deadfront filler plate, double-bus chassis	EDH-EAT-00393	345
5PFP6S	primary	EAT	PRL5P 6X deadfront filler plate, single-bus chassis	EDH-EAT-00394	346
5PFP6T	primary	EAT	PRL5P 6X deadfront filler plate, double-bus chassis	EDH-EAT-00395	346
5PG1200A	primary	EAT	PRL5P 1200 A ground bar, Al/Cu	EDH-EAT-00382	342
5PG1200C	primary	EAT	PRL5P 1200 A ground bar, copper	EDH-EAT-00383	343
5PLUG31200TC	primary	EAT	PRL5P 600-1200 A lug unit, double-bus chassis	EDH-EAT-00377	340
5PLUG3400SC	primary	EAT	PRL5P 400 A main/through-feed lug unit, single-bus chassis	EDH-EAT-00374	341
5PLUG3600SC	primary	EAT	PRL5P 600 A lug unit, single-bus chassis	EDH-EAT-00375	341
5PLUG3800SC	primary	EAT	PRL5P 800 A lug unit, single-bus chassis	EDH-EAT-00376	341
5PN1200A	primary	EAT	PRL5P 1200 A neutral assembly, Al/Cu	EDH-EAT-00380	342
5PN1200C	primary	EAT	PRL5P 1200 A neutral assembly, copper	EDH-EAT-00381	342
5PN800A	primary	EAT	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	EDH-EAT-00378	342
5PN800C	primary	EAT	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	EDH-EAT-00379	342
623B222G01	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00674	412
623B222G02	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00675	413
623B222G03	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00676	413
624B600H01	primary	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00702	358
624B600H02	primary	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00701	358
624B609G01	primary	EAT	Series C L-frame panelboard connecting strap, center pole, 600 A	EDH-EAT-00693	398
625B229G06	primary	EAT	Series C F-frame terminal shield 1-pole, line	EDH-EAT-00629	360
625B229G07	primary	EAT	Series C F-frame terminal shield 2-pole, line	EDH-EAT-00630	360
625B229G08	primary	EAT	Series C F-frame terminal shield 3-pole, line	EDH-EAT-00631	360
625B229G09	primary	EAT	Series C F-frame terminal shield 4-pole, line	EDH-EAT-00632	361
6554C01	primary	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00294	337
6554C02	primary	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00295	337
6555C40H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	EDH-EAT-00287	266

Number	Type	Mfr	Description	Catalogue ID	Pg
6555C41H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	EDH-EAT-00288	267
6559C59	primary	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00254	265
6572C746G01	primary	EAT	PRL4 standard ground bus	EDH-EAT-00238	336
6574C74	primary	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00298	336
6631C01G01	primary	EAT	Series C J-frame terminal shield 4-pole, line end	EDH-EAT-00636	370
6641C16G01	primary	EAT	Series C J-frame terminal shield 2/3-pole, load end	EDH-EAT-00637	370
6641C16G02	primary	EAT	Series C J-frame terminal shield 4-pole, load end	EDH-EAT-00638	371
6642C14G02	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	EDH-EAT-00658	389
6642C14G03	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in	EDH-EAT-00661	389
6642C14G04	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	EDH-EAT-00659	390
6642C14G05	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	EDH-EAT-00662	390
6642C14G06	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in	EDH-EAT-00660	390
6642C14G07	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in	EDH-EAT-00663	391
673B142G02	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing,	EDH-EAT-00679	357
673B142G03	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A	EDH-EAT-00682	357
673B142G04	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A	EDH-EAT-00681	358
673B142G10	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	EDH-EAT-00680	358
6BL2C	primary	SIE	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	EDH-SIE-00201	1090
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00278	260
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	263
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00277	259
6CLE2	primary	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	994
6CLF1	primary	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	1097
6CLF1C	alias	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	1097
6CLJ1	primary	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	1098
6CLJ1C	alias	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	1098
6CLJ6	primary	SIE	Mounting hardware to mount CJD (CLD) into FC-1 panel, single, 600 A	EDH-SIE-00321	1090
6CLL1	primary	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	1099
6CLL1C	alias	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	1099
6E62	primary	SIE	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	EDH-SIE-00188	1100
6F62	primary	SIE	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	EDH-SIE-00190	1101
6FPB01	primary	SIE	6FPB01 blank plate, 1.25in unit space	EDH-SIE-00211	990
6FPB02	primary	SIE	6FPB02 blank plate, 2.5in unit space	EDH-SIE-00212	990
6FPB03	primary	SIE	6FPB03 blank plate, 3.75in unit space	EDH-SIE-00213	990
6FPB05	primary	SIE	6FPB05 blank plate, 5in unit space	EDH-SIE-00214	991
6FPB10	primary	SIE	6FPB10 blank plate, 10in unit space	EDH-SIE-00215	991
6FPB15	primary	SIE	6FPB15 blank plate, 15in unit space	EDH-SIE-00216	1106

Number	Type	Mfr	Description	Catalogue ID	Pg
6JJ61	primary	SIE	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single	EDH-SIE-00192	995
6JJ62	primary	SIE	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	EDH-SIE-00193	1102
6LL61	primary	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	995
6LL61C	alias	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	995
6M61C	primary	SIE	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	EDH-SIE-00203	1091
6N61C	primary	SIE	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	EDH-SIE-00204	1091
6QJ2	primary	SIE	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	EDH-SIE-00189	1092
6QR2	primary	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	961
6QR2CAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	961
6QR2CCAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	961
6SCJ1	primary	SIE	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00196	1092
6SCL1	primary	SIE	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	EDH-SIE-00200	1103
6SCL61C	primary	SIE	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00202	1093
6SJL1	primary	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	996
6SJL1C	alias	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	996
6SLL1	primary	SIE	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	EDH-SIE-00199	997
739137	primary	SQD	Square D leveling nut (NQOB panelboard)	EDH-SQD-00553	529
7494A11G02	primary	EAT	Vintage Fastrim trim clamps for B10B and PRL1/2/3	EDH-EAT-00419	123
7499A48G04	primary	EAT	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	EDH-EAT-00415	199
75A105457	primary	GEA	GE panelboard directory card holder	EDH-GEA-00412	709
75A105503P101	primary	GEA	GE Conical spring washer 1/4 in - 75A105503P101	EDH-GEA-00467	854
75A105503P105	primary	GEA	GE Conical spring washer 5/16 in - 75A105503P105	EDH-GEA-00468	854
75B125198P101	primary	GEA	GE panelboard directory card	EDH-GEA-00411	709
75C140025P104	primary	GEA	GE NLAB/NLTQ/DB neutral and bus support, 100-225 A	EDH-GEA-00398	705
75C140025P105	primary	GEA	GE NLAB/NLTQ/DB main bus support, 100-600 A copper bus and 100-225 A aluminum bu	EDH-GEA-00396	705
75C140025P106	primary	GEA	GE NLAB/NLTQ/DB main bus support, 400-600 A aluminum bus	EDH-GEA-00397	705
75C140032P134	primary	GEA	GE NLAB/NLTQ/DB neutral support, 400-600 A (2 required)	EDH-GEA-00399	706
75C140045G705	primary	GEA	GE main lug assembly for phase bars and neutral (100/225 A row), NLAB/NLTQ/DB	EDH-GEA-00405	703
75C140485P103	primary	GEA	GE screw assembly for bolt-in branch breakers (one per hole), NLAB/NLTQ/DB	EDH-GEA-00404	706
75C145005G703	primary	GEA	QMR panelboard filler plate 3X	EDH-GEA-00275	699
75C145005G711	primary	GEA	CCB panelboard filler plate 2X	EDH-GEA-00270	699
75C145005G715	primary	GEA	CCB panelboard filler plate 6X	EDH-GEA-00271	699
75D165029P101T	primary	GEA	GE branch circuit insulator for TBQ and TQL breakers	EDH-GEA-00400	706
75V100083P101	primary	GEA	GE panelboard door lock, single-point lever handle type with key	EDH-GEA-00414	709
763B795P8	primary	GEA	GE main lug (with 763B795P9), 225 A row, NLAB/NLTQ/DB	EDH-GEA-00406	704
763B795P9	primary	GEA	GE main lug (with 763B795P8), NLAB/NLTQ/DB	EDH-GEA-00407	704
789A448G1	primary	GEA	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	EDH-GEA-00328	888
789A448G2	primary	GEA	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	EDH-GEA-00329	889
789A448G3	primary	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	889
789A448G377 (as printed)	alias	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	889
8000602001	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	EDH-SQD-00167	608

Number	Type	Mfr	Description	Catalogue ID	Pg
8000602003	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	EDH-SQD-00165	607
80025-067-01	supersedes	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00161	462
80031-024-02	primary	SQD	QED plug-button for unused holes 80031-024-02	EDH-SQD-00162	609
80034-187-02	style_number	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	603
80034-188-03	style_number	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	604
8011417101	primary	SQD	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	EDH-SQD-00160	462
80121-651-01	style_number	SQD	I-Line blank extension HLN1BL	EDH-SQD-00139	602
80121-652-01	style_number	SQD	I-Line blank extension HLN4BL	EDH-SQD-00140	602
80121-653-01	style_number	SQD	I-Line blank extension HLW4EBL	EDH-SQD-00144	605
80121-752-01	style_number	SQD	I-Line blank extension HLN4EBL	EDH-SQD-00141	603
8023317701	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	EDH-SQD-00166	607
8450C62H39	equivalent	EAT	Trim lock for right-handed door	EDH-EAT-00406	197
8450C62H39	primary	EAT	Trim lock for right-handed door	EDH-EAT-00407	197
8712C73H01	primary	EAT	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	EDH-EAT-00447	123
911E347P3	primary	GEA	3X branch base (THQB/TEY, A-Series II)	EDH-GEA-00029	689
ACSFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	712
ACSFPKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	712
ACSHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	712
ACSHKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	712
ACSMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	712
ACSMKSK	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	712
ACTFPKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	712
ACTFPKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	713
ACTFPKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	713
ACTFPKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	713
ACTFPKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	714
ACTFPKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	714
ACTFPKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	714
ACTFPKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	715
ACTFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	715
ACTHKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	712
ACTHKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	713
ACTHKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	713
ACTHKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	713
ACTHKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	714

Number	Type	Mfr	Description	Catalogue ID	Pg
ACTHKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	714
ACTHKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	714
ACTHKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	715
ACTHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	715
ACTMKEB1P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	712
ACTMKEB2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	713
ACTMKEB3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	713
ACTMKJD	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	713
ACTMKQD2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	714
ACTMKQD3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	714
ACTMKSE	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	714
ACTMKSF	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	715
ACTMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	715
AEG10	primary	GEA	Spectra equipment ground kit AEG10	EDH-GEA-00236	800
AEG21	primary	GEA	Spectra equipment ground kit AEG21	EDH-GEA-00237	801
AEG21S	primary	GEA	Spectra equipment ground kit AEG21S	EDH-GEA-00238	801
AEG31S	primary	GEA	Spectra equipment ground kit AEG31S	EDH-GEA-00239	801
AEG47	primary	GEA	Spectra equipment ground kit AEG47	EDH-GEA-00240	801
AEG47S	primary	GEA	Spectra equipment ground kit AEG47S	EDH-GEA-00241	802
AFL120	primary	GEA	Spectra feed-thru lug cover plate kit AFL120	EDH-GEA-00243	737
AFL600	primary	GEA	Spectra feed-thru lug cover plate kit AFL600	EDH-GEA-00242	737
AFP10T	primary	GEA	Spectra ADS switch filler plate AFP10T	EDH-GEA-00544	830
AFP10X	primary	GEA	Spectra ADS switch filler plate AFP10X	EDH-GEA-00545	830
AFP19X	primary	GEA	Spectra ADS switch filler plate AFP19X	EDH-GEA-00546	831
AFP2FBD	primary	GEA	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00131	831
AFP2QDD	primary	GEA	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	EDH-GEA-00128	831
AFP2TED	primary	GEA	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	EDH-GEA-00129	832
AFP3ELD	primary	GEA	Spectra breaker filler plate kit AFP3ELD	EDH-GEA-00533	832
AFP3EYD	primary	GEA	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	EDH-GEA-00130	832
AFP3FBD	primary	GEA	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00132	833
AFP3QBD	primary	GEA	Spectra breaker filler plate kit AFP3QBD	EDH-GEA-00538	833
AFP3QDD	primary	GEA	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	EDH-GEA-00133	833
AFP3SED	primary	GEA	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, du	EDH-GEA-00134	834
AFP3SFD	primary	GEA	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	EDH-GEA-00135	834
AFP3SFS	primary	GEA	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	EDH-GEA-00139	834
AFP3TED	primary	GEA	Spectra breaker filler plate kit AFP3TED	EDH-GEA-00532	835
AFP3TFD	primary	GEA	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	EDH-GEA-00136	835
AFP3TFS	primary	GEA	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	EDH-GEA-00140	835

Number	Type	Mfr	Description	Catalogue ID	Pg
AFP4FGD	primary	GEA	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	EDH-GEA-00137	835
AFP4FGS	primary	GEA	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	EDH-GEA-00141	836
AFP4SED	primary	GEA	Spectra breaker filler plate kit AFP4SED	EDH-GEA-00531	836
AFP4SFD	primary	GEA	Spectra breaker filler plate kit AFP4SFD	EDH-GEA-00534	836
AFP4SFS	primary	GEA	Spectra breaker filler plate kit AFP4SFS	EDH-GEA-00535	836
AFP4SGC	primary	GEA	Spectra breaker filler plate kit AFP4SGC	EDH-GEA-00539	836
AFP4SGD	primary	GEA	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	EDH-GEA-00138	837
AFP4SGS	primary	GEA	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	EDH-GEA-00142	837
AFP4X	primary	GEA	Spectra ADS switch filler plate AFP4X	EDH-GEA-00547	837
AFP5LCS	primary	GEA	Spectra breaker filler plate kit AFP5LCS (SKP, single)	EDH-GEA-00143	838
AFP5X	primary	GEA	Spectra ADS switch filler plate AFP5X	EDH-GEA-00548	838
AFP6SKS	primary	GEA	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	EDH-GEA-00144	838
AFP6TJD	primary	GEA	Spectra breaker filler plate kit AFP6TJD	EDH-GEA-00537	839
AFP6TJS	primary	GEA	Spectra breaker filler plate kit AFP6TJS	EDH-GEA-00536	839
AFP7T	primary	GEA	Spectra ADS switch filler plate AFP7T	EDH-GEA-00549	839
AFP7X	primary	GEA	Spectra ADS switch filler plate AFP7X	EDH-GEA-00551	839
AFP7X2	primary	GEA	Spectra ADS switch filler plate AFP7X2	EDH-GEA-00550	840
AHKBE1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	EDH-GEA-00194	847
AHKBF1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	EDH-GEA-00195	847
AHKBFB1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	EDH-GEA-00200	848
AHKBFD1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	EDH-GEA-00198	848
AHKBFG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	EDH-GEA-00199	848
AHKBG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	EDH-GEA-00196	848
AHKBQ1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	EDH-GEA-00197	848
AHKE1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKE1	EDH-GEA-00185	849
AHKEL1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKEL1	EDH-GEA-00186	849
AHKF1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKF1	EDH-GEA-00187	850
AHKFD1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFD1	EDH-GEA-00192	850
AHKFG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFG1	EDH-GEA-00193	850
AHKG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKG1	EDH-GEA-00188	851
AHKJ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKJ1	EDH-GEA-00189	851
AHKLB1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKLB1	EDH-GEA-00190	852
AHKQ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKQ1	EDH-GEA-00191	852
AL1000MAT	primary	SQD	Square D control wire terminal / tapped lug (MA)	EDH-SQD-00300	626
AL100FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00252	611
AL100FA4	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FC	EDH-SQD-00251	612
AL100FD	primary	SQD	E-frame mechanical lug kit (3 lugs), 35-125 A (optional for 15-30 A)	EDH-SQD-00430	482
AL100TF	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00253	612
AL1200NE6T	primary	SQD	Square D control wire terminal / tapped lug (NA)	EDH-SQD-00301	627
AL1200P24TK	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00306	657
AL1200P25TK	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00307	657
AL1200P25TK4	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00308	657
AL1200R53K	primary	SQD	Square D lug kit AL1200R53K (S33930 / R-frame)	EDH-SQD-00573	439
AL1200R53TK	primary	SQD	PowerPact R tapped (control-wire) lug kit 1200 A	EDH-SQD-00309	658

Number	Type	Mfr	Description	Catalogue ID	Pg
AL150FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00254	612
AL150HD	primary	SQD	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	EDH-SQD-00082	595
AL175JD	primary	SQD	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	EDH-SQD-00083	596
AL250JD	primary	SQD	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	EDH-SQD-00084	597
AL250KA	primary	SQD	Square D KA mechanical lug kit (Al lugs) - KI	EDH-SQD-00255	616
AL250KI	primary	SQD	Square D KA mechanical lug kit (Al lugs) - KI	EDH-SQD-00256	616
AL250KIT	primary	SQD	Square D control wire terminal / tapped lug (KI)	EDH-SQD-00295	618
AL30FD	primary	SQD	E-frame mechanical lug kit (3 lugs), 15-30 A	EDH-SQD-00429	482
AL400L61K3	primary	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	EDH-SQD-00221	641
AL400L61K4	primary	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 4P	EDH-SQD-00222	642
AL400L6IK3	alias	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	EDH-SQD-00221	641
AL400LA	primary	SQD	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	EDH-SQD-00085	597
AL400LAT	primary	SQD	Square D control wire terminal / tapped lug (Q4)	EDH-SQD-00296	622
AL400LH7	primary	SQD	Square D LA mechanical lug kit (Al lugs) - Q4	EDH-SQD-00257	618
AL50FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00250	613
AL600IN	primary	SQD	Square D LC/LI/LE/LX/LXI threaded terminal clip kit	EDH-SQD-00310	626
AL600LF52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)	EDH-SQD-00225	642
AL600LI35	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LE	EDH-SQD-00258	622
AL600LI35T	primary	SQD	Square D control wire terminal / tapped lug (LC)	EDH-SQD-00297	626
AL600LI5	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LI	EDH-SQD-00259	623
AL600LI5T	primary	SQD	Square D control wire terminal / tapped lug (LC)	EDH-SQD-00298	626
AL600LI7	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LC	EDH-SQD-00260	623
AL600LS52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)	EDH-SQD-00223	642
AL600LS52K4	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)	EDH-SQD-00224	643
AL800M23K	primary	SQD	PowerPact M/P-frame 800 A mechanical lug kit, Al	EDH-SQD-00311	655
AL800M23TK	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00302	655
AL800M23TK4	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00304	655
AL800P6TK	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00303	656
AL800P6TK4	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00305	656
AL800P7K	primary	SQD	PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)	EDH-SQD-00312	656
AL900MAT	primary	SQD	Square D control wire terminal / tapped lug (MA)	EDH-SQD-00299	627
AMB2120CA	primary	GEA	Spectra main lug kit AMB2120CA	EDH-GEA-00573	718
AMB2120CAF	equivalent	GEA	Spectra main lug kit AMB2120CA	EDH-GEA-00573	718
AMB2120DCA	primary	GEA	Spectra main lug kit AMB2120DCA	EDH-GEA-00581	719
AMB2120DCAF	equivalent	GEA	Spectra main lug kit AMB2120DCA	EDH-GEA-00581	719
AMB2120DMA	primary	GEA	Spectra main lug kit AMB2120DMA	EDH-GEA-00561	719
AMB2120DMAF	equivalent	GEA	Spectra main lug kit AMB2120DMA	EDH-GEA-00561	719
AMB2120DMC	primary	GEA	Spectra main lug kit AMB2120DMC	EDH-GEA-00559	720
AMB2120DMCF	equivalent	GEA	Spectra main lug kit AMB2120DMC	EDH-GEA-00559	720
AMB2120DN	primary	GEA	Spectra main lug kit AMB2120DN	EDH-GEA-00565	720
AMB2120DNF	equivalent	GEA	Spectra main lug kit AMB2120DN	EDH-GEA-00565	720
AMB2120MA	primary	GEA	Spectra main lug kit AMB2120MA	EDH-GEA-00556	721
AMB2120MAF	equivalent	GEA	Spectra main lug kit AMB2120MA	EDH-GEA-00556	721
AMB2120N	primary	GEA	Spectra main lug kit AMB2120N	EDH-GEA-00563	721
AMB2120NF	equivalent	GEA	Spectra main lug kit AMB2120N	EDH-GEA-00563	721
AMB2250CA	primary	GEA	Spectra main lug kit AMB2250CA	EDH-GEA-00567	722
AMB2250CAF	equivalent	GEA	Spectra main lug kit AMB2250CA	EDH-GEA-00567	722

Number	Type	Mfr	Description	Catalogue ID	Pg
AMB2250DCA	primary	GEA	Spectra main lug kit AMB2250DCA	EDH-GEA-00575	722
AMB2250DCAF	equivalent	GEA	Spectra main lug kit AMB2250DCA	EDH-GEA-00575	722
AMB2600CA	primary	GEA	Spectra main lug kit AMB2600CA	EDH-GEA-00569	723
AMB2600CAF	equivalent	GEA	Spectra main lug kit AMB2600CA	EDH-GEA-00569	723
AMB2600DCA	primary	GEA	Spectra main lug kit AMB2600DCA	EDH-GEA-00577	723
AMB2600DCAF	equivalent	GEA	Spectra main lug kit AMB2600DCA	EDH-GEA-00577	723
AMB2600MA	primary	GEA	Spectra main lug kit AMB2600MA	EDH-GEA-00552	724
AMB2600MAF	equivalent	GEA	Spectra main lug kit AMB2600MA	EDH-GEA-00552	724
AMB2600MC	primary	GEA	Spectra main lug kit AMB2600MC	EDH-GEA-00554	724
AMB2600MCF	equivalent	GEA	Spectra main lug kit AMB2600MC	EDH-GEA-00554	724
AMB2800CA	primary	GEA	Spectra main lug kit AMB2800CA	EDH-GEA-00571	725
AMB2800CAF	equivalent	GEA	Spectra main lug kit AMB2800CA	EDH-GEA-00571	725
AMB2800DCA	primary	GEA	Spectra main lug kit AMB2800DCA	EDH-GEA-00579	725
AMB2800DCAF	equivalent	GEA	Spectra main lug kit AMB2800DCA	EDH-GEA-00579	725
AMB3120CA	primary	GEA	Spectra main lug kit AMB3120CA	EDH-GEA-00574	726
AMB3120CAF	equivalent	GEA	Spectra main lug kit AMB3120CA	EDH-GEA-00574	726
AMB3120DCA	primary	GEA	Spectra main lug kit AMB3120DCA	EDH-GEA-00582	726
AMB3120DCAF	equivalent	GEA	Spectra main lug kit AMB3120DCA	EDH-GEA-00582	726
AMB3120DMA	primary	GEA	Spectra main lug kit AMB3120DMA	EDH-GEA-00562	727
AMB3120DMAF	equivalent	GEA	Spectra main lug kit AMB3120DMA	EDH-GEA-00562	727
AMB3120DMC	primary	GEA	Spectra main lug kit AMB3120DMC	EDH-GEA-00560	727
AMB3120DMCF	equivalent	GEA	Spectra main lug kit AMB3120DMC	EDH-GEA-00560	727
AMB3120DN	primary	GEA	Spectra main lug kit AMB3120DN	EDH-GEA-00566	728
AMB3120DNF	equivalent	GEA	Spectra main lug kit AMB3120DN	EDH-GEA-00566	728
AMB3120MA	primary	GEA	Spectra main lug kit AMB3120MA	EDH-GEA-00557	728
AMB3120MAF	equivalent	GEA	Spectra main lug kit AMB3120MA	EDH-GEA-00557	728
AMB3120MC	primary	GEA	Spectra main lug kit AMB3120MC	EDH-GEA-00558	729
AMB3120MCF	equivalent	GEA	Spectra main lug kit AMB3120MC	EDH-GEA-00558	729
AMB3120N	primary	GEA	Spectra main lug kit AMB3120N	EDH-GEA-00564	729
AMB3120NF	equivalent	GEA	Spectra main lug kit AMB3120N	EDH-GEA-00564	729
AMB3250CA	primary	GEA	Spectra main lug kit AMB3250CA	EDH-GEA-00568	730
AMB3250CAF	equivalent	GEA	Spectra main lug kit AMB3250CA	EDH-GEA-00568	730
AMB3250DCA	primary	GEA	Spectra main lug kit AMB3250DCA	EDH-GEA-00576	730
AMB3250DCAF	equivalent	GEA	Spectra main lug kit AMB3250DCA	EDH-GEA-00576	730
AMB3600CA	primary	GEA	Spectra main lug kit AMB3600CA	EDH-GEA-00570	731
AMB3600CAF	equivalent	GEA	Spectra main lug kit AMB3600CA	EDH-GEA-00570	731
AMB3600DCA	primary	GEA	Spectra main lug kit AMB3600DCA	EDH-GEA-00578	731
AMB3600DCAF	equivalent	GEA	Spectra main lug kit AMB3600DCA	EDH-GEA-00578	731
AMB3600MA	primary	GEA	Spectra main lug kit AMB3600MA	EDH-GEA-00553	732
AMB3600MAF	equivalent	GEA	Spectra main lug kit AMB3600MA	EDH-GEA-00553	732
AMB3600MC	primary	GEA	Spectra main lug kit AMB3600MC	EDH-GEA-00555	732
AMB3600MCF	equivalent	GEA	Spectra main lug kit AMB3600MC	EDH-GEA-00555	732
AMB3800CA	primary	GEA	Spectra main lug kit AMB3800CA	EDH-GEA-00572	733
AMB3800CAF	equivalent	GEA	Spectra main lug kit AMB3800CA	EDH-GEA-00572	733
AMB3800DCA	primary	GEA	Spectra main lug kit AMB3800DCA	EDH-GEA-00580	733
AMB3800DCAF	equivalent	GEA	Spectra main lug kit AMB3800DCA	EDH-GEA-00580	733
AMC2FGM	alias	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	770
AMC2FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	770
AMC2FJ	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	770

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC2FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	770
AMC2FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	771
AMC2FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	771
AMC2FLS	alias	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	772
AMC2FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	772
AMC2GM	alias	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	773
AMC2GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	773
AMC2JK	alias	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	773
AMC2JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	773
AMC2KM	alias	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	774
AMC2KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	774
AMC3FGM	alias	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	775
AMC3FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	775
AMC3FJ	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	775
AMC3FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	775
AMC3FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	776
AMC3FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	776
AMC3FLS	alias	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	777
AMC3FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	777
AMC3GM	alias	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	777
AMC3GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	777
AMC3JK	alias	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	778
AMC3JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	778
AMC3KM	alias	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	779
AMC3KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	779
AMC4EB	alias	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	779
AMC4EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	779
AMC4EBS	alias	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	780
AMC4EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	780
AMC4FDB	alias	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	781

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC4FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	781
AMC4FDS	alias	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	782
AMC4FDSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	782
AMC4FGB	alias	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	782
AMC4FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	782
AMC4FJ	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	782
AMC4FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	782
AMC4FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	783
AMC4FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	783
AMC4FLS	alias	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	784
AMC4FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	784
AMC4GB	alias	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	785
AMC4GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	785
AMC4JK	alias	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	785
AMC4JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	785
AMC4QD	alias	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	786
AMC4QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	786
AMC4SE	alias	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	787
AMC4SEFP	primary	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	787
AMC6EB	alias	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	788
AMC6EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	788
AMC6EBS	alias	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	788
AMC6EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	788
AMC6EL	primary	GEA	Spectra plug-in breaker module AMC6EL (TEL)	EDH-GEA-00530	789
AMC6EY	alias	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	789
AMC6EYFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	789
AMC6FB	alias	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	791
AMC6FBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	791
AMC6FDB	alias	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	791
AMC6FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	791
AMC6FDSPF	primary	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	792

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC6FDSPF	alias	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	792
AMC6FGB	alias	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	792
AMC6FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	792
AMC6FJ	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	792
AMC6FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	792
AMC6FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	793
AMC6FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	793
AMC6FLS	alias	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	794
AMC6FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	794
AMC6GB	alias	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	795
AMC6GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	795
AMC6JK	alias	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	795
AMC6JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	795
AMC6QB	alias	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	796
AMC6QBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	796
AMC6QD	alias	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	796
AMC6QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	796
AMCB2FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	740
AMCB2FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	740
AMCB2FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	742
AMCB2FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB2FJ (SF/TF, DEH059)	EDH-GEA-00444	741
AMCB2FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	742
AMCB2FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	742
AMCB2FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	742
AMCB2GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	744
AMCB2GM	primary	GEA	Spectra bolt-on G-frame main/single-branch strap kit AMCB2GM (DEH060)	EDH-GEA-00446	743
AMCB2GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	744
AMCB2KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	745
AMCB2KM	primary	GEA	Spectra bolt-on K-frame main strap kit AMCB2KM (DEH061)	EDH-GEA-00450	744
AMCB2KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	745
AMCB3FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	745

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB3FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	745
AMCB3FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	746
AMCB3FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB3FJ (SF/TF, DEH059)	EDH-GEA-00443	746
AMCB3FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	746
AMCB3FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX	EDH-GEA-00594	857
AMCB3FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK	EDH-GEA-00595	857
AMCB3FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	747
AMCB3FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	747
AMCB3GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	748
AMCB3GM	primary	GEA	Spectra bolt-on G-frame main/single-branch strap kit AMCB3GM (DEH060)	EDH-GEA-00447	747
AMCB3GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	748
AMCB3GMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX	EDH-GEA-00598	858
AMCB3GMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK	EDH-GEA-00599	858
AMCB3KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	750
AMCB3KM	primary	GEA	Spectra bolt-on K-frame main strap kit AMCB3KM (DEH061)	EDH-GEA-00451	749
AMCB3KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	750
AMCB3KMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX	EDH-GEA-00600	859
AMCB3KMFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK	EDH-GEA-00601	859
AMCB3LB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	750
AMCB3LBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	750
AMCB4EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	752
AMCB4EB	primary	GEA	Spectra bolt-on breaker strap kit AMCB4EB (TEB/TED/THED/SE, DEH047)	EDH-GEA-00441	751
AMCB4EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	752
AMCB4EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	753
AMCB4EY	primary	GEA	Spectra bolt-on TEY strap kit AMCB4EY (DEH062)	EDH-GEA-00452	752
AMCB4EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	753
AMCB4FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	753
AMCB4FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	753
AMCB4FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	754
AMCB4FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	754
AMCB4FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	754
AMCB4FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	754
AMCB4FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	756
AMCB4FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB4FJ (SF/TF, DEH059)	EDH-GEA-00445	755

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB4FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	756
AMCB4FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	756
AMCB4FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	756
AMCB4GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	758
AMCB4GB	primary	GEA	Spectra bolt-on G-frame double-branch strap kit AMCB4GB (DEH40129)	EDH-GEA-00448	757
AMCB4GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	758
AMCB4QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	758
AMCB4QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	758
AMCB4SE	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	760
AMCB4SE	primary	GEA	Spectra bolt-on breaker strap kit AMCB4SE (TEB/TED/THED/SE, DEH047)	EDH-GEA-00440	759
AMCB4SEFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	760
AMCB6EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	761
AMCB6EB	primary	GEA	Spectra bolt-on breaker strap kit AMCB6EB (TEB/TED/THED/SE, DEH047)	EDH-GEA-00439	761
AMCB6EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	761
AMCB6EBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX	EDH-GEA-00590	860
AMCB6EBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK	EDH-GEA-00591	860
AMCB6EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	762
AMCB6EY	primary	GEA	Spectra bolt-on TEY strap kit AMCB6EY (DEH062)	EDH-GEA-00453	762
AMCB6EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	762
AMCB6FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	763
AMCB6FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	763
AMCB6FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	764
AMCB6FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	764
AMCB6FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	764
AMCB6FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	764
AMCB6FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	765
AMCB6FJ	primary	GEA	Spectra bolt-on breaker strap kit AMCB6FJ (SF/TF, DEH059)	EDH-GEA-00442	765
AMCB6FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	765
AMCB6FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX	EDH-GEA-00592	861
AMCB6FJFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK	EDH-GEA-00593	861
AMCB6FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	766
AMCB6FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	766
AMCB6GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	767

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB6GB	primary	GEA	Spectra bolt-on G-frame double-branch strap kit AMCB6GB (DEH40129)	EDH-GEA-00449	766
AMCB6GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	767
AMCB6GBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX	EDH-GEA-00596	862
AMCB6GBFP	supersedes	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK	EDH-GEA-00597	862
AMCB6QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	768
AMCB6QD	primary	GEA	GE/ABB AMCB6QD	EDH-GEA-00610	910
AMCB6QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	768
AMCB6TEDL	primary	GEA	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	EDH-GEA-00244	840
AML3120CFP	primary	GEA	Spectra main lug module AML3120CFP (1200 A compression)	EDH-GEA-00231	734
AML3120FP	primary	GEA	Spectra main lug module AML3120FP (1200 A mechanical)	EDH-GEA-00226	734
AML3250CFP	primary	GEA	Spectra main lug module AML3250CFP (250 A compression)	EDH-GEA-00227	734
AML3250FP	primary	GEA	Spectra main lug module AML3250FP (250 A mechanical)	EDH-GEA-00220	734
AML3250SFP	primary	GEA	Spectra main lug module AML3250SFP (250 A mechanical)	EDH-GEA-00219	735
AML3400CFP	primary	GEA	Spectra main lug module AML3400CFP (400 A compression)	EDH-GEA-00228	735
AML3400FP	primary	GEA	Spectra main lug module AML3400FP (400 A mechanical)	EDH-GEA-00222	735
AML3400SFP	primary	GEA	Spectra main lug module AML3400SFP (400 A mechanical)	EDH-GEA-00221	735
AML3600CFP	primary	GEA	Spectra main lug module AML3600CFP (600 A compression)	EDH-GEA-00229	736
AML3600FP	primary	GEA	Spectra main lug module AML3600FP (600 A mechanical)	EDH-GEA-00224	736
AML3600SFP	primary	GEA	Spectra main lug module AML3600SFP (600 A mechanical)	EDH-GEA-00223	736
AML3800CFP	primary	GEA	Spectra main lug module AML3800CFP (800 A compression)	EDH-GEA-00230	736
AML3800FP	primary	GEA	Spectra main lug module AML3800FP (800 A mechanical)	EDH-GEA-00225	737
ANK120D	primary	GEA	Spectra neutral kit ANK120D	EDH-GEA-00235	799
ANK800D	primary	GEA	Spectra neutral kit ANK800D	EDH-GEA-00234	799
ANKN120	primary	GEA	Spectra neutral kit ANKN120	EDH-GEA-00233	799
ANKN400	primary	GEA	Spectra neutral kit ANKN400	EDH-GEA-00232	800
APHBL	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	EDH-GEA-00084	676
APHBQ	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	EDH-GEA-00083	677
APN48	primary	GEA	A-Series Permanent circuit number kit, Nos 1-48	EDH-GEA-00093	677
APN49	primary	GEA	Spectra permanent circuit marker kit APN49	EDH-GEA-00585	865
APN84	primary	GEA	A-Series Permanent circuit number kit, Nos 43-84	EDH-GEA-00094	678
APN99	primary	GEA	Spectra permanent circuit marker kit APN99	EDH-GEA-00586	865
APP1	primary	GEA	Spectra blank filler plate 1X (36, 40 in box)	EDH-GEA-00202	840
APP1S	primary	GEA	Spectra blank filler plate 1X (27, 31 in box)	EDH-GEA-00201	841
APP1W	primary	GEA	Spectra blank filler plate 1X (44 in box)	EDH-GEA-00203	841
APP2	primary	GEA	Spectra blank filler plate 2X (36, 40 in box)	EDH-GEA-00205	841
APP2S	primary	GEA	Spectra blank filler plate 2X (27, 31 in box)	EDH-GEA-00204	842
APP2W	primary	GEA	Spectra blank filler plate 2X (44 in box)	EDH-GEA-00206	842
APP3	primary	GEA	Spectra blank filler plate 3X (36, 40 in box)	EDH-GEA-00208	842
APP3S	primary	GEA	Spectra blank filler plate 3X (27, 31 in box)	EDH-GEA-00207	843
APP3W	primary	GEA	Spectra blank filler plate 3X (44 in box)	EDH-GEA-00209	843
APP4	primary	GEA	Spectra blank filler plate 4X (36, 40 in box)	EDH-GEA-00211	843
APP4S	primary	GEA	Spectra blank filler plate 4X (27, 31 in box)	EDH-GEA-00210	844
APP4W	primary	GEA	Spectra blank filler plate 4X (44 in box)	EDH-GEA-00212	844
APP5	primary	GEA	Spectra blank filler plate 5X (36, 40 in box)	EDH-GEA-00214	844
APP5S	primary	GEA	Spectra blank filler plate 5X (27, 31 in box)	EDH-GEA-00213	845
APP5W	primary	GEA	Spectra blank filler plate 5X (44 in box)	EDH-GEA-00215	845
APP6	primary	GEA	Spectra blank filler plate 6X (36, 40 in box)	EDH-GEA-00217	845

Number	Type	Mfr	Description	Catalogue ID	Pg
APP6S	primary	GEA	Spectra blank filler plate 6X (27, 31 in box)	EDH-GEA-00216	846
APP6W	primary	GEA	Spectra blank filler plate 6X (44 in box)	EDH-GEA-00218	846
ASP25AD65KA	primary	GEA	A-Series AD 25 to 65 kAIC barrier kit	EDH-GEA-00087	675
ASP2PTFJ3P	primary	GEA	A-Series 2P to 3P SF conversion kit for horizontal subfeed	EDH-GEA-00086	677
ASP2PTQD3P	primary	GEA	A-Series 2P to 3P TQD conversion kit	EDH-GEA-00085	677
ASPAQLEBKT	primary	GEA	A-Series AQ/AL/AE rail bracket	EDH-GEA-00089	674
ASPFB12P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	EDH-GEA-00038	671
ASPFB3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	EDH-GEA-00039	671
ASPP6EY12D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	EDH-GEA-00009	679
ASPP6EY6D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	EDH-GEA-00008	679
ASPP6FB6D	primary	GEA	A-Series II power panel FB three-phase circuit breaker kit, six-pole	EDH-GEA-00005	680
ASPP6QB12D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	EDH-GEA-00007	680
ASPP6QB6D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	EDH-GEA-00006	681
ASPP6QD6D	primary	GEA	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-br	EDH-GEA-00001	681
ASPP6SE6D	primary	GEA	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	EDH-GEA-00002	682
ASPP6SF3S	primary	GEA	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	EDH-GEA-00003	682
ASPP6SG3S	primary	GEA	A-Series II power panel SG three-phase circuit breaker kit, three-pole	EDH-GEA-00004	683
ASPTED3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	EDH-GEA-00036	672
ASPTQD3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	EDH-GEA-00037	672
ATHMEGNDN	primary	GEA	Spectra TVSS neutral & ground wire kit ATHMEGNDN	EDH-GEA-00589	863
B2016RD	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00533	414
B2016RDL	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00534	415
B2500RD	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00535	415
B74FLR	primary	SIE	74 in panelboard box (floor) accepting 26-74 in interiors	EDH-SIE-00415	1078
BBKB32	primary	SIE	P2/P3 BL/BQD 100A max twin-mount branch strap kit	EDH-SIE-00102	926
BBKEB32	primary	SIE	P3 NEB/HEB 6-pole 3in branch breaker kit	EDH-SIE-00107	949
BBKED32	primary	SIE	P2/P3 ED twin-mount branch strap kit	EDH-SIE-00104	927
BBKGB32	primary	SIE	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	EDH-SIE-00106	928
BBKNB32	primary	SIE	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	EDH-SIE-00105	929
BBKQ1	primary	SIE	P2 QJ single-mount branch strap kit	EDH-SIE-00110	930
BBKQ2	primary	SIE	P3 branch breaker kit for 2- and 3-pole QJ twin mount	EDH-SIE-00111	949
BBKQR1	primary	SIE	P2 QR 225A max single-mount branch strap kit	EDH-SIE-00108	930
BBKQR2	primary	SIE	P3 twin breaker mounting kit for QR	EDH-SIE-00109	950
BBKQRP1FK	primary	SIE	P2 filler kit for QR	EDH-SIE-00080	947
BBKQRP2FK	primary	SIE	P3 filler kit for QR	EDH-SIE-00081	957
BBKVA4P2P3	primary	SIE	P2/P3 3VA41/xGB 125A max twin-mount strap kit	EDH-SIE-00103	931
BBKVA5262P2HW	primary	SIE	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/	EDH-SIE-00113	946
BBKVA5262P2S	primary	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	932
BBKVA5262S	alias	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	932
BBKVA52P3HW	primary	SIE	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting	EDH-SIE-00115	955
BBKVA52P3HW	alias	SIE	P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52	EDH-SIE-00428	956

Number	Type	Mfr	Description	Catalogue ID	Pg
BBKVA52P3T	primary	SIE	P3 strap kit	EDH-SIE-00114	951
BBKVR52P3HW	primary	SIE	P3 branch breaker hardware kit (catalog spelling; instruction sheet uses BBKVA52	EDH-SIE-00428	956
BHT	primary	EAT	Type BR loadcenter handle tie bar joining two adjacent single-pole type br break	EDH-EAT-00458	29
BINA	primary	EAT	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	EDH-EAT-00456	28
BK1	primary	SIE	Bonding kit for 250A max. and all P1 panels	EDH-SIE-00425	956
BK1A	primary	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	1081
BNDKT	primary	GEA	A-Series Service entrance kit 225 A	EDH-GEA-00081	676
BNDKT6	primary	GEA	A-Series Service entrance kit 400/600 A	EDH-GEA-00082	676
BNK2	primary	SIE	Neutral lug kit	EDH-SIE-00116	933
BNK350N	primary	SIE	Neutral lug kit	EDH-SIE-00117	926
BNKP2EX1	primary	SIE	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/G	EDH-SIE-00119	934
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00265	260
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00260	259
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00261	258
BQFS1K	equivalent	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	1109
BQFS2	primary	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	1109
Breaker-included versions: MBKVAM1300A, MBKVAM1400A, MBKVAH3300A, MBKVAH3400A, MBKVAM3300A, MBKVAM3400A	equivalent	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	1032
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	1031
Breaker-included versions: MBKVAM3150A, MBKVAM3200A, MBKVAM3225A, MBKVAM3250A, MBKVAH3200A, MBKVAH3250A	equivalent	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	1031
BRFP	primary	EAT	Type BR loadcenter filler plate (BRFP)	EDH-EAT-00454	29
BRL200	primary	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00453	25
BRLW	primary	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00459	30
BRLW1	primary	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00460	30
BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00450	27
BRSF125	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00448	27

Number	Type	Mfr	Description	Catalogue ID	Pg
BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00449	28
BWFP	primary	EAT	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware	EDH-EAT-00455	29
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00298	336
BxxCVR	primary	SIE	Panelboard box extension cover (catalog pattern B<06-48><S|F>CVR)	EDH-SIE-00414	1133
CCA4K	primary	EAT	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	EDH-EAT-00766	92
CCBBLANK	primary	GEA	GE CCB 3-pole blanks	EDH-GEA-00437	699
CCBFP1	primary	GEA	CCB panelboard filler plate 1X	EDH-GEA-00267	700
CCBFP3	primary	GEA	CCB panelboard filler plate 3X	EDH-GEA-00268	700
CCBFP5	primary	GEA	CCB panelboard filler plate 5X	EDH-GEA-00269	700
CCE125	primary	SIE	Siemens CCE125 compression lug, ED 15-125A	EDH-SIE-00263	1113
CCF250	primary	SIE	Siemens CCF250 compression lug, FD	EDH-SIE-00267	1117
CCL600	primary	SIE	Siemens CCL600 compression lug, JD/LD	EDH-SIE-00274	1119
CCM800K2	primary	SIE	Siemens CCM800K2 compression lug kit, MD 2-pole	EDH-SIE-00290	1129
CCM800K3	primary	SIE	Siemens CCM800K3 compression lug kit, MD 3-pole	EDH-SIE-00291	1129
CCN1200K2	primary	SIE	Siemens CCN1200K2 compression lug kit, ND 2-pole	EDH-SIE-00292	1131
CCN1200K3	primary	SIE	Siemens CCN1200K3 compression lug kit, ND 3-pole	EDH-SIE-00293	1131
CCPB-n-xxCF	primary	EAT	Bussmann CCPB ampacity-rejecting branch disconnect (catalog pattern CCPB-<poles>	EDH-EAT-00901	295
CCQ250	primary	SIE	Siemens CCQ250 compression lug, QR2	EDH-SIE-00255	1112
CD55JJ2	primary	SIE	ITE CDP pre-Series 5 J-frame hardware kit, 2-3/4 in rise	EDH-SIE-00324	913
CD62JJ2	primary	SIE	ITE CDP mounting hardware for JJ3/JL3/HJL3	EDH-SIE-00325	913
CDP525-FD63BT	primary	SIE	ITE CDP 5.25 in deep panelboard twin hardware kit, FD63B	EDH-SIE-00326	913
CDP525-FJ3B	primary	SIE	ITE CDP 5.25 in deep panelboard hardware kit, FJ3B200	EDH-SIE-00327	913
CDP525-FJ3BT	primary	SIE	ITE CDP 5.25 in deep panelboard twin hardware kit, FJ3B200	EDH-SIE-00328	914
CDP71PHED4	primary	SIE	ITE CDP mounting hardware for HED breakers	EDH-SIE-00329	914
CDP7BQ3	primary	SIE	Siemens/ITE CDP-7 3-pole BQ hardware	EDH-SIE-00330	914
CDP7MBKQJ3	primary	SIE	CDP-7 panelboard 3-phase QJ main/sub-feed breaker kit, 225 A	EDH-SIE-00331	912
CDPFJ3	primary	SIE	Mounting hardware for FJ3 breaker in CDP panelboard (twin, 225 A)	EDH-SIE-00320	1093
CED3K	primary	EAT	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	EDH-EAT-00767	93
CED4BK	primary	EAT	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	EDH-EAT-00769	93
CED4K	primary	EAT	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	EDH-EAT-00768	93
CF16KF63C	primary	SQD	OEM QED-2 I-Line interior CF16KF63C	EDH-SQD-00577	600
CF16RJ63C36	primary	SQD	OEM QED-2 I-Line switchboard interior CF16RJ63C36	EDH-SQD-00176	600
CF20R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20R63C	EDH-SQD-00172	600
CF20RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20RJ63C	EDH-SQD-00174	601
CF25R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF25R63C	EDH-SQD-00173	601
CF30RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF30RJ63C	EDH-SQD-00175	601
CFD3K	primary	EAT	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	EDH-EAT-00770	93
CFD4BK	primary	EAT	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	EDH-EAT-00772	94
CFD4K	primary	EAT	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	EDH-EAT-00771	94
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00254	265

Number	Type	Mfr	Description	Catalogue ID	Pg
CJD4K	primary	EAT	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	EDH-EAT-00773	94
CJDS4BK	primary	EAT	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	EDH-EAT-00775	94
CJDS4K	primary	EAT	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 25	EDH-EAT-00774	95
CKD4K	primary	EAT	Challenger PM4a (no further description) mounting hardware kit CKD4K	EDH-EAT-00776	95
CKDS4BK	primary	EAT	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	EDH-EAT-00778	95
CKDS4K	primary	EAT	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	EDH-EAT-00777	95
CLD4K	primary	EAT	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	EDH-EAT-00779	96
CLDS4BK	primary	EAT	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	EDH-EAT-00780	96
CLRSJL3	primary	SIE	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	EDH-SIE-00313	1121
CMD4K	primary	EAT	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	EDH-EAT-00781	96
CND4K	primary	EAT	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	EDH-EAT-00782	96
CNLK30A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	1050
CNLK30A	primary	SIE	Revised P1-250 copper neutral lug kit, 30-circuit (250 A, Cu cable only)	EDH-SIE-00333	1050
CNLK42A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	1050
CNLK42A	primary	SIE	Revised P1-250 copper neutral lug kit, 42-circuit (250 A, Cu cable only)	EDH-SIE-00334	1050
CNLK42B	primary	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	1050
CNLK54A	supersedes	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	1051
CNLK54A	primary	SIE	Revised P1-250 copper neutral lug kit, 54-circuit (250 A, Cu cable only)	EDH-SIE-00335	1051
CNLK54B	primary	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	1051
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00279	262
CU100FA	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FA	EDH-SQD-00262	613
CU100FD	primary	SQD	E-frame copper mechanical lug kit (3 lugs), 15-125 A	EDH-SQD-00431	483
CU100TF	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FA	EDH-SQD-00263	613
CU1200R53K	primary	SQD	Square D lug kit CU1200R53K (S33930 / R-frame)	EDH-SQD-00574	439
CU150HD	primary	SQD	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	EDH-SQD-00086	598
CU250JD	primary	SQD	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	EDH-SQD-00087	598
CU250KA	primary	SQD	Square D KA mechanical lug kit (Cu lugs) - KI	EDH-SQD-00264	616
CU30FA4	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FC	EDH-SQD-00261	614
CU400L61K3	primary	SQD	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P	EDH-SQD-00226	643
CU400L61K4	primary	SQD	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P	EDH-SQD-00227	643
CU400LA	primary	SQD	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	EDH-SQD-00088	599
CU600LF52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	EDH-SQD-00230	644
CU600LI35	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00265	623
CU600LI5	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00266	624
CU600LI7	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00267	624
CU600LS52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	EDH-SQD-00228	644
CU600LS52K4	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P	EDH-SQD-00229	644
CU-NFJ	primary	OTH	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	EDH-OTH-00001	1163
CVC100FA	primary	SQD	Square D FA Cu compression lug kit	EDH-SQD-00282	614

Number	Type	Mfr	Description	Catalogue ID	Pg
CVC250KA3	primary	SQD	Square D KA Cu compression lug kit	EDH-SQD-00283	617
CVC400LA3	primary	SQD	Square D LA Cu compression lug kit	EDH-SQD-00284	619
CVC400LA5	primary	SQD	Square D LA Cu compression lug kit	EDH-SQD-00285	619
CVC600LI5	primary	SQD	Square D LI Cu compression lug kit	EDH-SQD-00286	624
CYA060HD	primary	SQD	PowerPact H-frame Cu compression lug kit	EDH-SQD-00208	630
CYA150HD	primary	SQD	PowerPact H-frame Cu compression lug kit	EDH-SQD-00209	630
CYA150JD	primary	SQD	PowerPact J-frame Cu compression lug kit	EDH-SQD-00210	635
CYA250J3	primary	SQD	PowerPact J-frame Cu compression lug kit	EDH-SQD-00211	636
CYA400L31K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00212	645
CYA400L31K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00217	645
CYA400L51K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00214	645
CYA400L51K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00219	646
CYA400L71K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00216	646
CYA600L32K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00213	646
CYA600L32K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00218	647
CYA600L52K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00215	647
CYA600L52K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00220	647
DFFP01A	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1072
DFFP01A	primary	SIE	Revised P1 deadfront main blank or subfeed filler plate	EDH-SIE-00396	1072
DFFP01B	primary	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	1072
DFFP01C	primary	SIE	Revised P1 400A main blank filler plate	EDH-SIE-00065	1073
DFFP1	supersedes	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1073
DFFP1	primary	SIE	1 in filler plate for BL/BQD/xGB/xGB2/ED blank positions; suitable for replacing	EDH-SIE-00426	953
DFFP1A	primary	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1073
DFFP1A	superseded_by	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	1095
DFFP3	primary	SIE	Deadfront filler kit	EDH-SIE-00076	943
DFFP6	primary	SIE	Deadfront filler kit	EDH-SIE-00077	944
DFFPED01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	1076
DFFPED01	primary	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	925
DFFPFD01	primary	SIE	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	EDH-SIE-00070	1074
DFFPJD01	primary	SIE	JD main filler plate (plastic)	EDH-SIE-00071	1074
DFFPJD02	primary	SIE	JD main filler plate for Revised P1 400A with large MB opening only	EDH-SIE-00072	1075
DFFPQJ01	primary	SIE	QJ main filler plate	EDH-SIE-00073	1075
DFFPQJ02	primary	SIE	QJ main filler plate	EDH-SIE-00074	1075
DFFPV5363A	primary	SIE	Revised P1 deadfront 3VA53/63 main breaker filler plate	EDH-SIE-00397	1076
DFFPVA41A	primary	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	1076
DFFPVA41A	superseded_by	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	925
DFFPVA5262A	primary	SIE	RP1 main or subfeed filler	EDH-SIE-00067	1077
DFFPVA5262P2A	primary	SIE	3VA52/61/62 filler for single mount P2/P3 applications	EDH-SIE-00078	944
DFFPVA5262P2B	primary	SIE	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or	EDH-SIE-00079	945
DFFPVA5363A	primary	SIE	RP1 400A main filler for 3VA53/63	EDH-SIE-00068	1077
DFK07	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00086	939
DFK08	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00087	939
DFK09	primary	SIE	P2/P3 deadfront center strip kit, 27 in flange length	EDH-SIE-00398	939
DFK1	primary	SIE	P2/P3 deadfront center strip kit	EDH-SIE-00085	940
DFK10	primary	SIE	P2/P3 deadfront center strip kit, 30 in flange length	EDH-SIE-00399	940
DFK11	primary	SIE	P2/P3 deadfront center strip kit, 33 in flange length	EDH-SIE-00400	940
DFK12	primary	SIE	P2/P3 deadfront center strip kit, 36 in flange length	EDH-SIE-00401	940
DFK13	primary	SIE	P2/P3 deadfront center strip kit, 39 in flange length	EDH-SIE-00402	941

Number	Type	Mfr	Description	Catalogue ID	Pg
DFK14	primary	SIE	P2/P3 deadfront center strip kit, 42 in flange length	EDH-SIE-00403	941
DFK15	primary	SIE	P2/P3 deadfront center strip kit, 45 in flange length	EDH-SIE-00404	941
DFK16	primary	SIE	P2/P3 deadfront center strip kit, 48 in flange length	EDH-SIE-00405	941
DFK17	primary	SIE	P2/P3 deadfront center strip kit, 51 in flange length	EDH-SIE-00406	942
DFK18	primary	SIE	P2/P3 deadfront center strip kit, 54 in flange length	EDH-SIE-00407	942
DFK19	primary	SIE	P2/P3 deadfront center strip kit, 57 in flange length	EDH-SIE-00408	942
DFK20	primary	SIE	P2/P3 deadfront center strip kit, 60 in flange length	EDH-SIE-00409	942
DFK21	primary	SIE	P2/P3 deadfront center strip kit, 63 in flange length	EDH-SIE-00410	943
DFP3AP01	primary	SIE	P3 adapter plate	EDH-SIE-00084	945
DPJ2185	primary	GEA	GE panelboard door lock, 3-point vault handle type with key	EDH-GEA-00415	709
DSLNEJT	primary	ZIN	Zinsco double slot twin mounting hardware, NEJ type	EDH-ZIN-00008	1155
DSLNET	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from nam	EDH-ZIN-00007	1155
DSLNFT	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	EDH-ZIN-00009	1155
DSLNJT	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	EDH-ZIN-00010	1156
DSLNM	primary	ZIN	Zinsco double slot mounting hardware for FPE NM (inferred from name)	EDH-ZIN-00011	1156
DSLNMS	primary	ZIN	Zinsco DSLNM mounting hardware (single?)	EDH-ZIN-00012	1156
DSLQB	primary	ZIN	Zinsco double slot breaker mounting hardware for QB	EDH-ZIN-00005	1156
DSLQFB	primary	ZIN	Zinsco double slot breaker mounting hardware for QFB	EDH-ZIN-00006	1156
E2A1649-1	primary	EAT	3FQS NEMA 3R enclosure, 51.5 in tall	EDH-EAT-00848	291
E2A1649-2	primary	EAT	3FQS NEMA 3R enclosure, 60.5 in tall	EDH-EAT-00849	291
E2A1649-3	primary	EAT	3FQS NEMA 3R enclosure, 70.5 in tall	EDH-EAT-00850	291
E2A1649-4	primary	EAT	3FQS NEMA 3R enclosure, 34.5 in tall	EDH-EAT-00851	291
E2A1667-1	primary	EAT	3FQS enclosure Door, surface for 50 in box (200 A)	EDH-EAT-00877	286
E2A1667-10	primary	EAT	3FQS enclosure Door, flush for 69 in box (400 A)	EDH-EAT-00886	286
E2A1667-11	primary	EAT	3FQS enclosure Door-in-door, surface for 69 in box (400 A)	EDH-EAT-00887	286
E2A1667-12	primary	EAT	3FQS enclosure Door-in-door, flush for 69 in box (400 A)	EDH-EAT-00888	286
E2A1667-13	primary	EAT	3FQS enclosure Door, surface for 33 in box (200 A)	EDH-EAT-00889	286
E2A1667-14	primary	EAT	3FQS enclosure Door, flush for 33 in box (200 A)	EDH-EAT-00890	286
E2A1667-15	primary	EAT	3FQS enclosure Door-in-door, surface for 33 in box (200 A)	EDH-EAT-00891	287
E2A1667-16	primary	EAT	3FQS enclosure Door-in-door, flush for 33 in box (200 A)	EDH-EAT-00892	287
E2A1667-17	primary	EAT	3FQS enclosure Door, surface for 50 in box (400 A)	EDH-EAT-00893	287
E2A1667-18	primary	EAT	3FQS enclosure Door, flush for 50 in box (400 A)	EDH-EAT-00894	287
E2A1667-19	primary	EAT	3FQS enclosure Door-in-door, surface for 50 in box (400 A)	EDH-EAT-00895	287
E2A1667-2	primary	EAT	3FQS enclosure Door, surface for 59 in box (200 A)	EDH-EAT-00878	287
E2A1667-20	primary	EAT	3FQS enclosure Door-in-door, flush for 50 in box (400 A)	EDH-EAT-00896	288
E2A1667-21	primary	EAT	3FQS enclosure Door, surface for 59 in box (400 A)	EDH-EAT-00897	288
E2A1667-22	primary	EAT	3FQS enclosure Door, flush for 59 in box (400 A)	EDH-EAT-00898	288
E2A1667-23	primary	EAT	3FQS enclosure Door-in-door, surface for 59 in box (400 A)	EDH-EAT-00899	288
E2A1667-24	primary	EAT	3FQS enclosure Door-in-door, flush for 59 in box (400 A)	EDH-EAT-00900	288
E2A1667-3	primary	EAT	3FQS enclosure Door, flush for 50 in box (200 A)	EDH-EAT-00879	288
E2A1667-4	primary	EAT	3FQS enclosure Door, flush for 59 in box (200 A)	EDH-EAT-00880	289
E2A1667-5	primary	EAT	3FQS enclosure Door-in-door, surface for 50 in box (200 A)	EDH-EAT-00881	289
E2A1667-6	primary	EAT	3FQS enclosure Door-in-door, surface for 59 in box (200 A)	EDH-EAT-00882	289
E2A1667-7	primary	EAT	3FQS enclosure Door-in-door, flush for 50 in box (200 A)	EDH-EAT-00883	289
E2A1667-8	primary	EAT	3FQS enclosure Door-in-door, flush for 59 in box (200 A)	EDH-EAT-00884	289
E2A1667-9	primary	EAT	3FQS enclosure Door, surface for 69 in box (400 A)	EDH-EAT-00885	289
E2A1914	primary	EAT	3FQS Kit, circuit directory card and sleeve	EDH-EAT-00869	295
E2A1917-1	primary	EAT	3FQS Kit, panelboard hardware	EDH-EAT-00871	292
EBF1	primary	SIE	NEB/HEB filler plate (EB deadfront filler)	EDH-SIE-00083	954

Number	Type	Mfr	Description	Catalogue ID	Pg
ECGK	primary	SIE	Copper equipment ground bus kit	EDH-SIE-00099	1057
EEC3K	primary	EAT	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EDH-EAT-00573	418
EEC4K	primary	EAT	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EDH-EAT-00574	418
EELD36600SB2	primary	EAT	LD3600 breaker with Cutler-Hammer EE hardware kit	EDH-EAT-00803	99
EEMODULEFS	primary	EAT	Cutler-Hammer EE panelboard mounting module for FS-frame breaker	EDH-EAT-00802	99
EF2RTDK	primary	EAT	Series G EG end cap kit, 2-pole, imperial	EDH-EAT-00584	419
EF2RTWK	primary	EAT	Series G EG end cap kit, 2-pole, metric	EDH-EAT-00581	419
EF3RTDK	primary	EAT	Series G EG end cap kit, 3-pole, imperial	EDH-EAT-00585	420
EF3RTWK	primary	EAT	Series G EG end cap kit, 3-pole, metric	EDH-EAT-00582	420
EF4RTDK	primary	EAT	Series G EG end cap kit, 4-pole, imperial	EDH-EAT-00586	420
EF4RTWK	primary	EAT	Series G EG end cap kit, 4-pole, metric	EDH-EAT-00583	420
EFTS3K	primary	EAT	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EDH-EAT-00570	418
EFTS4K	primary	EAT	Series G EG-frame terminal shield IP30 4-pole	EDH-EAT-00571	418
EGK	primary	SIE	Al/Cu equipment ground bus kit	EDH-SIE-00098	1058
EGS12	primary	GEA	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	EDH-GEA-00097	674
EH3K	primary	SIE	Twin mounting hardware kit for FC20/VB, EE/EH/EF/HE, 150 A (possibly aftermarket	EDH-SIE-00317	1093
EIPBK	primary	EAT	Series G EG-frame interphase barriers (package of 12 priced individually)	EDH-EAT-00572	418
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00241	192
EWK1	primary	SIE	End wall kit with knockouts (20in W x 5.75in D) 20in	EDH-SIE-00240	1079
EWK1B	primary	SIE	End wall kit without knockouts (20in W x 5.75in D) 20in	EDH-SIE-00243	1079
EWK2	primary	SIE	End wall kit with knockouts (24in W x 7.75in D) 24in	EDH-SIE-00241	1079
EWK2B	primary	SIE	End wall kit without knockouts (24in W x 7.75in D) 24in	EDH-SIE-00244	1080
EWK3	primary	SIE	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	EDH-SIE-00242	1080
F602	primary	SIE	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 2.5 in & 5 in hig	EDH-SIE-00419	962
F602D	primary	SIE	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 2.5 in high twin units (30A	EDH-SIE-00422	999
F657	primary	SIE	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in high twin	EDH-SIE-00420	963
F657D	primary	SIE	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 5 in and 7.5 in high twin u	EDH-SIE-00423	999
F671	primary	SIE	P4/F1 (shallow) Vacu-Break fusible switch branch mounting kit, 7.5 in & 10 in hi	EDH-SIE-00421	963
F671D	primary	SIE	P5/F2 (deep) Vacu-Break fusible switch mounting kit, 7.5 in and 10 in high singl	EDH-SIE-00424	999
FAT	primary	SQD	Square D control wire terminal / tapped lug (FA)	EDH-SQD-00294	615
FCAL12	primary	GEA	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	EDH-GEA-00369	892
FCAL13	primary	GEA	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	EDH-GEA-00371	892
FCAL14	primary	GEA	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	EDH-GEA-00373	892
FCAL15	primary	GEA	GE FCAL15 single lug, Record Plus FE 250 (150 A)	EDH-GEA-00375	894
FCAL16	primary	GEA	GE FCAL16 single lug, Record Plus FE 250 (250 A)	EDH-GEA-00378	894
FCALK12	primary	GEA	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	EDH-GEA-00370	891
FCALK13	primary	GEA	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	EDH-GEA-00372	891
FCALK14	primary	GEA	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	EDH-GEA-00374	891

Number	Type	Mfr	Description	Catalogue ID	Pg
FCALK15	primary	GEA	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	EDH-GEA-00376	893
FCALK15LV	primary	GEA	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	EDH-GEA-00377	893
FCALK16	primary	GEA	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	EDH-GEA-00379	893
FCALK16LV	primary	GEA	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	EDH-GEA-00380	894
FCALK218H	primary	GEA	GE FCALK218H 2-pole lug kit, Record Plus FG 600	EDH-GEA-00381	895
FCALK318H	primary	GEA	GE FCALK318H 3-pole lug kit, Record Plus FG 600	EDH-GEA-00382	895
FCWTK	primary	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00617	364
FCWTK225	primary	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00618	364
FGH1LCK	primary	GEA	GE FGH1LCK lug cover kit, Record Plus FG	EDH-GEA-00383	896
FGJN3	primary	GEA	GE FGJN3 nut plate / terminal shoe, Record Plus FG	EDH-GEA-00385	896
FGJS3	primary	GEA	GE FGJS3 terminal shield fin cover, Record Plus FG	EDH-GEA-00384	895
FJ3K	primary	SIE	Twin mounting hardware kit for FC20/VB, FJ3, 225 A (possibly aftermarket equival	EDH-SIE-00318	1094
FJ3RTDK	primary	EAT	Series G JG end cap kit, 3-pole, imperial	EDH-EAT-00589	423
FJ3RTWK	primary	EAT	Series G JG end cap kit, 3-pole, metric	EDH-EAT-00587	423
FJ4RTDK	primary	EAT	Series G JG end cap kit, 4-pole, imperial	EDH-EAT-00590	424
FJ4RTWK	primary	EAT	Series G JG end cap kit, 4-pole, metric	EDH-EAT-00588	424
FJCWTK	primary	EAT	Series G JG-frame control wire terminal kit (package of 14	EDH-EAT-00575	424
FJIPBK	primary	EAT	Series G JG-frame interphase barriers 3-pole (package of 2)	EDH-EAT-00568	422
FJIPBK4	primary	EAT	Series G JG-frame interphase barriers 4-pole (package of 2)	EDH-EAT-00569	422
FJTS3K	primary	EAT	Series G JG-frame terminal shield IP30 2/3-pole	EDH-EAT-00566	422
FJTS4K	primary	EAT	Series G JG-frame terminal shield IP30 4-pole	EDH-EAT-00567	423
FP1	primary	SQD	Square D EHB filler plate, 1 in (NEHB)	EDH-SQD-00520	468
FPENEFT	primary	ZIN	Sylvania twin mounting hardware for FPE NEF breaker	EDH-ZIN-00021	1157
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00236	188
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00235	188
GAVFP2	primary	GEA	GE blank filler plate 4.125 in x 17 in (AV1/AV2/CCB)	EDH-GEA-00436	700
GCWTK	alias	EAT	Series G Series G / G-frame control wire terminal kit (package of 12); for steel	EDH-EAT-00576	419
GEA2-750	primary	GEA	Spectra main lug GEA2-750	EDH-GEA-00584	738
GTIN 785901798019	alias	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00092	540
GTSK3	primary	EAT	Series C G-frame terminal shield	EDH-EAT-00628	367
GYT	primary	SQD	Square D G-frame terminal shield 3P	EDH-SQD-00271	658
H01	style_number	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00263	258
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	264
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	264
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	265
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00275	259
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00276	260

Number	Type	Mfr	Description	Catalogue ID	Pg
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00249	195
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00289	121
H01 = 1X ... H12 = 12X	style_number	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00269	266
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00259	258
H01 FCL; H02 FB-P	style_number	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00262	260
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00264	258
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	259
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	262
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00290	121
H01 (top and bottom)	style_number	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	192
H01 (top and bottom)	style_number	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	193
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	194
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	194
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	193
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00248	193
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	263
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00258	296
H01 top, H02 bottom (same with/without lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	263
H01 top, H04 bottom	style_number	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	194
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00257	296
HC-2609-EXF	primary	SQD	Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (f	EDH-SQD-00549	460
HC-2609-EXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCN or NH1B 9 in high extension (f	EDH-SQD-00549	460
HC2SN	primary	SQD	I-Line solid neutral assembly, HCJ, 225 A, Al/Al	EDH-SQD-00462	441
HC-2SN	alias	SQD	I-Line solid neutral assembly, HCJ, 225 A, Al/Al	EDH-SQD-00462	441
HC-3209-EXF	primary	SQD	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	EDH-SQD-00550	460
HC-3209-EXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCM 9 in high extension (flush)	EDH-SQD-00550	460

Number	Type	Mfr	Description	Catalogue ID	Pg
HC-4112-DEXF	primary	SQD	Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)	EDH-SQD-00552	460
HC-4112-DEXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCWM 12 in high extension (flush)	EDH-SQD-00552	460
HC-4112-EXF	primary	SQD	Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)	EDH-SQD-00551	460
HC-4112-EXS	equivalent	SQD	Square D I-Line panelboard box extension kit, HCW 12 in high extension (flush)	EDH-SQD-00551	460
HC4SN	primary	SQD	I-Line solid neutral assembly, HCJ, 400 A, Al/Al	EDH-SQD-00463	441
HC-4SN	alias	SQD	I-Line solid neutral assembly, HCJ, 400 A, Al/Al	EDH-SQD-00463	441
HC6SN	primary	SQD	I-Line solid neutral assembly, HCJ, 600 A, Al/Al	EDH-SQD-00464	442
HC-6SN	alias	SQD	I-Line solid neutral assembly, HCJ, 600 A, Al/Al	EDH-SQD-00464	442
HC6SNALCU	primary	SQD	I-Line solid neutral assembly, HCJ, 600 A, Al lugs/Cu plate	EDH-SQD-00472	442
HC6SNCU	primary	SQD	I-Line solid neutral assembly, HCJ, 600 A, Cu/Cu	EDH-SQD-00480	442
HC8SN	primary	SQD	I-Line solid neutral assembly, HCJ, 800 A, Al/Al	EDH-SQD-00465	443
HC-8SN	alias	SQD	I-Line solid neutral assembly, HCJ, 800 A, Al/Al	EDH-SQD-00465	443
HC8SNALCU	primary	SQD	I-Line solid neutral assembly, HCJ, 800 A, Al lugs/Cu plate	EDH-SQD-00473	443
HC8SNCU	primary	SQD	I-Line solid neutral assembly, HCJ, 800 A, Cu/Cu	EDH-SQD-00481	443
HCM400VCA	primary	SQD	I-Line crimp lug adapter kit, HCJ, 400 A	EDH-SQD-00503	435
HCM600VCA	primary	SQD	I-Line crimp lug adapter kit, HCJ, 600 A	EDH-SQD-00504	435
HCM800VCA	primary	SQD	I-Line crimp lug adapter kit, HCJ, 800 A	EDH-SQD-00505	435
HCP12SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Al lugs/Cu plate	EDH-SQD-00478	444
HCP12SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	EDH-SQD-00486	444
HCP4SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 400 A, Al lugs/Cu plate	EDH-SQD-00475	444
HCP6SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 600 A, Al lugs/Cu plate	EDH-SQD-00476	445
HCP8SNALCU	primary	SQD	I-Line solid neutral assembly, HCP, 800 A, Al lugs/Cu plate	EDH-SQD-00477	445
HCPSU8SN	primary	SQD	I-Line solid neutral assembly, HCP-SU, 800 A, Al/Al	EDH-SQD-00466	445
HCPSU8SNALCU	primary	SQD	I-Line solid neutral assembly, HCP-SU, 800 A, Al lugs/Cu plate	EDH-SQD-00474	446
HCPSU8SNCU	primary	SQD	I-Line solid neutral assembly, HCP-SU, 800 A, Cu/Cu	EDH-SQD-00482	446
HCR12SNALCU	primary	SQD	I-Line solid neutral assembly, HCR-U, 1200 A, Al lugs/Cu plate	EDH-SQD-00479	446
HCR12SNCT	primary	SQD	I-Line HCR-U 1200 A solid neutral with neutral current transformer	EDH-SQD-00489	447
HCR12SNCU	primary	SQD	I-Line solid neutral assembly, HCR-U, 1200 A, Cu/Cu	EDH-SQD-00488	447
HCW1200VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 1200 A	EDH-SQD-00509	436
HCW12SN	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Al/Al	EDH-SQD-00470	447
HCW-12SN	alias	SQD	I-Line solid neutral assembly, HCP, 1200 A, Al/Al	EDH-SQD-00470	447
HCW12SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 1200 A, Cu/Cu	EDH-SQD-00487	448
HCW400VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 400 A	EDH-SQD-00506	436
HCW4SN	primary	SQD	I-Line solid neutral assembly, HCP, 400 A, Al/Al	EDH-SQD-00467	448
HCW-4SN	alias	SQD	I-Line solid neutral assembly, HCP, 400 A, Al/Al	EDH-SQD-00467	448
HCW4SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 400 A, Cu/Cu	EDH-SQD-00483	448
HCW600VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 600 A	EDH-SQD-00507	436
HCW6SN	primary	SQD	I-Line solid neutral assembly, HCP, 600 A, Al/Al	EDH-SQD-00468	449
HCW-6SN	alias	SQD	I-Line solid neutral assembly, HCP, 600 A, Al/Al	EDH-SQD-00468	449
HCW6SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 600 A, Cu/Cu	EDH-SQD-00484	449
HCW800VCA	primary	SQD	I-Line crimp lug adapter kit, HCP/HCR-U, 800 A	EDH-SQD-00508	436
HCW8SN	primary	SQD	I-Line solid neutral assembly, HCP, 800 A, Al/Al	EDH-SQD-00469	450
HCW-8SN	alias	SQD	I-Line solid neutral assembly, HCP, 800 A, Al/Al	EDH-SQD-00469	450
HCW8SNCU	primary	SQD	I-Line solid neutral assembly, HCP, 800 A, Cu/Cu	EDH-SQD-00485	450
HCWM12SN	primary	SQD	I-Line solid neutral assembly, HCR-U, 1200 A, Al/Al	EDH-SQD-00471	450
HLN1BL	primary	SQD	I-Line blank extension HLN1BL	EDH-SQD-00139	602
HLN4BL	primary	SQD	I-Line blank extension HLN4BL	EDH-SQD-00140	602
HLN4EBL	primary	SQD	I-Line blank extension HLN4EBL	EDH-SQD-00141	603
HLO-1	primary	SQD	Square D handle lockoff for QO, Q1, A1 and Y1B breakers	EDH-SQD-00535	529

Number	Type	Mfr	Description	Catalogue ID	Pg
HLW1BL	primary	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	603
HLW-1BL	alias	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	603
HLW-3BL	primary	SQD	Square D I-Line blank extension HLW-3BL	EDH-SQD-00555	459
HLW-3BL	alias	SQD	Square D I-Line blank extension HLW-3BL	EDH-SQD-00555	459
HLW4BL	primary	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	604
HLW-4BL	alias	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	604
HLW4EBL	primary	SQD	I-Line blank extension HLW4EBL	EDH-SQD-00144	605
HNM1BL	primary	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	605
HNM-1BL	alias	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	605
HNM-3BL	primary	SQD	Square D I-Line blank, 3 in high	EDH-SQD-00554	459
HNM-3BL	alias	SQD	Square D I-Line blank, 3 in high	EDH-SQD-00554	459
HNM4BL	primary	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	606
HNM-4BL	alias	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	606
HPA-2QFS	primary	SQD	Square D padlock attachment for QFSB switch, 2/3-pole	EDH-SQD-00538	530
HPA-FK	primary	SQD	Square D padlock attachment for FA and KA breakers	EDH-SQD-00539	492
HPA-FYQ	primary	SQD	Square D padlock attachment for Q2 and FY breakers	EDH-SQD-00540	492
HPA-LM	primary	SQD	Square D padlock attachment for LA and MA (permanent trip) breakers	EDH-SQD-00541	462
HQO306	primary	SQD	Plug-on QO distribution panel HQO306 for I-Line	EDH-SQD-00155	610
HRK1020	primary	SQD	QMB Class R fuse kit HRK1020	EDH-SQD-00056	575
HRK30	primary	SQD	QMB Class R fuse kit HRK30	EDH-SQD-00052	575
HT-100	primary	GEA	GE/Trumbull handle extension for 2-pole operation (lighting panel breakers)	EDH-GEA-00417	707
ICGK	primary	SIE	Insulated copper ground bus kit	EDH-SIE-00101	1058
IGK	primary	SIE	Insulated Al/Cu ground bus kit	EDH-SIE-00100	1059
ILBFMHCJHULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCJ (HCM) / H, J	EDH-SQD-00452	456
ILBFMHCPHJULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / H, J	EDH-SQD-00453	456
ILBFMHCPLULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / LA,	EDH-SQD-00454	457
ILBFMHCPMPULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCP, HCP-SU / M, P	EDH-SQD-00455	457
ILBFMHCRLULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / LA, LH, Powe	EDH-SQD-00456	457
ILBFMHCRMULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / M	EDH-SQD-00457	458
ILBFMHCRPULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / P	EDH-SQD-00458	458
ILBFMHCRRULC	primary	SQD	I-Line back-fed main breaker UL service entrance barrier kit, HCR / R	EDH-SQD-00459	458
ILHCJ1ESN	primary	SQD	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, alum	EDH-SQD-00491	451
ILHCJ1ESNC	primary	SQD	I-Line expanded neutral kit, HCJ, copper	EDH-SQD-00497	451
ILHCJ27ESN	primary	SQD	I-Line expanded neutral kit, HCM/HCJ with 27 in. unit mounting space, aluminum	EDH-SQD-00490	451
ILHCJ2ESN	primary	SQD	I-Line expanded neutral kit, HCJ with 45 in. or larger unit mounting space, alum	EDH-SQD-00492	452
ILHCJ2ESNC	primary	SQD	I-Line expanded neutral kit, HCJ, copper	EDH-SQD-00498	452
ILHCPRU1ESN	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, aluminum	EDH-SQD-00495	452
ILHCPRU1ESNC	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, copper	EDH-SQD-00501	453
ILHCPRU2ESN	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, aluminum	EDH-SQD-00496	453
ILHCPRU2ESNC	primary	SQD	I-Line expanded neutral kit, HCP & HCR-U, copper	EDH-SQD-00502	453
ILHCPSU1ESN	primary	SQD	I-Line expanded neutral kit, HCP-SU, aluminum	EDH-SQD-00493	454
ILHCPSU1ESNC	primary	SQD	I-Line expanded neutral kit, HCP-SU, copper	EDH-SQD-00499	454
ILHCPSU2ESN	primary	SQD	I-Line expanded neutral kit, HCP-SU, aluminum	EDH-SQD-00494	454

Number	Type	Mfr	Description	Catalogue ID	Pg
ILHCPSU2ESNC	primary	SQD	I-Line expanded neutral kit, HCP-SU, copper	EDH-SQD-00500	455
IMK1	primary	SIE	Interior mounting kit with adjustment provisions for P1/P2/P3	EDH-SIE-00095	1081
IPB1	primary	EAT	Series C interphase barrier (F)	EDH-EAT-00647	361
IPB2	primary	EAT	Series C interphase barrier (J, K per newer table)	EDH-EAT-00651	371
IPB3	primary	EAT	Series C interphase barrier (J, K)	EDH-EAT-00648	371
IPB4	primary	EAT	Series C interphase barrier (L, M)	EDH-EAT-00649	399
IPB5	primary	EAT	Series C interphase barrier (N; NG)	EDH-EAT-00650	411
JDTERMSHIELD	primary	SIE	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	EDH-SIE-00276	1121
JJ3K	primary	SIE	Twin mounting hardware kit for FC20/VB, JD3/JJ3/JL3/HJ3, 400 A (possibly afterma	EDH-SIE-00319	1094
K-11-D-2550-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Cu 1-ph bus	EDH-SIE-00357	1060
K-11-D-2550-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Cu 1-ph bus	EDH-SIE-00358	1060
K-11-D-2550-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Cu 1-ph bus	EDH-SIE-00359	1060
K-11-D-2550-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Cu 1-ph bus	EDH-SIE-00360	1061
K-11-D-2550-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Cu 1-ph bus	EDH-SIE-00361	1061
K-11-D-2551-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Al 1-ph bus	EDH-SIE-00347	1061
K-11-D-2551-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Al 1-ph bus	EDH-SIE-00348	1062
K-11-D-2551-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Al 1-ph bus	EDH-SIE-00349	1062
K-11-D-2551-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Al 1-ph bus	EDH-SIE-00350	1062
K-11-D-2551-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Al 1-ph bus	EDH-SIE-00351	1063
K-11-D-2552-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Cu 3-ph bus	EDH-SIE-00362	1063
K-11-D-2552-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Cu 3-ph bus	EDH-SIE-00363	1063
K-11-D-2552-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Cu 3-ph bus	EDH-SIE-00364	1064
K-11-D-2552-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Cu 3-ph bus	EDH-SIE-00365	1064
K-11-D-2552-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Cu 3-ph bus	EDH-SIE-00366	1064
K-11-D-2553-01	primary	SIE	Revised P1 250A OEM chassis, 18 circuit, Al 3-ph bus	EDH-SIE-00352	1065
K-11-D-2553-02	primary	SIE	Revised P1 250A OEM chassis, 30 circuit, Al 3-ph bus	EDH-SIE-00353	1065
K-11-D-2553-03	primary	SIE	Revised P1 250A OEM chassis, 42 circuit, Al 3-ph bus	EDH-SIE-00354	1065
K-11-D-2553-04	primary	SIE	Revised P1 250A OEM chassis, 54 circuit, Al 3-ph bus	EDH-SIE-00355	1066
K-11-D-2553-05	primary	SIE	Revised P1 250A OEM chassis, 66 circuit, Al 3-ph bus	EDH-SIE-00356	1066
K80133	primary	EAT	Trim lock for right-handed door	EDH-EAT-00406	197
K80429	primary	EAT	T-handle lock	EDH-EAT-00408	197
K80522	primary	EAT	Trim lock for left-handed door	EDH-EAT-00405	198
KB11A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00038	202
KB11A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00037	202
KB11AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00006	126
KB11AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00005	127
KB11S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00040	202
KB11S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00039	203
KB11SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00008	127
KB11SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00007	128
KB13A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00034	203
KB13A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00033	203
KB13AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00002	128

Number	Type	Mfr	Description	Catalogue ID	Pg
KB13AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00001	129
KB13S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00036	204
KB13S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00035	204
KB13SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00004	129
KB13SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00003	130
KB21A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00046	204
KB21A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00045	205
KB21AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00014	130
KB21AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00013	131
KB21S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00048	205
KB21S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00047	205
KB21SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00016	131
KB21SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00015	132
KB23A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00042	206
KB23A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00041	206
KB23AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00010	132
KB23AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00009	133
KB23S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00044	206
KB23S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00043	207
KB23SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00012	133
KB23SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00011	134
KB41A14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00054	207
KB41A14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00053	208
KB41AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, t	EDH-EAT-00022	134
KB41AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-	EDH-EAT-00021	135
KB41AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, t	EDH-EAT-00030	135
KB41AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-	EDH-EAT-00029	136
KB41S14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00056	208
KB41S14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00055	209
KB41SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, s	EDH-EAT-00024	136

Number	Type	Mfr	Description	Catalogue ID	Pg
KB41SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silv	EDH-EAT-00023	137
KB41SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, s	EDH-EAT-00032	137
KB41SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silv	EDH-EAT-00031	138
KB43A34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00050	209
KB43A34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00049	210
KB43AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, ti	EDH-EAT-00018	138
KB43AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-p	EDH-EAT-00017	139
KB43AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, ti	EDH-EAT-00026	139
KB43AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-p	EDH-EAT-00025	140
KB43S34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00052	210
KB43S34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00051	211
KB43SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, si	EDH-EAT-00020	140
KB43SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silve	EDH-EAT-00019	141
KB43SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, si	EDH-EAT-00028	141
KB43SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silve	EDH-EAT-00027	142
KB61S16B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00060	211
KB61S16T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00059	212
KB63S36B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00058	212
KB63S36T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00057	213
KBDP1C	primary	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	1135
KBDP-1C	alias	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	1135
KBDP2C	primary	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	1136
KBDP-2C	alias	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	1136
KBDP3C	primary	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	1136
KBDP-3C	alias	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	1136
KBDP4C	primary	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	1137
KBDP-4C	alias	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	1137
KBDP5C	primary	FPE	FPE BDP mounting kit, NM/HNM frame	EDH-FPE-00011	1137
KCDP-1A	primary	FPE	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	EDH-FPE-00006	1149
KCDP1C	primary	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	1139
KCDP-1C	alias	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	1139
KCDP2C	primary	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	1139
KCDP-2C	alias	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	1139
KCDP3C	primary	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	1140
KCDP-3C	alias	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	1140
KCDP4C	primary	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	1140

Number	Type	Mfr	Description	Catalogue ID	Pg
KCDP-4C	alias	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	1140
KCDP5C	primary	FPE	FPE CDP link kit, NM/NN frame	EDH-FPE-00005	1141
KCDP-5C	alias	FPE	FPE CDP link kit, NM/NN frame	EDH-FPE-00005	1141
KCDPCA	primary	EAT	Westinghouse CDP breaker connector kit KCDPCA (CA...)	EDH-EAT-00343	69
KCDPDK	primary	EAT	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	EDH-EAT-00361	80
KCDPED225	primary	EAT	Westinghouse CDP breaker connector kit KCDPED225 (FD...)	EDH-EAT-00341	70
KCDPEHD	primary	EAT	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	EDH-EAT-00353	81
KCDPFB100	primary	EAT	Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)	EDH-EAT-00340	71
KCDPFB100-H	primary	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00423	79
KCDPFBP	primary	EAT	Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)	EDH-EAT-00342	71
KCDPFD	primary	EAT	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	EDH-EAT-00355	82
KCDPFD100H	alias	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00423	79
KCDPFDB	primary	EAT	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	EDH-EAT-00354	83
KCDPHKD	primary	EAT	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	EDH-EAT-00357	84
KCDPJD	primary	EAT	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	EDH-EAT-00358	85
KCDPJDB	primary	EAT	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	EDH-EAT-00360	86
KCDPKB	primary	EAT	Westinghouse CDP breaker connector kit KCDPKB (JD...)	EDH-EAT-00344	72
KCDPKD	primary	EAT	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	EDH-EAT-00356	87
KCDPKDB	primary	EAT	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	EDH-EAT-00359	88
KCDPLA400	primary	EAT	Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)	EDH-EAT-00346	73
KCDPLA600	primary	EAT	Westinghouse CDP breaker connector kit KCDPLA600 (LD...)	EDH-EAT-00347	73
KCDPLB	primary	EAT	Westinghouse CDP breaker connector kit KCDPLB (DK...)	EDH-EAT-00345	74
KCDPLCL	primary	EAT	Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)	EDH-EAT-00348	75
KCDPLD	primary	EAT	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	EDH-EAT-00362	89
KCDPMC	primary	EAT	Westinghouse CDP breaker connector kit KCDPMC (MDL...)	EDH-EAT-00349	75
KCDPMDL	primary	EAT	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	EDH-EAT-00363	90
KCDPNBP	primary	EAT	Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)	EDH-EAT-00351	76
KCDPNC	primary	EAT	Westinghouse CDP breaker connector kit KCDPNC (ND...)	EDH-EAT-00350	76
KCDPND	primary	EAT	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	EDH-EAT-00364	91
KCDP_X	primary	EAT	CDP filler cover (any X increment)	EDH-EAT-00352	78
KCWTK	primary	EAT	Series C J/K-frame control wire terminal kit	EDH-EAT-00619	373
KFDP2C	primary	FPE	FPE FDP link/strap kit KFDP2C for QMQB switch units	EDH-FPE-00015	1143
KFDP-2C	alias	FPE	FPE FDP link/strap kit KFDP2C for QMQB switch units	EDH-FPE-00015	1143
KFDP3C	primary	FPE	FPE FDP link/strap kit KFDP3C for QMQB switch units	EDH-FPE-00016	1143
KFDP-3C	alias	FPE	FPE FDP link/strap kit KFDP3C for QMQB switch units	EDH-FPE-00016	1143
KFDP46C	primary	FPE	FPE FDP link/strap kit KFDP46C for QMQB switch units	EDH-FPE-00018	1143
KFDP-46C	alias	FPE	FPE FDP link/strap kit KFDP46C for QMQB switch units	EDH-FPE-00018	1143
KFDP4C	primary	FPE	FPE FDP link/strap kit KFDP4C for QMQB switch units	EDH-FPE-00017	1144
KFDP-4C	alias	FPE	FPE FDP link/strap kit KFDP4C for QMQB switch units	EDH-FPE-00017	1144

Number	Type	Mfr	Description	Catalogue ID	Pg
KFDP4XT	primary	EAT	Westinghouse FDP switch connector kit KFDP4XT	EDH-EAT-00366	65
KFDP-5C	primary	FPE	FPE FDP link kit (QMQB4036R into BDP switchgear)	EDH-FPE-00026	1144
KFDP5XT	primary	EAT	Westinghouse FDP switch connector kit KFDP5XT	EDH-EAT-00367	66
KFDP66C	primary	FPE	FPE FDP link/strap kit KFDP66C for QMQB switch units	EDH-FPE-00019	1144
KFDP7C	primary	FPE	FPE FDP link/strap kit KFDP7C for QMQB switch units	EDH-FPE-00020	1145
KFDPB6X-2	primary	EAT	Westinghouse FDP switch connector kit KFDPB6X-2	EDH-EAT-00368	66
KFDPBS324R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	EDH-EAT-00430	102
KFDPBS364R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	EDH-EAT-00431	102
KFDPD16C	primary	FPE	FPE FDP link/strap kit KFDPD16C for QMQB switch units	EDH-FPE-00021	1145
KFDPD26C	primary	FPE	FPE FDP link/strap kit KFDPD26C for QMQB switch units	EDH-FPE-00023	1145
KFDPS16C	primary	FPE	FPE FDP link/strap kit KFDPS16C for QMQB switch units	EDH-FPE-00022	1146
KFDPS26C	primary	FPE	FPE FDP link/strap kit KFDPS26C for QMQB switch units	EDH-FPE-00024	1146
KFDPV7C	primary	FPE	FPE FDP link/strap kit KFDPV7C for QMQB switch units	EDH-FPE-00025	1146
KFDPW11X-6	primary	EAT	Westinghouse FDP switch connector kit KFDPW11X-6	EDH-EAT-00370	67
KFDPW11X-8	primary	EAT	Westinghouse FDP switch connector kit KFDPW11X-8	EDH-EAT-00371	67
KFDPW15X-12	primary	EAT	Westinghouse FDP switch connector kit KFDPW15X-12	EDH-EAT-00372	68
KFDPW325R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	EDH-EAT-00432	102
KFDPW326R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	EDH-EAT-00434	103
KFDPW365R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	EDH-EAT-00433	103
KFDPW366R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	EDH-EAT-00435	103
KFDPW367	primary	EAT	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	EDH-EAT-00436	104
KFDPW368	primary	EAT	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	EDH-EAT-00437	104
KFDPW9X-4	primary	EAT	Westinghouse FDP switch connector kit KFDPW9X-4	EDH-EAT-00369	68
KFDPWT3211R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	EDH-EAT-00424	104
KFDPWT3222R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	EDH-EAT-00426	105
KFDPWT3233R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	EDH-EAT-00428	105
KFDPWT3611R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	EDH-EAT-00425	105
KFDPWT3622R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	EDH-EAT-00427	106
KFDPWT3633R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	EDH-EAT-00429	106
KFDP_X	primary	EAT	FDP filler cover (any X increment)	EDH-EAT-00373	101
KL11AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00067	174
KL11AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00071	146
KL11AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00063	146
KL11AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00079	175
KL11AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00083	147
KL11AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00075	147
KL11SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00088	175

Number	Type	Mfr	Description	Catalogue ID	Pg
KL11SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00090	147
KL11SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00086	148
KL11SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00068	175
KL11SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00072	148
KL11SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00064	148
KL11SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00080	176
KL11SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00084	149
KL11SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00076	149
KL13AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00065	176
KL13AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00069	149
KL13AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00061	150
KL13AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00077	176
KL13AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00081	150
KL13AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00073	150
KL13SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00087	177
KL13SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00089	151
KL13SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00085	151
KL13SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00066	177
KL13SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00070	151
KL13SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00062	152
KL13SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00078	177
KL13SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00082	152
KL13SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00074	152
KL21AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00097	178
KL21AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00101	153
KL21AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00093	153
KL21AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00109	178
KL21AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00113	153
KL21AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00105	154
KL21SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00118	178

Number	Type	Mfr	Description	Catalogue ID	Pg
KL21SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00120	154
KL21SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00116	154
KL21SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00098	179
KL21SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00102	155
KL21SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00094	155
KL21SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00110	179
KL21SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00114	155
KL21SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00106	156
KL23AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00095	179
KL23AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00099	156
KL23AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00091	156
KL23AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00107	180
KL23AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00111	157
KL23AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00103	157
KL23SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00117	180
KL23SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00119	157
KL23SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00115	158
KL23SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00096	180
KL23SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00100	158
KL23SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00092	158
KL23SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00108	181
KL23SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00112	159
KL23SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00104	159
KL41AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00127	159
KL41AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00123	160
KL41AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00135	160
KL41AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00131	160
KL41SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00138	161
KL41SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00128	161
KL41SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00124	161

Number	Type	Mfr	Description	Catalogue ID	Pg
KL41SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00136	162
KL41SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00132	162
KL43AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00125	162
KL43AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00121	163
KL43AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00133	163
KL43AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00129	163
KL43SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00137	164
KL43SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00126	164
KL43SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00122	164
KL43SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00134	165
KL43SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00130	165
KL61CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00148	165
KL61CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00142	166
KL61CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00160	166
KL61CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00154	166
KL61SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00149	167
KL61SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00143	167
KL61SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00161	167
KL61SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00155	168
KL61TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00150	168
KL61TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00144	168
KL61TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00162	169
KL61TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00156	169
KL63CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00145	169
KL63CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00139	170
KL63CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00157	170
KL63CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00151	170
KL63SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00146	171
KL63SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00140	171
KL63SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00158	171

Number	Type	Mfr	Description	Catalogue ID	Pg
KL63SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00152	172
KL63TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00147	172
KL63TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00141	172
KL63TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00159	173
KL63TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00153	173
KNA1B1C	primary	FPE	FPE NA1B panelboard lug kit	EDH-FPE-00034	1149
KPEK1	primary	EAT	Series C F-frame end cap kit, 3-pole, 10-32	EDH-EAT-00593	364
KPEK12	primary	EAT	Series C F-frame end cap kit, 2-pole, 10-32	EDH-EAT-00591	365
KPEK14	primary	EAT	Series C F-frame end cap kit, 4-pole, 10-32	EDH-EAT-00595	365
KPEK2	primary	EAT	Series C J-frame end cap kit, 3-pole, .312-18	EDH-EAT-00597	373
KPEK24	primary	EAT	Series C J-frame end cap kit, 4-pole, .312-18	EDH-EAT-00599	373
KPEK3	primary	EAT	Series C K-frame end cap kit, 3-pole, .312-18	EDH-EAT-00601	391
KPEK34	primary	EAT	Series C K-frame end cap kit, 4-pole, .312-18	EDH-EAT-00603	391
KPEK4	primary	EAT	Series C L-frame end cap kit, 3-pole, .312-18	EDH-EAT-00605	400
KPEK44	primary	EAT	Series C L-frame end cap kit, 4-pole, .312-18	EDH-EAT-00607	401
KPEKM1	primary	EAT	Series C F-frame end cap kit, 3-pole, M5	EDH-EAT-00594	365
KPEKM12	primary	EAT	Series C F-frame end cap kit, 2-pole, M5	EDH-EAT-00592	366
KPEKM14	primary	EAT	Series C F-frame end cap kit, 4-pole, M5	EDH-EAT-00596	366
KPEKM2	primary	EAT	Series C J-frame end cap kit, 3-pole, M8	EDH-EAT-00598	374
KPEKM24	primary	EAT	Series C J-frame end cap kit, 4-pole, M8	EDH-EAT-00600	374
KPEKM3	primary	EAT	Series C K-frame end cap kit, 3-pole, M8	EDH-EAT-00602	392
KPEKM34	primary	EAT	Series C K-frame end cap kit, 4-pole, M8	EDH-EAT-00604	392
KPEKM4	primary	EAT	Series C L-frame end cap kit, 3-pole, M8	EDH-EAT-00606	401
KPEKM44	primary	EAT	Series C L-frame end cap kit, 4-pole, M8	EDH-EAT-00608	401
KPHCC3175S	primary	EAT	Cutler-Hammer PH panelboard retrofit kit, single-mount CC breaker 3P 175 A, with	EDH-EAT-00801	116
KPR1A	primary	EAT	Series C F-frame keeper nut (10-32, line or load end)	EDH-EAT-00609	362
KPR1AM	primary	EAT	Series C F-frame keeper nut (M5, line or load end)	EDH-EAT-00610	362
KPR3A	primary	EAT	Series C K-frame keeper nut (.375-16, line end)	EDH-EAT-00611	387
KPR3AM	primary	EAT	Series C K-frame keeper nut (M8, line end)	EDH-EAT-00613	388
KPR3B	primary	EAT	Series C K-frame keeper nut (.375-16, load end)	EDH-EAT-00612	388
KPR3BM	primary	EAT	Series C K-frame keeper nut (M8, load end)	EDH-EAT-00614	388
KPRL1BAB	primary	EAT	Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)	EDH-EAT-00166	118
KPRL2GHB	primary	EAT	Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)	EDH-EAT-00167	118
KPRL3ABA06	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00184	223
KPRL3ABA06-1	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00185	223
KPRL3ABA12	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00186	224
KPRL3ABA12-1	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00187	225
KPRL3ABA18	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00188	226
KPRL3ABA18-1	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00189	226
KPRL3ABA24	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00190	227
KPRL3ABA24-1	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00191	228

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL3AED2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00209	229
KPRL3AED3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00208	229
KPRL3AFD1	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00207	230
KPRL3AFD2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00206	230
KPRL3AFD3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00205	230
KPRL3AGB06	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00192	231
KPRL3AGB06-1	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00193	232
KPRL3AGB12	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00194	232
KPRL3AGB12-1	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00195	233
KPRL3AGB18	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00196	234
KPRL3AGB18-1	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00197	235
KPRL3AGB24	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00198	235
KPRL3AGB24-1	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00199	237
KPRL3CA	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)	EDH-EAT-00212	219
KPRL3CF3	primary	EAT	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	EDH-EAT-00788	97
KPRL3ED	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)	EDH-EAT-00211	219
KPRL3FD	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD,	EDH-EAT-00210	220
KPRL3X21T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	EDH-EAT-00204	296
KPRL3X22	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	EDH-EAT-00201	237
KPRL3X22T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	EDH-EAT-00203	238
KPRL3X23	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	EDH-EAT-00200	239
KPRL3X23T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	EDH-EAT-00202	240
KPRL3XBA06	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00168	241
KPRL3XBA06-1	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00169	242
KPRL3XBA12	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00170	243
KPRL3XBA12-1	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00171	244
KPRL3XBA18	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00172	245
KPRL3XBA18-1	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00173	246
KPRL3XBA24	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00174	247
KPRL3XBA24-1	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00175	248
KPRL3XGB06	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00176	249
KPRL3XGB06-1	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00177	250
KPRL3XGB12	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00178	251
KPRL3XGB12-1	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00179	252
KPRL3XGB18	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00180	253
KPRL3XGB18-1	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00181	254
KPRL3XGB24	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00182	255
KPRL3XGB24-1	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00183	256
KPRL44X	primary	EAT	PRL4F fusible switch connector kit KPRL44X	EDH-EAT-00331	298
KPRL45X	supersedes	EAT	PRL4F fusible switch connector kit KPRL45X1	EDH-EAT-00332	300
KPRL45X	primary	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	299
KPRL45X1	primary	EAT	PRL4F fusible switch connector kit KPRL45X1	EDH-EAT-00332	300

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL45X1	superseded_by	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	299
KPRL45XS	primary	EAT	PRL4F fusible switch connector kit KPRL45XS	EDH-EAT-00334	300
KPRL4B6XS	primary	EAT	PRL4F fusible switch connector kit KPRL4B6XS	EDH-EAT-00335	301
KPRL4B6XT	primary	EAT	PRL4F fusible switch connector kit KPRL4B6XT	EDH-EAT-00336	301
KPRL4CA	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	EDH-EAT-00308	305
KPRL4CD	primary	EAT	Challenger twin mounting hardware kit KPRL4CD, 225 A max	EDH-EAT-00784	97
KPRL4CED	primary	EAT	Challenger twin mounting hardware kit KPRL4CED, 225 A max	EDH-EAT-00783	97
KPRL4CKD	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	EDH-EAT-00322	306
KPRL4CND	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/	EDH-EAT-00324	307
KPRL4CSL	primary	EAT	Challenger single mounting hardware kit KPRL4CSL, 600 A max	EDH-EAT-00785	97
KPRL4CSM	primary	EAT	Challenger single mounting hardware kit KPRL4CSM, 800 A max	EDH-EAT-00786	98
KPRL4CSN	primary	EAT	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	EDH-EAT-00787	98
KPRL4ED	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	331
KPRL4ED	primary	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	308
KPRL4ED2	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	330
KPRL4ED2	primary	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	309
KPRL4FBP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	EDH-EAT-00311	310
KPRL4FD	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	331
KPRL4FD	primary	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	311
KPRL4FD1	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted	EDH-EAT-00299	329
KPRL4FD1	primary	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	313
KPRL4FD2	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	330
KPRL4FD2	primary	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	314
KPRL4FDCL	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)	EDH-EAT-00307	315
KPRL4JDS	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00309	315
KPRL4JDT	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00310	316
KPRL4KDS	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00312	317
KPRL4KDT	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00313	318
KPRL4LAP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	EDH-EAT-00317	319
KPRL4LC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	321
KPRL4LC	superseded_by	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	323
KPRL4LCL	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	EDH-EAT-00318	321
KPRL4LD	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	321
KPRL4LD	primary	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	323
KPRL4LG	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	EDH-EAT-00315	324
KPRL4MC	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	334
KPRL4MC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	325
KPRL4MD	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))	EDH-EAT-00323	326
KPRL4NBP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	EDH-EAT-00319	326

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4NC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)	EDH-EAT-00320	327
KPRL4ND	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	335
KPRL4ND	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	328
KPRL4W11X	primary	EAT	PRL4F fusible switch connector kit KPRL4W11X	EDH-EAT-00338	301
KPRL4W15X	primary	EAT	PRL4F fusible switch connector kit KPRL4W15X	EDH-EAT-00339	303
KPRL4W9X	primary	EAT	PRL4F fusible switch connector kit KPRL4W9X	EDH-EAT-00337	303
KPRL4X12	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted	EDH-EAT-00299	329
KPRL4X12	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	313
KPRL4X22	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	330
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	314
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	309
KPRL4X32	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	331
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	311
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	308
KPRL4X334S	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mo	EDH-EAT-00302	331
KPRL4X334T	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin moun	EDH-EAT-00303	332
KPRL4X336	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	EDH-EAT-00304	333
KPRL4X34	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	334
KPRL4X34	superseded_by	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	325
KPRL4X35	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	335
KPRL4X35	superseded_by	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	328
KQB3C	primary	FPE	FPE QMQB switch strap/link kit KQB3C	EDH-FPE-00027	1147
KQB46C	primary	FPE	FPE QMQB switch strap/link kit KQB46C	EDH-FPE-00029	1147
KQB4C	primary	FPE	FPE QMQB switch strap/link kit KQB4C	EDH-FPE-00028	1147
KQB66C	primary	FPE	FPE QMQB switch strap/link kit KQB66C	EDH-FPE-00030	1147
KQB86C	primary	FPE	FPE QMQB switch strap/link kit KQB86C	EDH-FPE-00031	1148
KQB-D26C	primary	FPE	FPE QMQB switch strap/link kit KQB-D26C	EDH-FPE-00032	1148
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	966
KS3VA52T / KS3VA52TD = panel-builder versions without nut keepers and provision filler plates	equivalent	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	967
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	968
KS3VA53T / KS3VA53TD panel-builder versions (no nut keepers / provision filler)	equivalent	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	968
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	969
KS3VA54T / KS3VA54TD panel-builder versions	equivalent	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	970
L3RTWK	primary	EAT	Series G LG-frame end cap kit (metric nuts), 3-pole	EDH-EAT-00560	430
L4RTWK	primary	EAT	Series G LG-frame end cap kit (metric nuts), 4-pole	EDH-EAT-00561	431
LALLC	primary	SQD	I-Line LA/LH vertical main line lug cover (US SE)	EDH-SQD-00460	458

Number	Type	Mfr	Description	Catalogue ID	Pg
LD1E060	primary	SIE	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	EDH-SIE-00260	1113
LD1E100	primary	SIE	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	EDH-SIE-00261	1113
LGTES3	primary	EAT	Series G LG-frame terminal spreader, 3-pole	EDH-EAT-00564	431
LGTES4	primary	EAT	Series G LG-frame terminal spreader, 4-pole	EDH-EAT-00565	431
LGTEW3	primary	EAT	Series G LG-frame terminal extension, 3-pole	EDH-EAT-00562	431
LGTEW4	primary	EAT	Series G LG-frame terminal extension, 4-pole	EDH-EAT-00563	432
LK-15	primary	ZIN	Zinsco main lug block 150 A	EDH-ZIN-00023	1160
LK-22	primary	ZIN	Zinsco main lug block 225 A	EDH-ZIN-00024	1160
LN1E100	primary	SIE	Siemens LN1E100 lug, ED 30-100A	EDH-SIE-00258	1114
LNLK30A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	1053
LNLK30A	primary	SIE	Revised P1 2/0 neutral lug (strip) kit, 30-circuit	EDH-SIE-00336	1052
LNLK42A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	1054
LNLK42A	primary	SIE	Revised P1 2/0 neutral lug (strip) kit, 42-circuit	EDH-SIE-00337	1053
LNLK4X11B	primary	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	1053
LNLK54A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	1056
LNLK54A	primary	SIE	Revised P1 2/0 neutral lug (strip) kit, 54-circuit	EDH-SIE-00338	1054
LNLK5X12A	primary	SIE	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	EDH-SIE-00033	1054
LNLK6X17B	primary	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	1054
LNLK7X18A	primary	SIE	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	EDH-SIE-00034	1056
LNLK7X20B	primary	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	1056
LPDC01	primary	SIE	Panelboard directory cards (10)	EDH-SIE-00411	1084
LPDC02	primary	SIE	Directory card holder (pack of 10)	EDH-SIE-00429	957
LPJSPDNUT01	primary	SIE	Panelboard trim J-type speed nut kit (25)	EDH-SIE-00442	1082
LPLOCK01A	primary	SIE	Replacement panelboard trim door lock (14 gage doors)	EDH-SIE-00412	1084
LPLOCK02A	primary	SIE	Replacement panelboard trim door lock (12 gage doors)	EDH-SIE-00413	1084
LPP2NB01	primary	SIE	Neutral lug kit	EDH-SIE-00118	934
LTS3K	primary	EAT	Series G LG-frame terminal cover, 3-pole	EDH-EAT-00558	430
LTS4K	primary	EAT	Series G LG-frame terminal cover, 4-pole	EDH-EAT-00559	430
MB133	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133	EDH-GEA-00059	661
MB133WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	EDH-GEA-00060	661
MB233	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233	EDH-GEA-00051	661
MB2332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332	EDH-GEA-00053	662
MB2332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	EDH-GEA-00054	662
MB233WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	EDH-GEA-00052	662
MB332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332	EDH-GEA-00045	663
MB332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	EDH-GEA-00046	663
MB333	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333	EDH-GEA-00055	663
MB333WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	EDH-GEA-00056	664
MB423	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB423	EDH-GEA-00057	664
MB426	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB426	EDH-GEA-00058	664
MB512	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB512	EDH-GEA-00044	665
MB513	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB513	EDH-GEA-00049	665
MB516	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB516	EDH-GEA-00050	665
MB612	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB612	EDH-GEA-00042	666
MB613	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB613	EDH-GEA-00047	666
MB614	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB614	EDH-GEA-00043	666
MB616	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB616	EDH-GEA-00048	667

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKBC1NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	1029
MBKBC1NBA	primary	SIE	Revised P1 BQD/GB main/subfeed breaker kit, 1-phase	EDH-SIE-00385	1022
MBKBC3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	EDH-SIE-00045	916
MBKBC3NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	1030
MBKBC3NBA	primary	SIE	Revised P1 BQD/GB main/subfeed breaker kit, 3-phase	EDH-SIE-00386	1022
MBKBFA	primary	SIE	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	EDH-SIE-00014	1082
MBKBL1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	EDH-SIE-00043	916
MBKBL1A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	1029
MBKBL1A	primary	SIE	Revised P1 BL main/subfeed breaker kit, 1-phase	EDH-SIE-00383	1022
MBKBL3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	EDH-SIE-00044	916
MBKBL3A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	1030
MBKBL3A	primary	SIE	Revised P1 BL main/subfeed breaker kit, 3-phase	EDH-SIE-00384	1023
MBKED1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	EDH-SIE-00048	917
MBKED1A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	1023
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	1023
MBKED1*A / MBKED3***A = kit with ED breaker factory-installed**	equivalent	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	1024
MBKED3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	EDH-SIE-00049	917
MBKED3A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	1024
MBKFD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00052	917
MBKFD1A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	1024
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	1024
MBKFD1*A / MBKFD3***A = same kit with FD breaker (amperage ***) factory-installed on barrier**	equivalent	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	1025
MBKFD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00053	918
MBKFD3A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	1025
MBKJD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00054	918
MBKJD1A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	1027
MBKJD1A	primary	SIE	Revised P1-400 JD main breaker kit, 1-phase	EDH-SIE-00345	1026
MBKJD1*A, MBKJD12***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	SIE	Revised P1-400 JD main breaker kit, 1-phase	EDH-SIE-00345	1026
MBKJD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00055	918
MBKJD3A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	1027
MBKJD3A	primary	SIE	Revised P1-400 JD main breaker kit, 3-phase	EDH-SIE-00346	1027

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKJD3*A, MBKJD32***A = JD kits with breaker (amperage ***), incl. bottom-feed variants**	equivalent	SIE	Revised P1-400 JD main breaker kit, 3-phase	EDH-SIE-00346	1027
MBKJD3B	primary	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	1027
MBKNB1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00046	919
MBKNB3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00047	919
MBKQR1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00050	920
MBKQR1A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	EDH-SIE-00005	1028
MBKQR3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00051	921
MBKQR3A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	EDH-SIE-00006	1029
MBKQRC1FK	primary	SIE	Column (C1) panelboard filler kit for vertically mounted 225A QR main/subfeed	EDH-SIE-00393	1087
MBKQRFK	primary	SIE	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	EDH-SIE-00075	1078
MBKVA41A	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	1029
MBKVA41B	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	1030
MBKVA5262A	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	1031
MBKVA5262B	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	1031
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM31	EDH-SIE-00387	1034
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00388	1034
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00389	1035
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00390	1035
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00391	1033
MBKVA5262B (strap kit without breaker)	equivalent	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00392	1034
MBKVA5363A	primary	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	1032
MBKVA5363JD	primary	SIE	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	EDH-SIE-00013	1083
MBKVAH3200A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00391	1033
MBKVAH3250A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAH32	EDH-SIE-00392	1034
MBKVAM3150A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM31	EDH-SIE-00387	1034
MBKVAM3200A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00388	1034
MBKVAM3225A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00389	1035
MBKVAM3250A	primary	SIE	Revised P1-250 3VA main/subfeed breaker kit with breaker pre-installed (MBKVAM32	EDH-SIE-00390	1035
MDTERMSHIELD	primary	SIE	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	EDH-SIE-00298	1130

Number	Type	Mfr	Description	Catalogue ID	Pg
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00220	267
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00219	198
MG1	primary	SIE	MG1 connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00149	964
MG1D	primary	SIE	MG1D connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00175	964
MH62D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 62 in. H (D9, for PowerPacT L)	EDH-SQD-00445	522
MH68D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 68 in. H (D9, for PowerPacT L)	EDH-SQD-00446	522
MH74D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 74 in. H (D9, for PowerPacT L)	EDH-SQD-00447	522
MH80D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 80 in. H (D9, for PowerPacT L)	EDH-SQD-00448	523
MH86D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 86 in. H (D9, for PowerPacT L)	EDH-SQD-00449	523
MH92D9	primary	SQD	MH box, 20 in. W x 8.75 in. D x 92 in. H (D9, for PowerPacT L)	EDH-SQD-00450	523
MHBE20	primary	SQD	Blank endwall for 20 in. wide MH enclosure (one per package)	EDH-SQD-00441	523
MHBE26	primary	SQD	Blank endwall, 26 in. wide MH enclosure (one per package)	EDH-SQD-00444	523
MHCO20	primary	SQD	NF/NQ rectangular cutout endwall kit for 20 in. wide NEMA 1 MH enclosure	EDH-SQD-00443	524
MHKE20	primary	SQD	Endwall with knockouts for 20 in. wide MH enclosure (one per package)	EDH-SQD-00442	524
ML1997	primary	SQD	ML-1 panel unknown mounting hardware for 997 frame breaker	EDH-SQD-00532	463
ML1FAS	primary	SQD	ML-1 panel single mounting hardware for FAP/FAL breaker	EDH-SQD-00531	464
ML1KAPT	primary	SQD	ML-1 panel twin mounting hardware for KAP breaker	EDH-SQD-00526	464
ML1LAPS	primary	SQD	ML-1 panel single mounting hardware for LAP breaker	EDH-SQD-00528	464
ML1LAPT	primary	SQD	ML-1 panel twin mounting hardware for LAP breaker	EDH-SQD-00527	464
ML1LAT	primary	SQD	ML-1 panel twin mounting hardware for LA breaker	EDH-SQD-00529	465
ML1MAPS	primary	SQD	ML-1 panel single mounting hardware for MAP breaker	EDH-SQD-00530	465
MLA1	primary	GEA	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	EDH-GEA-00061	668
MLA2	primary	GEA	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	EDH-GEA-00062	668
MLA41	primary	GEA	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	EDH-GEA-00063	668
MLA61	primary	GEA	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	EDH-GEA-00064	668
MLA62	primary	GEA	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	EDH-GEA-00065	669
MLKA1	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	1039
MLKA1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00025	923
MLKA1A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	1039
MLKA3	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	1040
MLKA3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00026	923
MLKA3A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	1040
MLKC1	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	1041
MLKC1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00027	924
MLKC1A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	1041
MLKC3	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	1041

Number	Type	Mfr	Description	Catalogue ID	Pg
MLKC3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00028	924
MLKC3A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	1041
ML-LAL-S	primary	SQD	ML-1 panel single? mounting hardware for LAP (title says single, spec says twin)	EDH-SQD-00533	465
MLR1	primary	GEA	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	EDH-GEA-00066	669
MLR2	primary	GEA	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	EDH-GEA-00067	669
MLR41	primary	GEA	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	EDH-GEA-00068	669
MLR61	primary	GEA	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	EDH-GEA-00069	670
MLT1	primary	GEA	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	EDH-GEA-00070	670
MLT2	primary	GEA	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	EDH-GEA-00071	670
MLT41	primary	GEA	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	EDH-GEA-00073	670
MLT42	primary	GEA	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	EDH-GEA-00072	671
MP403XBLANK	primary	EAT	Cutler-Hammer MP40 3X high filler blank	EDH-EAT-00799	113
MP40CHH	primary	EAT	Cutler-Hammer MP40 hardware kit for CHH breakers (twin, 225 A)	EDH-EAT-00798	108
MP40ED225-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A	EDH-EAT-00791	108
MP40ED2253	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, ED, FD, HFD, 225 A	EDH-EAT-00791	108
MP40KC225-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	EDH-EAT-00790	109
MP40KC2253	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, CA, CAH, HCA, 225 A	EDH-EAT-00790	109
MP40KF100-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB,	EDH-EAT-00789	109
MP40KF1003	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, EHB, FS, FB, FH, EHD, FDB,	EDH-EAT-00789	109
MP40KJ225-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	EDH-EAT-00792	110
MP40KJ2253	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, JB, KB, JD, HKB, 225 A	EDH-EAT-00792	110
MP40KK400-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relect	EDH-EAT-00793	110
MP40KK4003	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, KA, KS, KH, LB, HLB (Relect	EDH-EAT-00793	110
MP40KL400-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A	EDH-EAT-00794	111
MP40KL4003	alias	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 400 A	EDH-EAT-00794	111
MP40KL600-3	primary	EAT	Cutler-Hammer MP40 twin branch breaker mounting kit, LA, LS, LC, LD, HLC, 600 A	EDH-EAT-00795	111
MP40KM800-3	primary	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	EDH-EAT-00796	112
MP40KM8003	alias	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, MA, MS, MC, MD, 800 A	EDH-EAT-00796	112
MP40KN1200-3	primary	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	EDH-EAT-00797	112
MP40KN12003	alias	EAT	Cutler-Hammer MP40 single branch breaker mounting kit, NB, NS, NC, ND, 1200 A	EDH-EAT-00797	112
MPED1K	primary	EAT	Cutler-Hammer MP-series dual-branch connector kit, 225 A, 600 V (E/F frame)	EDH-EAT-00800	113
N100MFI	primary	SQD	NF FI-frame main circuit breaker adapter kit (legacy)	EDH-SQD-00379	469
N150MH	primary	SQD	NF main circuit breaker adapter kit, H-frame, 150 A	EDH-SQD-00375	469
N22P23012B6	primary	GEA	GE Hex-head bolt 5/16-18 x 3/4 in (breaker terminal to strap contact block) - N2	EDH-GEA-00470	854
N22P23016B6	primary	GEA	GE Hex-head bolt 3/8-16 x 1 in (breaker terminal to strap, G main kit) - N22P230	EDH-GEA-00469	854
N245P21B6	primary	GEA	GE Nut 1/4-20 - N245P21B6	EDH-GEA-00471	854

Number	Type	Mfr	Description	Catalogue ID	Pg
N250MJ	primary	SQD	NF main circuit breaker adapter kit, J-frame, 250 A	EDH-SQD-00376	470
N250MKC	primary	SQD	NF KI-frame main circuit breaker adapter kit (legacy)	EDH-SQD-00380	470
N32	primary	FPE	Lug kit for NN breaker	EDH-FPE-00038	1152
N37P21060B6	primary	GEA	GE Screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21060B6	EDH-GEA-00472	855
N37P21969B6	primary	GEA	GE Machine screw 1/4-20 x 3-3/4 in (breaker to bracket) - N37P21969B6	EDH-GEA-00473	855
N400M	primary	SQD	NF main circuit breaker adapter kit, LA/LH, 400 A	EDH-SQD-00377	471
N402P11B6	primary	GEA	GE Flat washer 1/4 in - N402P11B6	EDH-GEA-00474	855
N600MPPL	primary	SQD	NF main (400/600 A) or sub-feed (400 A) breaker kit, PowerPacT L	EDH-SQD-00378	471
N657P21024B6	primary	GEA	GE Carriage bolt 1/4-20 x 1-1/2 in (strap to vertical bus) - N657P21024B6	EDH-GEA-00475	855
N722EP16006B6	primary	GEA	GE Thread-forming screw 10-32 x 3/8 in - N722EP16006B6	EDH-GEA-00482	855
N730BP1308B6	primary	GEA	GE Thread-forming screw #6 x 1/2 in (terminal cover) - N730BP1308B6	EDH-GEA-00476	856
NAIB-NEF	primary	FPE	FPE NE/NEF twin kit for NA1B panel	EDH-FPE-00014	1150
NBK01A	primary	SIE	Revised P1 circuit numbering strip kit 1-60	EDH-SIE-00416	1084
NBK02A	primary	SIE	Revised P1 circuit numbering strip kit 61-120	EDH-SIE-00417	1084
NBK03A	primary	SIE	Revised P1 circuit numbering strip kit 121-240	EDH-SIE-00418	1085
NBK3	primary	SIE	P2/P3 snap-in number strips 1-42	EDH-SIE-00430	947
NBK4	primary	SIE	P2/P3 snap-in number strips 43-84	EDH-SIE-00431	948
NBK5	primary	SIE	P2/P3 snap-in number strips 85-126	EDH-SIE-00432	948
NBK6	primary	SIE	P2/P3 snap-in number strips 127-168	EDH-SIE-00433	948
NBK7	primary	SIE	P2/P3 snap-in number strips 169-210	EDH-SIE-00434	948
NBK8	primary	SIE	P2/P3 snap-in number strips 211-252	EDH-SIE-00435	948
NCFS	primary	FPE	FPE filler plate for thin NC breaker space	EDH-FPE-00042	1150
NDPNE	primary	FPE	FPE NDP twin mounting strap kit, NE/NEF	EDH-FPE-00013	1151
NDPNEJ	primary	FPE	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	EDH-FPE-00012	1151
NDTS	primary	SIE	Siemens NDTS wire lug shield / end barrier, MD/ND	EDH-SIE-00289	1130
NEB64K	primary	SIE	Twin mounting hardware kit for NEB/HEB breakers, 125 A (S4/P4/SPP/F1)	EDH-SIE-00323	1094
NEB65K	primary	SIE	Twin mounting hardware kit for NEB/HEB breakers, 125 A (Series 5/6 deep panels)	EDH-SIE-00322	1094
NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	1139
NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	1135
NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	1139
NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	1136
NF125FTL	primary	SQD	NF feed-through lug kit, 125 A	EDH-SQD-00390	481
NF125SFL	primary	SQD	NF sub-feed lug kit, 125 A	EDH-SQD-00387	480
NF12RDE	primary	SQD	NF 12 in. rail and deadfront extension kit	EDH-SQD-00419	487
NF18RDE	primary	SQD	NF 18 in. rail and deadfront extension kit	EDH-SQD-00420	487
NF250FTL	primary	SQD	NF feed-through lug kit, 250 A	EDH-SQD-00391	481
NF250SFBH	primary	SQD	NF sub-feed circuit breaker kit, H-frame, 250 A mains	EDH-SQD-00393	472
NF250SFBJ	primary	SQD	NF sub-feed circuit breaker kit, J-frame, 250 A mains	EDH-SQD-00394	472
NF250SFL	primary	SQD	NF sub-feed lug kit, 250 A	EDH-SQD-00388	480
NF400FTL	primary	SQD	NF feed-through lug kit, 400 A	EDH-SQD-00392	482
NF400SFL	primary	SQD	NF sub-feed lug kit, 400 A	EDH-SQD-00389	480

Number	Type	Mfr	Description	Catalogue ID	Pg
NF600SFBH	primary	SQD	NF single/dual sub-feed circuit breaker kit, H-frame, 400 A mains	EDH-SQD-00395	472
NF600SFBJ	primary	SQD	NF single/dual sub-feed circuit breaker kit, J-frame, 400 A mains	EDH-SQD-00396	473
NF600SFBPPL	primary	SQD	NF sub-feed circuit breaker kit, PowerPacT L, 600 A	EDH-SQD-00397	473
NF6RDE	primary	SQD	NF 6 in. rail and deadfront extension kit	EDH-SQD-00418	487
NFALV1	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 125 A	EDH-SQD-00404	474
NFALV2	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 250 A	EDH-SQD-00407	474
NFALV4	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 400 A	EDH-SQD-00410	475
NFALV6	primary	SQD	NF optional main lug kit, aluminum compression (crimp), 600 A	EDH-SQD-00413	475
NFBFMB20	primary	SQD	NF back-fed main circuit breaker barrier kit	EDH-SQD-00386	488
NFCRBOND8	primary	SQD	NF 800 A U.S. condo riser neutral bonding strap kit	EDH-SQD-00427	490
NFCUM1	primary	SQD	NF optional main lug kit, copper mechanical, 125 A	EDH-SQD-00405	476
NFCUM2	primary	SQD	NF optional main lug kit, copper mechanical, 250 A	EDH-SQD-00408	476
NFCUM4	primary	SQD	NF optional main lug kit, copper mechanical, 400 A	EDH-SQD-00411	477
NFCUM6	primary	SQD	NF optional main lug kit, copper mechanical, 600 A	EDH-SQD-00414	477
NFCUV1	primary	SQD	NF optional main lug kit, copper compression (crimp), 125 A	EDH-SQD-00406	478
NFCUV2	primary	SQD	NF optional main lug kit, copper compression (crimp), 250 A	EDH-SQD-00409	478
NFCUV4	primary	SQD	NF optional main lug kit, copper compression (crimp), 400 A	EDH-SQD-00412	479
NFCUV6	primary	SQD	NF optional main lug kit, copper compression (crimp), 600 A	EDH-SQD-00415	479
NFEDBS	primary	SQD	NF U.S. service entrance barrier kit (E-frame main)	EDH-SQD-00381	488
NFES18	primary	SQD	NF equipment space kit (18 in.)	EDH-SQD-00422	486
NFFP15	primary	SQD	NF filler plates (15 per package)	EDH-SQD-00421	490
NFHARDWARE	primary	FPE	NF frame custom panel hardware (dealer item)	EDH-FPE-00043	1141
NFHJLLC	primary	SQD	NF U.S. service entrance barrier kit (H/J main)	EDH-SQD-00382	488
NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	1140
NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern	equivalent	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	1136
NFLALLC	primary	SQD	NF U.S. service entrance barrier kit (LA/LH main)	EDH-SQD-00383	488
NFN1CU	primary	SQD	NF copper 100% neutral kit, 125 A	EDH-SQD-00401	484
NFN2CU	primary	SQD	NF copper 100% neutral kit, 250 A	EDH-SQD-00402	485
NFN6CR	primary	SQD	NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits	EDH-SQD-00428	485
NFN6CU	primary	SQD	NF copper 100% neutral kit, 400/600 A	EDH-SQD-00403	485
NFNL1	primary	SQD	NF 200% neutral kit, 125 A	EDH-SQD-00398	485
NFNL2	primary	SQD	NF 200% neutral kit, 250 A	EDH-SQD-00399	486
NFNL4	primary	SQD	NF 200% neutral kit, 400 A	EDH-SQD-00400	486
NFNL6CR	equivalent	SQD	NF/NQ condo riser 100% neutral assembly, 400/600 A, 72 circuits	EDH-SQD-00428	485
NFNQCRBOND46	primary	SQD	NQ/NF U.S. condo riser neutral bonding strap kit (400/600 A)	EDH-SQD-00426	491
NFPPLLLC	primary	SQD	NF U.S. service entrance barrier kit (PowerPacT L main)	EDH-SQD-00384	489
NFPPPLLC	primary	SQD	NF U.S. service entrance barrier kit (PowerPacT P main)	EDH-SQD-00385	489
NFRPLMB63RPPL	equivalent	SQD	NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00424	489
NFRPLMB6PPL	primary	SQD	NF PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00424	489
NFRPLMB8PPMP	primary	SQD	NF 800 A PowerPacT M/P main breaker deadfront replacement kit	EDH-SQD-00425	490
NG1D	primary	SIE	NG1D connecting strap kit - VL NG (10.00in, single)	EDH-SIE-00179	1000
NHB150PK	primary	GEA	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	EDH-GEA-00280	702

Number	Type	Mfr	Description	Catalogue ID	Pg
NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	1140
NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	1137
NKA	primary	GEA	A-Series 200% neutral kit NKA (225 A)	EDH-GEA-00074	672
NKA42	primary	GEA	A-Series 200% neutral kit NKA42 (400 A)	EDH-GEA-00075	672
NKA4FT	primary	GEA	A-Series 200% neutral kit NKA4FT (400 A)	EDH-GEA-00080	673
NKR	primary	GEA	A-Series 200% neutral kit NKR (225 A)	EDH-GEA-00076	673
NKR4	primary	GEA	A-Series 200% neutral kit NKR4 (400 A)	EDH-GEA-00077	673
NKT	primary	GEA	A-Series 200% neutral kit NKT (225 A)	EDH-GEA-00078	673
NKT4	primary	GEA	A-Series 200% neutral kit NKT4 (400 A)	EDH-GEA-00079	673
NL300	primary	EAT	Type BR loadcenter add-on neutral/ground lug (NL300)	EDH-EAT-00457	28
NLAB-TQC3	primary	GEA	GE NLAB 3-pole TQC hardware kit	EDH-GEA-00418	704
NM34	primary	FPE	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	EDH-FPE-00035	1152
NM36	primary	FPE	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	EDH-FPE-00036	1152
NM38	primary	FPE	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	EDH-FPE-00037	1153
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	Vintage PRL1/PRL2 400/600 A neutral bar	EDH-EAT-00240	120
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00438	119
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00439	119
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00440	120
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00441	119
NQ100AN	primary	SQD	NQ Add-on neutral/ground lug	EDH-SQD-00370	510
NQ12RDE	primary	SQD	NQ 12 in. trim/rail and deadfront extension kit	EDH-SQD-00363	518
NQ18RDE	primary	SQD	NQ 18 in. trim/rail and deadfront extension kit	EDH-SQD-00364	518
NQ200AN	primary	SQD	NQ Add-on neutral terminal kit for 175-200 A QO(VH) breakers	EDH-SQD-00372	510
NQ24RDE	primary	SQD	NQ 24 in. trim/rail and deadfront extension kit	EDH-SQD-00365	518
NQ3RDE	primary	SQD	NQ 3 in. trim/rail and deadfront extension kit	EDH-SQD-00361	519
NQ6RDE	primary	SQD	NQ 6 in. trim/rail and deadfront extension kit	EDH-SQD-00362	519
NQALMA6	primary	SQD	NQ 600 A aluminum mechanical main lug kit	EDH-SQD-00353	499
NQALMN6	primary	SQD	NQ 600 A neutral lug kit (aluminum mechanical)	EDH-SQD-00340	509
NQALV1	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 100 A	EDH-SQD-00341	499
NQALV2	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 225 A	EDH-SQD-00344	500
NQALV4	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 400 A	EDH-SQD-00347	500
NQALV6	primary	SQD	NQ optional main lug kit, aluminum compression (crimp), 600 A	EDH-SQD-00350	501
NQCUM1	primary	SQD	NQ optional main lug kit, copper mechanical, 100 A	EDH-SQD-00342	501
NQCUM2	primary	SQD	NQ optional main lug kit, copper mechanical, 225 A	EDH-SQD-00345	502
NQCUM4	primary	SQD	NQ optional main lug kit, copper mechanical, 400 A	EDH-SQD-00348	502

Number	Type	Mfr	Description	Catalogue ID	Pg
NQCUM6	primary	SQD	NQ optional main lug kit, copper mechanical, 600 A	EDH-SQD-00351	503
NQCUMN6	equivalent	SQD	NQ 600 A neutral lug kit (aluminum mechanical)	EDH-SQD-00340	509
NQCUV1	primary	SQD	NQ optional main lug kit, copper compression (crimp), 100 A	EDH-SQD-00343	503
NQCUV2	primary	SQD	NQ optional main lug kit, copper compression (crimp), 225 A	EDH-SQD-00346	504
NQCUV4	primary	SQD	NQ optional main lug kit, copper compression (crimp), 400 A	EDH-SQD-00349	504
NQCUV6	primary	SQD	NQ optional main lug kit, copper compression (crimp), 600 A	EDH-SQD-00352	505
NQES18	primary	SQD	NQ equipment space kit (18 in.)	EDH-SQD-00367	517
NQFP15	primary	SQD	NQ filler plates (15 per package)	EDH-SQD-00366	521
NQFTL2H	primary	SQD	NQ feed-through lug kit, 225 A, high circuit count (54/72/84)	EDH-SQD-00324	507
NQFTL2L	primary	SQD	NQ feed-through lug kit, 225 A, low circuit count (30/42)	EDH-SQD-00323	508
NQFTL4H	primary	SQD	NQ feed-through lug kit, 400 A, high circuit count	EDH-SQD-00326	508
NQFTL4L	primary	SQD	NQ feed-through lug kit, 400 A, low circuit count	EDH-SQD-00325	509
NQHJQLLC	primary	SQD	NQ U.S. service entrance barrier kit (H/J/Q main)	EDH-SQD-00358	520
NQLALLC	primary	SQD	NQ U.S. service entrance barrier kit (LA/LH main)	EDH-SQD-00357	520
NQMB2HJ	primary	SQD	NQ main circuit breaker adapter kit, H/J-frame, 225 A	EDH-SQD-00315	493
NQMB2HJ14	equivalent	SQD	NQ main circuit breaker adapter kit, H/J-frame, 225 A	EDH-SQD-00315	493
NQMB2HJ14	primary	SQD	NQ14 main circuit breaker adapter kit, H/J-frame (14-inch-wide interiors)	EDH-SQD-00316	494
NQMB2KI	primary	SQD	NQ main circuit breaker adapter kit, KI-frame, 225 A (legacy)	EDH-SQD-00317	494
NQMB2Q	primary	SQD	NQ main circuit breaker adapter kit, Q-frame, 225 A	EDH-SQD-00313	494
NQMB2Q14	equivalent	SQD	NQ main circuit breaker adapter kit, Q-frame, 225 A	EDH-SQD-00313	494
NQMB2Q14	primary	SQD	NQ14 main circuit breaker adapter kit, Q-frame, 225 A (14-inch-wide interiors)	EDH-SQD-00314	495
NQMB4LA	primary	SQD	NQ main circuit breaker adapter kit, LA/LH, 400 A	EDH-SQD-00318	495
NQMB6PPL	primary	SQD	NQ main / sub-feed circuit breaker kit, PowerPacT L-frame, 400/600 A	EDH-SQD-00319	496
NQN1CU	primary	SQD	NQ copper 100% neutral kit, 100 A	EDH-SQD-00336	512
NQN2CU	primary	SQD	NQ copper 100% neutral kit, 225 A	EDH-SQD-00337	512
NQN6CR / NQNL6CR	alias	SQD	NQ condo riser 100% neutral assembly, 400/600 A	EDH-SQD-00339	512
NQN6CRUS	primary	SQD	NQ condo riser 100% neutral assembly, 400/600 A	EDH-SQD-00339	512
NQN6CU	primary	SQD	NQ copper 100% neutral kit, 400 A	EDH-SQD-00338	513
NQNL1	primary	SQD	NQ 200% neutral kit, 100 A	EDH-SQD-00332	513
NQNL2	primary	SQD	NQ 200% neutral kit, 225 A	EDH-SQD-00333	514
NQNL2ACCY	primary	SQD	NQ 200% neutral kit, 225 A, for panels with SFL/FTL/SFB	EDH-SQD-00334	514
NQNL4	primary	SQD	NQ 200% neutral kit, 400 A	EDH-SQD-00335	515
NQNL6CRUS	equivalent	SQD	NQ condo riser 100% neutral assembly, 400/600 A	EDH-SQD-00339	512
NQODBFMB20	primary	SQD	NQ/NQOD back-fed main circuit breaker barrier kit	EDH-SQD-00360	520
NQPPLLLC	primary	SQD	NQ U.S. service entrance barrier kit (PowerPacT L main)	EDH-SQD-00359	521
NQRPLMB63RPPL	equivalent	SQD	NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00374	521
NQRPLMB6PPL	primary	SQD	NQ PowerPacT L main/sub-feed breaker deadfront replacement kit, 400/600 A	EDH-SQD-00374	521
NQSFB2HJ	primary	SQD	NQ sub-feed circuit breaker adapter kit, H/J-frame, 225 A mains	EDH-SQD-00328	496
NQSFB2Q	primary	SQD	NQ sub-feed circuit breaker adapter kit, Q-frame, 225 A mains	EDH-SQD-00327	497
NQSFB4HJ	primary	SQD	NQ sub-feed circuit breaker adapter kit, H/J-frame, 400 A mains (single or dual)	EDH-SQD-00330	497
NQSFB4Q	primary	SQD	NQ sub-feed circuit breaker adapter kit, Q-frame, 400 A mains (single or dual)	EDH-SQD-00329	498
NQSFB6PPL	primary	SQD	NQ sub-feed circuit breaker kit, PowerPacT L, 600 A mains	EDH-SQD-00331	498
NQSFL1	primary	SQD	NQ sub-feed lug kit, 100 A	EDH-SQD-00320	505
NQSFL2	primary	SQD	NQ sub-feed lug kit, 225 A	EDH-SQD-00321	506
NQSFL4	primary	SQD	NQ sub-feed lug kit, 400 A	EDH-SQD-00322	506
NQSFL4L	equivalent	SQD	NQ sub-feed lug kit, 400 A	EDH-SQD-00322	506

Number	Type	Mfr	Description	Catalogue ID	Pg
NTS3K	primary	EAT	Series C N-frame terminal shield	EDH-EAT-00644	411
P1CONACPHAL	primary	SIE	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	EDH-SIE-00097	1043
P1CONACPHCU	primary	SIE	RP1 A/C-phase replacement copper branch connectors	EDH-SIE-00088	1043
P1CONBPHAL	primary	SIE	RP1 B-phase replacement aluminum branch connectors	EDH-SIE-00089	1044
P1CONBPHCU	primary	SIE	RP1 B-phase replacement copper branch connectors	EDH-SIE-00090	1044
P1DFS250AFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00092	1066
P1DFS250ANFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00093	1067
P1DFS400A	primary	SIE	P1 400A deadfront support (new for 3VA)	EDH-SIE-00094	1067
P1SCRWS	primary	SIE	P1 branch breaker mounting screws	EDH-SIE-00091	1083
P2BK1	primary	SIE	P2 250A max horizontal main breaker bonding strap kit	EDH-SIE-00120	946
P2BK2	primary	SIE	P2 125A max main lug bonding strap assembly	EDH-SIE-00121	946
P2BK3	primary	SIE	P2 250-600A MLO and all vertical MB bonding kit	EDH-SIE-00122	947
P2QRFP01	primary	SIE	P2 QR deadfront filler	EDH-SIE-00082	945
P3BK1	primary	SIE	P3 bonding kit 800A max MLO+MB	EDH-SIE-00123	956
P41X25	primary	EAT	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	EDH-EAT-00296	337
P53RCONVKIT	primary	SIE	P5 power panel Type 1 to Type 3R/12 enclosure interior conversion kit	EDH-SIE-00382	1019
PDC12DG4	primary	SQD	PowerPact D-frame power distribution connector	EDH-SQD-00293	628
PDC12DG4L3	primary	SQD	PowerPact L-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00194	648
PDC12LA4	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00290	619
PDC3FA2	primary	SQD	Square D FA power distribution connector (multi-wire load lug)	EDH-SQD-00288	614
PDC3HD2	primary	SQD	PowerPact H-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00190	630
PDC3JD20	primary	SQD	PowerPact J-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00192	636
PDC4LA250	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00291	620
PDC5DG20	primary	SQD	PowerPact D-frame power distribution connector	EDH-SQD-00292	629
PDC5DG20L3	primary	SQD	PowerPact L-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00193	648
PDC6FA6	primary	SQD	Square D FA power distribution connector (multi-wire load lug)	EDH-SQD-00287	615
PDC6HD6	primary	SQD	PowerPact H-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00189	631
PDC6JD4	primary	SQD	PowerPact J-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00191	636
PDC6LA20	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00289	620
PJC-7201	primary	SQD	I-Line plug-on connector joint compound, 2 oz	EDH-SQD-00451	461
PJC7201	alias	SQD	I-Line plug-on connector joint compound, 2 oz	EDH-SQD-00451	461
PK103T	primary	FPE	FPE QMQB switch strap/link kit PK103T	EDH-FPE-00033	1148
PK12GTA	primary	SQD	Aluminum equipment ground bar kit (12 terminations, inferred from number)	EDH-SQD-00437	515
PK18GTA	primary	SQD	Aluminum equipment ground bar kit (18 terminations, inferred from number)	EDH-SQD-00438	516
PK1TC	primary	SQD	Square D trim clamp (NQOB), obsolete	EDH-SQD-00518	528
PK23GTA	primary	SQD	Aluminum equipment ground bar kit (23 terminations, inferred from number)	EDH-SQD-00439	516
PK-23GTA	alias	SQD	Aluminum equipment ground bar kit (23 terminations, inferred from number)	EDH-SQD-00439	516
PK23GTAL	primary	SQD	PK23GTA ground bar with #1-4/0 Al/Cu lug	EDH-SQD-00435	516
PK27GTA	primary	SQD	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug v	EDH-SQD-00433	517
PK-27GTA	alias	SQD	Aluminum equipment ground bar kit, 27 terminations #14-#4 AWG (also #6-2/0 lug v	EDH-SQD-00433	517
PK27GTACU	primary	SQD	Copper equipment ground bar kit, 27 terminations #14-#4 Cu	EDH-SQD-00434	517

Number	Type	Mfr	Description	Catalogue ID	Pg
PK32DGTA	primary	SQD	Equipment ground bar kit PK32DGTA (I-Line)	EDH-SQD-00156	455
PK-32DGTA	alias	SQD	Equipment ground bar kit PK32DGTA (I-Line)	EDH-SQD-00156	455
PK-3SP	primary	SQD	Square D touch-up paint, blue-gray (aerosol)	EDH-SQD-00545	530
PK-49SP	primary	SQD	Square D touch-up paint, ANSI 49 gray (aerosol)	EDH-SQD-00546	531
PK-4FL	primary	SQD	Square D flush lock for MONO-FLAT trims	EDH-SQD-00548	531
PK-9GTA	primary	SQD	Square D equipment ground bar kit, 1-12 circuits (NQO/NQOB/NA1B/NH1B/NTFB/NTHB)	EDH-SQD-00547	528
PKDFSCREW	primary	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00161	462
PKGTAB	primary	SQD	Equipment ground bar insulator kit	EDH-SQD-00436	519
PLN2	primary	EAT	Series C J-frame plug nut (.250-20)	EDH-EAT-00615	372
PLN2M	primary	EAT	Series C J-frame plug nut (M6)	EDH-EAT-00616	372
PPLLC	primary	SQD	I-Line PowerPacT L vertical main line lug cover (US SE); requires LTSM3P	EDH-SQD-00461	459
PRLSEBBAB	primary	EAT	Service entrance barrier for BAB main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00806	213
PRLSEBFD	primary	EAT	Service entrance barrier kit for FD main breaker	EDH-EAT-00215	189
PRLSEBGHB	primary	EAT	Service entrance barrier kit for GHB main breaker	EDH-EAT-00216	189
PRLSEBJD	primary	EAT	Service entrance barrier kit for JD main breaker	EDH-EAT-00214	190
PRLSEBLGKD	primary	EAT	Service entrance barrier kit for LG and KD main breaker	EDH-EAT-00213	191
PRLSEBPD2	primary	EAT	Service entrance barrier kit for PDG2 main breaker	EDH-EAT-00218	214
PRLSEBPD3	primary	EAT	Service entrance barrier kit for PDF3/PDG3 main breaker	EDH-EAT-00217	215
PRLSEBPD4	primary	EAT	Service entrance barrier for PD4 main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00805	215
PRLSEBPD5	primary	EAT	Service entrance barrier for PD5 main breaker (PRL1X/2X/3X, PRL4X)	EDH-EAT-00804	216
PRXP4PD2FILL1	primary	EAT	Pow-R-Xpress PRL4X PD2 1-pole filler	EDH-EAT-00297	340
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00266	262
Q1100AN	primary	SQD	Add-on neutral/ground lug, 80-100 A	EDH-SQD-00423	483
Q1150AN	primary	SQD	NQ Add-on neutral/ground lug	EDH-SQD-00371	510
QF3	equivalent	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	1073
QF3	primary	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	1095
QFP2T	primary	ZIN	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	EDH-ZIN-00022	1160
QM-1BL	primary	SQD	Square D QMB (QM interior) blank, 1-1/2 in	EDH-SQD-00557	584
QM-1SN	primary	SQD	Square D QMB solid neutral assembly 200 A	EDH-SQD-00561	582
QM-2SN	primary	SQD	Square D QMB solid neutral assembly 200 A	EDH-SQD-00562	583
QM-3BL	primary	SQD	Square D QMB (QM interior) blank, 3 in	EDH-SQD-00558	584
QM-4SN	primary	SQD	Square D QMB solid neutral assembly 400 A	EDH-SQD-00563	583
QM-6BL	primary	SQD	Square D QMB (QM interior) blank, 6 in	EDH-SQD-00559	584
QM-6SN	primary	SQD	Square D QMB solid neutral assembly 600 A	EDH-SQD-00564	583
QM-9BL	primary	SQD	Square D QMB (QM interior) blank, 9 in	EDH-SQD-00560	584
QMB100R	primary	SQD	QMB Class R fuse kit QMB100R	EDH-SQD-00055	575
QMB-103-AL	primary	SQD	Square D QMB adaptor kit, convert one 100 A switch to 30 A (250 V units only)	EDH-SQD-00566	585
QMB-106-AL	primary	SQD	Square D QMB adaptor kit, convert one 100 A switch to 60 A (250 V units only)	EDH-SQD-00567	586
QMB12CLA	primary	SQD	QMB main lug compression adaptor kit QMB12CLA (1200 A)	EDH-SQD-00081	533
QMB15BLW	primary	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00092	540
QMB1BLW	primary	SQD	QMB blank filler plate QMB1BLW (1.5 in.)	EDH-SQD-00089	540
QMB1IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB1IMA	EDH-SQD-00093	545
QMB200EK	primary	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	576
QMB200EK-1	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	576

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB200EK-2	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	576
QMB-206-EX	primary	SQD	Square D QMB 2-pole extension assembly, 6 in unit (600 V, 38 in wide QMB)	EDH-SQD-00568	581
QMB-210-EX	primary	SQD	Square D QMB 2-pole extension assembly, 7-1/2 in unit (600 V, 38 in wide QMB)	EDH-SQD-00569	581
QMB210T	primary	SQD	Legacy QMB switch QMB210T (obsolete)	EDH-SQD-00101	587
QMB-220-EX	primary	SQD	Square D QMB 2-pole extension assembly, 9 in unit (600 V, 38 in wide QMB)	EDH-SQD-00570	581
QMB221HW	primary	SQD	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	EDH-SQD-00002	549
QMB221TW	primary	SQD	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	EDH-SQD-00001	550
QMB222HW	primary	SQD	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	EDH-SQD-00004	550
QMB222TW	primary	SQD	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	EDH-SQD-00003	551
QMB223HW	primary	SQD	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	EDH-SQD-00006	551
QMB223TW	primary	SQD	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	EDH-SQD-00005	552
QMB2240	primary	SQD	Legacy QMB switch QMB2240 (obsolete)	EDH-SQD-00104	587
QMB224W	primary	SQD	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	EDH-SQD-00007	552
QMB225W	primary	SQD	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	EDH-SQD-00008	553
QMB225WT3	primary	SQD	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	EDH-SQD-00009	553
QMB261HW	primary	SQD	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	EDH-SQD-00023	554
QMB261TW	primary	SQD	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	EDH-SQD-00022	554
QMB262HW	primary	SQD	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	EDH-SQD-00025	555
QMB262TW	primary	SQD	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	EDH-SQD-00024	555
QMB263HW	primary	SQD	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	EDH-SQD-00027	556
QMB263TW	primary	SQD	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	EDH-SQD-00026	556
QMB264W	primary	SQD	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	EDH-SQD-00028	557
QMB2IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB2IMA	EDH-SQD-00094	545
QMB300EK	primary	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	576
QMB300EK-1	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	576
QMB300EK-2	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	576
QMB303T	primary	SQD	Legacy QMB switch QMB303T (obsolete)	EDH-SQD-00135	587
QMB306EX	primary	SQD	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	EDH-SQD-00106	543
QMB-306-EX	alias	SQD	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	EDH-SQD-00106	543
QMB306LEX	primary	SQD	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	EDH-SQD-00107	586
QMB306T	primary	SQD	Legacy QMB switch QMB306T (obsolete)	EDH-SQD-00136	587
QMB310EX	primary	SQD	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	EDH-SQD-00108	544
QMB-310-EX	alias	SQD	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	EDH-SQD-00108	544
QMB310LEX	primary	SQD	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	EDH-SQD-00109	586
QMB310T	primary	SQD	Legacy QMB switch QMB310T (obsolete)	EDH-SQD-00100	588
QMB320EX	primary	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00110	544
QMB-320-EX	alias	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00110	544
QMB321HW	primary	SQD	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	EDH-SQD-00011	557
QMB321TW	primary	SQD	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	EDH-SQD-00010	558
QMB322HW	primary	SQD	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	EDH-SQD-00013	558
QMB322TD	alias	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00012	558
QMB322TW	primary	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00012	558

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB323HW	primary	SQD	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	EDH-SQD-00015	559
QMB323TD	alias	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00014	559
QMB323TD	primary	SQD	QMB replacement switch QMB323TD for legacy interiors	EDH-SQD-00117	588
QMB323TW	primary	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00014	559
QMB3240	primary	SQD	Legacy QMB switch QMB3240 (obsolete)	EDH-SQD-00103	588
QMB324W	primary	SQD	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	EDH-SQD-00016	560
QMB325W	primary	SQD	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	EDH-SQD-00017	561
QMB325WT3	primary	SQD	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	EDH-SQD-00018	561
QMB3260	primary	SQD	Legacy QMB switch QMB3260 (obsolete)	EDH-SQD-00105	588
QMB326W	primary	SQD	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	EDH-SQD-00019	562
QMB326WT3	primary	SQD	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	EDH-SQD-00020	562
QMB327WT3	primary	SQD	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	EDH-SQD-00021	563
QMB3300LA	primary	SQD	QMB circuit breaker unit QMB3300LA	EDH-SQD-00112	582
QMB3400LA	primary	SQD	QMB circuit breaker unit QMB3400LA	EDH-SQD-00111	582
QMB3606T	primary	SQD	Legacy QMB switch QMB3606T (obsolete)	EDH-SQD-00099	588
QMB361HW	primary	SQD	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	EDH-SQD-00030	563
QMB361TW	primary	SQD	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	EDH-SQD-00029	564
QMB3620	primary	SQD	Legacy QMB switch QMB3620 (obsolete)	EDH-SQD-00102	589
QMB362HW	primary	SQD	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	EDH-SQD-00032	564
QMB362T	alias	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00031	565
QMB362T	primary	SQD	QMB replacement switch QMB362T for legacy interiors	EDH-SQD-00115	589
QMB362T21W	primary	SQD	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	EDH-SQD-00033	565
QMB362TW	primary	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00031	565
QMB363HW	primary	SQD	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	EDH-SQD-00035	566
QMB363T31W	primary	SQD	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	EDH-SQD-00036	566
QMB363T32W	primary	SQD	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	EDH-SQD-00037	567
QMB363TW	primary	SQD	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	EDH-SQD-00034	567
QMB364	primary	SQD	QMB replacement switch QMB364 for legacy interiors	EDH-SQD-00116	589
QMB3640	primary	SQD	Legacy QMB switch QMB3640 (obsolete)	EDH-SQD-00134	589
QMB364W	primary	SQD	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	EDH-SQD-00038	568
QMB365W	primary	SQD	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	EDH-SQD-00039	568
QMB365WT6	primary	SQD	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	EDH-SQD-00040	569
QMB366W	primary	SQD	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	EDH-SQD-00041	569
QMB367W	primary	SQD	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	EDH-SQD-00042	570
QMB368W	primary	SQD	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	EDH-SQD-00043	609
QMB36R	primary	SQD	QMB Class R fuse kit QMB36R	EDH-SQD-00053	576
QMB3BLW	primary	SQD	QMB blank filler plate QMB3BLW (3 in.)	EDH-SQD-00090	540
QMB3IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB3IMA	EDH-SQD-00095	546
QMB4060R	primary	SQD	QMB Class R fuse kit QMB4060R	EDH-SQD-00057	577
QMB4IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB4IMA	EDH-SQD-00096	546
QMB600T6	primary	SQD	QMB Class T fuse adapter kit QMB600T6	EDH-SQD-00058	544
QMB60R	primary	SQD	QMB Class R fuse kit QMB60R	EDH-SQD-00054	577
QMB610EK	primary	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	577
QMB610EK-1	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	577
QMB610EK-2	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	577
QMB-63-AL	primary	SQD	Square D QMB adaptor kit, convert one 60 A switch to 30 A (250 V units only)	EDH-SQD-00565	586
QMB6BLW	primary	SQD	QMB blank filler plate QMB6BLW (6 in.)	EDH-SQD-00091	541
QMB800T6	primary	SQD	QMB Class T fuse adapter kit QMB800T6	EDH-SQD-00059	545
QMB8CLA	primary	SQD	QMB main lug compression adaptor kit QMB8CLA (800 A)	EDH-SQD-00080	533

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB8IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB8IMA	EDH-SQD-00097	546
QMBHW	primary	SQD	QMB circuit breaker adapter unit for H-frame breaker	EDH-SQD-00511	539
QMBJW	primary	SQD	QMB circuit breaker adapter unit for J-frame breaker	EDH-SQD-00512	539
QMJ361T	primary	SQD	QMJ fusible switch unit QMJ361T (30-30 A)	EDH-SQD-00044	570
QMJ362T	primary	SQD	QMJ fusible switch unit QMJ362T (60-60 A)	EDH-SQD-00045	571
QMJ363H	primary	SQD	QMJ fusible switch unit QMJ363H (100-blank A)	EDH-SQD-00047	571
QMJ363T	primary	SQD	QMJ fusible switch unit QMJ363T (100-100 A)	EDH-SQD-00046	572
QMJ364H	primary	SQD	QMJ fusible switch unit QMJ364H (200-blank A)	EDH-SQD-00049	572
QMJ364T	primary	SQD	QMJ fusible switch unit QMJ364T (200-200 A)	EDH-SQD-00048	573
QMJ365	primary	SQD	QMJ fusible switch unit QMJ365 (400 A)	EDH-SQD-00050	573
QMJ366	primary	SQD	QMJ fusible switch unit QMJ366 (600 A)	EDH-SQD-00051	574
QMRFP1	primary	GEA	QMR panelboard filler plate 1X	EDH-GEA-00272	700
QMRFP2	primary	GEA	QMR panelboard filler plate 2X	EDH-GEA-00273	700
QMRFP3	primary	GEA	GE QMR full-width filler, 3X, 4.125 in x 24 in	EDH-GEA-00438	701
QMRFP5	primary	GEA	QMR panelboard filler plate 5X	EDH-GEA-00274	701
QO-100ASF	primary	SQD	Square D 100 A sub-feed lug kit for main-lug NQO panelboards	EDH-SQD-00542	526
QO-1CP	primary	SQD	Square D closure plate for twistout in NQO, NQOB and NA1B interior trims	EDH-SQD-00544	528
QO-1HT	primary	SQD	Square D handle tie for QO / QOB (two 1-pole to 2-pole individual trip)	EDH-SQD-00534	529
QO-1PA	primary	SQD	Square D handle padlock attachment, 1-pole QO/QOB/Q1/Q1B/QFSB/HFSB	EDH-SQD-00536	530
QO1PJ15	primary	SQD	Jaw accessory kit for QOB breaker on NQ (fingersafe IP2X)	EDH-SQD-00356	524
QO-1PL	primary	SQD	Square D handle padlock attachment, 2/3-pole QO/QOB/Q1/Q1B	EDH-SQD-00537	530
QO-225ASF	primary	SQD	Square D 225 A sub-feed lug kit for main-lug NQO panelboards	EDH-SQD-00543	526
QO70AN	primary	SQD	NQ Add-on neutral lug for 70 A QO(B)	EDH-SQD-00373	510
QOB2125SL	primary	SQD	2-pole QOB branch mounted sub-feed lug kit	EDH-SQD-00368	506
QOB3125SL	primary	SQD	3-pole QOB branch mounted sub-feed lug kit	EDH-SQD-00369	507
QSF100DS	primary	ZIN	Zinsco QSF switch kit 100 A, double slot, mounting hardware	EDH-ZIN-00001	1157
QSF100SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss, 100 A	EDH-ZIN-00014	1157
QSF100SS	primary	ZIN	Sylvania QSF 100 A twin kit	EDH-ZIN-00013	1157
QSF200DS	primary	ZIN	Zinsco QSF 200 A double slot mounting hardware	EDH-ZIN-00002	1157
QSF200SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss, 200 A	EDH-ZIN-00015	1158
QSF400DS	primary	ZIN	Zinsco/Sylvania QSF 400 A switch kit, double slot	EDH-ZIN-00003	1158
QSF400SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 40	EDH-ZIN-00016	1158
QSF600DS	primary	ZIN	Zinsco QSF 600 A double slot mounting hardware	EDH-ZIN-00004	1158
QSFB	primary	SQD	Square D QSFB switch/fuse unit from NTFB (basic NQOB) panel	EDH-SQD-00519	531
QW1BL	primary	SQD	Legacy QW interior blank filler QW1BL	EDH-SQD-00113	585
QW3BL	primary	SQD	Legacy QW interior blank filler QW3BL	EDH-SQD-00114	585
RAABR10BXXX	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR10BXXX	EDH-EAT-00764	34
RAABR10BXXXA	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR10BXXXA	EDH-EAT-00765	34
RAABR12L125	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125	EDH-EAT-00762	35
RAABR12L125A	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125A	EDH-EAT-00763	35
RABR12B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR12B3XXX	EDH-EAT-00748	36
RABR12H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR12H3XXX	EDH-EAT-00749	36
RABR12L3125	primary	EAT	Cutler-Hammer BR retrofit kit RABR12L3125	EDH-EAT-00756	37
RABR20BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR20BXXX	EDH-EAT-00737	37
RABR20HXXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR20HXXX	EDH-EAT-00738	38
RABR20L125	primary	EAT	Cutler-Hammer BR retrofit kit RABR20L125	EDH-EAT-00744	38

Number	Type	Mfr	Description	Catalogue ID	Pg
RACH18B3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RACH18B3XXX	EDH-EAT-00722	39
RACH22BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RACH22BXXX	EDH-EAT-00706	39
RACH24L125	primary	EAT	Cutler-Hammer CH retrofit kit RACH24L125	EDH-EAT-00712	40
RACH24L3125	primary	EAT	Cutler-Hammer CH retrofit kit RACH24L3125	EDH-EAT-00725	40
RACH30L3125	primary	EAT	Cutler-Hammer CH retrofit kit RACH30L3125	EDH-EAT-00726	41
RACH30L3225	primary	EAT	Cutler-Hammer CH retrofit kit RACH30L3225	EDH-EAT-00727	41
RBBR20BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR20BXXX	EDH-EAT-00741	42
RBBR24L3150	primary	EAT	Cutler-Hammer BR retrofit kit RBBR24L3150	EDH-EAT-00758	42
RBBR30BCXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30BCXXX	EDH-EAT-00739	43
RBBR30BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30BXXX	EDH-EAT-00750	43
RBBR30H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30H3XXX	EDH-EAT-00751	44
RBBR30HCXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30HCXXX	EDH-EAT-00740	44
RBBR30L200	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30L200	EDH-EAT-00745	45
RBBR30L3100	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30L3100	EDH-EAT-00757	45
RBCH24BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24BXXX	EDH-EAT-00708	46
RBCH24D225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24D225	EDH-EAT-00718	46
RBCH24D3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24D3225	EDH-EAT-00733	47
RBCH30BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30BXXX	EDH-EAT-00707	47
RBCH30D3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30D3225	EDH-EAT-00734	48
RBCH30L3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30L3225	EDH-EAT-00728	48
RBCH32D225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH32D225	EDH-EAT-00719	48
RBCH32L225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH32L225	EDH-EAT-00714	49
RBCH42L125	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L125	EDH-EAT-00713	50
RBCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L225	EDH-EAT-00715	50
RBCH42L3125	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L3125	EDH-EAT-00729	51
RBCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L3225	EDH-EAT-00730	51
RCBR30BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RCBR30BXXX	EDH-EAT-00742	52
RCBR30L3200	primary	EAT	Cutler-Hammer BR retrofit kit RCBR30L3200	EDH-EAT-00759	52
RCBR40L200	primary	EAT	Cutler-Hammer BR retrofit kit RCBR40L200	EDH-EAT-00746	53
RCCH30D3225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH30D3225	EDH-EAT-00735	53
RCCH32BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RCCH32BXXX	EDH-EAT-00709	54
RCCH32D225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH32D225	EDH-EAT-00720	54
RCCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH42L225	EDH-EAT-00716	55
RCCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH42L3225	EDH-EAT-00731	55
RDBR30B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR30B3XXX	EDH-EAT-00752	56
RDBR30H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR30H3XXX	EDH-EAT-00753	56
RDBR40BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR40BXXX	EDH-EAT-00743	57
RDBR42L225	primary	EAT	Cutler-Hammer BR retrofit kit RDBR42L225	EDH-EAT-00747	57
RDBR42L3225	primary	EAT	Cutler-Hammer BR retrofit kit RDBR42L3225	EDH-EAT-00760	58
RDCH42B3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42B3XXX	EDH-EAT-00723	58
RDCH42BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42BXXX	EDH-EAT-00710	59
RDCH42D225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42D225	EDH-EAT-00721	59
RDCH42D3225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42D3225	EDH-EAT-00736	60
RDCH42H3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42H3XXX	EDH-EAT-00724	60
RDCH42HXXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42HXXX	EDH-EAT-00711	61
RDCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42L225	EDH-EAT-00717	61
RDCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42L3225	EDH-EAT-00732	62
REBR42B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit REBR42B3XXX	EDH-EAT-00754	62
REBR42H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit REBR42H3XXX	EDH-EAT-00755	63
REBR42L3225	primary	EAT	Cutler-Hammer BR retrofit kit REBR42L3225	EDH-EAT-00761	63
RP211002	primary	FPE	FPE handle extension for NM 800/1000 A breakers	EDH-FPE-00039	1153
RP212001	primary	FPE	FPE handle kit for NP frame	EDH-FPE-00040	1153

Number	Type	Mfr	Description	Catalogue ID	Pg
RS2641	primary	SIE	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	EDH-SIE-00301	1115
RS2642	primary	SIE	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	EDH-SIE-00302	1115
RS2643	primary	SIE	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	EDH-SIE-00299	1116
RS2644	primary	SIE	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	EDH-SIE-00300	1116
RS4755	primary	SIE	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	EDH-SIE-00304	1118
RS4756	primary	SIE	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	EDH-SIE-00303	1118
RS5773	primary	SIE	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	EDH-SIE-00306	1122
RS5774	primary	SIE	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	EDH-SIE-00305	1122
RS5783	primary	SIE	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	EDH-SIE-00308	1123
RS5784	primary	SIE	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	EDH-SIE-00307	1123
RS5785	primary	SIE	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	EDH-SIE-00312	1130
RS5786	primary	SIE	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	EDH-SIE-00311	1131
RS5787	primary	SIE	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	EDH-SIE-00310	1125
RS5788	primary	SIE	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	EDH-SIE-00309	1125
S29348	alias	SQD	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	EDH-SQD-00181	653
S32477	primary	SQD	PowerPact L-frame mixed rear connection kit	EDH-SQD-00239	653
S32478	primary	SQD	PowerPact L-frame mixed rear connection kit	EDH-SQD-00240	653
S32508	alias	SQD	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	EDH-SQD-00268	628
S32510	alias	SQD	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	EDH-SQD-00269	628
S32562	primary	SQD	PowerPact L-frame short terminal cover 3p	EDH-SQD-00243	651
S32563	primary	SQD	PowerPact L-frame short terminal cover 4p	EDH-SQD-00244	652
S33930	primary	SQD	I-Line plug-on sub-feed lug kit S33930	EDH-SQD-00152	591
S33931	primary	SQD	I-Line sub-feed lug kit, 1200 A	EDH-SQD-00510	437
S36967	primary	SQD	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	EDH-SQD-00188	652
S37423	primary	SQD	PowerPact H-frame control wire terminal for mechanical lugs	EDH-SQD-00177	633
S37424	primary	SQD	PowerPact J-frame control wire terminal for mechanical lugs	EDH-SQD-00178	639
S37425	primary	SQD	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00182	634
S37426	primary	SQD	PowerPact H-frame terminal nut insert (M6) for bus bar connection	EDH-SQD-00184	634
S37427	primary	SQD	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00185	639
S37428	primary	SQD	PowerPact J-frame terminal nut insert (M8) for bus bar connection	EDH-SQD-00187	639
S37429	primary	SQD	PowerPact H-frame control wire terminal for terminal nut (busbar connection)	EDH-SQD-00179	634
S37430	primary	SQD	PowerPact J-frame control wire terminal for terminal nut (busbar connection)	EDH-SQD-00180	639
S37432	primary	SQD	PowerPact H-frame mixed rear connection kit	EDH-SQD-00231	632
S37433	primary	SQD	PowerPact H-frame short rear connections (set of 2)	EDH-SQD-00232	634
S37434	primary	SQD	PowerPact H-frame long rear connections (set of 2)	EDH-SQD-00233	635
S37436	primary	SQD	PowerPact H-frame short terminal cover 3p	EDH-SQD-00234	632
S37437	primary	SQD	PowerPact J-frame mixed rear connection kit	EDH-SQD-00235	640
S37438	primary	SQD	PowerPact J-frame short rear connections (set of 2)	EDH-SQD-00236	640

Number	Type	Mfr	Description	Catalogue ID	Pg
S37439	primary	SQD	PowerPact J-frame long rear connections (set of 2)	EDH-SQD-00237	640
S37440	primary	SQD	PowerPact J-frame short terminal cover 3p	EDH-SQD-00238	637
S37444	primary	SQD	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00183	578
S37445	primary	SQD	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00186	578
S37446	primary	SQD	PowerPact H-frame 60 A short lug shield	EDH-SQD-00245	632
S37447	primary	SQD	PowerPact H-frame 150 A short lug shield	EDH-SQD-00246	633
S37448	primary	SQD	PowerPact J-frame short lug shield	EDH-SQD-00247	638
S37449	primary	SQD	PowerPact H-frame long lug shield	EDH-SQD-00248	633
S37450	primary	SQD	PowerPact J-frame long lug shield	EDH-SQD-00249	638
S3VA41T	primary	SIE	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00125	965
S3VA41TD	primary	SIE	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00151	965
S3VA41TDHD	primary	SIE	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	EDH-SIE-00152	1000
S3VA52PR	primary	SIE	3VA52/61/62 breaker provision hardware kit (twin mount)	EDH-SIE-00205	991
S3VA52T	primary	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	966
S3VA52TD	primary	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	967
S3VA53PR	primary	SIE	3VA53/63/54/64 single-mount breaker provision hardware kit	EDH-SIE-00206	1107
S3VA53T	primary	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	968
S3VA53T2D	primary	SIE	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	EDH-SIE-00182	1001
S3VA53TD	primary	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	968
S3VA54T	primary	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	969
S3VA54T2D	primary	SIE	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	EDH-SIE-00185	1001
S3VA54TD	primary	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	970
S3VA55TD	primary	SIE	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	EDH-SIE-00186	1003
S3VA57TD	primary	SIE	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	EDH-SIE-00187	1003
S3VA63T	primary	SIE	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00136	971
S3VA63TD	primary	SIE	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00162	1004
S3VA64T	primary	SIE	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00143	971
S3VA64TD	primary	SIE	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00169	1005
S432475	primary	SQD	PowerPact L-frame short rear connections (set of 2)	EDH-SQD-00241	654
S432476	primary	SQD	PowerPact L-frame long rear connections (set of 2)	EDH-SQD-00242	654
S48899	primary	SQD	Square D maintenance compound S48899	EDH-SQD-00576	610
SA1E025	primary	SIE	Siemens SA1E025 lug, ED 2/3-pole 15-25A	EDH-SIE-00257	1114
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00295	337
SBL	primary	SIE	SBL connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00124	971
SBLBD	primary	SIE	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00150	972
SCE	primary	SIE	SCE connecting strap kit - CED (3.75in, twin)	EDH-SIE-00128	973
SCED	primary	SIE	SCED connecting strap kit - CED (3.75in, twin)	EDH-SIE-00180	1005
SCF	primary	SIE	SCF connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00134	974
SCFD	primary	SIE	SCFD connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00160	1006
SCJ	primary	SIE	SCJ connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00139	974
SCJD	primary	SIE	SCJD connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00167	1006
SCL	primary	SIE	SCL connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00146	975
SCLD	primary	SIE	SCLD connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00172	1007
SCPFP1	primary	GEA	SCP+ panelboard filler plate 1X	EDH-GEA-00276	715
SCPFP2	primary	GEA	SCP+ panelboard filler plate 2X	EDH-GEA-00277	715
SCPFP3	primary	GEA	SCP+ panelboard filler plate 3X	EDH-GEA-00278	716

Number	Type	Mfr	Description	Catalogue ID	Pg
SCPFP5	primary	GEA	SCP+ panelboard filler plate 5X	EDH-GEA-00279	716
SDG	primary	SIE	SB1/SB2/SB3 & P4/P5 branch mounting kit for Sentron VL DG frame breakers (shallo	EDH-SIE-00369	1104
SDGD	primary	SIE	SDGD connecting strap kit - VL DG (5.00in, twin)	EDH-SIE-00130	976
SE3LCK	primary	GEA	GE SE3LCK lug cover kit, SE150 line end	EDH-GEA-00347	899
SE3LCKL	primary	GEA	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	EDH-GEA-00348	899
SE6	primary	SIE	SE6 connecting strap kit - ED (3.75in, twin)	EDH-SIE-00127	977
SE6D	primary	SIE	SE6D connecting strap kit - ED (3.75in, twin)	EDH-SIE-00154	1009
SEB	primary	SIE	Switchboard/power panel branch kit for EB breakers, shallow (P4)	EDH-SIE-00367	1104
SEBD	primary	SIE	Switchboard/power panel branch kit for EB breakers, deep (P5 / switchboard)	EDH-SIE-00368	1104
SEBKP1P2P3V1	primary	SIE	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	EDH-SIE-00231	1068
SEBKP2V1	primary	SIE	SEB kit, P2 BL/BQD horizontal main	EDH-SIE-00232	935
SEBKP2V2	primary	SIE	SEB kit, P2 xGB horizontal main	EDH-SIE-00233	935
SEBKP2V3	primary	SIE	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	EDH-SIE-00234	936
SEBKP2V4	primary	SIE	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	EDH-SIE-00235	936
SEBKP2V5	primary	SIE	SEB kit (P2, P2 w/SEM3) ED horizontal main	EDH-SIE-00236	937
SEBKP2V6	primary	SIE	SEB kit (P2, P2 w/SEM3) ED vertical main	EDH-SIE-00237	937
SEBKP2V7	primary	SIE	SEB kit, P2/P3 3VA52/61/62 horizontal main	EDH-SIE-00238	938
SEBKP3V1	primary	SIE	Service entrance barrier kit CFD, FD (P3 only)	EDH-SIE-00239	953
SEBKP3V3	primary	SIE	FD, QJ, QR horizontal main service entrance barrier (P2, P2 with SEM3, P3)	EDH-SIE-00427	938
SEBKRP1V1	primary	SIE	SEB kit for RP1 with FD, QJ or QR horizontal main	EDH-SIE-00224	1068
SEBKRP1V2	primary	SIE	SEB kit for RP1 with ED horizontal main	EDH-SIE-00225	1069
SEBKRP1V3	primary	SIE	SEB kit for RP1 with back-fed BL/BQD main in unit space	EDH-SIE-00226	1069
SEBKRP1V4	primary	SIE	SEB kit for RP1 with back-fed xGB main in unit space	EDH-SIE-00227	1070
SEBKRP1V5	primary	SIE	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	EDH-SIE-00228	1070
SEBKRP1V6	primary	SIE	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	EDH-SIE-00229	1071
SEBKRP1V7	primary	SIE	SEB kit for RP1 with 3VA52/61/62 horizontal main	EDH-SIE-00230	1071
SEBP4V1	primary	SIE	Service entrance barrier for (S)JD, (S)LD, MG mains	EDH-SIE-00217	988
SEBP4V2	primary	SIE	Service entrance barrier for CJD, CLD	EDH-SIE-00218	989
SEBP4V3	primary	SIE	Service entrance barrier for JG, LG	EDH-SIE-00219	989
SEBP5V1	primary	SIE	Service entrance barrier for (S)MD, (S)ND without shield	EDH-SIE-00220	1018
SEBP5V2	primary	SIE	Service entrance barrier for (S)MD, (S)ND with shield	EDH-SIE-00221	1018
SEBP5V3	primary	SIE	Service entrance barrier for Vacu-Break switches	EDH-SIE-00222	1018
SEBP5V4	primary	SIE	Service entrance barrier for HCP switches	EDH-SIE-00223	1019
SEBPPVA1	primary	SIE	Switchboard / P4 / P5 service entrance barrier kit - horizontal 3VA53/63/54/64	EDH-SIE-00394	1106
SEBPPVA2	primary	SIE	P5 service entrance barrier kit - horizontal 3VA55/3VA65/3VA66	EDH-SIE-00395	1019
SECT	primary	ZIN	Sylvania 225 A twin kit (for SC? frame, inferred)	EDH-ZIN-00018	1158
SEHT	primary	ZIN	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	EDH-ZIN-00017	1159
SF-100LP	primary	SQD	Square D 100 A sub-feed lug kit for NQO and NQOB panelboards	EDH-SQD-00513	526
SF-225LP	primary	SQD	Square D 225 A sub-feed lug kit for NQO, NQOB and NY1B panelboards	EDH-SQD-00514	527
SF2DPK	primary	GEA	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	EDH-GEA-00262	693
SF3LCK	primary	GEA	GE SF3LCK lug cover kit, SF250 line end	EDH-GEA-00349	902
SF6	primary	SIE	SF6 connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00133	977
SF6D	primary	SIE	SF6D connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00159	1009
SFG	primary	SIE	SFG connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00132	978

Number	Type	Mfr	Description	Catalogue ID	Pg
SFGD	primary	SIE	SFGD connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00158	978
SG1BCK	primary	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	905
SG1BCK4 (as printed 2019)	alias	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	905
SG1LCK	primary	GEA	GE SG1LCK 3-pole lug cover, SG600	EDH-GEA-00350	905
SG6DPK	primary	GEA	GE SG-frame twin mounting kit, 600 A (dealer label 'AV')	EDH-GEA-00432	866
SG6SPK	primary	GEA	GE SG-frame single mounting kit, 600 A (dealer label 'AV')	EDH-GEA-00433	866
SGB2	primary	SIE	SGB2 connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00126	979
SGB2D	primary	SIE	SGB2D connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00153	980
SGBCS1	primary	GEA	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	EDH-GEA-00392	905
SGBCS2	primary	GEA	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	EDH-GEA-00393	906
SGLVK	primary	GEA	GE SGLVK line voltage control wire kit, SG600	EDH-GEA-00362	906
SGS6K	primary	GEA	SG-frame single mounting kit, 600 A (dealer label 'AV'; possibly aftermarket)	EDH-GEA-00434	867
SJ1	primary	SIE	SJ1 connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00138	981
SJ1D	primary	SIE	SJ1D connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00165	1010
SJ2D	primary	SIE	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	EDH-SIE-00166	1011
SJD4T	primary	ZIN	Sylvania 400 A twin kit (SJD frame)	EDH-ZIN-00019	1159
SJG	primary	SIE	SJG connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00137	981
SJG1D	primary	SIE	SJG1D connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00164	981
SJG2D	primary	SIE	SJG2D connecting strap kit - VL JG (6.25in, twin)	EDH-SIE-00163	1012
SK12SPK	primary	GEA	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	EDH-GEA-00266	693
SK1LCK	primary	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	909
SK1LCK3 (as printed 2019)	alias	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	909
SK4515	primary	SQD	Square D adapter kit for FAL breaker in obsolete MLN panelboard	EDH-SQD-00522	466
SK4516	primary	SQD	Square D adapter kit for KAL breaker in obsolete MLN panelboard	EDH-SQD-00523	466
SK4517	primary	SQD	Square D adapter kit for LAL breaker in obsolete MLN panelboard	EDH-SQD-00524	466
SK4529	primary	SQD	Square D NY1B mounting kit (discontinued)	EDH-SQD-00521	468
SK4578	primary	SQD	Square D adapter kit for MAL breaker in obsolete MLN panelboard	EDH-SQD-00525	466
SK-5666	primary	SQD	Square D Q1B panelboard mounting kit for NQOB	EDH-SQD-00515	527
SK5668	primary	SQD	Square D branch connector kit for NQOB panelboards	EDH-SQD-00516	527
SK5669	primary	SQD	Square D mounting assembly for QO2125 in NQO interior (not for NQOB)	EDH-SQD-00517	527
SK8SPK	primary	GEA	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	EDH-GEA-00265	693
SKLVK	primary	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	889
SKLVK6 / SKLVK8 (as printed)	alias	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	889
SKM8S	primary	ZIN	Sylvania 800 A single kit (SKM frame)	EDH-ZIN-00020	1159
SKNF250	primary	SQD	NF branch connector kit, 125/250 A interiors	EDH-SQD-00416	483
SKNF600	primary	SQD	NF branch connector kit, 400-800 A interiors	EDH-SQD-00417	484
SKNQBC	primary	SQD	NQ branch connector replacement kit	EDH-SQD-00354	511
SKNQOD225	primary	SQD	NQOD branch connector kit, 225 A max, 3-phase	EDH-SQD-00355	532
SKPSHLD	primary	GEA	GE SKPSHLD lug cover/arc shield, SKPA upper end	EDH-GEA-00353	909
SL100	primary	SQD	I-Line plug-on sub-feed lug kit SL100	EDH-SQD-00153	437
SL-100	alias	SQD	I-Line plug-on sub-feed lug kit SL100	EDH-SQD-00153	437
SL1200	primary	SQD	I-Line plug-on sub-feed lug SL1200	EDH-SQD-00572	438

Number	Type	Mfr	Description	Catalogue ID	Pg
SL1200P5	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P5	EDH-SQD-00149	592
SL1200P6	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P6	EDH-SQD-00150	593
SL1200P7	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P7	EDH-SQD-00151	593
SL-225	primary	SQD	Square D I-Line sub-feed lugs 225 A	EDH-SQD-00556	438
SL-225	alias	SQD	Square D I-Line sub-feed lugs 225 A	EDH-SQD-00556	438
SL250	primary	SQD	I-Line plug-on sub-feed lug kit SL250	EDH-SQD-00146	594
SL400	primary	SQD	I-Line plug-on sub-feed lug kit SL400	EDH-SQD-00147	594
SL-400	alias	SQD	I-Line plug-on sub-feed lug kit SL400	EDH-SQD-00147	594
SL6	primary	SIE	SL6 connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00145	982
SL6D	primary	SIE	SL6D connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00171	1012
SL800	primary	SQD	I-Line plug-on sub-feed lug kit SL800	EDH-SQD-00154	438
SL-800	alias	SQD	I-Line plug-on sub-feed lug kit SL800	EDH-SQD-00154	438
SL800FT	primary	SQD	I-Line plug-on sub-feed lug SL800FT	EDH-SQD-00571	439
SL800M5	primary	SQD	I-Line plug-on sub-feed lug kit SL800M5	EDH-SQD-00148	595
SLG	primary	SIE	SLG connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00144	982
SLGD	primary	SIE	SLGD connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00170	983
SLM1	primary	SIE	Switchboard/power panel branch kit SLM1 for Sentron LMD / VL MG frame breakers	EDH-SIE-00370	1105
SLM1D	primary	SIE	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	EDH-SIE-00176	984
SMBKED1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	EDH-SIE-00056	1085
SMBKED3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	EDH-SIE-00057	1086
SMBKFD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	EDH-SIE-00058	1086
SMBKFD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	EDH-SIE-00059	1086
SMBKJD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	EDH-SIE-00060	1087
SMBKJD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	EDH-SIE-00061	1087
SMBKL6	primary	SIE	P4/P5 main breaker kit for Sentron JD / LD frame (shallow P4)	EDH-SIE-00375	958
SMBKL6D	primary	SIE	P4/P5 main breaker kit for Sentron JD / LD frame (deep P5)	EDH-SIE-00376	958
SMBKLG	primary	SIE	P4/P5 main breaker kit for Sentron VL JG / LG frame (shallow P4)	EDH-SIE-00377	959
SMBKLG1D	primary	SIE	P4/P5 main breaker kit for Sentron VL JG / LG frame (deep P5)	EDH-SIE-00378	959
SMBKMG	primary	SIE	P4/P5 main breaker kit for Sentron VL MG frame (shallow P4)	EDH-SIE-00379	959
SMBKMG1D	primary	SIE	P4/P5 main breaker kit for Sentron VL MG frame (deep P5)	EDH-SIE-00380	959
SMLK12	primary	SIE	P4/P5 400-1200 A main lug kit	EDH-SIE-00381	960
SMND	primary	SIE	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	EDH-SIE-00177	1014
SNB	primary	SIE	Switchboard/P4/P5 branch kit for GB breakers (shallow)	EDH-SIE-00371	1105
SNBD	primary	SIE	Switchboard/P4/P5 branch kit for GB breakers (deep)	EDH-SIE-00372	1105
SQR	primary	SIE	SQR connecting strap kit - QR (5.00in, twin)	EDH-SIE-00131	984
SQRC	primary	SIE	QR cover plate for P4/P5/SPP power panels	EDH-SIE-00210	992
SQRD	primary	SIE	SQRD connecting strap kit - QR (5.00in, twin)	EDH-SIE-00181	985
SR1XBF	primary	GEA	ReliaGear neXT XT1 mounting bracket SR1XBF	EDH-GEA-00607	710
SR2XBF	primary	GEA	ReliaGear neXT XT1 mounting bracket SR2XBF	EDH-GEA-00608	711
SR5XBF	primary	GEA	ReliaGear neXT XT1 mounting bracket SR5XBF	EDH-GEA-00609	711
SRFB3XT4FPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPK	EDH-GEA-00595	857
SRFB3XT4FPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT4FPX	EDH-GEA-00594	857
SRFB3XT5MFPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPK	EDH-GEA-00599	858
SRFB3XT5MFPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT5MFPX	EDH-GEA-00598	858
SRFB3XT7MFPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPK	EDH-GEA-00601	859

Number	Type	Mfr	Description	Catalogue ID	Pg
SRFB3XT7MFPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB3XT7MFPX	EDH-GEA-00600	859
SRFB6XT1FPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPK	EDH-GEA-00591	860
SRFB6XT1FPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT1FPX	EDH-GEA-00590	860
SRFB6XT4FPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPK	EDH-GEA-00593	861
SRFB6XT4FPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT4FPX	EDH-GEA-00592	861
SRFB6XT5BFPK	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPK	EDH-GEA-00597	862
SRFB6XT5BFPX	primary	GEA	Tmax XT retrofit kit for Spectra panelboards SRFB6XT5BFPX	EDH-GEA-00596	862
SRFN100GF	primary	GEA	Spectra retrofit neutral CT kit SRFN100GF	EDH-GEA-00605	863
SRFN120GF	primary	GEA	Spectra retrofit neutral CT kit SRFN120GF	EDH-GEA-00606	864
SRFN400GF	primary	GEA	Spectra retrofit neutral CT kit SRFN400GF	EDH-GEA-00602	864
SRFN600GF	primary	GEA	Spectra retrofit neutral CT kit SRFN600GF	EDH-GEA-00603	864
SRFN800GF	primary	GEA	Spectra retrofit neutral CT kit SRFN800GF	EDH-GEA-00604	864
SSCJ	primary	SIE	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	EDH-SIE-00141	986
SSCJD	primary	SIE	SSCJD connecting strap kit - SCJD (8.75in, single)	EDH-SIE-00184	1106
SSCL	primary	SIE	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00148	986
SSCLD	primary	SIE	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00174	1014
SSJ1	primary	SIE	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	EDH-SIE-00140	987
SSJ1D	primary	SIE	SSJ1D connecting strap kit - SJD (8.75in, single)	EDH-SIE-00183	1015
SSL6	primary	SIE	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00147	988
SSL6D	primary	SIE	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00173	1016
SSMND	primary	SIE	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	EDH-SIE-00178	1017
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	186
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00233	183
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	187
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00231	185
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	187
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00227	184
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00234	186
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00223	183
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00221	183
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00225	184
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00232	186

Number	Type	Mfr	Description	Catalogue ID	Pg
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00224	184
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00228	185
SWLUB	primary	SQD	Square D maintenance compound SWLUB	EDH-SQD-00575	610
T1000NB1	primary	EAT	Series C N-frame line/load terminal, 1000 A, Cu	EDH-EAT-00527	408
T1200NB3	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu	EDH-EAT-00528	409
T1200NB3M	primary	EAT	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	EDH-EAT-00529	432
T1600RD	primary	EAT	Series C R-frame line/load terminal, 1600 A, Cu	EDH-EAT-00531	413
T250FJ	primary	EAT	Series G JG-frame line/load terminal, 250 A, Cu (standard)	EDH-EAT-00541	421
T250KB	primary	EAT	Series C J-frame line/load terminal, 250 A, Cu only (optional)	EDH-EAT-00471	368
T300K	primary	EAT	Series C K-frame line/load terminal , 225 A, Cu	EDH-EAT-00477	384
T350K	primary	EAT	Series C K-frame line/load terminal , 350 A, Cu	EDH-EAT-00478	384
T350LK	primary	EAT	Series G LG-frame line/load terminal, 400 A, Cu	EDH-EAT-00552	429
T600MA1	primary	EAT	Series C M-frame line/load terminal, 600 A, Cu	EDH-EAT-00517	402
T602LD	primary	EAT	Series C L-frame line/load terminal, 600 A, Cu	EDH-EAT-00508	396
T602LDCW	primary	EAT	Series C L-frame terminal with control wire termination (T602LD)	EDH-EAT-00513	396
T700NB1	primary	EAT	Series C N-frame line/load terminal, 700 A, Cu	EDH-EAT-00526	409
T800MA1	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu	EDH-EAT-00518	402
TA1000NB1	primary	EAT	Series C N-frame line/load terminal, 1000 A, Cu/Al	EDH-EAT-00523	409
TA1200NB1	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00524	409
TA1201NB1	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00525	410
TA1600RD	primary	EAT	Series C R-frame line/load terminal, 1600 A, Cu/Al	EDH-EAT-00530	414
TA1E6125	primary	SIE	Siemens TA1E6125 lug, ED 110-125A	EDH-SIE-00259	1114
TA1FD350A	primary	SIE	Siemens TA1FD350A lug, FD 70-250A	EDH-SIE-00265	1117
TA1L6750	primary	SIE	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	EDH-SIE-00273	1119
TA1Q1	primary	SIE	Siemens TA1Q1 line-side lug, BQ 45-125A	EDH-SIE-00247	1108
TA1Q300	primary	SIE	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	EDH-SIE-00256	1111
TA2000RD	primary	EAT	Series C R-frame line/load terminal, 2000 A, Cu/Al	EDH-EAT-00532	414
TA250FJ	primary	EAT	Series G JG-frame line/load terminal, 250 A, Cu/Al	EDH-EAT-00542	422
TA250KB	primary	EAT	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	EDH-EAT-00470	369
TA2J630	primary	SIE	Siemens TA2J630 lug, SJD6-B 65-200A	EDH-SIE-00270	1119
TA2J6500	primary	SIE	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	EDH-SIE-00269	1120
TA2K500	primary	SIE	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	EDH-SIE-00277	1124
TA2N750	primary	SIE	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	EDH-SIE-00280	1129
TA300K	primary	EAT	Series C K-frame line/load terminal , 225 A, Cu/Al	EDH-EAT-00472	385
TA350K	primary	EAT	Series C K-frame line/load terminal , 350 A, Cu/Al	EDH-EAT-00473	385
TA350LK	primary	EAT	Series G LG-frame line/load terminal, 400 A, Cu/Al	EDH-EAT-00551	429
TA3K500	primary	SIE	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	EDH-SIE-00278	1124
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	393
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	394
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00502	395
TA450LD	primary	EAT	Series C L-frame line/load terminal, 450 A, Cu/Al	EDH-EAT-00503	397
TA4P750	primary	SIE	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	EDH-SIE-00297	1132
TA5P600	primary	SIE	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	EDH-SIE-00294	1132
TA602LD	primary	EAT	Series C L-frame line/load terminal, 500 A, Cu/Al	EDH-EAT-00504	397
TA602LDCW	primary	EAT	Series C L-frame terminal with control wire termination (TA602LD)	EDH-EAT-00509	397
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	393

Number	Type	Mfr	Description	Catalogue ID	Pg
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	394
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	395
TA632L	primary	EAT	Series G LG-frame single terminal, 630 A, Cu/Al	EDH-EAT-00553	429
TA6ED06	primary	SIE	Siemens TA6ED06 distribution lug, ED	EDH-SIE-00264	1114
TA6FD04	primary	SIE	Siemens TA6FD04 distribution lug, FD	EDH-SIE-00268	1117
TA6GG04	primary	SIE	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	EDH-SIE-00250	1110
TA6JD20	primary	SIE	Siemens TA6JD20 distribution lug, JD/LD	EDH-SIE-00275	1120
TA6R600	primary	SIE	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	EDH-SIE-00295	1132
TA700MA1	primary	EAT	Series C M-frame line/load terminal, 600 A, Cu/Al	EDH-EAT-00514	402
TA700MA1CWT	primary	EAT	Series C M-frame terminal with control wire termination (TA700MA1)	EDH-EAT-00519	403
TA700NB1	primary	EAT	Series C N-frame line/load terminal, 700 A, Cu/Al	EDH-EAT-00522	410
TA800MA2	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00515	403
TA800MA2CWT	primary	EAT	Series C M-frame terminal with control wire termination (TA800MA2)	EDH-EAT-00520	403
TA801MA	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00516	403
TA801MACWT	primary	EAT	Series C M-frame terminal with control wire termination (TA801MA)	EDH-EAT-00521	404
TAD3	primary	EAT	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	EDH-EAT-00365	339
TB1DPK	primary	GEA	GE CCB panelboard twin mounting hardware, TB1, 15-150 A	EDH-GEA-00419	693
TB4SBK	primary	GEA	GE hardware kit for TB4 frame (single)	EDH-GEA-00421	694
TB4SPK	primary	GEA	GE CCB panelboard single mounting kit, TB4, 125-400 A	EDH-GEA-00420	694
TB8SPK	primary	GEA	GE CCB panelboard single mounting kit, TB6/TB8, 600-800 A	EDH-GEA-00422	694
TBPANEL	primary	SQD	NQ & NF tackle box spare parts kit	EDH-SQD-00440	524
TC012	primary	GEA	GE TC012 copper-only lug, E150/TB1 thru 150A	EDH-GEA-00287	868
TC0121	primary	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	882
TC0131	primary	GEA	GE TC0131 copper lug, TK4V load end	EDH-GEA-00324	882
TC018	primary	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	897
TC024	primary	GEA	GE TC024 copper-only lug, TFJ 250A	EDH-GEA-00290	872
TC041	primary	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	883
TC0416 / TC0414	alias	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	883
TC043	primary	GEA	GE TC043 copper-only lug, J400/TB4	EDH-GEA-00297	875
TC061	primary	GEA	GE TC061 copper-only lug, K1200/TB6 300-600A	EDH-GEA-00307	883
TC063	primary	GEA	GE TC063 copper-only lug, J600	EDH-GEA-00298	875
TC081A	primary	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	884
TC091	primary	GEA	GE TC091 copper lug, TK4V load end	EDH-GEA-00323	884
TC1ED6150	primary	SIE	Siemens TC1ED6150 copper-body lug, ED 30-125A	EDH-SIE-00262	1115
TC1FD350	primary	SIE	Siemens TC1FD350 copper lug, FD 70-250A	EDH-SIE-00266	1117
TC1J6600	primary	SIE	Siemens TC1J6600 copper lug, JD/LD (100% rated)	EDH-SIE-00271	1120
TC1Q1	primary	SIE	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	EDH-SIE-00245	1108
TC2J6500	primary	SIE	Siemens TC2J6500 copper lug, JD/LD (100% rated)	EDH-SIE-00272	1121
TC2K500	primary	SIE	Siemens TC2K500 copper lug, MD 500-600A	EDH-SIE-00279	1124
TC5R600	primary	SIE	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	EDH-SIE-00296	1133
TCAL12	primary	GEA	GE TCAL12 lug, E150/THLC1/TB1 15-60A	EDH-GEA-00284	868
TCAL121	primary	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	885
TCAL1214 / TCAL1212	alias	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	885
TCAL122	primary	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	885
TCAL1225 / TCAL1223	alias	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	885
TCAL124	primary	GEA	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	EDH-GEA-00341	908

Number	Type	Mfr	Description	Catalogue ID	Pg
TCAL125	primary	GEA	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	EDH-GEA-00344	908
TCAL12A	primary	GEA	GE TCAL12A lug, E150/THLC1/TB1 70-90A	EDH-GEA-00285	868
TCAL131	primary	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	886
TCAL1314 / TCAL1312	alias	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	886
TCAL14	primary	GEA	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	EDH-GEA-00283	869
TCAL15	primary	GEA	GE TCAL15 lug, E150/THLC1/TB1 100-150A	EDH-GEA-00286	869
TCAL18	primary	GEA	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	EDH-GEA-00335	898
TCAL18LV	primary	GEA	GE TCAL18LV lug with control-voltage quick connect, SE150	EDH-GEA-00360	898
TCAL19PD1	primary	GEA	GE TCAL19PD1 power distribution lug, SE1/TED 125A	EDH-GEA-00363	898
TCAL19PD3	primary	GEA	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	EDH-GEA-00364	896
TCAL24	primary	GEA	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	EDH-GEA-00288	872
TCAL25	primary	GEA	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00281	910
TCAL27	primary	GEA	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	EDH-GEA-00291	872
TCAL28PD1	primary	GEA	GE TCAL28PD1 power distribution lug, SF 250A	EDH-GEA-00365	900
TCAL28PD3	primary	GEA	GE TCAL28PD3 3-lug power distribution kit, SF	EDH-GEA-00366	899
TCAL29	primary	GEA	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	EDH-GEA-00337	901
TCAL29LV	primary	GEA	GE TCAL29LV lug with control-voltage quick connect, SF250	EDH-GEA-00361	901
TCAL40PD1	primary	GEA	GE TCAL40PD1 power distribution lug, SG 400A	EDH-GEA-00367	904
TCAL40PD3	primary	GEA	GE TCAL40PD3 3-lug power distribution kit, SG	EDH-GEA-00368	902
TCAL41	primary	GEA	GE TCAL41 lug, K1200/TB6 300-400A	EDH-GEA-00301	886
TCAL43	primary	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	875
TCAL433	alias	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	875
TCAL47	primary	GEA	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	EDH-GEA-00293	876
TCAL61	primary	GEA	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	EDH-GEA-00304	886
TCAL63	primary	GEA	GE TCAL63 lug, J600 450-600A	EDH-GEA-00295	876
TCAL81	primary	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	887
TCAL812 / TCAL811	alias	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	887
TCAL91	primary	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	887
TCAL912 / TCAL911	alias	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	887
TCALK2121	primary	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	878
TCALK21214 / TCALK21212	alias	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	878
TCALK2122	primary	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	878
TCALK21225 / TCALK21223	alias	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	878
TCALK2124	primary	GEA	GE TCALK2124 2-lug kit with wrench (TCAL124)	EDH-GEA-00342	906
TCALK2125	primary	GEA	GE TCALK2125 2-lug kit with wrench (TCAL125)	EDH-GEA-00345	907
TCALK261	primary	GEA	GE TCALK261 2-lug kit with wrench, K1200/TB6	EDH-GEA-00305	878
TCALK281	primary	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	879
TCALK2812 / TCALK2811	alias	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	879
TCALK291	primary	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	879
TCALK2912 / TCALK2911	alias	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	879
TCALK3121	primary	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	879
TCALK31214 / TCALK31212	alias	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	879
TCALK3122	primary	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	880
TCALK31225 / TCALK31223	alias	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	880
TCALK3124	primary	GEA	GE TCALK3124 3-lug kit with wrench (TCAL124)	EDH-GEA-00343	907
TCALK3125	primary	GEA	GE TCALK3125 3-lug kit with wrench (TCAL125)	EDH-GEA-00346	907
TCALK318	primary	GEA	GE TCALK318 3-lug kit, Spectra SE150	EDH-GEA-00336	897
TCALK324	primary	GEA	GE TCALK324 3-lug kit, F225	EDH-GEA-00289	871

Number	Type	Mfr	Description	Catalogue ID	Pg
TCALK325	primary	GEA	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00282	910
TCALK329	primary	GEA	GE TCALK329 3-lug kit, Spectra SF250	EDH-GEA-00338	900
TCALK341	primary	GEA	GE TCALK341 3-lug kit, K1200/TB6 300-400A	EDH-GEA-00302	880
TCALK343	primary	GEA	GE TCALK343 3-lug kit, TLB4/THLC4	EDH-GEA-00300	874
TCALK347	primary	GEA	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	EDH-GEA-00294	874
TCALK361	primary	GEA	GE TCALK361 3-lug kit with wrench, K1200/TB6	EDH-GEA-00306	880
TCALK363	primary	GEA	GE TCALK363 3-lug kit, J600 450-600A	EDH-GEA-00296	874
TCALK381	primary	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	881
TCALK3812 / TCALK3811	alias	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	881
TCALK391	primary	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	881
TCALK3912 / TCALK3911	alias	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	881
TCLK265	primary	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	903
TCLK2652 / TCLK2651 (as printed)	alias	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	903
TCLK365	primary	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	903
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	903
TCLK43	primary	GEA	GE TCLK43 lug, TLB4/THLC4	EDH-GEA-00299	876
TCO121	alias	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	882
TCO124	primary	GEA	GE TCO124 plated copper lug, SK1200 (3) 350-750	EDH-GEA-00358	908
TCO125	primary	GEA	GE TCO125 plated copper lug, SK1200 (4) 250-500	EDH-GEA-00359	909
TCO18	alias	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	897
TCO29	primary	GEA	GE TCO29 plated copper lug, SF250	EDH-GEA-00355	901
TCO81A	alias	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	884
TCOK265	primary	GEA	GE TCOK265 2-pole copper lug kit, SG600	EDH-GEA-00356	904
TCOK365	primary	GEA	GE TCOK365 3-pole copper lug kit, SG600	EDH-GEA-00357	904
TEC1	primary	EAT	Series C F-frame terminal end cover, 0.25 opening	EDH-EAT-00645	361
TEC2	primary	EAT	Series C F-frame terminal end cover, 0.41 opening	EDH-EAT-00646	361
TED1DPK	primary	GEA	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	EDH-GEA-00256	694
TED1DPK2	primary	GEA	GE CCB panelboard twin mounting hardware, E-frame 150 A (variant 2)	EDH-GEA-00426	695
TEDFP1	primary	GEA	A-Series filler plate for TQD/THQD/TED4/SE/FB	EDH-GEA-00040	675
TEDLS	primary	GEA	GE TEDLS line shield, TEB/TEC/TED/THED	EDH-GEA-00325	869
TEF1	primary	GEA	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (shor	EDH-GEA-00386	870
TEF2	primary	GEA	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long	EDH-GEA-00387	870
TEF3	primary	GEA	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (shor	EDH-GEA-00388	870
TEF4	primary	GEA	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long	EDH-GEA-00389	871
TEL1DPK	primary	GEA	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	EDH-GEA-00261	695
TEU-1	primary	GEA	GE extra key for panelboard door locks	EDH-GEA-00416	710
TF2DPK	primary	GEA	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	EDH-GEA-00257	695
TFK1	primary	GEA	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	EDH-GEA-00390	873
TFK2	primary	GEA	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	EDH-GEA-00391	873
TFKLS	primary	GEA	GE TFKLS line shield, TFJ/TFK/TFC	EDH-GEA-00326	873
TGL2	primary	GEA	A-Series Equipment ground, standard bonded to box, per 12 branch positions	EDH-GEA-00096	674
TGL20	primary	GEA	A-Series Main lug for equipment ground terminal kits	EDH-GEA-00095	674

Number	Type	Mfr	Description	Catalogue ID	Pg
THFP63DPK	primary	GEA	GE QMR panelboard twin mounting hardware for THFP fusible switch, 100 A	EDH-GEA-00428	695
THFP63SPK	primary	GEA	GE QMR panelboard single mounting hardware for THFP fusible switch, 100 A	EDH-GEA-00429	696
THFP64SPK	primary	GEA	GE QMR panelboard single mounting hardware for THFP fusible switch, 200 A	EDH-GEA-00430	696
THFP65SPK	primary	GEA	GE QMR panelboard single mounting hardware for THFP fusible switch, 400 A	EDH-GEA-00431	696
THJV6DPK	primary	GEA	GE CCB panelboard mounting hardware for THJV (listed 'twin mounted')	EDH-GEA-00425	696
THL103	primary	GEA	GE breaker handle locking device (non-padlocking) for TQB, TQC and TQL breakers,	EDH-GEA-00401	707
THLCDPK	primary	GEA	GE hardware kit for AV panel (THLC breaker, twin)	EDH-GEA-00435	867
THP100	primary	GEA	GE breaker handle padlocking device for TQB and TQL breakers, Model 3	EDH-GEA-00403	707
TIKFD	primary	SQD	E-frame terminal nut insert kit (3 per kit)	EDH-SQD-00432	491
TJ4DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	EDH-GEA-00259	697
TJ6DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	EDH-GEA-00260	697
TJ6SPK	primary	GEA	GE CCB panelboard single-mounted strap kit, 600 A J-frame	EDH-GEA-00424	697
TJKLS	primary	GEA	GE TJKLS line shield, TJJ/TJK/TJC	EDH-GEA-00327	877
TJLVK	primary	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	877
TJLVK8 (as printed)	alias	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	877
TK12SPK	primary	GEA	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	EDH-GEA-00264	697
TK8SPK	primary	GEA	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	EDH-GEA-00263	698
TK9SPK	primary	GEA	GE QMR panel mount for TKL/TKH breakers, 1200 A 600 V	EDH-GEA-00427	698
TKM11	primary	GEA	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	EDH-GEA-00394	890
TKM12	primary	GEA	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	EDH-GEA-00395	890
TKMC1	primary	GEA	GE TKMC1 connector (back strap), TKM	EDH-GEA-00332	888
TNKG3	primary	SIE	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	EDH-SIE-00249	1110
TP8SPK	primary	GEA	GE mounting hardware for Tri-Pac 800 A breaker (CCB/AV)	EDH-GEA-00423	698
TPS3 09	primary	SIE	TPS3 09 SPD module kit for Type P1 lighting panelboard (250 A max P1)	EDH-SIE-00441	925
TQ2DPK	primary	GEA	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	EDH-GEA-00258	698
TQDFM1	primary	GEA	A-Series 2-3 pole TQD mechanical interlock	EDH-GEA-00088	677
TQLFP1	primary	GEA	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	EDH-GEA-00041	675
TQPLD1	primary	GEA	GE breaker handle padlocking device for TQC breakers	EDH-GEA-00402	708
TS33LD	primary	EAT	Series C K-frame terminal shield 3-pole, load	EDH-EAT-00641	386
TS33LN	primary	EAT	Series C K-frame terminal shield 2/3-pole, line	EDH-EAT-00639	387
TS34LN	primary	EAT	Series C K-frame terminal shield 4-pole, line	EDH-EAT-00640	387
TSSG3A	primary	SIE	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	EDH-SIE-00251	1110
TVS12RMU	primary	SQD	Surgelogic TVSS remote monitor TVS12RMU	EDH-SQD-00098	546
UBIZRBK12	primary	ZIN	Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco lo	EDH-ZIN-00025	1161
UPC 782114795194	alias	EAT	PRL4F fusible switch connector kit KPRL4W11X	EDH-EAT-00338	301
UPC 782114795941	alias	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	311
UPC 782114795996	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00312	317
UPC 782114796030	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00309	315
UPC 782114796078	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	328

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 782114796115	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00310	316
UPC 782114796184	alias	EAT	PRL4F fusible switch connector kit KPRL44X	EDH-EAT-00331	298
UPC 782114796191	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	321
UPC 782114796207	alias	EAT	PRL4F fusible switch connector kit KPRL45XS	EDH-EAT-00334	300
UPC 782114796214	alias	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	299
UPC 782114796412	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00313	318
UPC 782114798195	alias	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	308
UPC 782114858813	alias	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	323
UPC 782114858820	alias	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	309
UPC 782114887257	alias	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00184	223
UPC 782114887271	alias	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00185	223
UPC 782114887295	alias	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00186	224
UPC 782114887301	alias	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00187	225
UPC 782114887318	alias	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00188	226
UPC 782114887332	alias	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00189	226
UPC 782114887349	alias	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00190	227
UPC 782114887363	alias	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00206	230
UPC 782114887370	alias	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00205	230
UPC 782114887387	alias	EAT	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00192	231
UPC 782114887400	alias	EAT	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00194	232
UPC 782114887417	alias	EAT	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00195	233
UPC 782114887424	alias	EAT	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00196	234
UPC 782114887431	alias	EAT	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00197	235
UPC 782114887448	alias	EAT	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00198	235
UPC 782114887462	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	EDH-EAT-00308	305
UPC 782114887479	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	EDH-EAT-00322	306
UPC 782114887493	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/	EDH-EAT-00324	307
UPC 782114887509	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	EDH-EAT-00311	310
UPC 782114887516	alias	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	313
UPC 782114887523	alias	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	314
UPC 782114887530	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	EDH-EAT-00317	319
UPC 782114887547	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	EDH-EAT-00318	321
UPC 782114887554	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	325
UPC 782114887561	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	EDH-EAT-00319	326
UPC 782116654130	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	EDH-EAT-00315	324
UPC 786676000499	alias	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00459	30
UPC 786676001762	alias	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00448	27
UPC 786676001779	alias	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00449	28
UPC 786676001786	alias	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00451	26
UPC 786676376228	alias	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00460	30
UPC 786676460101	alias	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00453	25

Number	Type	Mfr	Description	Catalogue ID	Pg
UPC 786676461405	alias	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00450	27
UPC 786676461504	alias	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00452	26
UPC 786679004203	alias	EAT	PRL4F fusible switch connector kit KPRL4W9X	EDH-EAT-00337	303
UPC 786689014650	alias	EAT	Service entrance barrier kit for LG and KD main breaker	EDH-EAT-00213	191
UPC 786689014674	alias	EAT	Service entrance barrier kit for FD main breaker	EDH-EAT-00215	189
UPC 786689014681	alias	EAT	Service entrance barrier kit for GHB main breaker	EDH-EAT-00216	189
UPC 786689040796	alias	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00208	229
UPC 786689242091	alias	EAT	Service entrance barrier kit for PDG2 main breaker	EDH-EAT-00218	214
UPC 786689242107	alias	EAT	Service entrance barrier kit for PDF3/PDG3 main breaker	EDH-EAT-00217	215
UPC 786689242572	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	330
UPC 786689242589	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	331
UPC 786689242596	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mo	EDH-EAT-00302	331
UPC 786689242602	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin moun	EDH-EAT-00303	332
UPC 786689242619	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	EDH-EAT-00304	333
UPC 786689242626	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	334
UPC 786689242633	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	335
UPC 786689242640	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	EDH-EAT-00200	239
UPC 786689242657	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	EDH-EAT-00202	240
UPC 786689242664	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	EDH-EAT-00201	237
UPC 786689242671	alias	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	EDH-EAT-00203	238
UPC 786689346935	alias	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00168	241
UPC 786689346942	alias	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00170	243
UPC 786689346959	alias	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00169	242
UPC 786689346966	alias	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00171	244
UPC 786689346973	alias	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00172	245
UPC 786689346980	alias	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00173	246
UPC 786689346997	alias	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00174	247
UPC 786689347000	alias	EAT	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00177	250
UPC 786689347017	alias	EAT	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00178	251
UPC 786689347024	alias	EAT	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00179	252
UPC 786689347031	alias	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00175	248
UPC 786689347048	alias	EAT	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00176	249
UPC 786689347062	alias	EAT	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00180	253
UPC 786689347079	alias	EAT	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00181	254
UPC 786689347086	alias	EAT	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00182	255
UPC 786689347093	alias	EAT	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00183	256
UPC 887621572570	alias	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	1081
VB610	primary	SIE	ITE Vacu-Break mounting hardware straps	EDH-SIE-00332	1095
VC100FA	primary	SQD	Square D FA Al compression lug kit	EDH-SQD-00272	615
VC250KA3	primary	SQD	Square D KA Al compression lug kit	EDH-SQD-00273	617
VC250KA35	primary	SQD	Square D KA Al compression lug kit	EDH-SQD-00274	617
VC400LA3	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00276	620
VC400LA35	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00275	621

Number	Type	Mfr	Description	Catalogue ID	Pg
VC400LA5	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00277	621
VC400LA7	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00278	621
VC600LI3	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00279	625
VC600LI5	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00280	625
VC600LI7	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00281	625
VCEL02114S1	primary	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00074	536
VCEL021-14S1	alias	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00074	536
VCEL030516H1	primary	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00071	537
VCEL030-516H1	alias	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00071	537
VCEL05012H1	primary	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00072	537
VCEL050-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00072	537
VCEL06012H1	primary	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00079	537
VCEL060-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00079	537
VCEL07512H1	primary	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00073	537
VCEL075-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00073	537
VCELC02114S1	primary	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00075	538
VCELC021-14S1	alias	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00075	538
VCELC03038H1	primary	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00076	538
VCELC030-38H1	alias	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00076	538
VCELC05012H1	primary	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00077	538
VCELC050-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00077	538
VCELC07512H1	primary	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00078	538
VCELC075-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00078	538
Westinghouse DA breaker	supersedes	EAT	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	EDH-EAT-00361	80
Westinghouse EB, EHB breaker	supersedes	EAT	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	EDH-EAT-00353	81
Westinghouse FB breaker	supersedes	EAT	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	EDH-EAT-00354	83
Westinghouse HFB breaker	supersedes	EAT	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	EDH-EAT-00355	82
Westinghouse HKA breaker	supersedes	EAT	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	EDH-EAT-00357	84
Westinghouse JA breaker	supersedes	EAT	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	EDH-EAT-00359	88
Westinghouse JB breaker	supersedes	EAT	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	EDH-EAT-00360	86
Westinghouse KA breaker	supersedes	EAT	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	EDH-EAT-00356	87
Westinghouse KB, HKB breaker	supersedes	EAT	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	EDH-EAT-00358	85
Westinghouse LA, HLA breaker	supersedes	EAT	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	EDH-EAT-00362	89
Westinghouse MA, HMA breaker	supersedes	EAT	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	EDH-EAT-00363	90
Westinghouse NB, HNB breaker	supersedes	EAT	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	EDH-EAT-00364	91
YA060HD	primary	SQD	PowerPact H-frame Al/Cu compression lug kit	EDH-SQD-00195	631
YA150HD	primary	SQD	PowerPact H-frame Al/Cu compression lug kit	EDH-SQD-00196	631
YA150JD	primary	SQD	PowerPact J-frame Al/Cu compression lug kit	EDH-SQD-00197	637
YA250J35	primary	SQD	PowerPact J-frame Al/Cu compression lug kit	EDH-SQD-00198	637
YA400L31K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00199	648
YA400L51K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00201	649
YA400L51K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00205	649
YA400L71K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00203	649
YA400L71K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00207	650

Number	Type	Mfr	Description	Catalogue ID	Pg
YA600L32K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00200	650
YA600L32K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00204	650
YA600L52K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00202	651
YA600L52K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00206	651

12.4 Breaker compatibility index

Parts linked to each breaker family. The confidence shown is that of the part's breaker-compatibility claim.

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	931
3VA41 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1073
3VA41 (SIE)	DFFPVA41A	filler-plate	RP1	—	1076
3VA41 (SIE)	DFK1	deadfront	P2, P3	—	940
3VA41 (SIE)	DFP3AP01	filler-plate	P2, P3	—	945
3VA41 (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1029
3VA41 (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1030
3VA41 (SIE)	P1CONACPHAL	connector-strap	RP1	A	1043
3VA41 (SIE)	P1CONACPHCU	connector-strap	RP1	A	1043
3VA41 (SIE)	P1CONBPHAL	connector-strap	RP1	A	1044
3VA41 (SIE)	P1CONBPHCU	connector-strap	RP1	A	1044
3VA41 (SIE)	P1SCRWS	fastener	RP1, P1	—	1083
3VA41 (SIE)	S3VA41T	branch-connector-kit	P4, P5, SB	A	965
3VA41 (SIE)	S3VA41TD	branch-connector-kit	P4, P5, SB, CDP6	A	965
3VA41 (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	1000
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9233-0QA00	fastener	SB	—	1107
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9243-0QA00	fastener	SB	—	1107
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9473-0QA00	fastener	SB	—	1107
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2HW	hardware-kit	P2, P3	A	946
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2S	branch-connector-kit	P2, P3	A	932
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3HW	hardware-kit	P3	A	955
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3T	branch-connector-kit	P3	A	951

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262A	filler-plate	RP1	—	1077
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2A	filler-plate	P2, P3	—	944
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2B	filler-plate	P2, P3	—	945
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5363A	filler-plate	RP1, P2, P3	—	1077
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262A	main-breaker-kit	RP1	A	1031
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262B	main-breaker-kit	RP1	A	1031
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363A	main-breaker-kit	RP1	A	1032
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	1083
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52PR	hardware-kit	P4, P5, SB	—	991
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52T	branch-connector-kit	P4, P5, SB	A	966
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52TD	branch-connector-kit	P4, P5, SB, CDP6	A	967
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53PR	hardware-kit	SB	—	1107
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T	branch-connector-kit	P4, P5, SB	A	968

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T2D	branch-connector-kit	P5, SB	A	1001
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53TD	branch-connector-kit	P4, P5, SB, CDP6	A	968
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T	branch-connector-kit	P4, P5, SB	A	969
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T2D	branch-connector-kit	P5, SB	A	1001
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54TD	branch-connector-kit	P4, P5, SB, CDP6	A	970
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA55TD	branch-connector-kit	P5, SB	A	1003
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA57TD	branch-connector-kit	P5, SB	A	1003
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63T	branch-connector-kit	P4	A	971
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63TD	branch-connector-kit	P5, SB, CDP6	A	1004
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64T	branch-connector-kit	P4	A	971
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64TD	branch-connector-kit	P5, SB, CDP6	A	1005
BAB (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	118
BL (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	1090
BL (SIE)	BBKB32	branch-connector-kit	P2, P3	A	926
BL (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1073
BL (SIE)	DFFPED01	filler-plate	P1, RP1	—	925
BL (SIE)	DFFPVA41A	filler-plate	RP1	—	1076
BL (SIE)	DFK1	deadfront	P2, P3	—	940
BL (SIE)	DFP3AP01	filler-plate	P2, P3	—	945
BL (SIE)	MBKBFA	hardware-kit	RP1	A	1082
BL (SIE)	MBKBL1	main-breaker-kit	P1, S1/S2	A	916

Breaker family	Part	Component	Equipment family	Cl.	Pg
BL (SIE)	MBKBL3	main-breaker-kit	P1, S1/S2	A	916
BL (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1029
BL (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1030
BL (SIE)	P1CONACPHAL	connector-strap	RP1	A	1043
BL (SIE)	P1CONACPHCU	connector-strap	RP1	A	1043
BL (SIE)	P1CONBPHAL	connector-strap	RP1	A	1044
BL (SIE)	P1CONBPHCU	connector-strap	RP1	A	1044
BL (SIE)	P1SCRWS	fastener	RP1, P1	—	1083
BL (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	1095
BL (SIE)	SBL	branch-connector-kit	P4, P5, SB	A	971
BL (SIE)	SBLBD	branch-connector-kit	P4, P5, SB, CDP6	A	972
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	1090
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	1095
BQ / BQH / HBQ / BQXD bolt-on (SIE)	BQFS2	barrier		A	1109
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TA1Q1	lug		A	1108
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TC1Q1	lug		A	1108
BQD (SIE)	BBKB32	branch-connector-kit	P2, P3	A	926
BQD (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1073
BQD (SIE)	DFFPED01	filler-plate	P1, RP1	—	925
BQD (SIE)	DFFPVA41A	filler-plate	RP1	—	1076
BQD (SIE)	DFK1	deadfront	P2, P3	—	940
BQD (SIE)	DFP3AP01	filler-plate	P2, P3	—	945
BQD (SIE)	MBKBC3	main-breaker-kit	P1, S1/S2	A	916
BQD (SIE)	MBKBFA	hardware-kit	RP1	A	1082
BQD (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1029
BQD (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1030
BQD (SIE)	P1CONACPHAL	connector-strap	RP1	A	1043
BQD (SIE)	P1CONACPHCU	connector-strap	RP1	A	1043
BQD (SIE)	P1CONBPHAL	connector-strap	RP1	A	1044
BQD (SIE)	P1CONBPHCU	connector-strap	RP1	A	1044
BQD (SIE)	P1SCRWS	fastener	RP1, P1	—	1083
BQD (SIE)	SBL	branch-connector-kit	P4, P5, SB	A	971
BQD (SIE)	SBLBD	branch-connector-kit	P4, P5, SB, CDP6	A	972
BR (EAT)	3BRS225	sub-feed-lug-kit	BR	A	26
BR (EAT)	3BRSF150	sub-feed-lug-kit	BR	A	26
BR (EAT)	BHT	handle-lock	BR	—	29
BR (EAT)	BINA	neutral-assembly	BR	—	28
BR (EAT)	BRFP	filler-plate	BR	—	29
BR (EAT)	BRL200	main-lug-kit	BR	—	25
BR (EAT)	BRLW	padlock-attachment	BR	A	30
BR (EAT)	BRLW1	padlock-attachment	BR	—	30
BR (EAT)	BRS225	sub-feed-lug-kit	BR	—	27
BR (EAT)	BRSF125	sub-feed-lug-kit	BR	—	27
BR (EAT)	BRSF150	sub-feed-lug-kit	BR	—	28
BR (EAT)	BWFP	filler-plate	BR	—	29
BR (EAT)	NL300	lug	BR	—	28
CA (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	69
CA (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	219
CA (EAT)	KPRL4CA	breaker-mounting-kit	PRL4, PRL4X	A	305

Breaker family	Part	Component	Equipment family	Cl.	Pg
CA/CAH/HCA 225 A frame (EAT)	4176B66	deadfront	PRL3A	—	259
CA/CAH/HCA 225 A frame (EAT)	4176B80	deadfront	PRL3A	—	260
CA/CAH/HCA 225 A frame (EAT)	6555C40H01	filler-plate	PRL3A	—	266
CA/CAH/HCA 225 A frame (EAT)	6555C41H01	filler-plate	PRL3A	—	267
CA/CAH/HCA 225 A frame (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	69
CA/CAH/HCA 225 A frame (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	219
CA/CAH/HCA 225 A frame (EAT)	KPRL4CA	breaker-mounting-kit	PRL4, PRL4X	A	305
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B56	deadfront	PRL3A	—	258
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B70	deadfront	PRL3A	—	260
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	71
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPLCL	breaker-mounting-kit	CDP	A	75
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	310
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	315
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4LCL	breaker-mounting-kit	PRL4, PRL4X	A	321
Cutler-Hammer CC / CCH / CHH (EAT)	KPHCC3175S	branch-connector-kit	PH	C	116
Cutler-Hammer CC / CCH / CHH (EAT)	MP40CHH	branch-connector-kit	MP40, MP2	C	108
Cutler-Hammer CC / CCH / CHH (EAT)	MP40ED225-3	branch-connector-kit	MP40, MP2	C	108
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KC225-3	branch-connector-kit	MP40, MP2	C	109
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KF100-3	branch-connector-kit	MP40, MP2	C	109
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KJ225-3	branch-connector-kit	MP40, MP2	C	110
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KK400-3	branch-connector-kit	MP40, MP2	C	110
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KL400-3	branch-connector-kit	MP40, MP2	C	111
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KL600-3	branch-connector-kit	MP40, MP2	C	111
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KM800-3	branch-connector-kit	MP40, MP2	C	112
Cutler-Hammer CC / CCH / CHH (EAT)	MP40KN1200-3	branch-connector-kit	MP40, MP2	C	112
DA (EAT)	KCDPDK	conversion-kit	CDP	A	80
DA (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	74
E150 line (TEB, TED, THED, TEC) (GEA)	TC012	lug		A	868
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12	lug		A	868
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12A	lug		A	868
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL14	lug		A	869

Breaker family	Part	Component	Equipment family	Cl.	Pg
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL15	lug		A	869
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD1	lug		A	898
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD3	lug-kit		A	896
E150 line (TEB, TED, THED, TEC) (GEA)	TEDLS	barrier		A	869
E150 line (TEB, TED, THED, TEC) (GEA)	TEF1	breaker-accessory		A	870
E150 line (TEB, TED, THED, TEC) (GEA)	TEF2	breaker-accessory		A	870
E150 line (TEB, TED, THED, TEC) (GEA)	TEF3	breaker-accessory		A	870
E150 line (TEB, TED, THED, TEC) (GEA)	TEF4	breaker-accessory		A	871
EB (EAT)	KCDPEHD	conversion-kit	CDP	A	81
EB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
ED (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	70
ED (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	219
ED (EAT)	KPRL4ED	breaker-mounting-kit	PRL4, PRL4X	A	308
ED (EAT)	KPRL4ED2	breaker-mounting-kit	PRL4, PRL4X	A	309
ED (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	330
ED (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	331
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6CLE2	branch-connector-kit	P5, SB, CDP6	A	994
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6E62	branch-connector-kit	SB, CDP6	A	1100
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	BBKED32	branch-connector-kit	P2, P3	A	927
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1073
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPED01	filler-plate	P1, RP1	—	925
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPVA41A	filler-plate	RP1	—	1076
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFK1	deadfront	P2, P3	—	940
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFP3AP01	filler-plate	P2, P3	—	945
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1	main-breaker-kit	P1, S1/S2	A	917
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1A	main-breaker-kit	RP1	A	1023
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3	main-breaker-kit	P1, S1/S2	A	917
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3A	main-breaker-kit	RP1	A	1024

Breaker family	Part	Component	Equipment family	Cl.	Pg
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	1095
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCE	branch-connector-kit	P4	A	973
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCED	branch-connector-kit	P5, SB	A	1005
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6	branch-connector-kit	P4	A	977
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6D	branch-connector-kit	P5, SB, CDP6	A	1009
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED1	main-breaker-kit	S1/S2, SE	A	1085
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED3	main-breaker-kit	S1/S2, SE	A	1086
EDB / EGB / EJB (E-frame bolt-on) (SQD)	AL100FD	lug-kit	NF	—	482
EDB / EGB / EJB (E-frame bolt-on) (SQD)	AL30FD	lug-kit	NF	—	482
EDB / EGB / EJB (E-frame bolt-on) (SQD)	CU100FD	lug-kit	NF	—	483
EDB / EGB / EJB (E-frame bolt-on) (SQD)	NFBFMB20	barrier	NF	—	488
EDB / EGB / EJB (E-frame bolt-on) (SQD)	NFEDBS	barrier	NF	—	488
EDB / EGB / EJB (E-frame bolt-on) (SQD)	NFFP15	filler-plate	NF	—	490
EDB / EGB / EJB (E-frame bolt-on) (SQD)	Q1100AN	lug	NF	—	483
EDB / EGB / EJB (E-frame bolt-on) (SQD)	SKNF250	branch-connector-kit	NF	—	483
EDB / EGB / EJB (E-frame bolt-on) (SQD)	SKNF600	branch-connector-kit	NF	—	484
EDB / EGB / EJB (E-frame bolt-on) (SQD)	TIKFD	hardware-kit	NF	—	491
EHB (EAT)	KCDPEHD	conversion-kit	CDP	A	81
EHB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
EHD (EAT)	KCDPEHD	conversion-kit	CDP	A	81
EHD (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
EHD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	79
EHD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	220
EHD (EAT)	KPRL4FD	breaker-mounting-kit	PRL4, PRL4X	A	311
EHD (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4, PRL4X	A	313
EHD (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4, PRL4X	A	314
EHD (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	329
EHD (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	330
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TC024	lug		A	872
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL24	lug		A	872
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL27	lug		A	872
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCALK324	lug-kit		A	871

Breaker family	Part	Component	Equipment family	Cl.	Pg
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK1	breaker-accessory		A	873
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK2	breaker-accessory		A	873
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFKLS	barrier		A	873
FA / FH (I-Line) (SQD)	2152620361	fastener	I-LINE, QED-2	A	461
FB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
FB (EAT)	KCDPFDB	conversion-kit	CDP	A	83
FD (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	70
FD (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
FD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	79
FD (EAT)	KCDPFD	conversion-kit	CDP	A	82
FD (EAT)	KCDPFDB	conversion-kit	CDP	A	83
FD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	220
FD (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	310
FD (EAT)	KPRL4FD	breaker-mounting-kit	PRL4, PRL4X	A	311
FD (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4, PRL4X	A	313
FD (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4, PRL4X	A	314
FD (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	315
FD (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	329
FD (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	330
FD (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	331
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6CLF1	branch-connector-kit	SB, CDP6	A	1097
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6F62	branch-connector-kit	SB, CDP6	A	1101
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	DFFPFD01	filler-plate	RP1, P1, S1/S2, SE, P2, P3	—	1074
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1	main-breaker-kit	P1, S1/S2	A	917
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1A	main-breaker-kit	RP1	A	1024
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3	main-breaker-kit	P1, S1/S2	A	918
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3A	main-breaker-kit	RP1	A	1025
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCF	branch-connector-kit	P4	A	974
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCFD	branch-connector-kit	P5, SB, CDP6	A	1006
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6	branch-connector-kit	P4	A	977
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6D	branch-connector-kit	P5, SB, CDP6	A	1009
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD1	main-breaker-kit	S1/S2, SE	A	1086

Breaker family	Part	Component	Equipment family	Cl.	Pg
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD3	main-breaker-kit	S1/S2, SE	A	1086
FI frame (legacy) (SQD)	N100MFI	main-breaker-kit	NF	—	469
GB (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	118
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKGB32	branch-connector-kit	P2, P3	A	928
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKNB32	branch-connector-kit	P2, P3	A	929
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	931
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	1073
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPED01	filler-plate	P1, RP1	—	925
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPVA41A	filler-plate	RP1	—	1076
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFK1	deadfront	P2, P3	—	940
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFP3AP01	filler-plate	P2, P3	—	945
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKBFA	hardware-kit	RP1	A	1082
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB1	main-breaker-kit	P1, S1/S2	A	919
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB3	main-breaker-kit	P1, S1/S2	A	919
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41A	main-breaker-kit	RP1	A	1029
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41B	main-breaker-kit	RP1	A	1030
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHAL	connector-strap	RP1	A	1043
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHCU	connector-strap	RP1	A	1043
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHAL	connector-strap	RP1	A	1044
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHCU	connector-strap	RP1	A	1044
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1SCRWS	fastener	RP1, P1	—	1083
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41T	branch-connector-kit	P4, P5, SB	A	965

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TD	branch-connector-kit	P4, P5, SB, CDP6	A	965
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	1000
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2	branch-connector-kit	P4, P5, SB	A	979
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2D	branch-connector-kit	P4, P5, SB, CDP6	A	980
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB1DPK	branch-connector-kit	CCB-QMR, AV-LINE	C	693
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB4SBK	branch-connector-kit	CCB-QMR, AV-LINE	C	694
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB4SPK	branch-connector-kit	CCB-QMR, AV-LINE	C	694
GE TB1 / TB4 / TB6 / TB8 breakers (CCB / AV) (GEA)	TB8SPK	branch-connector-kit	CCB-QMR, AV-LINE	C	694
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	75D165029P101T	insulator	NLAB	—	706
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	HT-100	breaker-accessory	NLAB	B	707
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	NLAB-TQC3	breaker-mounting-kit	NLAB	C	704
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THL103	handle-lock	NLAB	A	707
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	THP100	padlock-attachment	NLAB	A	707
GE TQ / TQL / TQC / TQB / TBQ lighting breakers (GEA)	TQPLD1	padlock-attachment	NLAB	A	708
GHB family (480Y/277 bolt-on) (EAT)	1C96609	branch-connector-kit	PRL2A, PRL2X	A	217
GHB family (480Y/277 bolt-on) (EAT)	1C96620	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	192
GHB family (480Y/277 bolt-on) (EAT)	4176B69	deadfront	PRL3A, PRL3X	—	260
GHB family (480Y/277 bolt-on) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	195
GHB family (480Y/277 bolt-on) (EAT)	5156C09	deadfront	PRL1/PRL2	—	121
GHB family (480Y/277 bolt-on) (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	118
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB06	branch-connector-kit	PRL3A, PRL3X, PRC	A	231
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB06-1	branch-connector-kit	PRL3A, PRC	A	232
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB12	branch-connector-kit	PRL3A, PRL3X, PRC	A	232
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB12-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	233
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB18	branch-connector-kit	PRL3A, PRL3X, PRC	A	234
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB18-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	235
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB24	branch-connector-kit	PRL3A, PRL3X, PRC	A	235
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB24-1	branch-connector-kit	PRL3A, PRC	A	237
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB06	branch-connector-kit	PRL3A, PRL3X	A	249

Breaker family	Part	Component	Equipment family	Cl.	Pg
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB06-1	branch-connector-kit	PRL3A, PRL3X	A	250
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB12	branch-connector-kit	PRL3A, PRL3X	A	251
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB12-1	branch-connector-kit	PRL3A, PRL3X	A	252
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB18	branch-connector-kit	PRL3A, PRL3X	A	253
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB18-1	branch-connector-kit	PRL3A, PRL3X	A	254
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB24	branch-connector-kit	PRL3A, PRL3X	A	255
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB24-1	branch-connector-kit	PRL3A, PRL3X	A	256
GHB family (480Y/277 bolt-on) (EAT)	PRLSEBGHB	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4X	A	189
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	461
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	AL150HD	lug-kit	QED-2, QMB, I-LINE	A	595
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	CU150HD	lug-kit	QED-2, QMB, I-LINE	A	598
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLN4EBL	filler-plate	QED-2, I-LINE	A	603
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLW4EBL	filler-plate	QED-2, I-LINE	A	605
HFB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
HFB (EAT)	KCDPFD	conversion-kit	CDP	A	82
ITE BQ / BQH / HBQ bolt-on (Canada) (SIE)	CDP7BQ3	branch-connector-kit	CDP-ITE	C	914
ITE EE / EH / EF / HE breakers (SIE)	5EH2	branch-connector-kit	CDP6	C	1089
ITE EE / EH / EF / HE breakers (SIE)	EH3K	branch-connector-kit	CDP6	C	1093
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	5FJ2	branch-connector-kit	CDP6	C	1089
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	5JJ2	branch-connector-kit	CDP6, NLAB	C	1090
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	CD55JJ2	branch-connector-kit	CDP-ITE	C	913
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	CD62JJ2	branch-connector-kit	CDP-ITE, CDP6	C	913
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	CDPFJ3	branch-connector-kit	CDP6	C	1093
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	FJ3K	branch-connector-kit	CDP6	C	1094
ITE FJ3 / JD3 / JJ3 / JL3 / HJ3 breakers (SIE)	JJ3K	branch-connector-kit	CDP6	C	1094
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	461
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL175JD	lug-kit	QED-2, QMB, I-LINE	A	596
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL250JD	lug-kit	QED-2, QMB, I-LINE	A	597
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	CU250JD	lug-kit	QED-2, QMB, I-LINE	A	598
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLN4EBL	filler-plate	QED-2, I-LINE	A	603
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLW4EBL	filler-plate	QED-2, I-LINE	A	605

Breaker family	Part	Component	Equipment family	Cl.	Pg
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC043	lug		A	875
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC063	lug		A	875
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL43	lug		A	875
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL47	lug		A	876
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL63	lug		A	876
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK343	lug-kit		A	874
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK347	lug-kit		A	874
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK363	lug-kit		A	874
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCLK43	lug		A	876
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJKLS	barrier		A	877
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJLVK	breaker-accessory		A	877
JA (EAT)	KCDPKDB	conversion-kit	CDP	A	88
JA (EAT)	TAD3	conversion-kit	PRL4, CDP	A	339
JB (EAT)	KCDPJDB	conversion-kit	CDP	A	86
JB (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	72
JD (EAT)	KCDPJD	conversion-kit	CDP	A	85
JD (EAT)	KCDPJDB	conversion-kit	CDP	A	86
JD (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	72
JD (EAT)	KPRL4JDS	breaker-mounting-kit	PRL4, PRL4X	A	315
JD (EAT)	KPRL4JDT	breaker-mounting-kit	PRL4, PRL4X	A	316
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6CLJ1	branch-connector-kit	SB, CDP6	A	1098
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ61	branch-connector-kit	P5, SB, CDP6	A	995
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ62	branch-connector-kit	SB, CDP6	A	1102
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCJ1	branch-connector-kit	CDP6, SB	A	1092
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCL61C	branch-connector-kit	CDP6, SB	A	1093
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SJL1	branch-connector-kit	P5, SB, CDP6	A	996
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD01	filler-plate	RP1, P1, S1/S2, P2, P3	—	1074
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD02	filler-plate	RP1	—	1075
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD1	main-breaker-kit	P1	A	918
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3	main-breaker-kit	P1	A	918

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3B	main-breaker-kit	RP1	A	1027
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	1083
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJ	branch-connector-kit	P4	A	974
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJD	branch-connector-kit	P5, SB, CDP6	A	1006
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1	branch-connector-kit	P4	A	981
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1D	branch-connector-kit	P5, SB, CDP6	A	1010
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ2D	branch-connector-kit	P5, SB, CDP6	A	1011
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD1	main-breaker-kit	S1/S2, SE	A	1087
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD3	main-breaker-kit	S1/S2, SE	A	1087
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJ	branch-connector-kit	P4	A	986
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJD	branch-connector-kit	SB	A	1106
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1	branch-connector-kit	P4	A	987
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1D	branch-connector-kit	P5, SB, CDP6	A	1015
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	286A8066G1	breaker-accessory		A	888
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G1	breaker-accessory		A	888
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G2	breaker-accessory		A	889
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G3	breaker-accessory		C	889
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	SKLVK	breaker-accessory		A	889
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0121	lug		A	882
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0131	lug		A	882
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC041	lug		A	883

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC061	lug		A	883
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC081A	lug		A	884
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC091	lug		A	884
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL121	lug		A	885
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL122	lug		B	885
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL131	lug		B	886
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL41	lug		A	886
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL61	lug		A	886
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL81	lug		A	887
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL91	lug		B	887
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2121	lug-kit		B	878
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2122	lug-kit		B	878
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK261	lug-kit		A	878
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK281	lug-kit		A	879
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK291	lug-kit		B	879
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3121	lug-kit		B	879
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3122	lug-kit		B	880
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK341	lug-kit		A	880
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK361	lug-kit		A	880
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK381	lug-kit		A	881
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK391	lug-kit		B	881

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM11	breaker-accessory		A	890
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM12	breaker-accessory		A	890
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKMC1	connector-strap		A	888
KA (EAT)	KCDPHKD	conversion-kit	CDP	A	84
KA (EAT)	KCDPKD	conversion-kit	CDP	A	87
KA (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	74
KB (EAT)	KCDPJD	conversion-kit	CDP	A	85
KB (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	72
KD (EAT)	KCDPDK	conversion-kit	CDP	A	80
KD (EAT)	KCDPHKD	conversion-kit	CDP	A	84
KD (EAT)	KCDPKD	conversion-kit	CDP	A	87
KD (EAT)	KCDPKDB	conversion-kit	CDP	A	88
KD (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	74
KD (EAT)	KPRL4CKD	breaker-mounting-kit	PRL4, PRL4X	A	306
KD (EAT)	KPRL4KDS	breaker-mounting-kit	PRL4, PRL4X	A	317
KD (EAT)	KPRL4KDT	breaker-mounting-kit	PRL4, PRL4X	A	318
KD (EAT)	TAD3	conversion-kit	PRL4, CDP	A	339
KI / KC frame (legacy) (SQD)	N250MKC	main-breaker-kit	NF	—	470
KI / KC frame (legacy) (SQD)	NQMB2KI	main-breaker-kit	NQ	—	494
LA (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	73
LA (EAT)	KCDPLD	conversion-kit	CDP	A	89
LA (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	321
LA / LH (I-Line) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	597
LA / LH (I-Line) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	599
LA / LH (I-Line) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	582
LA / LH (I-Line) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	582
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	LALLC	barrier	I-LINE	—	458
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	N400M	main-breaker-kit	NF	B	471
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NFLALLC	barrier	NF	—	488
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NQLALLC	barrier	NQ	A	520
LA / LH (L-frame, legacy thermal-magnetic) (SQD)	NQMB4LA	main-breaker-kit	NQ	A	495
LB (EAT)	KCDPKD	conversion-kit	CDP	A	87
LB (EAT)	KCDPKDB	conversion-kit	CDP	A	88
LB (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	74
LB (EAT)	TAD3	conversion-kit	PRL4, CDP	A	339
LC (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	73
LC (EAT)	KCDPLD	conversion-kit	CDP	A	89
LC (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	321
LD (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	73
LD (EAT)	KCDPLD	conversion-kit	CDP	A	89
LD (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	321
LD (EAT)	KPRL4LD	breaker-mounting-kit	PRL4, PRL4X	A	323
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6CLL1	branch-connector-kit	SB, CDP6	A	1099

Breaker family	Part	Component	Equipment family	Cl.	Pg
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6LL61	branch-connector-kit	P5, SB, CDP6	A	995
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SCL1	branch-connector-kit	SB, CDP6	A	1103
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SLL1	branch-connector-kit	P5, SB, CDP6	A	997
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCL	branch-connector-kit	P4	A	975
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCLD	branch-connector-kit	P5, SB, CDP6	A	1007
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6	branch-connector-kit	P4	A	982
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6D	branch-connector-kit	P5, SB, CDP6	A	1012
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCL	branch-connector-kit	P4	A	986
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCLD	branch-connector-kit	P5, SB, CDP6	A	1014
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6	branch-connector-kit	P4	A	988
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6D	branch-connector-kit	P5, SB, CDP6	A	1016
MA (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	75
MA (EAT)	KCDPMDL	conversion-kit	CDP	A	90
MC (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	75
MC (EAT)	KCDPMDL	conversion-kit	CDP	A	90
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6M61C	branch-connector-kit	CDP6, SB	A	1091
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6N61C	branch-connector-kit	CDP6, SB	A	1091
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	MG1D	branch-connector-kit	P4, P5, SB, CDP6	A	964
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	1000
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SLM1D	branch-connector-kit	P4, P5, SB, CDP6	A	984
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	1014

Breaker family	Part	Component	Equipment family	Cl.	Pg
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	1017
MDL (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	75
MDL (EAT)	KCDPMDL	conversion-kit	CDP	A	90
MDL (EAT)	KPRL4MC	breaker-mounting-kit	PRL4, PRL4X	A	325
MDL (EAT)	KPRL4MD	breaker-mounting-kit	PRL4, PRL4X	A	326
MDL (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	334
NA / NC (Stab-Lok plug-in) (FPE)	1LOK	handle-lock	NA1B, NBLP	—	1150
NA / NC (Stab-Lok plug-in) (FPE)	NCFS	filler-plate	NA1B	—	1150
NB (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	76
NB (EAT)	KCDPND	conversion-kit	CDP	A	91
NB (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	327
NB (Stab-Lok bolt-on) (FPE)	1LOK	handle-lock	NA1B, NBLP	—	1150
NC (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	76
NC (EAT)	KCDPND	conversion-kit	CDP	A	91
NC (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	327
ND (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	76
ND (EAT)	KCDPND	conversion-kit	CDP	A	91
ND (EAT)	KPRL4CND	breaker-mounting-kit	PRL4, PRL4X	A	307
ND (EAT)	KPRL4ND	breaker-mounting-kit	PRL4, PRL4X	A	328
ND (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	335
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	DSLNET	branch-connector-kit	ZIN-DIST	—	1155
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	FPENEFT	branch-connector-kit	ZIN-DIST	—	1157
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KBDP1C	branch-connector-kit	BDP	C	1135
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KCDP-1A	branch-connector-kit	NA1B	C	1149
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KCDP1C	branch-connector-kit	CDP	C	1139
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	NAIB-NEF	branch-connector-kit	NA1B	C	1150
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	NDPNE	branch-connector-kit	NDP	C	1151
NEB / HEB (SIE)	BBKEB32	branch-connector-kit	P3	A	949
NEB / HEB (SIE)	EBF1	filler-plate	P3, P4, P5	—	954
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	DSLNEJT	branch-connector-kit	ZIN-DIST	—	1155
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	KBDP2C	branch-connector-kit	BDP	C	1136
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	KCDP2C	branch-connector-kit	CDP	C	1139
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	NDPNEJ	branch-connector-kit	NDP	C	1151
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	CU-NFJ	breaker-mounting-kit	FA	—	1163
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	DSLNFT	branch-connector-kit	ZIN-DIST	—	1155
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	KBDP3C	branch-connector-kit	BDP	C	1136
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	KCDP3C	branch-connector-kit	CDP	C	1140

Breaker family	Part	Component	Equipment family	Cl.	Pg
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	NFHARDWARE	breaker-mounting-kit	CDP	—	1141
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1GG20	lug-kit		A	1109
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1Q1	lug-kit		A	1109
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TA6GG04	lug		A	1110
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TC1Q1	lug		A	1108
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TNKG3	hardware-kit		A	1110
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TSSG3A	barrier		A	1110
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	DSLNJT	branch-connector-kit	ZIN-DIST	—	1156
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	KBDP4C	branch-connector-kit	BDP	C	1137
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	KCDP4C	branch-connector-kit	CDP	C	1140
NM / HM / NN / NP / NK (large N-frames) (FPE)	DSLNM	branch-connector-kit	ZIN-DIST	—	1156
NM / HM / NN / NP / NK (large N-frames) (FPE)	DSLNMS	branch-connector-kit	ZIN-DIST	—	1156
NM / HM / NN / NP / NK (large N-frames) (FPE)	KBDP5C	branch-connector-kit	BDP	C	1137
NM / HM / NN / NP / NK (large N-frames) (FPE)	KCDP5C	branch-connector-kit	CDP	C	1141
NM / HM / NN / NP / NK (large N-frames) (FPE)	N32	lug-kit	FPE-SWBD, CDP	—	1152
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM34	lug-kit	FPE-SWBD, CDP	—	1152
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM36	lug-kit	FPE-SWBD, CDP	—	1152
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM38	lug-kit	FPE-SWBD, CDP	—	1153
NM / HM / NN / NP / NK (large N-frames) (FPE)	RP211002	breaker-accessory	FPE-SWBD	—	1153
NM / HM / NN / NP / NK (large N-frames) (FPE)	RP212001	breaker-accessory	FPE-SWBD	—	1153
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	263
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	263
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	263
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	264
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	264
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	264
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	265
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	266

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2B	main-breaker-kit	PRL1X, PRL2X	A	202
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2T	main-breaker-kit	PRL1X, PRL2X	A	202
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2B	main-breaker-kit	PRL1X, PRL2X	A	202
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2T	main-breaker-kit	PRL1X, PRL2X	A	203
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2B	main-breaker-kit	PRL1X, PRL2X	A	203
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2T	main-breaker-kit	PRL1X, PRL2X	A	203
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2B	main-breaker-kit	PRL1X, PRL2X	A	204
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2T	main-breaker-kit	PRL1X, PRL2X	A	204
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2B	main-breaker-kit	PRL1X, PRL2X	A	204
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2T	main-breaker-kit	PRL1X, PRL2X	A	205
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2B	main-breaker-kit	PRL1X, PRL2X	A	205
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2T	main-breaker-kit	PRL1X, PRL2X	A	205
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2B	main-breaker-kit	PRL1X, PRL2X	A	206
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2T	main-breaker-kit	PRL1X, PRL2X	A	206
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2B	main-breaker-kit	PRL1X, PRL2X	A	206
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2T	main-breaker-kit	PRL1X, PRL2X	A	207
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X21T	branch-connector-kit	PRL3X	A	296
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22	branch-connector-kit	PRL3A, PRL3X	A	237
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22T	branch-connector-kit	PRL3A, PRL3X	A	238
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23	branch-connector-kit	PRL3A, PRL3X	A	239
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23T	branch-connector-kit	PRL3A, PRL3X	A	240
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	329
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	330
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	331
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	189
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBPD2	barrier	PRL1X, PRL2X, PRL3X, PRL4X	A	214
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRXP4PD2FILL1	filler-plate	PRL4X	—	340
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7980	deadfront	PRL3X	—	296
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C8055	deadfront	PRL3X	—	296

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14B	main-breaker-kit	PRL1X, PRL2X	A	207
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14T	main-breaker-kit	PRL1X, PRL2X	A	208
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14B	main-breaker-kit	PRL1X, PRL2X	A	208
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14T	main-breaker-kit	PRL1X, PRL2X	A	209
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34B	main-breaker-kit	PRL1X, PRL2X	A	209
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34T	main-breaker-kit	PRL1X, PRL2X	A	210
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34B	main-breaker-kit	PRL1X, PRL2X	A	210
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34T	main-breaker-kit	PRL1X, PRL2X	A	211
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16B	main-breaker-kit	PRL1X, PRL2X	A	211
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16T	main-breaker-kit	PRL1X, PRL2X	A	212
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36B	main-breaker-kit	PRL1X, PRL2X	A	212
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36T	main-breaker-kit	PRL1X, PRL2X	A	213
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334S	breaker-mounting-kit	PRL4, PRL4X	A	331
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334T	breaker-mounting-kit	PRL4, PRL4X	A	332
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X336	breaker-mounting-kit	PRL4, PRL4X	A	333
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	191
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBPD3	barrier	PRL1X, PRL2X, PRL3X, PRL4X	A	215
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	334
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	335
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	HLN4EBL	filler-plate	QED-2, I-LINE	A	603
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	HLW4EBL	filler-plate	QED-2, I-LINE	A	605
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	N150MH	main-breaker-kit	NF	A	469
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NF250SFBH	main-breaker-kit	NF	A	472
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NF600SFBH	main-breaker-kit	NF	A	472
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NFHJLLC	barrier	NF	—	488
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQHJQLLC	barrier	NQ	A	520
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQMB2HJ	main-breaker-kit	NQ	A	493
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQMB2HJ14	main-breaker-kit	NQ	A	494
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB2HJ	main-breaker-kit	NQ	A	496

Breaker family	Part	Component	Equipment family	Cl.	Pg
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB2Q	main-breaker-kit	NQ	A	497
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB4HJ	main-breaker-kit	NQ	A	497
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	NQSFB4Q	main-breaker-kit	NQ	A	498
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	QMBHW	breaker-mounting-kit	QMB	—	539
PowerPacT H-frame (HD/HG/HJ/HL/HR) (SQD)	S37444	breaker-accessory	QMB, NQ, NQOD, NF	A	578
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	HLN4EBL	filler-plate	QED-2, I-LINE	A	603
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	HLW4EBL	filler-plate	QED-2, I-LINE	A	605
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	N250MJ	main-breaker-kit	NF	A	470
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NF250SFBJ	main-breaker-kit	NF	A	472
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NF600SFBJ	main-breaker-kit	NF	A	473
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NFHJLLC	barrier	NF	—	488
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQHJQLLC	barrier	NQ	A	520
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQMB2HJ	main-breaker-kit	NQ	A	493
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQMB2HJ14	main-breaker-kit	NQ	A	494
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB2HJ	main-breaker-kit	NQ	A	496
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB2Q	main-breaker-kit	NQ	A	497
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB4HJ	main-breaker-kit	NQ	A	497
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	NQSFB4Q	main-breaker-kit	NQ	A	498
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	QMBJW	breaker-mounting-kit	QMB	—	539
PowerPacT J-frame (JD/JG/JJ/JL/JR) (SQD)	S37445	breaker-accessory	QMB, NQ, NQOD, NF	A	578
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH62D9	box/enclosure	NQ, NF	—	522
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH68D9	box/enclosure	NQ, NF	—	522
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH74D9	box/enclosure	NQ, NF	—	522
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH80D9	box/enclosure	NQ, NF	—	523
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH86D9	box/enclosure	NQ, NF	—	523
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	MH92D9	box/enclosure	NQ, NF	—	523
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	N600MPPL	main-breaker-kit	NF	A	471
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NF600SFBPPL	main-breaker-kit	NF	—	473
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NFPPLLLC	barrier	NF	A	489
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NFRPLMB6PPL	deadfront	NF	—	489

Breaker family	Part	Component	Equipment family	Cl.	Pg
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQMB6PPL	main-breaker-kit	NQ	A	496
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQPPLLLC	barrier	NQ	A	521
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQRPLMB6PPL	deadfront	NQ	—	521
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	NQSFB6PPL	main-breaker-kit	NQ	A	498
PowerPacT L-frame (LG/LJ/LL/LR) (SQD)	PPLLC	barrier	I-LINE	—	459
PowerPacT M / P / R frame (I-Line) (SQD)	HCR12SNCT	neutral-assembly	I-LINE	—	447
PowerPacT M / P / R frame (I-Line) (SQD)	NFPPPLLC	barrier	NF	—	489
PowerPacT M / P / R frame (I-Line) (SQD)	NFRPLMB8PPMP	deadfront	NF	—	490
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQHJQLLC	barrier	NQ	A	520
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQMB2Q	main-breaker-kit	NQ	A	494
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQMB2Q14	main-breaker-kit	NQ	A	495
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB2HJ	main-breaker-kit	NQ	A	496
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB2Q	main-breaker-kit	NQ	A	497
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB4HJ	main-breaker-kit	NQ	A	497
PowerPacT Q-frame (QB/QD/QG/QJ) (SQD)	NQSFB4Q	main-breaker-kit	NQ	A	498
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	6QJ2	branch-connector-kit	CDP6, SB	A	1092
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ1	branch-connector-kit	P2	A	930
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ2	branch-connector-kit	P3	A	949
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	947
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	957
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ01	filler-plate	RP1, P1	—	1075
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ02	filler-plate	RP1, P1	—	1075
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	SQRC	other	P4, P5, SB	—	992
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	TA1Q300	lug-kit		C	1111
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL150HD	lug-kit	QED-2, QMB, I-LINE	A	595
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL175JD	lug-kit	QED-2, QMB, I-LINE	A	596
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL250JD	lug-kit	QED-2, QMB, I-LINE	A	597
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	597
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU150HD	lug-kit	QED-2, QMB, I-LINE	A	598
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU250JD	lug-kit	QED-2, QMB, I-LINE	A	598

Breaker family	Part	Component	Equipment family	Cl.	Pg
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	599
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	582
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	582
QMQB fusible panelboard switch (FPE)	KFDP2C	connector-strap	FDP	C	1143
QMQB fusible panelboard switch (FPE)	KFDP3C	connector-strap	FDP	C	1143
QMQB fusible panelboard switch (FPE)	KFDP46C	connector-strap	FDP	C	1143
QMQB fusible panelboard switch (FPE)	KFDP4C	connector-strap	FDP	C	1144
QMQB fusible panelboard switch (FPE)	KFDP-5C	connector-strap	FDP, BDP	C	1144
QMQB fusible panelboard switch (FPE)	KFDP66C	connector-strap	FDP	C	1144
QMQB fusible panelboard switch (FPE)	KFDP7C	connector-strap	FDP	C	1145
QMQB fusible panelboard switch (FPE)	KFDPD16C	connector-strap	FDP	C	1145
QMQB fusible panelboard switch (FPE)	KFDPD26C	connector-strap	FDP	C	1145
QMQB fusible panelboard switch (FPE)	KFDPS16C	connector-strap	FDP	C	1146
QMQB fusible panelboard switch (FPE)	KFDPS26C	connector-strap	FDP	C	1146
QMQB fusible panelboard switch (FPE)	KFDPV7C	connector-strap	FDP	C	1146
QMQB fusible panelboard switch (FPE)	KQB3C	connector-strap	FDP	C	1147
QMQB fusible panelboard switch (FPE)	KQB46C	connector-strap	FDP	C	1147
QMQB fusible panelboard switch (FPE)	KQB4C	connector-strap	FDP	C	1147
QMQB fusible panelboard switch (FPE)	KQB66C	connector-strap	FDP	C	1147
QMQB fusible panelboard switch (FPE)	KQB86C	connector-strap	FDP	C	1148
QMQB fusible panelboard switch (FPE)	KQB-D26C	connector-strap	FDP	C	1148
QMQB fusible panelboard switch (FPE)	PK103T	connector-strap	FDP	C	1148
QO (plug-on) (SQD)	HQO306	other	QED-2, I-LINE	—	610
QO (plug-on) (SQD)	NQ100AN	lug	NQ	—	510
QO (plug-on) (SQD)	NQ200AN	lug	NQ	A	510
QO (plug-on) (SQD)	NQFP15	filler-plate	NQ	—	521
QO (plug-on) (SQD)	Q1150AN	lug	NQ	—	510
QO (plug-on) (SQD)	QO70AN	lug	NQ, NF	—	510
QO (plug-on) (SQD)	SKNQBC	branch-connector-kit	NQ	—	511
QO (plug-on) (SQD)	SKNQOD225	branch-connector-kit	NQOD	—	532
QOB (bolt-on) (SQD)	NQ100AN	lug	NQ	—	510
QOB (bolt-on) (SQD)	NQ200AN	lug	NQ	A	510
QOB (bolt-on) (SQD)	NQFP15	filler-plate	NQ	—	521
QOB (bolt-on) (SQD)	NQODBFMB20	barrier	NQ, NQOD	—	520
QOB (bolt-on) (SQD)	Q1150AN	lug	NQ	—	510
QOB (bolt-on) (SQD)	QO1PJ15	breaker-accessory	NQ	—	524

Breaker family	Part	Component	Equipment family	Cl.	Pg
QOB (bolt-on) (SQD)	QO70AN	lug	NQ, NF	—	510
QOB (bolt-on) (SQD)	QOB2125SL	sub-feed-lug-kit	NQ	—	506
QOB (bolt-on) (SQD)	QOB3125SL	sub-feed-lug-kit	NQ	—	507
QOB (bolt-on) (SQD)	SKNQBC	branch-connector-kit	NQ	—	511
QOB (bolt-on) (SQD)	SKNQOD225	branch-connector-kit	NQOD	—	532
QR2 / QRH2 / HQR2 (250A frame) (SIE)	3TA1QR300	lug-kit		A	1111
QR2 / QRH2 / HQR2 (250A frame) (SIE)	3TC1QR250	lug-kit		A	1112
QR2 / QRH2 / HQR2 (250A frame) (SIE)	CCQ250	lug		A	1112
QR2 / QRH2 / HQR2 / HQR2H (SIE)	6QR2	branch-connector-kit	P4, P5, SB, CDP6	A	961
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR1	branch-connector-kit	P2	A	930
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR2	branch-connector-kit	P3	A	950
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	947
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	957
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1	main-breaker-kit	P1, S1/S2	A	920
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1A	main-breaker-kit	RP1	A	1028
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3	main-breaker-kit	P1, S1/S2	A	921
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3A	main-breaker-kit	RP1	A	1029
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQRFK	filler-plate	RP1, P1	—	1078
QR2 / QRH2 / HQR2 / HQR2H (SIE)	P2QRFP01	filler-plate	P2	—	945
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQR	branch-connector-kit	P4, P5, SB	A	984
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRC	other	P4, P5, SB	—	992
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRD	branch-connector-kit	P4, P5, SB	A	985
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1256C42G01	handle-lock	PRL1A, PRL3A	—	199
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1256C42G02	handle-lock	PRL1A, PRL3A	—	199
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1C96608	branch-connector-kit	PRL1A, PRL1X	A	181
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1C96619	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	192
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	4176B67	deadfront	PRL3A, PRL3X	—	259
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	195
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	5156C10	deadfront	PRL1/PRL2	—	121
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	118
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA06	branch-connector-kit	PRL3A, PRL3X, PRC	A	223
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA06-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	223

Breaker family	Part	Component	Equipment family	Cl.	Pg
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA12	branch-connector-kit	PRL3A, PRL3X, PRC	A	224
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA12-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	225
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA18	branch-connector-kit	PRL3A, PRL3X, PRC	A	226
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA18-1	branch-connector-kit	PRL3A, PRL3X, PRC	A	226
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA24	branch-connector-kit	PRL3A, PRL3X, PRC	A	227
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA24-1	branch-connector-kit	PRL3A, PRC	A	228
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA06	branch-connector-kit	PRL3A, PRL3X	A	241
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA06-1	branch-connector-kit	PRL3A, PRL3X	A	242
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA12	branch-connector-kit	PRL3A, PRL3X	A	243
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA12-1	branch-connector-kit	PRL3A, PRL3X	A	244
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA18	branch-connector-kit	PRL3A, PRL3X	A	245
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA18-1	branch-connector-kit	PRL3A, PRL3X	A	246
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA24	branch-connector-kit	PRL3A, PRL3X	A	247
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA24-1	branch-connector-kit	PRL3A, PRL3X	A	248
QUICKLAG plug-on (HQP/QPHW family) (EAT)	2C11642	branch-connector-kit	PRL1A, PRL1X	A	182
QUICKLAG plug-on (HQP/QPHW family) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	195
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	691
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5700P86	mounting-bracket	A-SERIES-PWR	—	688
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	684
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	684
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	685
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP2FBD	filler-plate	SPECTRA-PP	A	831
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP3FBD	filler-plate	SPECTRA-PP	A	833
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AHKBFB1	hardware-kit	SPECTRA-PP	A	848
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMC6FBFP	breaker-mounting-kit	SPECTRA-PP	A	791
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB4FBFP	branch-connector-kit	SPECTRA-PP	A	753
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB6FBFP	branch-connector-kit	SPECTRA-PP	A	763
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB12P	breaker-mounting-kit	A-SERIES	—	671
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB3P	breaker-mounting-kit	A-SERIES	—	671
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPP6FB6D	branch-connector-kit	A-SERIES-PWR	A	680

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	TEDFP1	filler-plate	A-SERIES	—	675
Record Plus FB 100 (GEA)	FCAL12	lug		A	892
Record Plus FB 100 (GEA)	FCAL13	lug		A	892
Record Plus FB 100 (GEA)	FCAL14	lug		A	892
Record Plus FB 100 (GEA)	FCALK12	lug-kit		A	891
Record Plus FB 100 (GEA)	FCALK13	lug-kit		A	891
Record Plus FB 100 (GEA)	FCALK14	lug-kit		A	891
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKBFD1	hardware-kit	SPECTRA-PP	A	848
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKFD1	hardware-kit	SPECTRA-PP	A	850
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDBFP	breaker-mounting-kit	SPECTRA-PP	A	781
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDSFP	breaker-mounting-kit	SPECTRA-PP	A	782
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDBFP	breaker-mounting-kit	SPECTRA-PP	A	791
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDSPF	breaker-mounting-kit	SPECTRA-PP	A	792
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB4FDBFP	branch-connector-kit	SPECTRA-PP	A	754
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB6FDBFP	branch-connector-kit	SPECTRA-PP	A	764
Record Plus FC 100 (GEA)	FCAL12	lug		A	892
Record Plus FC 100 (GEA)	FCAL13	lug		A	892
Record Plus FC 100 (GEA)	FCAL14	lug		A	892
Record Plus FC 100 (GEA)	FCALK12	lug-kit		A	891
Record Plus FC 100 (GEA)	FCALK13	lug-kit		A	891
Record Plus FC 100 (GEA)	FCALK14	lug-kit		A	891
Record Plus FE 250 (GEA)	FCAL15	lug		A	894
Record Plus FE 250 (GEA)	FCAL16	lug		A	894
Record Plus FE 250 (GEA)	FCALK15	lug-kit		A	893
Record Plus FE 250 (GEA)	FCALK15LV	lug-kit		A	893
Record Plus FE 250 (GEA)	FCALK16	lug-kit		A	893
Record Plus FE 250 (GEA)	FCALK16LV	lug-kit		A	894
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGD	filler-plate	SPECTRA-PP	A	835
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGS	filler-plate	SPECTRA-PP	A	836
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKBFG1	hardware-kit	SPECTRA-PP	A	848
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKFG1	hardware-kit	SPECTRA-PP	A	850
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC2FGMFP	breaker-mounting-kit	SPECTRA-PP	A	770

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC3FGMFP	breaker-mounting-kit	SPECTRA-PP	A	775
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC4FGBFP	breaker-mounting-kit	SPECTRA-PP	A	782
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC6FGBFP	breaker-mounting-kit	SPECTRA-PP	A	792
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB2FGMFP	branch-connector-kit	SPECTRA-PP	A	740
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB3FGMFP	branch-connector-kit	SPECTRA-PP	A	745
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB4FGBFP	branch-connector-kit	SPECTRA-PP	A	754
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB6FGBFP	branch-connector-kit	SPECTRA-PP	A	764
Record Plus FG 600 (GEA)	FCALK218H	lug-kit		A	895
Record Plus FG 600 (GEA)	FCALK318H	lug-kit		A	895
Record Plus FG 600 (GEA)	FGH1LCK	breaker-accessory		A	896
Record Plus FG 600 (GEA)	FGJN3	breaker-accessory		A	896
Record Plus FG 600 (GEA)	FGJS3	barrier		A	895
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	CCE125	lug		A	1113
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LD1E060	lug		A	1113
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LD1E100	lug		A	1113
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LN1E100	lug		A	1114
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2641	breaker-accessory		A	1115
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2642	breaker-accessory		A	1115
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2643	breaker-accessory		A	1116
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2644	breaker-accessory		A	1116
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	SA1E025	lug		A	1114
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TA1E6125	lug		A	1114
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TA6ED06	lug		A	1114
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TC1ED6150	lug		A	1115
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	CCF250	lug		A	1117
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	RS4755	breaker-accessory		A	1118
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	RS4756	breaker-accessory		A	1118
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TA1FD350A	lug		A	1117
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TA6FD04	lug		A	1117

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TC1FD350	lug		A	1117
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CCL600	lug		A	1119
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CLRSJL3	barrier		A	1121
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	JDTERMSHIELD	barrier		A	1121
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	RS5773	breaker-accessory		A	1122
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	RS5774	breaker-accessory		A	1122
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA1L6750	lug		A	1119
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J630	lug		A	1119
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J6500	lug		A	1120
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA6JD20	lug		A	1120
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TC1J6600	lug		A	1120
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TC2J6500	lug		A	1121
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CCL600	lug		A	1119
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CLRSJL3	barrier		A	1121
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	JDTERMSHIELD	barrier		A	1121
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	RS5783	breaker-accessory		A	1123
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	RS5784	breaker-accessory		A	1123
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA1L6750	lug		A	1119
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA2J6500	lug		A	1120
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA6JD20	lug		A	1120
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TC1J6600	lug		A	1120

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TC2J6500	lug		A	1121
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	RS5787	breaker-accessory		A	1125
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	RS5788	breaker-accessory		A	1125
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TA2K500	lug		A	1124
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TA3K500	lug		A	1124
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TC2K500	lug		A	1124
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA2N8750	lug-kit		A	1126
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA3N8750	lug-kit		A	1126
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA4N8500	lug-kit		A	1127
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA4P8500	lug-kit		A	1127
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA2N8750	lug-kit		A	1127
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA3N8750	lug-kit		A	1128
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA4N8500	lug-kit		A	1128
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA4P8500	lug-kit		A	1128
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800K2	lug-kit		A	1129
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800K3	lug-kit		A	1129
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	MDTERMSHIELD	barrier		A	1130
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	NDTS	barrier		A	1130
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	RS5785	breaker-accessory		A	1130
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	RS5786	breaker-accessory		A	1131
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2K500	lug		A	1124
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2N750	lug		A	1129
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA3K500	lug		A	1124

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TC2K500	lug		A	1124
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA3N8750	lug-kit		A	1126
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA4N8500	lug-kit		A	1127
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA4P8500	lug-kit		A	1127
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA3N8750	lug-kit		A	1128
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA4N8500	lug-kit		A	1128
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA4P8500	lug-kit		A	1128
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200K2	lug-kit		A	1131
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200K3	lug-kit		A	1131
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	MDTERMSHIELD	barrier		A	1130
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	NDTS	barrier		A	1130
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	RS5785	breaker-accessory		A	1130
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	RS5786	breaker-accessory		A	1131
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MDTERMSHIELD	barrier		A	1130
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA4P750	lug		A	1132
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA5P600	lug		A	1132
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA6R600	lug		A	1132
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TC5R600	lug		A	1133
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MDTERMSHIELD	barrier		A	1130
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TA6R600	lug		A	1132
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TC5R600	lug		A	1133
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1	branch-connector-kit	P4, P5, SB	A	964
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1D	branch-connector-kit	P4, P5, SB, CDP6	A	964

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	1000
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SDGD	branch-connector-kit	P4, P5, SB, CDP6	A	976
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFG	branch-connector-kit	P4, P5, SB	A	978
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFGD	branch-connector-kit	P4, P5, SB, CDP6	A	978
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG	branch-connector-kit	P4, P5, SB	A	981
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG1D	branch-connector-kit	P4, P5, SB, CDP6	A	981
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG2D	branch-connector-kit	P5, SB, CDP6	A	1012
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLG	branch-connector-kit	P4, P5, SB	A	982
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLGD	branch-connector-kit	P4, P5, SB, CDP6	A	983
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4176B68	deadfront	PRL3A	—	259
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4178B08	deadfront	PRL3A	—	261
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B39	deadfront	PRL3A	—	261
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B40	deadfront	PRL3A	—	261
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B41	deadfront	PRL3A	—	261
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B42	deadfront	PRL3A	—	262
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	193
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4180B93	deadfront	PRL3A	—	262
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	263
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	263
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	264
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	265
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	130
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	131

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	131
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	132
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	132
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	133
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	133
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	134
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	70
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	229
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3AED3	branch-connector-kit	PRL3A, PRL3X	A	229
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	219
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4ED	breaker-mounting-kit	PRL4, PRL4X	A	308
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4ED2	breaker-mounting-kit	PRL4, PRL4X	A	309
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	330
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	331
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C72G01	connector-strap		A	356
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C72G03	connector-strap		A	356
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G01	connector-strap		A	356
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G03	connector-strap		A	356
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G05	connector-strap		A	357
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G06	connector-strap		A	357
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	374D883G01	breaker-accessory		A	363

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	374D883G02	breaker-accessory		A	363
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T100FB	lug-kit		A	352
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T150FB	lug-kit		A	352
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T20FB	lug-kit		A	352
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T225FD	lug-kit		C	353
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA100FD	lug-kit		A	353
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150F3K	lug-kit		A	353
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150F6K	lug-kit		A	354
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150FB	lug-kit		—	354
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA225FD	lug-kit		A	354
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA225FDK	lug-kit		A	355
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA50FB	lug-kit		A	355
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	4210B95G01	barrier		A	359
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	4210B95G02	barrier		A	359
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	451D874G01	breaker-accessory		A	363
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	451D874G02	breaker-accessory		A	364
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	624B600H01	mounting-bracket		A	358
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	624B600H02	mounting-bracket		A	358
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G06	barrier		A	360
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G07	barrier		A	360
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G08	barrier		A	360

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G09	barrier		A	361
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G02	connector-strap		A	357
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G03	connector-strap		A	357
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G04	connector-strap		A	358
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G10	connector-strap		A	358
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	FCWTK	breaker-accessory		A	364
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	FCWTK225	breaker-accessory		A	364
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	IPB1	barrier		A	361
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK1	breaker-accessory		A	364
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK12	breaker-accessory		A	365
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK14	breaker-accessory		A	365
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM1	breaker-accessory		A	365
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM12	breaker-accessory		A	366
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM14	breaker-accessory		A	366
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPR1A	fastener		A	362
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPR1AM	fastener		A	362
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	TEC1	barrier		A	361
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	TEC2	barrier		A	361
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4176B68	deadfront	PRL3A	—	259
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4178B06H01	filler-plate	PRL3A	—	266
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4178B08	deadfront	PRL3A	—	261

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B39	deadfront	PRL3A	—	261
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B40	deadfront	PRL3A	—	261
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B41	deadfront	PRL3A	—	261
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B42	deadfront	PRL3A	—	262
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B03	deadfront	PRL1A, PRL2A	—	192
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	195
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	193
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B93	deadfront	PRL3A	—	262
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	263
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	263
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	263
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	264
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	264
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	264
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	265
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	266
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11AFB	main-breaker-kit	PRL1A, PRL2A	**A**	126
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11AFT	main-breaker-kit	PRL1A, PRL2A	**A**	127
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11SFB	main-breaker-kit	PRL1A, PRL2A	**A**	127

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11SFT	main-breaker-kit	PRL1A, PRL2A	A	128
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13AFB	main-breaker-kit	PRL1A, PRL2A	A	128
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13AFT	main-breaker-kit	PRL1A, PRL2A	A	129
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13SFB	main-breaker-kit	PRL1A, PRL2A	A	129
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13SFT	main-breaker-kit	PRL1A, PRL2A	A	130
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	130
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	131
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	131
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	132
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	132
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	133
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	133
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	134
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	70
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPEHD	conversion-kit	CDP	A	81
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFD	conversion-kit	CDP	A	82
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFDB	conversion-kit	CDP	A	83
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	229
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AED3	branch-connector-kit	PRL3A, PRL3X	A	229
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD1	branch-connector-kit	PRL3A	A	230

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD2	branch-connector-kit	PRL3A, PRL3X	A	230
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD3	branch-connector-kit	PRL3A, PRL3X	A	230
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	220
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	310
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD	breaker-mounting-kit	PRL4, PRL4X	A	311
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4, PRL4X	A	313
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4, PRL4X	A	314
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	315
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	329
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	330
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	331
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	189
Series C G-Frame (GD/GHC/GHB) (EAT)	3TA100G3K	lug-kit		A	366
Series C G-Frame (GD/GHC/GHB) (EAT)	3TA100G6K	lug-kit		A	367
Series C G-Frame (GD/GHC/GHB) (EAT)	5652B38G01	breaker-accessory		A	419
Series C G-Frame (GD/GHC/GHB) (EAT)	GTSK3	barrier		A	367
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	1266C07G01	barrier		A	370
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	2600D26G01	connector-strap		A	369
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	2600D26G02	connector-strap		A	369
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	3TA250J3K	lug-kit		A	368
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	3TA250J6K	lug-kit		A	368
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	5010D23G01	breaker-accessory		A	372
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	5010D23G02	breaker-accessory		A	373
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6631C01G01	barrier		A	370
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6641C16G01	barrier		A	370

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6641C16G02	barrier		A	371
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	IPB2	barrier		C	371
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	IPB3	barrier		A	371
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KCWTK	breaker-accessory		A	373
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEK2	breaker-accessory		A	373
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEK24	breaker-accessory		A	373
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEKM2	breaker-accessory		A	374
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEKM24	breaker-accessory		A	374
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	PLN2	fastener		A	372
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	PLN2M	fastener		A	372
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	T250KB	lug-kit		A	368
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	TA250KB	lug-kit		A	369
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4176B60	deadfront	PRL3A	—	258
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4176B79	deadfront	PRL3A	—	260
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4180B04	deadfront	PRL1A, PRL2A	—	193
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	195
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41AJB	main-breaker-kit	PRL1A, PRL2A	A	134
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41AJT	main-breaker-kit	PRL1A, PRL2A	A	135
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41SJB	main-breaker-kit	PRL1A, PRL2A	A	136
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41SJT	main-breaker-kit	PRL1A, PRL2A	A	137
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43AJB	main-breaker-kit	PRL1A, PRL2A	A	138
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43AJT	main-breaker-kit	PRL1A, PRL2A	A	139
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43SJB	main-breaker-kit	PRL1A, PRL2A	A	140
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43SJT	main-breaker-kit	PRL1A, PRL2A	A	141
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPJD	conversion-kit	CDP	A	85
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPJDB	conversion-kit	CDP	A	86
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	72
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KPRL4JDS	breaker-mounting-kit	PRL4, PRL4X	A	315
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KPRL4JDT	breaker-mounting-kit	PRL4, PRL4X	A	316
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PRLSEBJD	barrier	PRL1A, PRL2A, PRL3A	A	190

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	208B264H01	mounting-bracket		A	386
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T400K	lug-kit		A	375
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T400KCW	lug-kit		A	376
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T402K	lug-kit		A	376
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA400K	lug-kit		A	376
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA400KCW	lug-kit		A	377
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA401K	lug-kit		A	377
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA401KCW	lug-kit		A	377
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA402K	lug-kit		A	378
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T400K	lug-kit		A	378
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T400KCW	lug-kit		A	378
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T402K	lug-kit		A	379
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K	lug-kit		A	379
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K3K	lug-kit		A	379
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K6K	lug-kit		A	380
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400KCW	lug-kit		A	380
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA401K	lug-kit		A	380
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA401KCW	lug-kit		A	381
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA402K	lug-kit		A	381
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4212B77G01	connector-strap		A	385
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4212B78G02	connector-strap		A	386
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T400K	lug-kit		A	381
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T400KCW	lug-kit		A	382
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T402K	lug-kit		A	382
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA400K	lug-kit		A	382
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA400KCW	lug-kit		A	383
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA401K	lug-kit		A	383
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA401KCW	lug-kit		A	383
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA402K	lug-kit		A	384
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G02	breaker-accessory		A	389

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G03	breaker-accessory		A	389
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G04	breaker-accessory		A	390
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G05	breaker-accessory		A	390
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G06	breaker-accessory		A	390
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G07	breaker-accessory		A	391
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	IPB2	barrier		C	371
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	IPB3	barrier		A	371
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KCWTK	breaker-accessory		A	373
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEK3	breaker-accessory		A	391
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEK34	breaker-accessory		A	391
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEKM3	breaker-accessory		A	392
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEKM34	breaker-accessory		A	392
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3A	fastener		A	387
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3AM	fastener		A	388
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3B	fastener		A	388
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3BM	fastener		A	388
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	T300K	lug-kit		A	384
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	T350K	lug-kit		A	384
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA250KB	lug-kit		A	369
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA300K	lug-kit		A	385
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA350K	lug-kit		A	385
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TAD3	conversion-kit	PRL4, CDP	A	339
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS33LD	barrier		A	386
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS33LN	barrier		A	387
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS34LN	barrier		A	387
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4176B61	deadfront	PRL3A	—	259
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4180B05	deadfront	PRL1A, PRL2A	—	193
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	195
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	194

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41AKB	main-breaker-kit	PRL1A, PRL2A	A	135
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41AKT	main-breaker-kit	PRL1A, PRL2A	A	136
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41SKB	main-breaker-kit	PRL1A, PRL2A	A	137
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41SKT	main-breaker-kit	PRL1A, PRL2A	A	138
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43AKB	main-breaker-kit	PRL1A, PRL2A	A	139
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43AKT	main-breaker-kit	PRL1A, PRL2A	A	140
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43SKB	main-breaker-kit	PRL1A, PRL2A	A	141
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43SKT	main-breaker-kit	PRL1A, PRL2A	A	142
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPDK	conversion-kit	CDP	A	80
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPHKD	conversion-kit	CDP	A	84
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPKD	conversion-kit	CDP	A	87
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPKDB	conversion-kit	CDP	A	88
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	74
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4CKD	breaker-mounting-kit	PRL4, PRL4X	A	306
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4KDS	breaker-mounting-kit	PRL4, PRL4X	A	317
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4KDT	breaker-mounting-kit	PRL4, PRL4X	A	318
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	191
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	TAD3	conversion-kit	PRL4, CDP	A	339
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	208B297H01	mounting-bracket		A	398
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA401LDK	lug-kit		A	393
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA603LDK	lug-kit		A	393
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA603LDKCW	lug-kit		A	394
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C420G05	barrier		A	399

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G07	breaker-accessory		A	399
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G08	breaker-accessory		A	400
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G09	breaker-accessory		A	400
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA401LDK	lug-kit		A	394
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA603LDK	lug-kit		A	394
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA603LDKCW	lug-kit		A	395
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA401LDK	lug-kit		A	395
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA603LDK	lug-kit		A	395
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA603LDKCW	lug-kit		A	396
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	506C052G01	connector-strap		A	398
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	624B609G01	connector-strap		A	398
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	IPB3	barrier		A	371
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	IPB4	barrier		A	399
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEK4	breaker-accessory		A	400
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEK44	breaker-accessory		A	401
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEKM4	breaker-accessory		A	401
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEKM44	breaker-accessory		A	401
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	T602LD	lug-kit		A	396
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	T602LDCW	lug-kit		A	396
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA450LD	lug-kit		A	397
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA602LD	lug-kit		A	397
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA602LDCW	lug-kit		A	397
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	4176B51	deadfront	PRL3A	—	258
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	73
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KCDPLD	conversion-kit	CDP	A	89
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	321

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KPRL4LD	breaker-mounting-kit	PRL4, PRL4X	A	323
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	208B966G01	barrier		A	405
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G01	breaker-accessory		A	406
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G04	breaker-accessory		A	406
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G05	breaker-accessory		A	406
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G06	breaker-accessory		A	407
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G07	breaker-accessory		A	399
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G08	breaker-accessory		A	400
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G09	breaker-accessory		A	400
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G10	breaker-accessory		A	407
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G11	breaker-accessory		A	407
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G12	breaker-accessory		A	408
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G01	connector-strap		A	404
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G02	connector-strap		A	404
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G03	connector-strap		A	405
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	315C270H01	mounting-bracket		A	405
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	IPB4	barrier		A	399
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	T600MA1	lug-kit		A	402
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	T800MA1	lug-kit		A	402
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA700MA1	lug-kit		A	402
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA700MA1CWT	lug-kit		A	403
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA800MA2	lug-kit		A	403
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA800MA2CWT	lug-kit		A	403
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA801MA	lug-kit		A	403
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA801MACWT	lug-kit		A	404
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	75
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KCDPMDL	conversion-kit	CDP	A	90
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4MC	breaker-mounting-kit	PRL4, PRL4X	A	325

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4MD	breaker-mounting-kit	PRL4, PRL4X	A	326
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	334
Series C N-Frame (ND/HND/NDC/NB) (EAT)	315C270H01	mounting-bracket		A	405
Series C N-Frame (ND/HND/NDC/NB) (EAT)	373B375G03	breaker-accessory		A	412
Series C N-Frame (ND/HND/NDC/NB) (EAT)	373B375G04	breaker-accessory		A	412
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G04	connector-strap		A	410
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G05	connector-strap		A	411
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G06	connector-strap		A	411
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G01	breaker-accessory		A	412
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G02	breaker-accessory		A	413
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G03	breaker-accessory		A	413
Series C N-Frame (ND/HND/NDC/NB) (EAT)	IPB5	barrier		A	411
Series C N-Frame (ND/HND/NDC/NB) (EAT)	NTS3K	barrier		A	411
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T1000NB1	lug-kit		A	408
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T1200NB3	lug-kit		A	409
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T700NB1	lug-kit		A	409
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1000NB1	lug-kit		A	409
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1200NB1	lug-kit		A	409
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1201NB1	lug-kit		A	410
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA700NB1	lug-kit		A	410
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	76
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KCDPND	conversion-kit	CDP	A	91
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4CND	breaker-mounting-kit	PRL4, PRL4X	A	307
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	327

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4ND	breaker-mounting-kit	PRL4, PRL4X	A	328
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	335
Series C R-Frame (RD/RDC) (EAT)	B2016RD	breaker-accessory		A	414
Series C R-Frame (RD/RDC) (EAT)	B2016RDL	breaker-accessory		A	415
Series C R-Frame (RD/RDC) (EAT)	B2500RD	breaker-accessory		A	415
Series C R-Frame (RD/RDC) (EAT)	T1600RD	lug-kit		A	413
Series C R-Frame (RD/RDC) (EAT)	TA1600RD	lug-kit		A	414
Series C R-Frame (RD/RDC) (EAT)	TA2000RD	lug-kit		A	414
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3T125EF	lug-kit		A	416
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125E3K	lug-kit		A	416
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125E6K	lug-kit		A	416
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125EF	lug-kit		A	416
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA150EF	lug-kit		A	417
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA160EFK	lug-kit		A	417
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	4TA160EFK	lug-kit		A	417
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	5652B38G01	breaker-accessory		A	419
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EEC3K	barrier		A	418
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EEC4K	barrier		A	418
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF2RTDK	breaker-accessory		A	419
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF2RTWK	breaker-accessory		A	419
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF3RTDK	breaker-accessory		A	420
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF3RTWK	breaker-accessory		A	420

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF4RTDK	breaker-accessory		A	420
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF4RTWK	breaker-accessory		A	420
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFTS3K	barrier		A	418
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFTS4K	barrier		A	418
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EIPBK	barrier		A	418
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA225FD	lug-kit		A	354
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA250FJ3	lug-kit		A	421
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA250FJ6	lug-kit		A	421
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ3RTDK	breaker-accessory		A	423
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ3RTWK	breaker-accessory		A	423
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ4RTDK	breaker-accessory		A	424
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ4RTWK	breaker-accessory		A	424
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJCWTK	breaker-accessory		A	424
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJIPBK	barrier		A	422
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJIPBK4	barrier		A	422
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJTS3K	barrier		A	422
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJTS4K	barrier		A	423
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	T250FJ	lug-kit		A	421
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	TA250FJ	lug-kit		A	422
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4LG	breaker-mounting-kit	PRL4, PRL4X	A	324
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4X336	breaker-mounting-kit	PRL4, PRL4X	A	333
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	191
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T631LK	lug-kit		A	425
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T632LK	lug-kit		A	425
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T632LKW	lug-kit		A	426
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA631LK	lug-kit		A	426
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA632LK	lug-kit		A	426

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA632LKW	lug-kit		A	427
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T631LK	lug-kit		A	427
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T632LK	lug-kit		A	427
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T632LKW	lug-kit		A	428
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA631LK	lug-kit		A	428
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA632LK	lug-kit		A	428
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA632LKW	lug-kit		A	429
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	IPB3	barrier		A	371
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	L3RTWK	breaker-accessory		A	430
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	L4RTWK	breaker-accessory		A	431
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTES3	breaker-accessory		A	431
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTES4	breaker-accessory		A	431
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTEW3	breaker-accessory		A	431
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTEW4	breaker-accessory		A	432
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LTS3K	barrier		A	430
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LTS4K	barrier		A	430
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	T350LK	lug-kit		A	429
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	TA350LK	lug-kit		A	429
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	TA632L	lug-kit		A	429
Series G NG-Frame (EAT)	IPB5	barrier		A	411
Series G NG-Frame (EAT)	T1200NB3M	lug-kit		A	432
Spectra RMS SE150 (GEA)	SE3LCK	breaker-accessory		A	899
Spectra RMS SE150 (GEA)	SE3LCKL	breaker-accessory		A	899
Spectra RMS SE150 (GEA)	TC018	lug		A	897
Spectra RMS SE150 (GEA)	TCAL18	lug		A	898
Spectra RMS SE150 (GEA)	TCAL18LV	lug		A	898
Spectra RMS SE150 (GEA)	TCAL19PD1	lug		A	898
Spectra RMS SE150 (GEA)	TCAL19PD3	lug-kit		A	896
Spectra RMS SE150 (GEA)	TCALK318	lug-kit		A	897
Spectra RMS SE150 (GEA)	TEF1	breaker-accessory		A	870
Spectra RMS SE150 (GEA)	TEF2	breaker-accessory		A	870
Spectra RMS SE150 (GEA)	TEF3	breaker-accessory		A	870
Spectra RMS SE150 (GEA)	TEF4	breaker-accessory		A	871
Spectra RMS SF250 (GEA)	SF3LCK	breaker-accessory		A	902
Spectra RMS SF250 (GEA)	TCAL28PD1	lug		A	900
Spectra RMS SF250 (GEA)	TCAL28PD3	lug-kit		A	899
Spectra RMS SF250 (GEA)	TCAL29	lug		A	901
Spectra RMS SF250 (GEA)	TCAL29LV	lug		A	901
Spectra RMS SF250 (GEA)	TCALK329	lug-kit		A	900

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra RMS SF250 (GEA)	TCO29	lug		A	901
Spectra RMS SF250 (GEA)	TFK1	breaker-accessory		A	873
Spectra RMS SF250 (GEA)	TFK2	breaker-accessory		A	873
Spectra RMS SG600 (GEA)	SG1BCK	breaker-accessory		A	905
Spectra RMS SG600 (GEA)	SG1LCK	breaker-accessory		A	905
Spectra RMS SG600 (GEA)	SGBCS1	breaker-accessory		A	905
Spectra RMS SG600 (GEA)	SGBCS2	breaker-accessory		A	906
Spectra RMS SG600 (GEA)	SGLVK	breaker-accessory		A	906
Spectra RMS SG600 (GEA)	TCAL40PD1	lug		A	904
Spectra RMS SG600 (GEA)	TCAL40PD3	lug-kit		A	902
Spectra RMS SG600 (GEA)	TCLK265	lug-kit		A	903
Spectra RMS SG600 (GEA)	TCLK365	lug-kit		A	903
Spectra RMS SG600 (GEA)	TCOK265	lug-kit		A	904
Spectra RMS SG600 (GEA)	TCOK365	lug-kit		A	904
Spectra RMS SK1200 (GEA)	SK1LCK	breaker-accessory		A	909
Spectra RMS SK1200 (GEA)	SKLVK	breaker-accessory		A	889
Spectra RMS SK1200 (GEA)	SKPSHLD	barrier		A	909
Spectra RMS SK1200 (GEA)	TC0121	lug		A	882
Spectra RMS SK1200 (GEA)	TC081A	lug		A	884
Spectra RMS SK1200 (GEA)	TCAL124	lug		A	908
Spectra RMS SK1200 (GEA)	TCAL125	lug		A	908
Spectra RMS SK1200 (GEA)	TCAL81	lug		A	887
Spectra RMS SK1200 (GEA)	TCALK2124	lug-kit		A	906
Spectra RMS SK1200 (GEA)	TCALK2125	lug-kit		A	907
Spectra RMS SK1200 (GEA)	TCALK281	lug-kit		A	879
Spectra RMS SK1200 (GEA)	TCALK3124	lug-kit		A	907
Spectra RMS SK1200 (GEA)	TCALK3125	lug-kit		A	907
Spectra RMS SK1200 (GEA)	TCALK381	lug-kit		A	881
Spectra RMS SK1200 (GEA)	TCO124	lug		A	908
Spectra RMS SK1200 (GEA)	TCO125	lug		A	909
Spectra RMS SK1200 (GEA)	TKM11	breaker-accessory		A	890
Spectra RMS SK1200 (GEA)	TKM12	breaker-accessory		A	890
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5500P82	mounting-bracket	A-SERIES-PWR	—	688
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	691
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	684
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	684
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	685
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G32	filler-plate	SPECTRA-PP	A	821
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G33	filler-plate	SPECTRA-PP	A	821
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G34	filler-plate	SPECTRA-PP	A	822

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G35	filler-plate	SPECTRA-PP	A	822
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	208C4262G36	filler-plate	SPECTRA-PP	A	823
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTMKSE	branch-connector-kit	SCP-PLUS	A	714
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP3SED	filler-plate	SPECTRA-PP	A	834
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP4SED	filler-plate	SPECTRA-PP	A	836
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	847
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP	A	779
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	780
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP	A	787
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP	A	788
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	788
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4EB	branch-connector-kit	SPECTRA-PP	A	751
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	752
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SE	branch-connector-kit	SPECTRA-PP	A	759
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	760
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB6EB	branch-connector-kit	SPECTRA-PP	A	761
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	761
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ASPP6SE6D	branch-connector-kit	A-SERIES-PWR	A	682
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	MB133WB	main-breaker-kit	A-SERIES	A	661
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	NHB150PK	branch-connector-kit	NHB	C	702
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TEDFP1	filler-plate	A-SERIES	—	675

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5500P84	mounting-bracket	A-SERIES-PWR	—	688
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	691
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702ASFG1	connector-strap	A-SERIES-PWR	—	684
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702BSFG1	connector-strap	A-SERIES-PWR	—	685
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702CSFG1	connector-strap	A-SERIES-PWR	—	685
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G53	filler-plate	SPECTRA-PP	**A**	824
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G54	filler-plate	SPECTRA-PP	**A**	824
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G55	filler-plate	SPECTRA-PP	**A**	825
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G56	filler-plate	SPECTRA-PP	**A**	825
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G57	filler-plate	SPECTRA-PP	**A**	826
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G58	filler-plate	SPECTRA-PP	**A**	826
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G59	filler-plate	SPECTRA-PP	**A**	827
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G60	filler-plate	SPECTRA-PP	**A**	828
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G61	filler-plate	SPECTRA-PP	**A**	828
Spectra SF (SFHA/SFLA/SFPA) (GEA)	208C4262G62	filler-plate	SPECTRA-PP	**A**	829
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTMKSF	branch-connector-kit	SCP-PLUS	**A**	715
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFD	filler-plate	SPECTRA-PP	**A**	834
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFS	filler-plate	SPECTRA-PP	**A**	834
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP4SFD	filler-plate	SPECTRA-PP	**A**	836
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP4SFS	filler-plate	SPECTRA-PP	**A**	836
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	**A**	847
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKF1	hardware-kit	SPECTRA-PP	**A**	850
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP	**A**	770
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	**A**	771
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	**A**	772
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP	**A**	775
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	**A**	776
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	**A**	777
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP	**A**	782
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	**A**	783

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	784
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP	A	792
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	793
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	794
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJ	branch-connector-kit	SPECTRA-PP	A	741
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	742
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	742
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJ	branch-connector-kit	SPECTRA-PP	A	746
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	746
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	747
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJ	branch-connector-kit	SPECTRA-PP	A	755
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	756
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	756
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJ	branch-connector-kit	SPECTRA-PP	A	765
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	765
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	766
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASP2PTFJ3P	conversion-kit	A-SERIES	—	677
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASPP6SF3S	branch-connector-kit	A-SERIES-PWR	A	682
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233	main-breaker-kit	A-SERIES	A	661
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332	main-breaker-kit	A-SERIES	A	662
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332WB	main-breaker-kit	A-SERIES	A	662
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233WB	main-breaker-kit	A-SERIES	A	662
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SF2DPK	branch-connector-kit	CCB-QMR	A	693
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	10083041P1	barrier	SPECTRA-PP	—	804
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5500P83	mounting-bracket	A-SERIES-PWR	—	688
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5503P103	filler-plate	A-SERIES-PWR	—	690
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	192A6976P189	fastener	SPECTRA-PP	—	853
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C2291P1	filler-plate	SPECTRA-PP	—	808

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G16	filler-plate	SPECTRA-PP	A	812
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G17	filler-plate	SPECTRA-PP	A	812
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G18	filler-plate	SPECTRA-PP	A	813
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G19	filler-plate	SPECTRA-PP	A	813
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	208C4262G49	filler-plate	SPECTRA-PP	A	823
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3575P1	mounting-bracket	SPECTRA-PP	—	804
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3576P1	mounting-bracket	SPECTRA-PP	—	804
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3613P1	fastener	SPECTRA-PP	—	853
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G10	connector-strap	SPECTRA-PP	—	798
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G11	connector-strap	SPECTRA-PP	—	798
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G13	connector-strap	SPECTRA-PP	—	798
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G14	connector-strap	SPECTRA-PP	—	798
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3618G15	connector-strap	SPECTRA-PP	—	798
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3657P1	other	SPECTRA-PP	—	864
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	252B3657P2	other	SPECTRA-PP	—	865
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P7	connector-strap	A-SERIES-PWR	—	686
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P8	connector-strap	A-SERIES-PWR	—	686
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P9	connector-strap	A-SERIES-PWR	—	686
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	75A105503P101	fastener	SPECTRA-PP	—	854
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	75A105503P105	fastener	SPECTRA-PP	—	854
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSMKSG	branch-connector-kit	SCP-PLUS	A	712

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTMKSG	branch-connector-kit	SCP-PLUS	A	715
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGC	filler-plate	SPECTRA-PP	A	836
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGD	filler-plate	SPECTRA-PP	A	837
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGS	filler-plate	SPECTRA-PP	A	837
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKBG1	hardware-kit	SPECTRA-PP	A	848
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKG1	hardware-kit	SPECTRA-PP	A	851
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC2GMFP	breaker-mounting-kit	SPECTRA-PP	A	773
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC3GMFP	breaker-mounting-kit	SPECTRA-PP	A	777
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC4GBFP	breaker-mounting-kit	SPECTRA-PP	A	785
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC6GBFP	breaker-mounting-kit	SPECTRA-PP	A	795
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GM	branch-connector-kit	SPECTRA-PP	A	743
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GMFP	branch-connector-kit	SPECTRA-PP	A	744
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GM	branch-connector-kit	SPECTRA-PP	A	747
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GMFP	branch-connector-kit	SPECTRA-PP	A	748
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GB	branch-connector-kit	SPECTRA-PP	A	757
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GBFP	branch-connector-kit	SPECTRA-PP	A	758
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GB	branch-connector-kit	SPECTRA-PP	A	766
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GBFP	branch-connector-kit	SPECTRA-PP	A	767
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ASPP6SG3S	branch-connector-kit	A-SERIES-PWR	A	683
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332	main-breaker-kit	A-SERIES	A	663
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332WB	main-breaker-kit	A-SERIES	A	663

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333	main-breaker-kit	A-SERIES	A	663
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333WB	main-breaker-kit	A-SERIES	A	664
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N22P23012B6	fastener	SPECTRA-PP	—	854
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N22P23016B6	fastener	SPECTRA-PP	—	854
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N245P21B6	fastener	SPECTRA-PP	—	854
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N37P21060B6	fastener	SPECTRA-PP	—	855
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N37P21969B6	fastener	SPECTRA-PP	—	855
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N402P11B6	fastener	SPECTRA-PP	—	855
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N657P21024B6	fastener	SPECTRA-PP	—	855
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	N730BP1308B6	fastener	SPECTRA-PP	—	856
Spectra SK (SKHA/SKLA/SKPA) (GEA)	252B1768G1	filler-plate	SPECTRA-PP	—	829
Spectra SK (SKHA/SKLA/SKPA) (GEA)	252B1768G2	filler-plate	SPECTRA-PP	—	830
Spectra SK (SKHA/SKLA/SKPA) (GEA)	455C592P1	breaker-accessory	SPECTRA-PP	—	863
Spectra SK (SKHA/SKLA/SKPA) (GEA)	455C592P2	breaker-accessory	SPECTRA-PP	—	863
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSMKSK	branch-connector-kit	SCP-PLUS	A	712
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP5LCS	filler-plate	SPECTRA-PP	A	838
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP6SKS	filler-plate	SPECTRA-PP	A	838
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AHKLB1	hardware-kit	SPECTRA-PP	A	852
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP	A	774
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP	A	779
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KM	branch-connector-kit	SPECTRA-PP	A	744
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	745
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KM	branch-connector-kit	SPECTRA-PP	A	749
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	750
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3LBFP	branch-connector-kit	SPECTRA-PP	A	750
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK12SPK	branch-connector-kit	CCB-QMR	A	693

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK8SPK	branch-connector-kit	CCB-QMR	A	693
Square D EH / EHB (NEHB) (SQD)	FP1	filler-plate	NEHB	C	468
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100FA	lug-kit		A	611
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100FA4	lug-kit		A	612
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100TF	lug-kit		A	612
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL150FA	lug-kit		A	612
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL50FA	lug-kit		A	613
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU100FA	lug-kit		A	613
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU100TF	lug-kit		A	613
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU30FA4	lug-kit		A	614
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CVC100FA	lug-kit		A	614
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	FAT	breaker-accessory		A	615
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	PDC3FA2	lug-kit		A	614
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	PDC6FA6	lug-kit		A	615
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	VC100FA	lug-kit		A	615
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KA	lug-kit		A	616
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KI	lug-kit		A	616
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KIT	breaker-accessory		A	618
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	CU250KA	lug-kit		A	616
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	CVC250KA3	lug-kit		A	617
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	VC250KA3	lug-kit		A	617
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	VC250KA35	lug-kit		A	617
Square D LA/LH (L-frame 400 A) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	597
Square D LA/LH (L-frame 400 A) (SQD)	AL400LAT	breaker-accessory		A	622
Square D LA/LH (L-frame 400 A) (SQD)	AL400LH7	lug-kit		A	618
Square D LA/LH (L-frame 400 A) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	599
Square D LA/LH (L-frame 400 A) (SQD)	CVC400LA3	lug-kit		A	619
Square D LA/LH (L-frame 400 A) (SQD)	CVC400LA5	lug-kit		A	619
Square D LA/LH (L-frame 400 A) (SQD)	PDC12LA4	lug-kit		A	619
Square D LA/LH (L-frame 400 A) (SQD)	PDC4LA250	lug-kit		A	620

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D LA/LH (L-frame 400 A) (SQD)	PDC6LA20	lug-kit		A	620
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA3	lug-kit		A	620
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA35	lug-kit		A	621
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA5	lug-kit		A	621
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA7	lug-kit		A	621
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600IN	breaker-accessory		A	626
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI35	lug-kit		A	622
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI35T	breaker-accessory		A	626
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI5	lug-kit		A	623
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI5T	breaker-accessory		A	626
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI7	lug-kit		A	623
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI35	lug-kit		A	623
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI5	lug-kit		A	624
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI7	lug-kit		A	624
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CVC600LI5	lug-kit		A	624
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI3	lug-kit		A	625
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI5	lug-kit		A	625
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI7	lug-kit		A	625
Square D MA/MH/MX/ME (M-frame 1000 A) (SQD)	AL1000MAT	breaker-accessory		A	626
Square D MA/MH/MX/ME (M-frame 1000 A) (SQD)	AL900MAT	breaker-accessory		A	627
Square D ML breakers (MLN panels) (SQD)	SK4515	conversion-kit	MLN	A	466
Square D ML breakers (MLN panels) (SQD)	SK4516	conversion-kit	MLN	A	466
Square D ML breakers (MLN panels) (SQD)	SK4517	conversion-kit	MLN	A	466
Square D ML breakers (MLN panels) (SQD)	SK4578	conversion-kit	MLN	A	466
Square D NA/NC/NX/NE (N-frame 1200 A) (SQD)	AL1200NE6T	breaker-accessory		A	627
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	29348	breaker-accessory		A	653
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	32508	lug-kit		A	628
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	32510	lug-kit		A	628
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	36965	barrier		A	629
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	PDC12DG4	lug-kit		A	628

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	PDC5DG20	lug-kit		A	629
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	S36967	fastener		A	652
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	AL150HD	lug-kit	QED-2, QMB, I-LINE	A	595
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CU150HD	lug-kit	QED-2, QMB, I-LINE	A	598
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CYA060HD	lug-kit		A	630
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CYA150HD	lug-kit		A	630
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	PDC3HD2	lug-kit		A	630
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	PDC6HD6	lug-kit		A	631
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37423	breaker-accessory		A	633
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37425	breaker-accessory		A	634
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37426	breaker-accessory		A	634
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37429	breaker-accessory		A	634
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37432	barrier		A	632
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37433	breaker-accessory		A	634
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37434	breaker-accessory		A	635
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37436	barrier		A	632
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37444	breaker-accessory	QMB, NQ, NQOD, NF	A	578
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37446	barrier		A	632
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37447	barrier		A	633
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37449	barrier		A	633
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	YA060HD	lug-kit		A	631
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	YA150HD	lug-kit		A	631

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	AL175JD	lug-kit	QED-2, QMB, I-LINE	A	596
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	AL250JD	lug-kit	QED-2, QMB, I-LINE	A	597
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CU250JD	lug-kit	QED-2, QMB, I-LINE	A	598
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CYA150JD	lug-kit		A	635
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CYA250J3	lug-kit		A	636
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	PDC3JD20	lug-kit		A	636
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	PDC6JD4	lug-kit		A	636
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37424	breaker-accessory		A	639
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37427	breaker-accessory		A	639
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37428	breaker-accessory		A	639
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37430	breaker-accessory		A	639
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37437	breaker-accessory		A	640
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37438	breaker-accessory		A	640
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37439	breaker-accessory		A	640
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37440	barrier		A	637
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37445	breaker-accessory	QMB, NQ, NQOD, NF	A	578
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37448	barrier		A	638
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37450	barrier		A	638
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	YA150JD	lug-kit		A	637
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	YA250J35	lug-kit		A	637
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	29348	breaker-accessory		A	653

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL400L61K3	lug-kit		A	641
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL400L61K4	lug-kit		A	642
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LF52K3	lug-kit		A	642
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LS52K3	lug-kit		A	642
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LS52K4	lug-kit		A	643
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU400L61K3	lug-kit		A	643
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU400L61K4	lug-kit		A	643
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LF52K3	lug-kit		A	644
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LS52K3	lug-kit		A	644
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LS52K4	lug-kit		A	644
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L31K3	lug-kit		A	645
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L31K4	lug-kit		A	645
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L51K3	lug-kit		A	645
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L51K4	lug-kit		A	646
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L71K3	lug-kit		A	646
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L32K3	lug-kit		A	646
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L32K4	lug-kit		A	647
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L52K3	lug-kit		A	647
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L52K4	lug-kit		A	647
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	PDC12DG4L3	lug-kit		A	648
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	PDC5DG20L3	lug-kit		A	648

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32477	breaker-accessory		A	653
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32478	breaker-accessory		A	653
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32562	barrier		A	651
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32563	barrier		A	652
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S36967	fastener		A	652
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S432475	breaker-accessory		A	654
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S432476	breaker-accessory		A	654
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L31K3	lug-kit		A	648
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L51K3	lug-kit		A	649
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L51K4	lug-kit		A	649
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L71K3	lug-kit		A	649
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L71K4	lug-kit		A	650
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L32K3	lug-kit		A	650
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L32K4	lug-kit		A	650
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L52K3	lug-kit		A	651
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L52K4	lug-kit		A	651
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23K	lug-kit		C	655
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23TK	lug-kit		A	655
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23TK4	lug-kit		A	655
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P6TK	lug-kit		A	656
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P6TK4	lug-kit		A	656
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P7K	lug-kit		C	656
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P24TK	lug-kit		A	657
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P25TK	lug-kit		A	657

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P25TK4	lug-kit		A	657
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23K	lug-kit		C	655
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23TK	lug-kit		A	655
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23TK4	lug-kit		A	655
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P6TK	lug-kit		A	656
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P6TK4	lug-kit		A	656
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P7K	lug-kit		C	656
Square D PowerPact R-Frame (RG/RJ/RL) (SQD)	AL1200R53TK	lug-kit		A	658
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	597
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LAT	breaker-accessory		A	622
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LH7	lug-kit		A	618
Square D Q4 (400 A, LA-type lugs) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	599
Square D Q4 (400 A, LA-type lugs) (SQD)	CVC400LA3	lug-kit		A	619
Square D Q4 (400 A, LA-type lugs) (SQD)	CVC400LA5	lug-kit		A	619
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC12LA4	lug-kit		A	619
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC4LA250	lug-kit		A	620
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC6LA20	lug-kit		A	620
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA3	lug-kit		A	620
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA35	lug-kit		A	621
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA5	lug-kit		A	621
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA7	lug-kit		A	621
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	HLO-1	handle-lock	NQOB, NA1B, NH1B, NEHB	A	529
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO-1HT	breaker-accessory	NQOB	—	529
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO-1PA	padlock-attachment	NQOB	—	530
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	QO-1PL	padlock-attachment	NQOB	—	530
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	SK-5666	breaker-mounting-kit	NQOB	C	527
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	SK5668	branch-connector-kit	NQOB	—	527

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D QO / QOB (Q1 / Q1B in Canada) for NQO / NQOB (SQD)	SK5669	breaker-mounting-kit	NQOB	C	527
Square D Y1B 1-pole (NY1B) (SQD)	HLO-1	handle-lock	NQOB, NA1B, NH1B, NEHB	A	529
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SECT	branch-connector-kit	ZIN-DIST	—	1158
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SEHT	branch-connector-kit	ZIN-DIST	—	1159
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SJD4T	branch-connector-kit	ZIN-DIST	—	1159
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SKM8S	branch-connector-kit	ZIN-DIST	—	1159
TEB / TED / THED / TED4 / TED6 (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	691
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	684
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	684
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	685
TEB / TED / THED / TED4 / TED6 (GEA)	168D1930P3	filler-plate	SPECTRA-PP	—	808
TEB / TED / THED / TED4 / TED6 (GEA)	168D1930P4	filler-plate	SPECTRA-PP	—	808
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G26	filler-plate	SPECTRA-PP	A	817
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G27	filler-plate	SPECTRA-PP	A	818
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G28	filler-plate	SPECTRA-PP	A	818
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G29	filler-plate	SPECTRA-PP	A	819
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G30	filler-plate	SPECTRA-PP	A	820
TEB / TED / THED / TED4 / TED6 (GEA)	208C4262G31	filler-plate	SPECTRA-PP	A	820
TEB / TED / THED / TED4 / TED6 (GEA)	252B1667P1	barrier	SPECTRA-PP	—	805
TEB / TED / THED / TED4 / TED6 (GEA)	252B2056P8	filler-plate	SPECTRA-PP	—	830
TEB / TED / THED / TED4 / TED6 (GEA)	331A3329P2	fastener	SPECTRA-PP	—	853
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB1P	branch-connector-kit	SCP-PLUS	A	712
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB2P	branch-connector-kit	SCP-PLUS	A	713
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB3P	branch-connector-kit	SCP-PLUS	A	713
TEB / TED / THED / TED4 / TED6 (GEA)	AFP2TED	filler-plate	SPECTRA-PP	A	832
TEB / TED / THED / TED4 / TED6 (GEA)	AFP3ELD	filler-plate	SPECTRA-PP	A	832
TEB / TED / THED / TED4 / TED6 (GEA)	AFP3TED	filler-plate	SPECTRA-PP	A	835
TEB / TED / THED / TED4 / TED6 (GEA)	AFP4SED	filler-plate	SPECTRA-PP	A	836

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEB / TED / THED / TED4 / TED6 (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	847
TEB / TED / THED / TED4 / TED6 (GEA)	AHKE1	hardware-kit	SPECTRA-PP	A	849
TEB / TED / THED / TED4 / TED6 (GEA)	AHKEL1	hardware-kit	SPECTRA-PP	A	849
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP	A	779
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	780
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP	A	787
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP	A	788
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	788
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EL	breaker-mounting-kit	SPECTRA-PP	A	789
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EB	branch-connector-kit	SPECTRA-PP	A	751
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	752
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4SE	branch-connector-kit	SPECTRA-PP	A	759
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	760
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EB	branch-connector-kit	SPECTRA-PP	A	761
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	761
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6TEDL	filler-plate	SPECTRA-PP	—	840
TEB / TED / THED / TED4 / TED6 (GEA)	ASPTED3P	breaker-mounting-kit	A-SERIES	—	672
TEB / TED / THED / TED4 / TED6 (GEA)	MB133	main-breaker-kit	A-SERIES	A	661
TEB / TED / THED / TED4 / TED6 (GEA)	N722EP16006B6	fastener	SPECTRA-PP	—	855
TEB / TED / THED / TED4 / TED6 (GEA)	NHB150PK	branch-connector-kit	NHB	C	702
TEB / TED / THED / TED4 / TED6 (GEA)	TED1DPK	branch-connector-kit	CCB-QMR	A	694
TEB / TED / THED / TED4 / TED6 (GEA)	TEDFP1	filler-plate	A-SERIES	—	675
TEB / TED / THED / TED4 / TED6 (GEA)	TEL1DPK	branch-connector-kit	CCB-QMR	A	695
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	139C5503P129	filler-plate	A-SERIES-PWR	—	690
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	208C4262G13	filler-plate	SPECTRA-PP	A	810
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	208C4262G14	filler-plate	SPECTRA-PP	A	811
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	208C4262G15	filler-plate	SPECTRA-PP	A	811
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	687
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	687
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	911E347P3	insulator	A-SERIES-PWR	—	689

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AFP3EYD	filler-plate	SPECTRA-PP	A	832
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP	A	789
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP	A	796
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EY	branch-connector-kit	SPECTRA-PP	A	752
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EYFP	branch-connector-kit	SPECTRA-PP	A	753
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EY	branch-connector-kit	SPECTRA-PP	A	762
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EYFP	branch-connector-kit	SPECTRA-PP	A	762
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY12D	branch-connector-kit	A-SERIES-PWR	A	679
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY6D	branch-connector-kit	A-SERIES-PWR	A	679
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB423	main-breaker-kit	A-SERIES	A	664
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB426	main-breaker-kit	A-SERIES	A	664
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	675
TFJ / TFK / THFK / TFL (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	691
TFJ / TFK / THFK / TFL (GEA)	208C4262G1	filler-plate	SPECTRA-PP	A	809
TFJ / TFK / THFK / TFL (GEA)	208C4262G2	filler-plate	SPECTRA-PP	A	814
TFJ / TFK / THFK / TFL (GEA)	208C4262G3	filler-plate	SPECTRA-PP	A	819
TFJ / TFK / THFK / TFL (GEA)	208C4262G6	filler-plate	SPECTRA-PP	A	827
TFJ / TFK / THFK / TFL (GEA)	208C4262G7	filler-plate	SPECTRA-PP	A	829
TFJ / TFK / THFK / TFL (GEA)	AFP3TFD	filler-plate	SPECTRA-PP	A	835
TFJ / TFK / THFK / TFL (GEA)	AFP3TFS	filler-plate	SPECTRA-PP	A	835
TFJ / TFK / THFK / TFL (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	A	847
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP	A	770
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	771
TFJ / TFK / THFK / TFL (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	A	772
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP	A	775
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	776
TFJ / TFK / THFK / TFL (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	A	777
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP	A	782
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	783
TFJ / TFK / THFK / TFL (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	784
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP	A	792
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	793
TFJ / TFK / THFK / TFL (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	794
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJ	branch-connector-kit	SPECTRA-PP	A	741
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	742
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	742
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJ	branch-connector-kit	SPECTRA-PP	A	746
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	746
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	747
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJ	branch-connector-kit	SPECTRA-PP	A	755
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	756
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	756
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJ	branch-connector-kit	SPECTRA-PP	A	765
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	765

Breaker family	Part	Component	Equipment family	Cl.	Pg
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	766
TFJ / TFK / THFK / TFL (GEA)	TF2DPK	branch-connector-kit	CCB-QMR	A	695
THQB / THHQB / TXQB (GEA)	139C5362P2	filler-plate	A-SERIES-PWR	—	689
THQB / THHQB / TXQB (GEA)	208C4262G10	filler-plate	SPECTRA-PP	A	809
THQB / THHQB / TXQB (GEA)	208C4262G11	filler-plate	SPECTRA-PP	A	810
THQB / THHQB / TXQB (GEA)	208C4262G12	filler-plate	SPECTRA-PP	A	810
THQB / THHQB / TXQB (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	687
THQB / THHQB / TXQB (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	687
THQB / THHQB / TXQB (GEA)	911E347P3	insulator	A-SERIES-PWR	—	689
THQB / THHQB / TXQB (GEA)	AFP3QBD	filler-plate	SPECTRA-PP	A	833
THQB / THHQB / TXQB (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP	A	789
THQB / THHQB / TXQB (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP	A	796
THQB / THHQB / TXQB (GEA)	ASPP6QB12D	branch-connector-kit	A-SERIES-PWR	A	680
THQB / THHQB / TXQB (GEA)	ASPP6QB6D	branch-connector-kit	A-SERIES-PWR	A	681
THQB / THHQB / TXQB (GEA)	MB612	main-breaker-kit	A-SERIES	A	666
THQB / THHQB / TXQB (GEA)	MB613	main-breaker-kit	A-SERIES	A	666
THQB / THHQB / TXQB (GEA)	MB614	main-breaker-kit	A-SERIES	A	666
THQB / THHQB / TXQB (GEA)	MB616	main-breaker-kit	A-SERIES	A	667
THQB / THHQB / TXQB (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	675
THQL / THHQL / TXQL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	675
TJD / TJJ / TJK / THJK (GEA)	ACTMKJD	branch-connector-kit	SCP-PLUS	A	713
TJD / TJJ / TJK / THJK (GEA)	AFP6TJD	filler-plate	SPECTRA-PP	A	839
TJD / TJJ / TJK / THJK (GEA)	AFP6TJS	filler-plate	SPECTRA-PP	A	839
TJD / TJJ / TJK / THJK (GEA)	AHKJ1	hardware-kit	SPECTRA-PP	A	851
TJD / TJJ / TJK / THJK (GEA)	AMC2JKFP	breaker-mounting-kit	SPECTRA-PP	A	773
TJD / TJJ / TJK / THJK (GEA)	AMC3JKFP	breaker-mounting-kit	SPECTRA-PP	A	778
TJD / TJJ / TJK / THJK (GEA)	AMC4JKFP	breaker-mounting-kit	SPECTRA-PP	A	785
TJD / TJJ / TJK / THJK (GEA)	AMC6JKFP	breaker-mounting-kit	SPECTRA-PP	A	795
TJD / TJJ / TJK / THJK (GEA)	TJ4DPK	branch-connector-kit	CCB-QMR	A	697
TJD / TJJ / TJK / THJK (GEA)	TJ6DPK	branch-connector-kit	CCB-QMR	A	697
TKM / THKM (GEA)	252B1768G1	filler-plate	SPECTRA-PP	—	829
TKM / THKM (GEA)	252B1768G2	filler-plate	SPECTRA-PP	—	830
TKM / THKM (GEA)	455C592P1	breaker-accessory	SPECTRA-PP	—	863
TKM / THKM (GEA)	455C592P2	breaker-accessory	SPECTRA-PP	—	863
TKM / THKM (GEA)	AFP6SKS	filler-plate	SPECTRA-PP	A	838
TKM / THKM (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP	A	774
TKM / THKM (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP	A	779
TKM / THKM (GEA)	AMCB2KM	branch-connector-kit	SPECTRA-PP	A	744
TKM / THKM (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	745
TKM / THKM (GEA)	AMCB3KM	branch-connector-kit	SPECTRA-PP	A	749

Breaker family	Part	Component	Equipment family	Cl.	Pg
TKM / THKM (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	750
TKM / THKM (GEA)	TK12SPK	branch-connector-kit	CCB-QMR	A	697
TKM / THKM (GEA)	TK8SPK	branch-connector-kit	CCB-QMR	A	698
TQD / THQD (GEA)	139C5500P81	mounting-bracket	A-SERIES-PWR	—	687
TQD / THQD (GEA)	139C5503P64	filler-plate	A-SERIES-PWR	—	690
TQD / THQD (GEA)	139C5702AQDG1	connector-strap	A-SERIES-PWR	—	683
TQD / THQD (GEA)	139C5702BQDG1	connector-strap	A-SERIES-PWR	—	684
TQD / THQD (GEA)	139C5702CQDG1	connector-strap	A-SERIES-PWR	—	685
TQD / THQD (GEA)	208C4262G20	filler-plate	SPECTRA-PP	A	814
TQD / THQD (GEA)	208C4262G21	filler-plate	SPECTRA-PP	A	815
TQD / THQD (GEA)	208C4262G22	filler-plate	SPECTRA-PP	A	815
TQD / THQD (GEA)	208C4262G23	filler-plate	SPECTRA-PP	A	816
TQD / THQD (GEA)	208C4262G24	filler-plate	SPECTRA-PP	A	816
TQD / THQD (GEA)	208C4262G25	filler-plate	SPECTRA-PP	A	817
TQD / THQD (GEA)	ACTMKQD2P	branch-connector-kit	SCP-PLUS	A	714
TQD / THQD (GEA)	ACTMKQD3P	branch-connector-kit	SCP-PLUS	A	714
TQD / THQD (GEA)	AFP2QDD	filler-plate	SPECTRA-PP	A	831
TQD / THQD (GEA)	AFP3QDD	filler-plate	SPECTRA-PP	A	833
TQD / THQD (GEA)	AHKBQ1	hardware-kit	SPECTRA-PP	A	848
TQD / THQD (GEA)	AHKQ1	hardware-kit	SPECTRA-PP	A	852
TQD / THQD (GEA)	AMC4QDFP	breaker-mounting-kit	SPECTRA-PP	A	786
TQD / THQD (GEA)	AMC6QDFP	breaker-mounting-kit	SPECTRA-PP	A	796
TQD / THQD (GEA)	AMCB4QDFP	branch-connector-kit	SPECTRA-PP	A	758
TQD / THQD (GEA)	AMCB6QDFP	branch-connector-kit	SPECTRA-PP	A	768
TQD / THQD (GEA)	ASP2PTQD3P	conversion-kit	A-SERIES	—	677
TQD / THQD (GEA)	ASPP6QD6D	branch-connector-kit	A-SERIES-PWR	A	681
TQD / THQD (GEA)	ASPTQD3P	breaker-mounting-kit	A-SERIES	—	672
TQD / THQD (GEA)	MB512	main-breaker-kit	A-SERIES	A	665
TQD / THQD (GEA)	MB513	main-breaker-kit	A-SERIES	A	665
TQD / THQD (GEA)	MB516	main-breaker-kit	A-SERIES	A	665
TQD / THQD (GEA)	TEDFP1	filler-plate	A-SERIES	—	675
TQD / THQD (GEA)	TQ2DPK	branch-connector-kit	CCB-QMR	A	698
TQD / THQD (GEA)	TQDFM1	breaker-accessory	A-SERIES	—	677
TQD / THQD (Q-Line 225A) (GEA)	TCAL25	lug		A	910
TQD / THQD (Q-Line 225A) (GEA)	TCALK325	lug-kit		A	910
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	4176B57	deadfront	PRL3A	—	258
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	4176B70	deadfront	PRL3A	—	260
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	71
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	73
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	76
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	310
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4LAP	breaker-mounting-kit	PRL4, PRL4X	A	319
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4NBP	breaker-mounting-kit	PRL4, PRL4X	A	326
Tri-Pac (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	71
Tri-Pac (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	73

Breaker family	Part	Component	Equipment family	Cl.	Pg
Tri-Pac (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	76
Tri-Pac (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	310
Tri-Pac (EAT)	KPRL4LAP	breaker-mounting-kit	PRL4, PRL4X	A	319
Tri-Pac (EAT)	KPRL4NBP	breaker-mounting-kit	PRL4, PRL4X	A	326
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40ED225-3	branch-connector-kit	MP40, MP2	C	108
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KC225-3	branch-connector-kit	MP40, MP2	C	109
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KF100-3	branch-connector-kit	MP40, MP2	C	109
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KJ225-3	branch-connector-kit	MP40, MP2	C	110
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KK400-3	branch-connector-kit	MP40, MP2	C	110
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KL400-3	branch-connector-kit	MP40, MP2	C	111
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KL600-3	branch-connector-kit	MP40, MP2	C	111
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KM800-3	branch-connector-kit	MP40, MP2	C	112
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MP40KN1200-3	branch-connector-kit	MP40, MP2	C	112
Westinghouse AB De-ion molded case breakers (E, F, G, J, K, KL, L, M frames) (EAT)	MPED1K	branch-connector-kit	MP40, MP2	C	113
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	69
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPDK	conversion-kit	CDP	A	80
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	70
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPEHD	conversion-kit	CDP	A	81
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	71
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	71
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFD	conversion-kit	CDP	A	82
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFDB	conversion-kit	CDP	A	83
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPHKD	conversion-kit	CDP	A	84
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPJD	conversion-kit	CDP	A	85

Breaker family	Part	Component	Equipment family	Cl.	Pg
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPJDB	conversion-kit	CDP	A	86
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	72
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKD	conversion-kit	CDP	A	87
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKDB	conversion-kit	CDP	A	88
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	73
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	73
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	74
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLCL	breaker-mounting-kit	CDP	A	75
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLD	conversion-kit	CDP	A	89
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	75
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPMDL	conversion-kit	CDP	A	90
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	76
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	76
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPND	conversion-kit	CDP	A	91
Westinghouse pre-Series C industrial MCCBs (EAT)	TAD3	conversion-kit	PRL4, CDP	A	339
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100DS	branch-connector-kit	ZIN-DIST	—	1157
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100SB	branch-connector-kit	ZIN-DIST	—	1157
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100SS	branch-connector-kit	ZIN-DIST	—	1157
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF200DS	branch-connector-kit	ZIN-DIST	—	1157
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF200SB	branch-connector-kit	ZIN-DIST	—	1158
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF400DS	branch-connector-kit	ZIN-DIST	—	1158
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF400SB	branch-connector-kit	ZIN-DIST	—	1158
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF600DS	branch-connector-kit	ZIN-DIST	—	1158
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	DSLQB	branch-connector-kit	ZIN-DIST	—	1156
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	DSLQFB	branch-connector-kit	ZIN-DIST	—	1156
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	QFP2T	main-breaker-kit	ZIN-Q	C	1160
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	UBIZRBK12	bus-assembly	ZIN-Q	—	1161

12.5 Component-type index

Component type	Parts (OEM PN → page)
main-breaker-kit	2A1909-19 (EAT), 2A1909-29 (EAT), 2A1909-4 (EAT), 2A1909-8 (EAT), 2A1909-9 (EAT), KB11A2B (EAT), KB11A2T (EAT), KB11AFB (EAT), KB11AFT (EAT), KB11S2B (EAT), KB11S2T (EAT), KB11SFB (EAT), KB11SFT (EAT), KB13A2B (EAT), KB13A2T (EAT), KB13AFB (EAT), KB13AFT (EAT), KB13S2B (EAT), KB13S2T (EAT), KB13SFB (EAT), KB13SFT (EAT), KB21A2B (EAT), KB21A2T (EAT), KB21AFB (EAT), KB21AFT (EAT), KB21S2B (EAT), KB21S2T (EAT), KB21SFB (EAT), KB21SFT (EAT), KB23A2B (EAT), KB23A2T (EAT), KB23AFB (EAT), KB23AFT (EAT), KB23S2B (EAT), KB23S2T (EAT), KB23SFB (EAT), KB23SFT (EAT), KB41A14B (EAT), KB41A14T (EAT), KB41AJB (EAT), KB41AJT (EAT), KB41AKB (EAT), KB41AKT (EAT), KB41S14B (EAT), KB41S14T (EAT), KB41SJB (EAT), KB41SJT (EAT), KB41SKB (EAT), KB41SKT (EAT), KB43A34B (EAT), KB43A34T (EAT), KB43AJB (EAT), KB43AJT (EAT), KB43AKB (EAT), KB43AKT (EAT), KB43S34B (EAT), KB43S34T (EAT), KB43SJB (EAT), KB43SJT (EAT), KB43SKB (EAT), KB43SKT (EAT), KB61S16B (EAT), KB61S16T (EAT), KB63S36B (EAT), KB63S36T (EAT), MB133 (GEA), MB133WB (GEA), MB233 (GEA), MB2332 (GEA), MB2332WB (GEA), MB233WB (GEA), MB332 (GEA), MB332WB (GEA), MB333 (GEA), MB333WB (GEA), MB423 (GEA), MB426 (GEA), MB512 (GEA), MB513 (GEA), MB516 (GEA), MB612 (GEA), MB613 (GEA), MB614 (GEA), MB616 (GEA), CDP7MBKQJ3 (SIE), MBKBC1NBA (SIE), MBKBC3 (SIE), MBKBC3NBA (SIE), MBKBL1 (SIE), MBKBL1A (SIE), MBKBL3 (SIE), MBKBL3A (SIE), MBKED1 (SIE), MBKED1A (SIE), MBKED3 (SIE), MBKED3A (SIE), MBKFD1 (SIE), MBKFD1A (SIE), MBKFD3 (SIE), MBKFD3A (SIE), MBKJD1 (SIE), MBKJD1A (SIE), MBKJD3 (SIE), MBKJD3A (SIE), MBKJD3B (SIE), MBKNB1 (SIE), MBKNB3 (SIE), MBKQR1 (SIE), MBKQR1A (SIE), MBKQR3 (SIE), MBKQR3A (SIE), MBKVA41A (SIE), MBKVA41B (SIE), MBKVA5262A (SIE), MBKVA5262B (SIE), MBKVA5363A (SIE), MBKVAH3200A (SIE), MBKVAH3250A (SIE), MBKVAM3150A (SIE), MBKVAM3200A (SIE), MBKVAM3225A (SIE), MBKVAM3250A (SIE), SMBKED1 (SIE), SMBKED3 (SIE), SMBKFD1 (SIE), SMBKFD3 (SIE), SMBKJD1 (SIE), SMBKJD3 (SIE), SMBKL6 (SIE), SMBKL6D (SIE), SMBKLG (SIE), SMBKLG1D (SIE), SMBKMG (SIE), SMBKMG1D (SIE), N100MFI (SQD), N150MH (SQD), N250MJ (SQD), N250MKC (SQD), N400M (SQD), N600MPPL (SQD), NF250SFBH (SQD), NF250SFBJ (SQD), NF600SFBH (SQD), NF600SFBJ (SQD), NF600SFBPPL (SQD), NQMB2HJ (SQD), NQMB2HJ14 (SQD), NQMB2KI (SQD), NQMB2Q (SQD), NQMB2Q14 (SQD), NQMB4LA (SQD), NQMB6PPL (SQD), NQSFB2HJ (SQD), NQSFB2Q (SQD), NQSFB4HJ (SQD), NQSFB4Q (SQD), NQSFB6PPL (SQD), QFP2T (ZIN)
main-lug-kit	2A1909-1 (EAT), 2A1909-10 (EAT), 2A1909-11 (EAT), 2A1909-12 (EAT), 2A1909-13 (EAT), 2A1909-14 (EAT), 2A1909-15 (EAT), 2A1909-17 (EAT), 2A1909-18 (EAT), 2A1909-2 (EAT), 2A1909-20 (EAT), 2A1909-21 (EAT), 2A1909-23 (EAT), 2A1909-24 (EAT), 2A1909-26 (EAT), 2A1909-27 (EAT), 2A1909-5 (EAT), 2A1909-6 (EAT), 5PLUG31200TC (EAT), 5PLUG3400SC (EAT), 5PLUG3600SC (EAT), 5PLUG3800SC (EAT), BRL200 (EAT), KL11AMO (EAT), KL11AMS (EAT), KL11AVO (EAT), KL11AVS (EAT), KL11SCO (EAT), KL11SCS (EAT), KL11SMO (EAT), KL11SMS (EAT), KL11SVO (EAT), KL11SVS (EAT), KL13AMO (EAT), KL13AMS (EAT), KL13AVO (EAT), KL13AVS (EAT), KL13SCO (EAT), KL13SCS (EAT), KL13SMO (EAT), KL13SMS (EAT), KL13SVO (EAT), KL13SVS (EAT), KL21AMO (EAT), KL21AMS (EAT), KL21AVO (EAT), KL21AVS (EAT), KL21SCO (EAT), KL21SCS (EAT), KL21SMO (EAT), KL21SMS (EAT), KL21SVO (EAT), KL21SVS (EAT), KL23AMO (EAT), KL23AMS (EAT), KL23AVO (EAT), KL23AVS (EAT), KL23SCO (EAT), KL23SCS (EAT), KL23SMO (EAT), KL23SMS (EAT), KL23SVO (EAT), KL23SVS (EAT), KL41AMO (EAT), KL41AMS (EAT), KL41AVO (EAT), KL41AVS (EAT), KL41SCO (EAT), KL41SMO (EAT), KL41SMS (EAT), KL41SVO (EAT), KL41SVS (EAT), KL43AMO (EAT), KL43AMS (EAT), KL43AVO (EAT), KL43AVS (EAT), KL43SCO (EAT), KL43SMO (EAT), KL43SMS (EAT), KL43SVO (EAT), KL43SVS (EAT), KL61CMO (EAT), KL61CMS (EAT), KL61CVO (EAT), KL61CVS (EAT), KL61SMO (EAT), KL61SMS (EAT), KL61SVO (EAT), KL61SVS (EAT), KL61TMO (EAT), KL61TMS (EAT), KL61TVO (EAT), KL61TVS (EAT), KL63CMO (EAT), KL63CMS (EAT), KL63CVO (EAT), KL63CVS (EAT), KL63SMO (EAT), KL63SMS (EAT), KL63SVO (EAT), KL63SVS (EAT), KL63TMO (EAT), KL63TMS (EAT), KL63TVO (EAT), KL63TVS (EAT), KNA1B1C (FPE), AMB2120CA (GEA), AMB2120DCA (GEA), AMB2120DMA (GEA), AMB2120DMC (GEA), AMB2120DN (GEA), AMB2120MA (GEA), AMB2120N (GEA), AMB2250CA (GEA), AMB2250DCA (GEA), AMB2600CA (GEA), AMB2600DCA (GEA), AMB2600MA (GEA), AMB2600MC (GEA), AMB2800CA (GEA), AMB2800DCA (GEA), AMB3120CA (GEA), AMB3120DCA (GEA), AMB3120DMA (GEA), AMB3120DMC (GEA), AMB3120DN (GEA), AMB3120MA (GEA), AMB3120MC (GEA), AMB3120N (GEA), AMB3250CA (GEA), AMB3250DCA (GEA), AMB3600CA (GEA), AMB3600DCA (GEA), AMB3600MA (GEA), AMB3600MC (GEA), AMB3800CA (GEA), AMB3800DCA (GEA), AML3120CFP (GEA), AML3120FP (GEA), AML3250CFP (GEA), AML3250FP (GEA), AML3250SFP (GEA), AML3400CFP (GEA), AML3400FP (GEA), AML3400SFP (GEA), AML3600CFP (GEA), AML3600FP (GEA), AML3600SFP (GEA), AML3800CFP (GEA), AML3800FP (GEA), MLA1 (GEA), MLA2 (GEA), MLA41 (GEA), MLA61 (GEA), MLA62 (GEA), MLR1 (GEA), MLR2 (GEA), MLR41 (GEA), MLR61 (GEA), MLT1 (GEA), MLT2 (GEA), MLT41 (GEA), MLT42 (GEA), 4MLKA1 (SIE), 4MLKA1A (SIE), 4MLKA1B (SIE), 4MLKA3 (SIE), 4MLKA3A (SIE), 4MLKA3B (SIE), 4MLKC1 (SIE), 4MLKC1A (SIE), 4MLKC3 (SIE), 4MLKC3A (SIE), MLKA1 (SIE), MLKA1A (SIE), MLKA3 (SIE), MLKA3A (SIE), MLKC1 (SIE), MLKC1A (SIE), MLKC3 (SIE), MLKC3A (SIE), SMLK12 (SIE), HCM400VCA (SQD), HCM600VCA (SQD), HCM800VCA (SQD), HCW1200VCA (SQD), HCW400VCA (SQD), HCW600VCA (SQD), HCW800VCA (SQD), NFALV1 (SQD), NFALV2 (SQD), NFALV4 (SQD), NFALV6 (SQD), NFCUM1 (SQD), NFCUM2 (SQD), NFCUM4 (SQD), NFCUM6 (SQD), NFCUV1 (SQD), NFCUV2 (SQD), NFCUV4 (SQD), NFCUV6 (SQD), NQALMA6 (SQD), NQALV1 (SQD), NQALV2 (SQD), NQALV4 (SQD), NQALV6 (SQD), NQCUM1 (SQD), NQCUM2 (SQD), NQCUM4 (SQD), NQCUM6 (SQD), NQCUV1 (SQD), NQCUV2 (SQD), NQCUV4 (SQD), NQCUV6 (SQD), QMB12CLA (SQD), QMB8CLA (SQD), LK-15 (ZIN), LK-22 (ZIN)
sub-feed-lug-kit	2A1909-16 (EAT), 2A1909-22 (EAT), 2A1909-25 (EAT), 2A1909-28 (EAT), 2A1909-3 (EAT), 2A1909-7 (EAT), 3BRS225 (EAT), 3BRSF150 (EAT), BRS225 (EAT), BRSF125 (EAT), BRSF150 (EAT), KL11AMF (EAT), KL11AVF (EAT), KL11SCF (EAT), KL11SMF (EAT), KL11SVF (EAT), KL13AMF (EAT), KL13AVF (EAT), KL13SCF (EAT), KL13SMF (EAT), KL13SVF (EAT), KL21AMF (EAT), KL21AVF (EAT), KL21SCF (EAT), KL21SMF (EAT), KL21SVF (EAT), KL23AMF (EAT), KL23AVF (EAT), KL23SCF (EAT), KL23SMF (EAT), KL23SVF (EAT), NF125SFL (SQD), NF250SFL (SQD), NF400SFL (SQD), NQSFL1 (SQD), NQSFL2 (SQD), NQSFL4 (SQD), QO-100ASF (SQD), QO-225ASF (SQD), QOB2125SL (SQD), QOB3125SL (SQD), S33930 (SQD), S33931 (SQD), SF-100LP (SQD), SF-225LP (SQD), SL100 (SQD), SL1200 (SQD), SL1200P5 (SQD), SL1200P6 (SQD), SL1200P7 (SQD), SL-225 (SQD), SL250 (SQD), SL400 (SQD), SL800 (SQD), SL800FT (SQD), SL800M5 (SQD)

Component type	Parts (OEM PN → page)
through-feed-lug-kit	AFL120 (GEA), AFL600 (GEA), NF125FTL (SQD), NF250FTL (SQD), NF400FTL (SQD), NQFTL2H (SQD), NQFTL2L (SQD), NQFTL4H (SQD), NQFTL4L (SQD)
lug-kit	2T400K (EAT), 2T400KCW (EAT), 2T402K (EAT), 2TA400K (EAT), 2TA400KCW (EAT), 2TA401K (EAT), 2TA401KCW (EAT), 2TA401LDK (EAT), 2TA402K (EAT), 2TA603LDK (EAT), 2TA603LDKCW (EAT), 3T100FB (EAT), 3T125EF (EAT), 3T150FB (EAT), 3T20FB (EAT), 3T225FD (EAT), 3T400K (EAT), 3T400KCW (EAT), 3T402K (EAT), 3T631LK (EAT), 3T632LK (EAT), 3T632LKW (EAT), 3TA100FD (EAT), 3TA100G3K (EAT), 3TA100G6K (EAT), 3TA125E3K (EAT), 3TA125E6K (EAT), 3TA125EF (EAT), 3TA150EF (EAT), 3TA150F3K (EAT), 3TA150F6K (EAT), 3TA150FB (EAT), 3TA160EFK (EAT), 3TA225FD (EAT), 3TA225FDK (EAT), 3TA250FJ3 (EAT), 3TA250FJ6 (EAT), 3TA250J3K (EAT), 3TA250J6K (EAT), 3TA400K (EAT), 3TA400K3K (EAT), 3TA400K6K (EAT), 3TA400KCW (EAT), 3TA401K (EAT), 3TA401KCW (EAT), 3TA401LDK (EAT), 3TA402K (EAT), 3TA50FB (EAT), 3TA603LDK (EAT), 3TA603LDKCW (EAT), 3TA631LK (EAT), 3TA632LK (EAT), 3TA632LKW (EAT), 4T400K (EAT), 4T400KCW (EAT), 4T402K (EAT), 4T631LK (EAT), 4T632LK (EAT), 4T632LKW (EAT), 4TA160EFK (EAT), 4TA400K (EAT), 4TA400KCW (EAT), 4TA401K (EAT), 4TA401KCW (EAT), 4TA401LDK (EAT), 4TA402K (EAT), 4TA603LDK (EAT), 4TA603LDKCW (EAT), 4TA631LK (EAT), 4TA632LK (EAT), 4TA632LKW (EAT), T1000NB1 (EAT), T1200NB3 (EAT), T1200NB3M (EAT), T1600RD (EAT), T250FJ (EAT), T250KB (EAT), T300K (EAT), T350K (EAT), T350LK (EAT), T600MA1 (EAT), T602LD (EAT), T602LDCW (EAT), T700NB1 (EAT), T800MA1 (EAT), TA1000NB1 (EAT), TA1200NB1 (EAT), TA1201NB1 (EAT), TA1600RD (EAT), TA2000RD (EAT), TA250FJ (EAT), TA250KB (EAT), TA300K (EAT), TA350K (EAT), TA350LK (EAT), TA450LD (EAT), TA602LD (EAT), TA602LDCW (EAT), TA632L (EAT), TA700MA1 (EAT), TA700MA1CWT (EAT), TA700NB1 (EAT), TA800MA2 (EAT), TA800MA2CWT (EAT), TA801MA (EAT), TA801MACWT (EAT), N32 (FPE), NM34 (FPE), NM36 (FPE), NM38 (FPE), 75C140045G705 (GEA), FCALK12 (GEA), FCALK13 (GEA), FCALK14 (GEA), FCALK15 (GEA), FCALK15LV (GEA), FCALK16 (GEA), FCALK16LV (GEA), FCALK218H (GEA), FCALK318H (GEA), TCAL19PD3 (GEA), TCAL28PD3 (GEA), TCAL40PD3 (GEA), TCALK2121 (GEA), TCALK2122 (GEA), TCALK2124 (GEA), TCALK2125 (GEA), TCALK261 (GEA), TCALK281 (GEA), TCALK291 (GEA), TCALK3121 (GEA), TCALK3122 (GEA), TCALK3124 (GEA), TCALK3125 (GEA), TCALK318 (GEA), TCALK324 (GEA), TCALK325 (GEA), TCALK329 (GEA), TCALK341 (GEA), TCALK343 (GEA), TCALK347 (GEA), TCALK361 (GEA), TCALK363 (GEA), TCALK381 (GEA), TCALK391 (GEA), TCLK265 (GEA), TCLK365 (GEA), TCOK265 (GEA), TCOK365 (GEA), 2TA2N8750 (SIE), 2TA3N8750 (SIE), 2TA4N8500 (SIE), 2TA4P8500 (SIE), 3TA1QR300 (SIE), 3TA2N8750 (SIE), 3TA3N8750 (SIE), 3TA4N8500 (SIE), 3TA4P8500 (SIE), 3TC1GG20 (SIE), 3TC1Q1 (SIE), 3TC1QR250 (SIE), BNK350N (SIE), CCM800K2 (SIE), CCM800K3 (SIE), CCN1200K2 (SIE), CCN1200K3 (SIE), TA1Q300 (SIE), 32508 (SQD), 32510 (SQD), AL100FA (SQD), AL100FA4 (SQD), AL100FD (SQD), AL100TF (SQD), AL1200P24TK (SQD), AL1200P25TK (SQD), AL1200P25TK4 (SQD), AL1200R53K (SQD), AL1200R53TK (SQD), AL150FA (SQD), AL150HD (SQD), AL175JD (SQD), AL250JD (SQD), AL250KA (SQD), AL250KI (SQD), AL30FD (SQD), AL400L61K3 (SQD), AL400L61K4 (SQD), AL400LA (SQD), AL400LH7 (SQD), AL50FA (SQD), AL600LF52K3 (SQD), AL600LI35 (SQD), AL600LI5 (SQD), AL600LI7 (SQD), AL600LS52K3 (SQD), AL600LS52K4 (SQD), AL800M23K (SQD), AL800M23TK (SQD), AL800M23TK4 (SQD), AL800P6TK (SQD), AL800P6TK4 (SQD), AL800P7K (SQD), CU100FA (SQD), CU100FD (SQD), CU100TF (SQD), CU1200R53K (SQD), CU150HD (SQD), CU250JD (SQD), CU250KA (SQD), CU30FA4 (SQD), CU400L61K3 (SQD), CU400L61K4 (SQD), CU400LA (SQD), CU600LF52K3 (SQD), CU600LI35 (SQD), CU600LI5 (SQD), CU600LI7 (SQD), CU600LS52K3 (SQD), CU600LS52K4 (SQD), CVC100FA (SQD), CVC250KA3 (SQD), CVC400LA3 (SQD), CVC400LA5 (SQD), CVC600LI5 (SQD), CYA060HD (SQD), CYA150HD (SQD), CYA150JD (SQD), CYA250J3 (SQD), CYA400L31K3 (SQD), CYA400L31K4 (SQD), CYA400L51K3 (SQD), CYA400L51K4 (SQD), CYA400L71K3 (SQD), CYA600L32K3 (SQD), CYA600L32K4 (SQD), CYA600L52K3 (SQD), CYA600L52K4 (SQD), NQALMN6 (SQD), PDC12DG4 (SQD), PDC12DG4L3 (SQD), PDC12LA4 (SQD), PDC3FA2 (SQD), PDC3HD2 (SQD), PDC3JD20 (SQD), PDC4LA250 (SQD), PDC5DG20 (SQD), PDC5DG20L3 (SQD), PDC6FA6 (SQD), PDC6HD6 (SQD), PDC6JD4 (SQD), PDC6LA20 (SQD), VC100FA (SQD), VC250KA3 (SQD), VC250KA35 (SQD), VC400LA3 (SQD), VC400LA35 (SQD), VC400LA5 (SQD), VC400LA7 (SQD), VC600LI3 (SQD), VC600LI5 (SQD), VC600LI7 (SQD), YA060HD (SQD), YA150HD (SQD), YA150JD (SQD), YA250J35 (SQD), YA400L31K3 (SQD), YA400L51K3 (SQD), YA400L51K4 (SQD), YA400L71K3 (SQD), YA400L71K4 (SQD), YA600L32K3 (SQD), YA600L32K4 (SQD), YA600L52K3 (SQD), YA600L52K4 (SQD)
lug	NL300 (EAT), 121B7147P1 (GEA), 252B3638 (GEA), 763B795P8 (GEA), 763B795P9 (GEA), FCAL12 (GEA), FCAL13 (GEA), FCAL14 (GEA), FCAL15 (GEA), FCAL16 (GEA), GEA2-750 (GEA), TC012 (GEA), TC0121 (GEA), TC0131 (GEA), TC018 (GEA), TC024 (GEA), TC041 (GEA), TC043 (GEA), TC061 (GEA), TC063 (GEA), TC081A (GEA), TC091 (GEA), TCAL12 (GEA), TCAL121 (GEA), TCAL122 (GEA), TCAL124 (GEA), TCAL125 (GEA), TCAL12A (GEA), TCAL131 (GEA), TCAL14 (GEA), TCAL15 (GEA), TCAL18 (GEA), TCAL18LV (GEA), TCAL19PD1 (GEA), TCAL24 (GEA), TCAL25 (GEA), TCAL27 (GEA), TCAL28PD1 (GEA), TCAL29 (GEA), TCAL29LV (GEA), TCAL40PD1 (GEA), TCAL41 (GEA), TCAL43 (GEA), TCAL47 (GEA), TCAL61 (GEA), TCAL63 (GEA), TCAL81 (GEA), TCAL91 (GEA), TCLK43 (GEA), TCO124 (GEA), TCO125 (GEA), TCO29 (GEA), CCE125 (SIE), CCF250 (SIE), CCL600 (SIE), CCQ250 (SIE), LD1E060 (SIE), LD1E100 (SIE), LN1E100 (SIE), SA1E025 (SIE), TA1E6125 (SIE), TA1FD350A (SIE), TA1L6750 (SIE), TA1Q1 (SIE), TA2J630 (SIE), TA2J6500 (SIE), TA2K500 (SIE), TA2N750 (SIE), TA3K500 (SIE), TA4P750 (SIE), TA5P600 (SIE), TA6ED06 (SIE), TA6FD04 (SIE), TA6GG04 (SIE), TA6JD20 (SIE), TA6R600 (SIE), TC1ED6150 (SIE), TC1FD350 (SIE), TC1J6600 (SIE), TC1Q1 (SIE), TC2J6500 (SIE), TC2K500 (SIE), TC5R600 (SIE), 40251-016-51 (SQD), 40251-018-50 (SQD), 4025101851 (SQD), 40251-162-50 (SQD), 40251-287-50 (SQD), 40256-014-50 (SQD), 40256-034-50 (SQD), 40256-039-50 (SQD), 40560-270-50 (SQD), NQ100AN (SQD), NQ200AN (SQD), Q1100AN (SQD), Q1150AN (SQD), QO70AN (SQD), VCEL02114S1 (SQD), VCEL030516H1 (SQD), VCEL05012H1 (SQD), VCEL06012H1 (SQD), VCEL07512H1 (SQD), VCELC02114S1 (SQD), VCELC03038H1 (SQD), VCELC05012H1 (SQD), VCELC07512H1 (SQD)

Component type	Parts (OEM PN → page)
branch-connector-kit	1C96608 (EAT), 1C96609 (EAT), 2C11642 (EAT), CCA4K (EAT), CED3K (EAT), CED4BK (EAT), CED4K (EAT), CFD3K (EAT), CFD4BK (EAT), CFD4K (EAT), CJD4K (EAT), CJDS4BK (EAT), CJDS4K (EAT), CKD4K (EAT), CKDS4BK (EAT), CKDS4K (EAT), CLD4K (EAT), CLDS4BK (EAT), CMD4K (EAT), CND4K (EAT), KFDP4XT (EAT), KFDP5XT (EAT), KFDPB6X-2 (EAT), KFDPW11X-6 (EAT), KFDPW11X-8 (EAT), KFDPW15X-12 (EAT), KFDPW9X-4 (EAT), KPHCC3175S (EAT), KPRL1BAB (EAT), KPRL2GHB (EAT), KPRL3ABA06 (EAT), KPRL3ABA06-1 (EAT), KPRL3ABA12 (EAT), KPRL3ABA12-1 (EAT), KPRL3ABA18 (EAT), KPRL3ABA18-1 (EAT), KPRL3ABA24 (EAT), KPRL3ABA24-1 (EAT), KPRL3AED2 (EAT), KPRL3AED3 (EAT), KPRL3AFD1 (EAT), KPRL3AFD2 (EAT), KPRL3AFD3 (EAT), KPRL3AGB06 (EAT), KPRL3AGB06-1 (EAT), KPRL3AGB12 (EAT), KPRL3AGB12-1 (EAT), KPRL3AGB18 (EAT), KPRL3AGB18-1 (EAT), KPRL3AGB24 (EAT), KPRL3AGB24-1 (EAT), KPRL3CA (EAT), KPRL3CF3 (EAT), KPRL3ED (EAT), KPRL3FD (EAT), KPRL3X21T (EAT), KPRL3X22 (EAT), KPRL3X22T (EAT), KPRL3X23 (EAT), KPRL3X23T (EAT), KPRL3XBA06 (EAT), KPRL3XBA06-1 (EAT), KPRL3XBA12 (EAT), KPRL3XBA12-1 (EAT), KPRL3XBA18 (EAT), KPRL3XBA18-1 (EAT), KPRL3XBA24 (EAT), KPRL3XBA24-1 (EAT), KPRL3XGB06 (EAT), KPRL3XGB06-1 (EAT), KPRL3XGB12 (EAT), KPRL3XGB12-1 (EAT), KPRL3XGB18 (EAT), KPRL3XGB18-1 (EAT), KPRL3XGB24 (EAT), KPRL3XGB24-1 (EAT), KPRL44X (EAT), KPRL45X (EAT), KPRL45X1 (EAT), KPRL45XS (EAT), KPRL4B6XS (EAT), KPRL4B6XT (EAT), KPRL4CD (EAT), KPRL4CED (EAT), KPRL4CSL (EAT), KPRL4CSM (EAT), KPRL4CSN (EAT), KPRL4W11X (EAT), KPRL4W15X (EAT), KPRL4W9X (EAT), MP40CHH (EAT), MP40ED225-3 (EAT), MP40KC225-3 (EAT), MP40KF100-3 (EAT), MP40KJ225-3 (EAT), MP40KK400-3 (EAT), MP40KL400-3 (EAT), MP40KL600-3 (EAT), MP40KM800-3 (EAT), MP40KN1200-3 (EAT), MPED1K (EAT), KBDP1C (FPE), KBDP2C (FPE), KBDP3C (FPE), KBDP4C (FPE), KBDP5C (FPE), KCDP-1A (FPE), KCDP1C (FPE), KCDP2C (FPE), KCDP3C (FPE), KCDP4C (FPE), KCDP5C (FPE), NAIB-NEF (FPE), NDPNE (FPE), NDPNEJ (FPE), ACSMKSG (GEA), ACSMKSK (GEA), ACTMKEB1P (GEA), ACTMKEB2P (GEA), ACTMKEB3P (GEA), ACTMKJD (GEA), ACTMKQD2P (GEA), ACTMKQD3P (GEA), ACTMKSE (GEA), ACTMKSF (GEA), ACTMKSG (GEA), AMCB2FGMFP (GEA), AMCB2FJ (GEA), AMCB2FJFP (GEA), AMCB2FJFPTF (GEA), AMCB2GM (GEA), AMCB2GMFP (GEA), AMCB2KM (GEA), AMCB2KMFP (GEA), AMCB3FGMFP (GEA), AMCB3FJ (GEA), AMCB3FJFP (GEA), AMCB3FJFPTF (GEA), AMCB3GM (GEA), AMCB3GMFP (GEA), AMCB3KM (GEA), AMCB3KMFP (GEA), AMCB3LBFP (GEA), AMCB4EB (GEA), AMCB4EBFP (GEA), AMCB4EY (GEA), AMCB4EYFP (GEA), AMCB4FBFP (GEA), AMCB4FDBFP (GEA), AMCB4FGBFP (GEA), AMCB4FJ (GEA), AMCB4FJFP (GEA), AMCB4FJFPTF (GEA), AMCB4GB (GEA), AMCB4GBFP (GEA), AMCB4QDFP (GEA), AMCB4SE (GEA), AMCB4SEFP (GEA), AMCB6EB (GEA), AMCB6EBFP (GEA), AMCB6EY (GEA), AMCB6EYFP (GEA), AMCB6FBFP (GEA), AMCB6FDBFP (GEA), AMCB6FGBFP (GEA), AMCB6FJ (GEA), AMCB6FJFP (GEA), AMCB6FJFPTF (GEA), AMCB6GB (GEA), AMCB6GBFP (GEA), AMCB6QDFP (GEA), ASPP6EY12D (GEA), ASPP6EY6D (GEA), ASPP6FB6D (GEA), ASPP6QB12D (GEA), ASPP6QB6D (GEA), ASPP6QD6D (GEA), ASPP6SE6D (GEA), ASPP6SF3S (GEA), ASPP6SG3S (GEA), NHB150PK (GEA), SF2DPK (GEA), SG6DPK (GEA), SG6SPK (GEA), SGS6K (GEA), SK12SPK (GEA), SK8SPK (GEA), TB1DPK (GEA), TB4SBK (GEA), TB4SPK (GEA), TB8SPK (GEA), TED1DPK (GEA), TED1DPK2 (GEA), TEL1DPK (GEA), TF2DPK (GEA), THFP63DPK (GEA), THFP63SPK (GEA), THFP64SPK (GEA), THFP65SPK (GEA), THJV6DPK (GEA), THLCDPK (GEA), TJ4DPK (GEA), TJ6DPK (GEA), TJ6SPK (GEA), TK12SPK (GEA), TK8SPK (GEA), TK9SPK (GEA), TP8SPK (GEA), TQ2DPK (GEA), 5EH2 (SIE), 5FJ2 (SIE), 5JJ2 (SIE), 6BL2C (SIE), 6CLE2 (SIE), 6CLF1 (SIE), 6CLJ1 (SIE), 6CLJ6 (SIE), 6CLL1 (SIE), 6E62 (SIE), 6F62 (SIE), 6JJ61 (SIE), 6JJ62 (SIE), 6LL61 (SIE), 6M61C (SIE), 6N61C (SIE), 6QJ2 (SIE), 6QR2 (SIE), 6SCJ1 (SIE), 6SCL1 (SIE), 6SCL61C (SIE), 6SJL1 (SIE), 6SLL1 (SIE), BBKB32 (SIE), BBKEB32 (SIE), BBKED32 (SIE), BBKGB32 (SIE), BBKNB32 (SIE), BBKQ1 (SIE), BBKQ2 (SIE), BBKQR1 (SIE), BBKQR2 (SIE), BBKVA4P2P3 (SIE), BBKVA5262P2S (SIE), BBKVA52P3T (SIE), CD55JJ2 (SIE), CD62JJ2 (SIE), CDP525-FD63BT (SIE), CDP525-FJ3B (SIE), CDP525-FJ3BT (SIE), CDP71PHED4 (SIE), CDP7BQ3 (SIE), CDPFJ3 (SIE), EH3K (SIE), F602 (SIE), F602D (SIE), F657 (SIE), F657D (SIE), F671 (SIE), F671D (SIE), FJ3K (SIE), JJ3K (SIE), MG1 (SIE), MG1D (SIE), NEB64K (SIE), NEB65K (SIE), NG1D (SIE), S3VA41T (SIE), S3VA41TD (SIE), S3VA41TDHD (SIE), S3VA52T (SIE), S3VA52TD (SIE), S3VA53T (SIE), S3VA53T2D (SIE), S3VA53TD (SIE), S3VA54T (SIE), S3VA54T2D (SIE), S3VA54TD (SIE), S3VA55TD (SIE), S3VA57TD (SIE), S3VA63T (SIE), S3VA63TD (SIE), S3VA64T (SIE), S3VA64TD (SIE), SBL (SIE), SBLBD (SIE), SCE (SIE), SCED (SIE), SCF (SIE), SCFD (SIE), SCJ (SIE), SCJD (SIE), SCL (SIE), SCLD (SIE), SDG (SIE), SDGD (SIE), SE6 (SIE), SE6D (SIE), SEB (SIE), SEBD (SIE), SF6 (SIE), SF6D (SIE), SFG (SIE), SFGD (SIE), SGB2 (SIE), SGB2D (SIE), SJ1 (SIE), SJ1D (SIE), SJ2D (SIE), SJG (SIE), SJG1D (SIE), SJG2D (SIE), SL6 (SIE), SL6D (SIE), SLG (SIE), SLGD (SIE), SLM1 (SIE), SLM1D (SIE), SMND (SIE), SNB (SIE), SNBD (SIE), SQR (SIE), SQRD (SIE), SSCJ (SIE), SSCJD (SIE), SSCL (SIE), SSCLD (SIE), SSJ1 (SIE), SSJ1D (SIE), SSL6 (SIE), SSL6D (SIE), SSMND (SIE), VB610 (SIE), QMB-206-EX (SQD), QMB-210-EX (SQD), QMB-220-EX (SQD), SK5668 (SQD), SKNF250 (SQD), SKNF600 (SQD), SKNQBC (SQD), SKNQOD225 (SQD), DSLNEJT (ZIN), DSLNET (ZIN), DSLNFT (ZIN), DSLNJT (ZIN), DSLNM (ZIN), DSLNMS (ZIN), DSLQB (ZIN), DSLQFB (ZIN), FPENEFT (ZIN), QSF100DS (ZIN), QSF100SB (ZIN), QSF100SS (ZIN), QSF200DS (ZIN), QSF200SB (ZIN), QSF400DS (ZIN), QSF400SB (ZIN), QSF600DS (ZIN), SECT (ZIN), SEHT (ZIN), SJD4T (ZIN), SKM8S (ZIN)

Component type	Parts (OEM PN → page)
breaker-mounting-kit	EEMODULEFS (EAT), KCDPCA (EAT), KCDPED225 (EAT), KCDPFB100 (EAT), KCDPFBP (EAT), KCDPKB (EAT), KCDPLA400 (EAT), KCDPLA600 (EAT), KCDPLB (EAT), KCDPLCL (EAT), KCDPMC (EAT), KCDPNBP (EAT), KCDPNC (EAT), KPRL4CA (EAT), KPRL4CKD (EAT), KPRL4CND (EAT), KPRL4ED (EAT), KPRL4ED2 (EAT), KPRL4FBP (EAT), KPRL4FD (EAT), KPRL4FD1 (EAT), KPRL4FD2 (EAT), KPRL4FDCL (EAT), KPRL4JDS (EAT), KPRL4JDT (EAT), KPRL4KDS (EAT), KPRL4KDT (EAT), KPRL4LAP (EAT), KPRL4LC (EAT), KPRL4LCL (EAT), KPRL4LD (EAT), KPRL4LG (EAT), KPRL4MC (EAT), KPRL4MD (EAT), KPRL4NBP (EAT), KPRL4NC (EAT), KPRL4ND (EAT), KPRL4X12 (EAT), KPRL4X22 (EAT), KPRL4X32 (EAT), KPRL4X334S (EAT), KPRL4X334T (EAT), KPRL4X336 (EAT), KPRL4X34 (EAT), KPRL4X35 (EAT), NFHARDWARE (FPE), AMC2FGMFP (GEA), AMC2FJFP (GEA), AMC2FJFPTF (GEA), AMC2FLSFP (GEA), AMC2GMFP (GEA), AMC2JKFP (GEA), AMC2KMFP (GEA), AMC3FGMFP (GEA), AMC3FJFP (GEA), AMC3FJFPTF (GEA), AMC3FLSFP (GEA), AMC3GMFP (GEA), AMC3JKFP (GEA), AMC3KMFP (GEA), AMC4EBFP (GEA), AMC4EBSFP (GEA), AMC4FDBFP (GEA), AMC4FDSFP (GEA), AMC4FGBFP (GEA), AMC4FJFP (GEA), AMC4FJFPTF (GEA), AMC4FLSFP (GEA), AMC4GBFP (GEA), AMC4JKFP (GEA), AMC4QDFP (GEA), AMC4SEFP (GEA), AMC6EBFP (GEA), AMC6EBSFP (GEA), AMC6EL (GEA), AMC6EYFP (GEA), AMC6FBFP (GEA), AMC6FDBFP (GEA), AMC6FDSPF (GEA), AMC6FGBFP (GEA), AMC6FJFP (GEA), AMC6FJFPTF (GEA), AMC6FLSFP (GEA), AMC6GBFP (GEA), AMC6JKFP (GEA), AMC6QBFP (GEA), AMC6QDFP (GEA), ASPFB12P (GEA), ASPFB3P (GEA), ASPTED3P (GEA), ASPTQD3P (GEA), NLAB-TQC3 (GEA), CU-NFJ (OTH), ML1997 (SQD), ML1FAS (SQD), ML1KAPT (SQD), ML1LAPS (SQD), ML1LAPT (SQD), ML1LAT (SQD), ML1MAPS (SQD), ML-LAL-S (SQD), QMB3300LA (SQD), QMB3400LA (SQD), QMBHW (SQD), QMBJW (SQD), SK4529 (SQD), SK-5666 (SQD), SK5669 (SQD)
connector-strap	1253C72G01 (EAT), 1253C72G03 (EAT), 1253C73G01 (EAT), 1253C73G03 (EAT), 1253C73G05 (EAT), 1253C73G06 (EAT), 2600D26G01 (EAT), 2600D26G02 (EAT), 314C996G01 (EAT), 314C996G02 (EAT), 314C996G03 (EAT), 4212B77G01 (EAT), 4212B78G02 (EAT), 505C606G04 (EAT), 505C606G05 (EAT), 505C606G06 (EAT), 506C052G01 (EAT), 624B609G01 (EAT), 673B142G02 (EAT), 673B142G03 (EAT), 673B142G04 (EAT), 673B142G10 (EAT), KFDP2C (FPE), KFDP3C (FPE), KFDP46C (FPE), KFDP4C (FPE), KFDP-5C (FPE), KFDP66C (FPE), KFDP7C (FPE), KFDPD16C (FPE), KFDPD26C (FPE), KFDPS16C (FPE), KFDPS26C (FPE), KFDPV7C (FPE), KQB3C (FPE), KQB46C (FPE), KQB4C (FPE), KQB66C (FPE), KQB86C (FPE), KQB-D26C (FPE), PK103T (FPE), 139C5702AQDG1 (GEA), 139C5702ASEG1 (GEA), 139C5702ASFG1 (GEA), 139C5702BQDG1 (GEA), 139C5702BSEG1 (GEA), 139C5702BSFG1 (GEA), 139C5702CQDG1 (GEA), 139C5702CSEG1 (GEA), 139C5702CSFG1 (GEA), 252B3618G10 (GEA), 252B3618G11 (GEA), 252B3618G13 (GEA), 252B3618G14 (GEA), 252B3618G15 (GEA), 315A7046P7 (GEA), 315A7046P8 (GEA), 315A7046P9 (GEA), 315A7048P20 (GEA), 315A7049P10 (GEA), TKMC1 (GEA), P1CONACPHAL (SIE), P1CONACPHCU (SIE), P1CONBPHAL (SIE), P1CONBPHCU (SIE)
bus-assembly	UBIZRBK12 (ZIN)
neutral-assembly	1C96645 (EAT), 1C96646 (EAT), 1C96647 (EAT), 1C96648 (EAT), 1C96649 (EAT), 1C96650 (EAT), 1C96651 (EAT), 1C96652 (EAT), 1C96653 (EAT), 1C96654 (EAT), 1C97022 (EAT), 2A1908-1 (EAT), 2A1908-2 (EAT), 2A1908-3 (EAT), 2A1908-4 (EAT), 2A1908-5 (EAT), 2A1908-6 (EAT), 42C4050 (EAT), 42C4051 (EAT), 42C4052 (EAT), 5158C03 (EAT), 5158C03G01 (EAT), 5158C03G02 (EAT), 5158C03G03 (EAT), 5158C03G04 (EAT), 5158C04G01 (EAT), 5PN1200A (EAT), 5PN1200C (EAT), 5PN800A (EAT), 5PN800C (EAT), BINA (EAT), ANK120D (GEA), ANK800D (GEA), ANKN120 (GEA), ANKN400 (GEA), NKA (GEA), NKA42 (GEA), NKA4FT (GEA), NKR (GEA), NKR4 (GEA), NKT (GEA), NKT4 (GEA), 2NLK30A (SIE), 2NLK42A (SIE), 2NLK42B (SIE), 2NLK54A (SIE), 2NLK54B (SIE), 42NLK30A (SIE), 42NLK42A (SIE), 42NLK54A (SIE), 42NLK54B (SIE), BNK2 (SIE), BNKP2EX1 (SIE), CNLK30A (SIE), CNLK42A (SIE), CNLK42B (SIE), CNLK54A (SIE), CNLK54B (SIE), LNLK30A (SIE), LNLK42A (SIE), LNLK4X11B (SIE), LNLK54A (SIE), LNLK5X12A (SIE), LNLK6X17B (SIE), LNLK7X18A (SIE), LNLK7X20B (SIE), LPP2NB01 (SIE), HC2SN (SQD), HC4SN (SQD), HC6SN (SQD), HC6SNALCU (SQD), HC6SNCU (SQD), HC8SN (SQD), HC8SNALCU (SQD), HC8SNCU (SQD), HCP12SNALCU (SQD), HCP12SNCU (SQD), HCP4SNALCU (SQD), HCP6SNALCU (SQD), HCP8SNALCU (SQD), HCPSU8SN (SQD), HCPSU8SNALCU (SQD), HCPSU8SNCU (SQD), HCR12SNALCU (SQD), HCR12SNCT (SQD), HCR12SNCU (SQD), HCW12SN (SQD), HCW12SNCU (SQD), HCW4SN (SQD), HCW4SNCU (SQD), HCW6SN (SQD), HCW6SNCU (SQD), HCW8SN (SQD), HCW8SNCU (SQD), HCWM12SN (SQD), ILHCJ1ESN (SQD), ILHCJ1ESNC (SQD), ILHCJ27ESN (SQD), ILHCJ2ESN (SQD), ILHCJ2ESNC (SQD), ILHCPRU1ESN (SQD), ILHCPRU1ESNC (SQD), ILHCPRU2ESN (SQD), ILHCPRU2ESNC (SQD), ILHCPSU1ESN (SQD), ILHCPSU1ESNC (SQD), ILHCPSU2ESN (SQD), ILHCPSU2ESNC (SQD), NFN1CU (SQD), NFN2CU (SQD), NFN6CR (SQD), NFN6CU (SQD), NFNL1 (SQD), NFNL2 (SQD), NFNL4 (SQD), NQN1CU (SQD), NQN2CU (SQD), NQN6CRUS (SQD), NQN6CU (SQD), NQNL1 (SQD), NQNL2 (SQD), NQNL2ACCY (SQD), NQNL4 (SQD), QM-1SN (SQD), QM-2SN (SQD), QM-4SN (SQD), QM-6SN (SQD)
ground-bar	2A1907-1 (EAT), 2A1907-2 (EAT), 2C11296 (EAT), 5158C05 (EAT), 5158C05G01 (EAT), 5158C05G02 (EAT), 5158C05G05 (EAT), 5158C05G06 (EAT), 5PG1200A (EAT), 5PG1200C (EAT), 6572C746G01 (EAT), AEG10 (GEA), AEG21 (GEA), AEG21S (GEA), AEG31S (GEA), AEG47 (GEA), AEG47S (GEA), EGS12 (GEA), TGL2 (GEA), TGL20 (GEA), ECGK (SIE), EGK (SIE), ICGK (SIE), IGK (SIE), PK12GTA (SQD), PK18GTA (SQD), PK23GTA (SQD), PK23GTAL (SQD), PK27GTA (SQD), PK27GTACU (SQD), PK32DGTA (SQD), PK-9GTA (SQD)
interior	K-11-D-2550-01 (SIE), K-11-D-2550-02 (SIE), K-11-D-2550-03 (SIE), K-11-D-2550-04 (SIE), K-11-D-2550-05 (SIE), K-11-D-2551-01 (SIE), K-11-D-2551-02 (SIE), K-11-D-2551-03 (SIE), K-11-D-2551-04 (SIE), K-11-D-2551-05 (SIE), K-11-D-2552-01 (SIE), K-11-D-2552-02 (SIE), K-11-D-2552-03 (SIE), K-11-D-2552-04 (SIE), K-11-D-2552-05 (SIE), K-11-D-2553-01 (SIE), K-11-D-2553-02 (SIE), K-11-D-2553-03 (SIE), K-11-D-2553-04 (SIE), K-11-D-2553-05 (SIE), CF16KF63C (SQD), CF16RJ63C36 (SQD), CF20R63C (SQD), CF20RJ63C (SQD), CF25R63C (SQD), CF30RJ63C (SQD)
mounting-bracket	208B264H01 (EAT), 208B297H01 (EAT), 315C270H01 (EAT), 624B600H01 (EAT), 624B600H02 (EAT), 139C5500P81 (GEA), 139C5500P82 (GEA), 139C5500P83 (GEA), 139C5500P84 (GEA), 139C5700P86 (GEA), 208C1850P3 (GEA), 208C1850P4 (GEA), 208C1850P5 (GEA), 208C1850P6 (GEA), 252B3575P1 (GEA), 252B3576P1 (GEA), ASPAQLEBKT (GEA), SR1XBF (GEA), SR2XBF (GEA), SR5XBF (GEA), P1DFS250AFT (SIE), P1DFS250ANFT (SIE), P1DFS400A (SIE), 4051749901 (SQD), NFES18 (SQD), NQES18 (SQD)

Component type	Parts (OEM PN → page)
mounting-rail	NF12RDE (SQD), NF18RDE (SQD), NF6RDE (SQD), NQ12RDE (SQD), NQ18RDE (SQD), NQ24RDE (SQD), NQ3RDE (SQD), NQ6RDE (SQD)
standoff	208C2022P1 (GEA)
insulator	75C140025P104 (GEA), 75C140025P105 (GEA), 75C140025P106 (GEA), 75C140032P134 (GEA), 75D165029P101T (GEA), 911E347P3 (GEA), 4052098601 (SQD), PKGTAB (SQD)
barrier	1266C07G01 (EAT), 208B966G01 (EAT), 314C420G05 (EAT), 4210B95G01 (EAT), 4210B95G02 (EAT), 625B229G06 (EAT), 625B229G07 (EAT), 625B229G08 (EAT), 625B229G09 (EAT), 6631C01G01 (EAT), 6641C16G01 (EAT), 6641C16G02 (EAT), EEC3K (EAT), EEC4K (EAT), EFTS3K (EAT), EFTS4K (EAT), EIPBK (EAT), FJIPBK (EAT), FJIPBK4 (EAT), FJTS3K (EAT), FJTS4K (EAT), GTSK3 (EAT), IPB1 (EAT), IPB2 (EAT), IPB3 (EAT), IPB4 (EAT), IPB5 (EAT), LTS3K (EAT), LTS4K (EAT), NTS3K (EAT), PRLSEBBAB (EAT), PRLSEBFD (EAT), PRLSEBGHB (EAT), PRLSEBJD (EAT), PRLSEBLGKD (EAT), PRLSEBPD2 (EAT), PRLSEBPD3 (EAT), PRLSEBPD4 (EAT), PRLSEBPD5 (EAT), TEC1 (EAT), TEC2 (EAT), TS33LD (EAT), TS33LN (EAT), TS34LN (EAT), 10083041P1 (GEA), 252B1667P1 (GEA), ASP25AD65KA (GEA), FGJS3 (GEA), SKPSHLD (GEA), TEDLS (GEA), TFKLS (GEA), TJKLS (GEA), BQFS2 (SIE), CLRSJL3 (SIE), JDTERMSHIELD (SIE), MDTERMSHIELD (SIE), NDTS (SIE), SEBKP1P2P3V1 (SIE), SEBKP2V1 (SIE), SEBKP2V2 (SIE), SEBKP2V3 (SIE), SEBKP2V4 (SIE), SEBKP2V5 (SIE), SEBKP2V6 (SIE), SEBKP2V7 (SIE), SEBKP3V1 (SIE), SEBKP3V3 (SIE), SEBKRP1V1 (SIE), SEBKRP1V2 (SIE), SEBKRP1V3 (SIE), SEBKRP1V4 (SIE), SEBKRP1V5 (SIE), SEBKRP1V6 (SIE), SEBKRP1V7 (SIE), SEBP4V1 (SIE), SEBP4V2 (SIE), SEBP4V3 (SIE), SEBP5V1 (SIE), SEBP5V2 (SIE), SEBP5V3 (SIE), SEBP5V4 (SIE), SEBPPVA1 (SIE), SEBPPVA2 (SIE), TSSG3A (SIE), 36965 (SQD), GYT (SQD), ILBFMHCJHULC (SQD), ILBFMHCPHJULC (SQD), ILBFMHCPLULC (SQD), ILBFMHCPMPULC (SQD), ILBFMHCRLULC (SQD), ILBFMHCRMULC (SQD), ILBFMHCRPULC (SQD), ILBFMHCRRULC (SQD), LALLC (SQD), NFBFMB20 (SQD), NFEDBS (SQD), NFHJLLC (SQD), NFLALLC (SQD), NFPPLLLC (SQD), NFPPPLLC (SQD), NQHJQLLC (SQD), NQLALLC (SQD), NQODBFMB20 (SQD), NQPPLLLC (SQD), PPLLC (SQD), S32562 (SQD), S32563 (SQD), S37432 (SQD), S37436 (SQD), S37440 (SQD), S37446 (SQD), S37447 (SQD), S37448 (SQD), S37449 (SQD), S37450 (SQD)
deadfront	1C96619 (EAT), 1C96620 (EAT), 1C96638 (EAT), 2A1906-1 (EAT), 2A1906-2 (EAT), 2A1906-3 (EAT), 2A1960-1 (EAT), 2A1960-2 (EAT), 2A1960-3 (EAT), 4176B51 (EAT), 4176B56 (EAT), 4176B57 (EAT), 4176B60 (EAT), 4176B61 (EAT), 4176B66 (EAT), 4176B67 (EAT), 4176B68 (EAT), 4176B69 (EAT), 4176B70 (EAT), 4176B79 (EAT), 4176B80 (EAT), 4178B08 (EAT), 4179B39 (EAT), 4179B40 (EAT), 4179B41 (EAT), 4179B42 (EAT), 4180B03 (EAT), 4180B04 (EAT), 4180B05 (EAT), 4180B61 (EAT), 4180B79 (EAT), 4180B91 (EAT), 4180B93 (EAT), 42C7980 (EAT), 42C7982 (EAT), 42C8055 (EAT), 42C8072 (EAT), 42C8073 (EAT), 42C8076 (EAT), 42C8077 (EAT), 42C8078 (EAT), 42C8079 (EAT), 42C8080 (EAT), 42C8081 (EAT), 42C8082 (EAT), 5156C09 (EAT), 5156C10 (EAT), 6559C59 (EAT), 6574C74 (EAT), DFK07 (SIE), DFK08 (SIE), DFK09 (SIE), DFK1 (SIE), DFK10 (SIE), DFK11 (SIE), DFK12 (SIE), DFK13 (SIE), DFK14 (SIE), DFK15 (SIE), DFK16 (SIE), DFK17 (SIE), DFK18 (SIE), DFK19 (SIE), DFK20 (SIE), DFK21 (SIE), NFRPLMB6PPL (SQD), NFRPLMB8PPMP (SQD), NQRPLMB6PPL (SQD)
filler-plate	2A1918-1 (EAT), 2A1918-2 (EAT), 3456B35H01 (EAT), 3456B99H01 (EAT), 3456B99H05 (EAT), 4176B72 (EAT), 4178B06H01 (EAT), 4180B08 (EAT), 4180B52H01 (EAT), 42C8083H01 (EAT), 5155C62H01 (EAT), 5PFP1S (EAT), 5PFP1T (EAT), 5PFP2S (EAT), 5PFP2T (EAT), 5PFP3S (EAT), 5PFP3T (EAT), 5PFP4S (EAT), 5PFP4T (EAT), 5PFP5S (EAT), 5PFP5T (EAT), 5PFP6S (EAT), 5PFP6T (EAT), 6554C01 (EAT), 6554C02 (EAT), 6555C40H01 (EAT), 6555C41H01 (EAT), BRFP (EAT), BWFP (EAT), KCDP_X (EAT), KFDP_X (EAT), MP403XBLANK (EAT), P41X25 (EAT), PRXP4PD2FILL1 (EAT), NCFS (FPE), 139C5362P2 (GEA), 139C5503P103 (GEA), 139C5503P129 (GEA), 139C5503P64 (GEA), 139C5503P77 (GEA), 139C5503P90 (GEA), 168D1930P3 (GEA), 168D1930P4 (GEA), 208C2291P1 (GEA), 208C4262G1 (GEA), 208C4262G10 (GEA), 208C4262G11 (GEA), 208C4262G12 (GEA), 208C4262G13 (GEA), 208C4262G14 (GEA), 208C4262G15 (GEA), 208C4262G16 (GEA), 208C4262G17 (GEA), 208C4262G18 (GEA), 208C4262G19 (GEA), 208C4262G2 (GEA), 208C4262G20 (GEA), 208C4262G21 (GEA), 208C4262G22 (GEA), 208C4262G23 (GEA), 208C4262G24 (GEA), 208C4262G25 (GEA), 208C4262G26 (GEA), 208C4262G27 (GEA), 208C4262G28 (GEA), 208C4262G29 (GEA), 208C4262G3 (GEA), 208C4262G30 (GEA), 208C4262G31 (GEA), 208C4262G32 (GEA), 208C4262G33 (GEA), 208C4262G34 (GEA), 208C4262G35 (GEA), 208C4262G36 (GEA), 208C4262G49 (GEA), 208C4262G53 (GEA), 208C4262G54 (GEA), 208C4262G55 (GEA), 208C4262G56 (GEA), 208C4262G57 (GEA), 208C4262G58 (GEA), 208C4262G59 (GEA), 208C4262G6 (GEA), 208C4262G60 (GEA), 208C4262G61 (GEA), 208C4262G62 (GEA), 208C4262G7 (GEA), 252B1768G1 (GEA), 252B1768G2 (GEA), 252B2056P8 (GEA), 75C145005G703 (GEA), 75C145005G711 (GEA), 75C145005G715 (GEA), AFP10T (GEA), AFP10X (GEA), AFP19X (GEA), AFP2FBD (GEA), AFP2QDD (GEA), AFP2TED (GEA), AFP3ELD (GEA), AFP3EYD (GEA), AFP3FBD (GEA), AFP3QBD (GEA), AFP3QDD (GEA), AFP3SED (GEA), AFP3SFD (GEA), AFP3SFS (GEA), AFP3TED (GEA), AFP3TFD (GEA), AFP3TFS (GEA), AFP4FGD (GEA), AFP4FGS (GEA), AFP4SED (GEA), AFP4SFD (GEA), AFP4SFS (GEA), AFP4SGC (GEA), AFP4SGD (GEA), AFP4SGS (GEA), AFP4X (GEA), AFP5LCS (GEA), AFP5X (GEA), AFP6SKS (GEA), AFP6TJD (GEA), AFP6TJS (GEA), AFP7T (GEA), AFP7X (GEA), AFP7X2 (GEA), AMCB6TEDL (GEA), APP1 (GEA), APP1S (GEA), APP1W (GEA), APP2 (GEA), APP2S (GEA), APP2W (GEA), APP3 (GEA), APP3S (GEA), APP3W (GEA), APP4 (GEA), APP4S (GEA), APP4W (GEA), APP5 (GEA), APP5S (GEA), APP5W (GEA), APP6 (GEA), APP6S (GEA), APP6W (GEA), CCBBLANK (GEA), CCBFP1 (GEA), CCBFP3 (GEA), CCBFP5 (GEA), GAVFP2 (GEA), QMRFP1 (GEA), QMRFP2 (GEA), QMRFP3 (GEA), QMRFP5 (GEA), SCPFP1 (GEA), SCPFP2 (GEA), SCPFP3 (GEA), SCPFP5 (GEA), TEDFP1 (GEA), TQLFP1 (GEA), 6FPB01 (SIE), 6FPB02 (SIE), 6FPB03 (SIE), 6FPB05 (SIE), 6FPB10 (SIE), 6FPB15 (SIE), DFFP01A (SIE), DFFP01B (SIE), DFFP01C (SIE), DFFP1 (SIE), DFFP1A (SIE), DFFP3 (SIE), DFFP6 (SIE), DFFPED01 (SIE), DFFPFD01 (SIE), DFFPJD01 (SIE), DFFPJD02 (SIE), DFFPQJ01 (SIE), DFFPQJ02 (SIE), DFFPV5363A (SIE), DFFPVA41A (SIE), DFFPVA5262A (SIE), DFFPVA5262P2A (SIE), DFFPVA5262P2B (SIE), DFFPVA5363A (SIE), DFP3AP01 (SIE), EBF1 (SIE), MBKQRC1FK (SIE), MBKQRFK (SIE), P2QRFP01 (SIE), QF3 (SIE), FP1 (SQD), HLN1BL (SQD), HLN4BL (SQD), HLN4EBL (SQD), HLW1BL (SQD), HLW-3BL (SQD), HLW4BL (SQD), HLW4EBL (SQD), HNM1BL (SQD), HNM-3BL (SQD), HNM4BL (SQD), NFFP15 (SQD), NQFP15 (SQD), QM-1BL (SQD), QM-3BL (SQD), QM-6BL (SQD), QM-9BL (SQD), QMB15BLW (SQD), QMB1BLW (SQD), QMB3BLW (SQD), QMB6BLW (SQD), QO-1CP (SQD), QW1BL (SQD), QW3BL (SQD)

Component type	Parts (OEM PN → page)
trim	0080429 (EAT), 114C247G01 (EAT), 1A32258H03 (EAT), 1A85194G01 (EAT), 3457B16G01 (EAT), 5155C81G01 (EAT), 5155C81G03 (EAT), 8450C62H39 (EAT), E2A1667-1 (EAT), E2A1667-10 (EAT), E2A1667-11 (EAT), E2A1667-12 (EAT), E2A1667-13 (EAT), E2A1667-14 (EAT), E2A1667-15 (EAT), E2A1667-16 (EAT), E2A1667-17 (EAT), E2A1667-18 (EAT), E2A1667-19 (EAT), E2A1667-2 (EAT), E2A1667-20 (EAT), E2A1667-21 (EAT), E2A1667-22 (EAT), E2A1667-23 (EAT), E2A1667-24 (EAT), E2A1667-3 (EAT), E2A1667-4 (EAT), E2A1667-5 (EAT), E2A1667-6 (EAT), E2A1667-7 (EAT), E2A1667-8 (EAT), E2A1667-9 (EAT), K80133 (EAT), K80429 (EAT), K80522 (EAT), BxxCVR (SIE)
box/enclosure	2A1690-1XX (EAT), 2A1690-2XX (EAT), 2A1690-3XX (EAT), 2A1690-4XX (EAT), 2A1916-1 (EAT), 2A1916-2 (EAT), E2A1649-1 (EAT), E2A1649-2 (EAT), E2A1649-3 (EAT), E2A1649-4 (EAT), 24WD56 (SIE), 24WD62 (SIE), 24WD68 (SIE), 24WD74 (SIE), 24WD80 (SIE), B74FLR (SIE), EWK1 (SIE), EWK1B (SIE), EWK2 (SIE), EWK2B (SIE), EWK3 (SIE), HC-2609-EXF (SQD), HC-3209-EXF (SQD), HC-4112-DEXF (SQD), HC-4112-EXF (SQD), MH62D9 (SQD), MH68D9 (SQD), MH74D9 (SQD), MH80D9 (SQD), MH86D9 (SQD), MH92D9 (SQD), MHBE20 (SQD), MHBE26 (SQD), MHCO20 (SQD), MHKE20 (SQD)
hardware-kit	2A1917-2 (EAT), 2C11641G02 (EAT), 414A380G02 (EAT), 4180B62 (EAT), 5078A98 (EAT), 7494A11G02 (EAT), E2A1917-1 (EAT), KCDPFB100-H (EAT), 10085396G1 (GEA), 139C5720G3 (GEA), 139C5720G6 (GEA), 139C5720G9 (GEA), 359L481G1 (GEA), AHKBE1 (GEA), AHKBF1 (GEA), AHKBFB1 (GEA), AHKBFD1 (GEA), AHKBFG1 (GEA), AHKBG1 (GEA), AHKBQ1 (GEA), AHKE1 (GEA), AHKEL1 (GEA), AHKF1 (GEA), AHKFD1 (GEA), AHKFG1 (GEA), AHKG1 (GEA), AHKJ1 (GEA), AHKLB1 (GEA), AHKQ1 (GEA), BNDKT (GEA), BNDKT6 (GEA), BBKVA5262P2HW (SIE), BBKVA52P3HW (SIE), BBKVR52P3HW (SIE), BK1 (SIE), BK1A (SIE), IMK1 (SIE), MBKBFA (SIE), P2BK1 (SIE), P2BK2 (SIE), P2BK3 (SIE), P3BK1 (SIE), S3VA52PR (SIE), S3VA53PR (SIE), TNKG3 (SIE), 4028343250 (SQD), 4028343550 (SQD), 4028343750 (SQD), 8000602003 (SQD), 8023317701 (SQD), NFCRBOND8 (SQD), NFNQCRBOND46 (SQD), PJC-7201 (SQD), PK1TC (SQD), TBPANEL (SQD), TIKFD (SQD)
fastener	414A380G01 (EAT), 42C1129H02 (EAT), 5081A08G02 (EAT), 5081A09G02 (EAT), 5157C83G06 (EAT), 7499A48G04 (EAT), 8712C73H01 (EAT), KPR1A (EAT), KPR1AM (EAT), KPR3A (EAT), KPR3AM (EAT), KPR3B (EAT), KPR3BM (EAT), PLN2 (EAT), PLN2M (EAT), 192A6976P189 (GEA), 252B3613P1 (GEA), 331A3329P2 (GEA), 75A105503P101 (GEA), 75A105503P105 (GEA), 75C140485P103 (GEA), N22P23012B6 (GEA), N22P23016B6 (GEA), N245P21B6 (GEA), N37P21060B6 (GEA), N37P21969B6 (GEA), N402P11B6 (GEA), N657P21024B6 (GEA), N722EP16006B6 (GEA), N730BP1308B6 (GEA), 3VA9233-0QA00 (SIE), 3VA9243-0QA00 (SIE), 3VA9473-0QA00 (SIE), LPJSPDNUT01 (SIE), P1SCRWS (SIE), 2142720241 (SQD), 21427-20401 (SQD), 2150720200 (SQD), 2152620361 (SQD), 21590-20241 (SQD), 21593-20100 (SQD), 2271020200 (SQD), 2300100200 (SQD), 2330241601 (SQD), 2342702001 (SQD), 2342702400 (SQD), 2370100200 (SQD), 4020506501 (SQD), 739137 (SQD), 8000602001 (SQD), 8011417101 (SQD), PKDFSCREW (SQD), S36967 (SQD)
conversion-kit	5PCGBLD600S (EAT), 5PCGBLUG1200T (EAT), 5PCGBLUG400S (EAT), 5PCGBLUG600S (EAT), 5PCGBLUG800S (EAT), 5PCGBMD800T (EAT), 5PCGBND1200T (EAT), EELD36600SB2 (EAT), KCDPDK (EAT), KCDPEHD (EAT), KCDPFD (EAT), KCDPFDB (EAT), KCDPHKD (EAT), KCDPJD (EAT), KCDPJDB (EAT), KCDPKD (EAT), KCDPKDB (EAT), KCDPLD (EAT), KCDPMDL (EAT), KCDPND (EAT), KFDPBS324R (EAT), KFDPBS364R (EAT), KFDPW325R (EAT), KFDPW326R (EAT), KFDPW365R (EAT), KFDPW366R (EAT), KFDPW367 (EAT), KFDPW368 (EAT), KFDPWT3211R (EAT), KFDPWT3222R (EAT), KFDPWT3233R (EAT), KFDPWT3611R (EAT), KFDPWT3622R (EAT), KFDPWT3633R (EAT), RAABR10BXXX (EAT), RAABR10BXXXA (EAT), RAABR12L125 (EAT), RAABR12L125A (EAT), RABR12B3XXX (EAT), RABR12H3XXX (EAT), RABR12L3125 (EAT), RABR20BXXX (EAT), RABR20HXXX (EAT), RABR20L125 (EAT), RACH18B3XXX (EAT), RACH22BXXX (EAT), RACH24L125 (EAT), RACH24L3125 (EAT), RACH30L3125 (EAT), RACH30L3225 (EAT), RBBR20BXXX (EAT), RBBR24L3150 (EAT), RBBR30BCXXX (EAT), RBBR30BXXX (EAT), RBBR30H3XXX (EAT), RBBR30HCXXX (EAT), RBBR30L200 (EAT), RBBR30L3100 (EAT), RBCH24BXXX (EAT), RBCH24D225 (EAT), RBCH24D3225 (EAT), RBCH30BXXX (EAT), RBCH30D3225 (EAT), RBCH30L3225 (EAT), RBCH32D225 (EAT), RBCH32L225 (EAT), RBCH42L125 (EAT), RBCH42L225 (EAT), RBCH42L3125 (EAT), RBCH42L3225 (EAT), RCBR30BXXX (EAT), RCBR30L3200 (EAT), RCBR40L200 (EAT), RCCH30D3225 (EAT), RCCH32BXXX (EAT), RCCH32D225 (EAT), RCCH42L225 (EAT), RCCH42L3225 (EAT), RDBR30B3XXX (EAT), RDBR30H3XXX (EAT), RDBR40BXXX (EAT), RDBR42L225 (EAT), RDBR42L3225 (EAT), RDCH42B3XXX (EAT), RDCH42BXXX (EAT), RDCH42D225 (EAT), RDCH42D3225 (EAT), RDCH42H3XXX (EAT), RDCH42HXXX (EAT), RDCH42L225 (EAT), RDCH42L3225 (EAT), REBR42B3XXX (EAT), REBR42H3XXX (EAT), REBR42L3225 (EAT), TAD3 (EAT), APHBL (GEA), APHBQ (GEA), ASP2PTFJ3P (GEA), ASP2PTQD3P (GEA), SRFB3XT4FPK (GEA), SRFB3XT4FPX (GEA), SRFB3XT5MFPK (GEA), SRFB3XT5MFPX (GEA), SRFB3XT7MFPK (GEA), SRFB3XT7MFPX (GEA), SRFB6XT1FPK (GEA), SRFB6XT1FPX (GEA), SRFB6XT4FPK (GEA), SRFB6XT4FPX (GEA), SRFB6XT5BFPK (GEA), SRFB6XT5BFPX (GEA), 11-5570-01 (SIE), 11-5570-02 (SIE), BBKQRP1FK (SIE), BBKQRP2FK (SIE), MBKVA5363JD (SIE), P53RCONVKIT (SIE), QMB-103-AL (SQD), QMB-106-AL (SQD), QMB306EX (SQD), QMB306LEX (SQD), QMB310EX (SQD), QMB310LEX (SQD), QMB320EX (SQD), QMB600T6 (SQD), QMB-63-AL (SQD), QMB800T6 (SQD), SK4515 (SQD), SK4516 (SQD), SK4517 (SQD), SK4578 (SQD)
spd-kit	ATHMEGNDN (GEA), TPS3 09 (SIE), QMB1IMA_ (SQD), QMB2IMA_ (SQD), QMB3IMA_ (SQD), QMB4IMA_ (SQD), QMB8IMA_ (SQD), TVS12RMU (SQD)
switch-unit	QMB221HW (SQD), QMB221TW (SQD), QMB222HW (SQD), QMB222TW (SQD), QMB223HW (SQD), QMB223TW (SQD), QMB224W (SQD), QMB225W (SQD), QMB225WT3 (SQD), QMB261HW (SQD), QMB261TW (SQD), QMB262HW (SQD), QMB262TW (SQD), QMB263HW (SQD), QMB263TW (SQD), QMB264W (SQD), QMB321HW (SQD), QMB321TW (SQD), QMB322HW (SQD), QMB322TW (SQD), QMB323HW (SQD), QMB323TW (SQD), QMB324W (SQD), QMB325W (SQD), QMB325WT3 (SQD), QMB326W (SQD), QMB326WT3 (SQD), QMB327WT3 (SQD), QMB361HW (SQD), QMB361TW (SQD), QMB362HW (SQD), QMB362T21W (SQD), QMB362TW (SQD), QMB363HW (SQD), QMB363T31W (SQD), QMB363T32W (SQD), QMB363TW (SQD), QMB364W (SQD), QMB365W (SQD), QMB365WT6 (SQD), QMB366W (SQD), QMB367W (SQD), QMB368W (SQD), QMJ361T (SQD), QMJ362T (SQD), QMJ363H (SQD), QMJ363T (SQD), QMJ364H (SQD), QMJ364T (SQD), QMJ365 (SQD), QMJ366 (SQD)

Component type	Parts (OEM PN → page)
breaker-accessory	314C960G01 (EAT), 314C960G04 (EAT), 314C960G05 (EAT), 314C960G06 (EAT), 314C960G07 (EAT), 314C960G08 (EAT), 314C960G09 (EAT), 314C960G10 (EAT), 314C960G11 (EAT), 314C960G12 (EAT), 373B375G03 (EAT), 373B375G04 (EAT), 374D883G01 (EAT), 374D883G02 (EAT), 451D874G01 (EAT), 451D874G02 (EAT), 5010D23G01 (EAT), 5010D23G02 (EAT), 5652B38G01 (EAT), 623B222G01 (EAT), 623B222G02 (EAT), 623B222G03 (EAT), 6642C14G02 (EAT), 6642C14G03 (EAT), 6642C14G04 (EAT), 6642C14G05 (EAT), 6642C14G06 (EAT), 6642C14G07 (EAT), B2016RD (EAT), B2016RDL (EAT), B2500RD (EAT), EF2RTDK (EAT), EF2RTWK (EAT), EF3RTDK (EAT), EF3RTWK (EAT), EF4RTDK (EAT), EF4RTWK (EAT), FCWTK (EAT), FCWTK225 (EAT), FJ3RTDK (EAT), FJ3RTWK (EAT), FJ4RTDK (EAT), FJ4RTWK (EAT), FJCWTK (EAT), KCWTK (EAT), KPEK1 (EAT), KPEK12 (EAT), KPEK14 (EAT), KPEK2 (EAT), KPEK24 (EAT), KPEK3 (EAT), KPEK34 (EAT), KPEK4 (EAT), KPEK44 (EAT), KPEKM1 (EAT), KPEKM12 (EAT), KPEKM14 (EAT), KPEKM2 (EAT), KPEKM24 (EAT), KPEKM3 (EAT), KPEKM34 (EAT), KPEKM4 (EAT), KPEKM44 (EAT), L3RTWK (EAT), L4RTWK (EAT), LGTES3 (EAT), LGTES4 (EAT), LGTEW3 (EAT), LGTEW4 (EAT), RP211002 (FPE), RP212001 (FPE), 286A8066G1 (GEA), 455C592P1 (GEA), 455C592P2 (GEA), 789A448G1 (GEA), 789A448G2 (GEA), 789A448G3 (GEA), FGH1LCK (GEA), FGJN3 (GEA), HT-100 (GEA), SE3LCK (GEA), SE3LCKL (GEA), SF3LCK (GEA), SG1BCK (GEA), SG1LCK (GEA), SGBCS1 (GEA), SGBCS2 (GEA), SGLVK (GEA), SK1LCK (GEA), SKLVK (GEA), SRFN100GF (GEA), SRFN120GF (GEA), SRFN400GF (GEA), SRFN600GF (GEA), SRFN800GF (GEA), TEF1 (GEA), TEF2 (GEA), TEF3 (GEA), TEF4 (GEA), TFK1 (GEA), TFK2 (GEA), TJLVK (GEA), TKM11 (GEA), TKM12 (GEA), TQDFM1 (GEA), RS2641 (SIE), RS2642 (SIE), RS2643 (SIE), RS2644 (SIE), RS4755 (SIE), RS4756 (SIE), RS5773 (SIE), RS5774 (SIE), RS5783 (SIE), RS5784 (SIE), RS5785 (SIE), RS5786 (SIE), RS5787 (SIE), RS5788 (SIE), 29348 (SQD), AL1000MAT (SQD), AL1200NE6T (SQD), AL250KIT (SQD), AL400LAT (SQD), AL600IN (SQD), AL600LI35T (SQD), AL600LI5T (SQD), AL900MAT (SQD), FAT (SQD), HRK1020 (SQD), HRK30 (SQD), QMB100R (SQD), QMB200EK (SQD), QMB300EK (SQD), QMB36R (SQD), QMB4060R (SQD), QMB60R (SQD), QMB610EK (SQD), QO-1HT (SQD), QO1PJ15 (SQD), S32477 (SQD), S32478 (SQD), S37423 (SQD), S37424 (SQD), S37425 (SQD), S37426 (SQD), S37427 (SQD), S37428 (SQD), S37429 (SQD), S37430 (SQD), S37433 (SQD), S37434 (SQD), S37437 (SQD), S37438 (SQD), S37439 (SQD), S37444 (SQD), S37445 (SQD), S432475 (SQD), S432476 (SQD)
handle-lock	1256C42G01 (EAT), 1256C42G02 (EAT), BHT (EAT), 1LOK (FPE), THL103 (GEA), HLO-1 (SQD)
padlock-attachment	2A1912-1 (EAT), 2A1912-2 (EAT), 2A1912-3 (EAT), 2A1912-4 (EAT), 2A1912-5 (EAT), BRLW (EAT), BRLW1 (EAT), THP100 (GEA), TQPLD1 (GEA), HPA-2QFS (SQD), HPA-FK (SQD), HPA-FYQ (SQD), HPA-LM (SQD), QO-1PA (SQD), QO-1PL (SQD)
other	2A1910-1 (EAT), 2A1910-2 (EAT), 2A1910-3 (EAT), 2A1910-4 (EAT), 2A1915 (EAT), 2A1919 (EAT), 2A1961-1 (EAT), CCPB-n-xxCF (EAT), E2A1914 (EAT), 113A5356P1 (GEA), 113A5357P1 (GEA), 252B3657P1 (GEA), 252B3657P2 (GEA), 75A105457 (GEA), 75B125198P101 (GEA), 75V100083P101 (GEA), AMCB6QD (GEA), APN48 (GEA), APN49 (GEA), APN84 (GEA), APN99 (GEA), DPJ2185 (GEA), TEU-1 (GEA), LPDC01 (SIE), LPDC02 (SIE), LPLOCK01A (SIE), LPLOCK02A (SIE), NBK01A (SIE), NBK02A (SIE), NBK03A (SIE), NBK3 (SIE), NBK4 (SIE), NBK5 (SIE), NBK6 (SIE), NBK7 (SIE), NBK8 (SIE), SQRC (SIE), 4052017302 (SQD), 4052021450 (SQD), 4052021650 (SQD), 4052031850 (SQD), 4052036750 (SQD), 4052085601 (SQD), 50552-108-01 (SQD), 80031-024-02 (SQD), HQO306 (SQD), PK-3SP (SQD), PK-49SP (SQD), PK-4FL (SQD), QMB210T (SQD), QMB2240 (SQD), QMB303T (SQD), QMB306T (SQD), QMB310T (SQD), QMB323TD (SQD), QMB3240 (SQD), QMB3260 (SQD), QMB3606T (SQD), QMB3620 (SQD), QMB362T (SQD), QMB364 (SQD), QMB3640 (SQD), QSFB (SQD), S48899 (SQD), SWLUB (SQD)

12.6 Rating and pole index

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00635	1266C07G01	—	2,3	—	370
EDH-EAT-00703	208B264H01	—	2,3	—	386
EDH-EAT-00704	208B297H01	—	2,3	—	398
EDH-EAT-00807	2A1909-1	70-200A	—	—	270
EDH-EAT-00816	2A1909-10	30-60A	—	—	270
EDH-EAT-00817	2A1909-11	30-60A	—	—	271
EDH-EAT-00818	2A1909-12	30-60A	—	—	271
EDH-EAT-00819	2A1909-13	30-60A	—	—	272
EDH-EAT-00820	2A1909-14	70-200A	—	—	272
EDH-EAT-00821	2A1909-15	70-200A	—	—	273
EDH-EAT-00822	2A1909-16	30-200A	—	—	279
EDH-EAT-00823	2A1909-17	30-60A	—	—	273
EDH-EAT-00824	2A1909-18	30-60A	—	—	274
EDH-EAT-00825	2A1909-19	30-60A	—	—	268
EDH-EAT-00808	2A1909-2	70-200A	—	—	274
EDH-EAT-00826	2A1909-20	225-400A	—	—	275
EDH-EAT-00827	2A1909-21	225-400A	—	—	275
EDH-EAT-00828	2A1909-22	225-400A	—	—	279
EDH-EAT-00829	2A1909-23	225-400A	—	—	276
EDH-EAT-00830	2A1909-24	225-400A	—	—	276

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00831	2A1909-25	225-400A	—	—	280
EDH-EAT-00832	2A1909-26	225-400A	—	—	277
EDH-EAT-00833	2A1909-27	225-400A	—	—	277
EDH-EAT-00834	2A1909-28	225-400A	—	—	280
EDH-EAT-00835	2A1909-29	225-400A	—	—	268
EDH-EAT-00809	2A1909-3	30-200A	—	—	281
EDH-EAT-00810	2A1909-4	70-200A	—	—	269
EDH-EAT-00811	2A1909-5	70-200A	—	—	278
EDH-EAT-00812	2A1909-6	70-200A	—	—	278
EDH-EAT-00813	2A1909-7	30-200A	—	—	281
EDH-EAT-00814	2A1909-8	30-60A	—	—	269
EDH-EAT-00815	2A1909-9	30-60A	—	—	269
EDH-EAT-00164	2C11642	Sum of horizontally twin-mounted breakers shall not exceed 140 A	—	—	182
EDH-EAT-00479	2T400K	400 A max breaker	2	—	375
EDH-EAT-00494	2T400KCW	400 A max breaker	2	—	376
EDH-EAT-00488	2T402K	400 A max breaker	2	—	376
EDH-EAT-00474	2TA400K	400 A max breaker	2	—	376
EDH-EAT-00491	2TA400KCW	400 A max breaker	2	—	377
EDH-EAT-00482	2TA401K	400 A max breaker	2	—	377
EDH-EAT-00497	2TA401KCW	400 A max breaker	2	—	377
EDH-EAT-00500	2TA401LDK	400 A max breaker	2	—	393
EDH-EAT-00485	2TA402K	400 A max breaker	2	—	378
EDH-EAT-00505	2TA603LDK	600 A max breaker	2	—	393
EDH-EAT-00510	2TA603LDKCW	—	2	—	394
EDH-EAT-00452	3BRS225	225 A	Three-pole	—	26
EDH-EAT-00451	3BRSF150	150 A	Three-pole	—	26
EDH-EAT-00462	3T100FB	100 A max breaker	—	—	352
EDH-EAT-00536	3T125EF	125 A max breaker	—	—	416
EDH-EAT-00466	3T150FB	200 A max breaker	—	—	352
EDH-EAT-00461	3T20FB	20 (EHD) A max breaker	—	—	352
EDH-EAT-00468	3T225FD	225 A	—	—	353
EDH-EAT-00480	3T400K	400 A max breaker	3	—	378
EDH-EAT-00495	3T400KCW	400 A max breaker	3	—	378
EDH-EAT-00489	3T402K	400 A max breaker	3	—	379
EDH-EAT-00545	3T631LK	400 A max breaker	3	—	425
EDH-EAT-00549	3T632LK	630 A max breaker	3	—	425
EDH-EAT-00556	3T632LKW	—	3	—	426
EDH-EAT-00465	3TA100FD	100 A max breaker	—	—	353
EDH-EAT-00620	3TA100G3K	100 A	—	—	366
EDH-EAT-00621	3TA100G6K	100 A	—	—	367
EDH-EAT-00537	3TA125EF	125 A max breaker	—	—	416
EDH-EAT-00538	3TA150EF	125/160 A max breaker	—	—	417
EDH-EAT-00622	3TA150F3K	225 A	—	—	353
EDH-EAT-00623	3TA150F6K	225 A	—	—	354
EDH-EAT-00469	3TA150FB	150 A	—	—	354
EDH-EAT-00539	3TA160EFK	160 A max breaker	—	—	417
EDH-EAT-00463	3TA225FD	225 A max breaker	—	—	354
EDH-EAT-00467	3TA225FDK	225 A max breaker	—	—	355
EDH-EAT-00624	3TA250J3K	250 A	—	—	368
EDH-EAT-00625	3TA250J6K	250 A	—	—	368
EDH-EAT-00475	3TA400K	400 A max breaker	3	—	379

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00626	3TA400K3K	400 A	—	—	379
EDH-EAT-00627	3TA400K6K	400 A	—	—	380
EDH-EAT-00492	3TA400KCW	400 A max breaker	3	—	380
EDH-EAT-00483	3TA401K	400 A max breaker	3	—	380
EDH-EAT-00498	3TA401KCW	400 A max breaker	3	—	381
EDH-EAT-00501	3TA401LDK	400 A max breaker	3	—	394
EDH-EAT-00486	3TA402K	400 A max breaker	3	—	381
EDH-EAT-00464	3TA50FB	50 A max breaker	—	—	355
EDH-EAT-00506	3TA603LDK	600 A max breaker	3	—	394
EDH-EAT-00511	3TA603LDKCW	—	3	—	395
EDH-EAT-00543	3TA631LK	400 A max breaker	3	—	426
EDH-EAT-00547	3TA632LK	630 A max breaker	3	—	426
EDH-EAT-00554	3TA632LKW	—	3	—	427
EDH-EAT-00633	4210B95G01	—	3	—	359
EDH-EAT-00634	4210B95G02	—	4	—	359
EDH-EAT-00481	4T400K	400 A max breaker	4	—	381
EDH-EAT-00496	4T400KCW	400 A max breaker	4	—	382
EDH-EAT-00490	4T402K	400 A max breaker	4	—	382
EDH-EAT-00546	4T631LK	400 A max breaker	4	—	427
EDH-EAT-00550	4T632LK	630 A max breaker	4	—	427
EDH-EAT-00557	4T632LKW	—	4	—	428
EDH-EAT-00540	4TA160EFK	160 A max breaker	—	—	417
EDH-EAT-00476	4TA400K	400 A max breaker	4	—	382
EDH-EAT-00493	4TA400KCW	400 A max breaker	4	—	383
EDH-EAT-00484	4TA401K	400 A max breaker	4	—	383
EDH-EAT-00499	4TA401KCW	400 A max breaker	4	—	383
EDH-EAT-00502	4TA401LDK	400 A max breaker	4	—	395
EDH-EAT-00487	4TA402K	400 A max breaker	4	—	384
EDH-EAT-00507	4TA603LDK	600 A max breaker	4	—	395
EDH-EAT-00512	4TA603LDKCW	—	4	—	396
EDH-EAT-00544	4TA631LK	400 A max breaker	4	—	428
EDH-EAT-00548	4TA632LK	630 A max breaker	4	—	428
EDH-EAT-00555	4TA632LKW	—	4	—	429
EDH-EAT-00702	624B600H01	—	3	—	358
EDH-EAT-00701	624B600H02	—	2	—	358
EDH-EAT-00629	625B229G06	—	1	—	360
EDH-EAT-00630	625B229G07	—	2	—	360
EDH-EAT-00631	625B229G08	—	3	—	360
EDH-EAT-00632	625B229G09	—	4	—	361
EDH-EAT-00636	6631C01G01	—	4	—	370
EDH-EAT-00637	6641C16G01	—	2,3	—	370
EDH-EAT-00638	6641C16G02	—	4	—	371
EDH-EAT-00453	BRL200	200 A	Two-pole	120/240V, 208Y/120, 240V	25
EDH-EAT-00450	BRS225	225 A	Two-pole	—	27
EDH-EAT-00448	BRSF125	125 A	Two-pole	—	27
EDH-EAT-00449	BRSF150	150 A	Two-pole	—	28
EDH-EAT-00766	CCA4K	225 A max, 240 V	—	—	92
EDH-EAT-00767	CED3K	225 A max, 600 V	—	—	93
EDH-EAT-00769	CED4BK	225 A max, 600 V	—	—	93
EDH-EAT-00768	CED4K	225 A max, 240 V	—	—	93
EDH-EAT-00770	CFD3K	150 A max, 600 V	—	—	93

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00772	CFD4BK	150 A max, 600 V	—	—	94
EDH-EAT-00771	CFD4K	150 A max, 600 V	—	—	94
EDH-EAT-00773	CJD4K	250 A max, 600 V	—	—	94
EDH-EAT-00775	CJDS4BK	250 A max, 600 V	—	—	94
EDH-EAT-00774	CJDS4K	250 A max, 600 V	—	—	95
EDH-EAT-00778	CKDS4BK	400 A max, 600 V	—	—	95
EDH-EAT-00777	CKDS4K	400 A max, 600 V	—	—	95
EDH-EAT-00779	CLD4K	600 A max, 600 V	—	—	96
EDH-EAT-00780	CLDS4BK	600 A max, 600 V	—	—	96
EDH-EAT-00781	CMD4K	800 A max, 600 V	—	—	96
EDH-EAT-00782	CND4K	1200 A max, 600 V	—	—	96
EDH-EAT-00803	EELD36600SB2	600 A	—	—	99
EDH-EAT-00584	EF2RTDK	—	2	—	419
EDH-EAT-00581	EF2RTWK	—	2	—	419
EDH-EAT-00585	EF3RTDK	—	3	—	420
EDH-EAT-00582	EF3RTWK	—	3	—	420
EDH-EAT-00586	EF4RTDK	—	4	—	420
EDH-EAT-00583	EF4RTWK	—	4	—	420
EDH-EAT-00589	FJ3RTDK	—	3	—	423
EDH-EAT-00587	FJ3RTWK	—	3	—	423
EDH-EAT-00590	FJ4RTDK	—	4	—	424
EDH-EAT-00588	FJ4RTWK	—	4	—	424
EDH-EAT-00006	KB11AFB	100 A max	2-pole (single-phase A/C)	—	126
EDH-EAT-00005	KB11AFT	100 A max	2-pole (single-phase A/C)	—	127
EDH-EAT-00008	KB11SFB	100 A max	2-pole (single-phase A/C)	—	127
EDH-EAT-00007	KB11SFT	100 A max	2-pole (single-phase A/C)	—	128
EDH-EAT-00002	KB13AFB	100 A max	3-pole (A/B/C)	—	128
EDH-EAT-00001	KB13AFT	100 A max	3-pole (A/B/C)	—	129
EDH-EAT-00004	KB13SFB	100 A max	3-pole (A/B/C)	—	129
EDH-EAT-00003	KB13SFT	100 A max	3-pole (A/B/C)	—	130
EDH-EAT-00014	KB21AFB	225 A max	2-pole (single-phase A/C)	—	130
EDH-EAT-00013	KB21AFT	225 A max	2-pole (single-phase A/C)	—	131
EDH-EAT-00016	KB21SFB	225 A max	2-pole (single-phase A/C)	—	131
EDH-EAT-00015	KB21SFT	225 A max	2-pole (single-phase A/C)	—	132
EDH-EAT-00010	KB23AFB	225 A max	3-pole (A/B/C)	—	132
EDH-EAT-00009	KB23AFT	225 A max	3-pole (A/B/C)	—	133
EDH-EAT-00012	KB23SFB	225 A max	3-pole (A/B/C)	—	133
EDH-EAT-00011	KB23SFT	225 A max	3-pole (A/B/C)	—	134
EDH-EAT-00022	KB41AJB	400 A class (frame)	2-pole (single-phase A/C)	—	134

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00021	KB41AJT	400 A class (frame)	2-pole (single-phase A/C)	—	135
EDH-EAT-00030	KB41AKB	400 A class (frame)	2-pole (single-phase A/C)	—	135
EDH-EAT-00029	KB41AKT	400 A class (frame)	2-pole (single-phase A/C)	—	136
EDH-EAT-00024	KB41SJB	400 A class (frame)	2-pole (single-phase A/C)	—	136
EDH-EAT-00023	KB41SJT	400 A class (frame)	2-pole (single-phase A/C)	—	137
EDH-EAT-00032	KB41SKB	400 A class (frame)	2-pole (single-phase A/C)	—	137
EDH-EAT-00031	KB41SKT	400 A class (frame)	2-pole (single-phase A/C)	—	138
EDH-EAT-00018	KB43AJB	400 A class (frame)	3-pole (A/B/C)	—	138
EDH-EAT-00017	KB43AJT	400 A class (frame)	3-pole (A/B/C)	—	139
EDH-EAT-00026	KB43AKB	400 A class (frame)	3-pole (A/B/C)	—	139
EDH-EAT-00025	KB43AKT	400 A class (frame)	3-pole (A/B/C)	—	140
EDH-EAT-00020	KB43SJB	400 A class (frame)	3-pole (A/B/C)	—	140
EDH-EAT-00019	KB43SJT	400 A class (frame)	3-pole (A/B/C)	—	141
EDH-EAT-00028	KB43SKB	400 A class (frame)	3-pole (A/B/C)	—	141
EDH-EAT-00027	KB43SKT	400 A class (frame)	3-pole (A/B/C)	—	142
EDH-EAT-00343	KCDPCA	225 A frame	3	—	69
EDH-EAT-00341	KCDPED225	225 A frame	3	—	70
EDH-EAT-00340	KCDPFB100	100 A maximum	3	—	71
EDH-EAT-00342	KCDPFBP	100 A (FB-P 15-100 A)	3	—	71
EDH-EAT-00344	KCDPKB	250 A frame	3	—	72
EDH-EAT-00346	KCDPLA400	400 A (LA-P 70-400 A)	3	—	73
EDH-EAT-00347	KCDPLA600	600 A frame	3	—	73
EDH-EAT-00345	KCDPLB	400 A frame	3	—	74
EDH-EAT-00348	KCDPLCL	LCL 125-400 A	3	—	75
EDH-EAT-00349	KCDPMC	800 A frame	3	—	75
EDH-EAT-00351	KCDPNBP	800 A (NB-P 300-800 A)	3	—	76
EDH-EAT-00350	KCDPNC	1200 A frame; not rated for 100 percent breakers	3	—	76
EDH-EAT-00366	KFDP4XT	—	3	—	65
EDH-EAT-00367	KFDP5XT	—	3	—	66
EDH-EAT-00368	KFDPB6X-2	—	3	—	66
EDH-EAT-00430	KFDPBS324R	200 A	3	240 V	102
EDH-EAT-00431	KFDPBS364R	200 A	3	600 V	102
EDH-EAT-00370	KFDPW11X-6	—	3	—	67
EDH-EAT-00371	KFDPW11X-8	—	3	—	67
EDH-EAT-00372	KFDPW15X-12	—	3	—	68
EDH-EAT-00432	KFDPW325R	400 A	3	240 V	102
EDH-EAT-00434	KFDPW326R	600 A	3	240 V	103
EDH-EAT-00433	KFDPW365R	400 A	3	600 V	103
EDH-EAT-00435	KFDPW366R	600 A	3	600 V	103
EDH-EAT-00436	KFDPW367	800 A	3	240/600 V	104
EDH-EAT-00437	KFDPW368	1200 A	3	240/600 V	104

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00369	KFDPW9X-4	—	3	—	68
EDH-EAT-00424	KFDPWT3211R	30 A	3	240 V	104
EDH-EAT-00426	KFDPWT3222R	60 A	3	240 V	105
EDH-EAT-00428	KFDPWT3233R	100 A	3	240 V	105
EDH-EAT-00425	KFDPWT3611R	30 A	3	600 V	105
EDH-EAT-00427	KFDPWT3622R	60 A	3	600 V	106
EDH-EAT-00429	KFDPWT3633R	100 A	3	600 V	106
EDH-EAT-00067	KL11AMF	100 A	—	—	174
EDH-EAT-00071	KL11AMO	100 A	—	—	146
EDH-EAT-00063	KL11AMS	100 A	—	—	146
EDH-EAT-00079	KL11AVF	100 A	—	—	175
EDH-EAT-00083	KL11AVO	100 A	—	—	147
EDH-EAT-00075	KL11AVS	100 A	—	—	147
EDH-EAT-00088	KL11SCF	100 A	—	—	175
EDH-EAT-00090	KL11SCO	100 A	—	—	147
EDH-EAT-00086	KL11SCS	100 A	—	—	148
EDH-EAT-00068	KL11SMF	100 A	—	—	175
EDH-EAT-00072	KL11SMO	100 A	—	—	148
EDH-EAT-00064	KL11SMS	100 A	—	—	148
EDH-EAT-00080	KL11SVF	100 A	—	—	176
EDH-EAT-00084	KL11SVO	100 A	—	—	149
EDH-EAT-00076	KL11SVS	100 A	—	—	149
EDH-EAT-00065	KL13AMF	100 A	—	—	176
EDH-EAT-00069	KL13AMO	100 A	—	—	149
EDH-EAT-00061	KL13AMS	100 A	—	—	150
EDH-EAT-00077	KL13AVF	100 A	—	—	176
EDH-EAT-00081	KL13AVO	100 A	—	—	150
EDH-EAT-00073	KL13AVS	100 A	—	—	150
EDH-EAT-00087	KL13SCF	100 A	—	—	177
EDH-EAT-00089	KL13SCO	100 A	—	—	151
EDH-EAT-00085	KL13SCS	100 A	—	—	151
EDH-EAT-00066	KL13SMF	100 A	—	—	177
EDH-EAT-00070	KL13SMO	100 A	—	—	151
EDH-EAT-00062	KL13SMS	100 A	—	—	152
EDH-EAT-00078	KL13SVF	100 A	—	—	177
EDH-EAT-00082	KL13SVO	100 A	—	—	152
EDH-EAT-00074	KL13SVS	100 A	—	—	152
EDH-EAT-00097	KL21AMF	225 A	—	—	178
EDH-EAT-00101	KL21AMO	225 A	—	—	153
EDH-EAT-00093	KL21AMS	225 A	—	—	153
EDH-EAT-00109	KL21AVF	225 A	—	—	178
EDH-EAT-00113	KL21AVO	225 A	—	—	153
EDH-EAT-00105	KL21AVS	225 A	—	—	154
EDH-EAT-00118	KL21SCF	225 A	—	—	178
EDH-EAT-00120	KL21SCO	225 A	—	—	154
EDH-EAT-00116	KL21SCS	225 A	—	—	154
EDH-EAT-00098	KL21SMF	225 A	—	—	179
EDH-EAT-00102	KL21SMO	225 A	—	—	155
EDH-EAT-00094	KL21SMS	225 A	—	—	155
EDH-EAT-00110	KL21SVF	225 A	—	—	179
EDH-EAT-00114	KL21SVO	225 A	—	—	155
EDH-EAT-00106	KL21SVS	225 A	—	—	156

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00095	KL23AMF	225 A	—	—	179
EDH-EAT-00099	KL23AMO	225 A	—	—	156
EDH-EAT-00091	KL23AMS	225 A	—	—	156
EDH-EAT-00107	KL23AVF	225 A	—	—	180
EDH-EAT-00111	KL23AVO	225 A	—	—	157
EDH-EAT-00103	KL23AVS	225 A	—	—	157
EDH-EAT-00117	KL23SCF	225 A	—	—	180
EDH-EAT-00119	KL23SCO	225 A	—	—	157
EDH-EAT-00115	KL23SCS	225 A	—	—	158
EDH-EAT-00096	KL23SMF	225 A	—	—	180
EDH-EAT-00100	KL23SMO	225 A	—	—	158
EDH-EAT-00092	KL23SMS	225 A	—	—	158
EDH-EAT-00108	KL23SVF	225 A	—	—	181
EDH-EAT-00112	KL23SVO	225 A	—	—	159
EDH-EAT-00104	KL23SVS	225 A	—	—	159
EDH-EAT-00127	KL41AMO	400 A	—	—	159
EDH-EAT-00123	KL41AMS	400 A	—	—	160
EDH-EAT-00135	KL41AVO	400 A	—	—	160
EDH-EAT-00131	KL41AVS	400 A	—	—	160
EDH-EAT-00138	KL41SCO	400 A	—	—	161
EDH-EAT-00128	KL41SMO	400 A	—	—	161
EDH-EAT-00124	KL41SMS	400 A	—	—	161
EDH-EAT-00136	KL41SVO	400 A	—	—	162
EDH-EAT-00132	KL41SVS	400 A	—	—	162
EDH-EAT-00125	KL43AMO	400 A	—	—	162
EDH-EAT-00121	KL43AMS	400 A	—	—	163
EDH-EAT-00133	KL43AVO	400 A	—	—	163
EDH-EAT-00129	KL43AVS	400 A	—	—	163
EDH-EAT-00137	KL43SCO	400 A	—	—	164
EDH-EAT-00126	KL43SMO	400 A	—	—	164
EDH-EAT-00122	KL43SMS	400 A	—	—	164
EDH-EAT-00134	KL43SVO	400 A	—	—	165
EDH-EAT-00130	KL43SVS	400 A	—	—	165
EDH-EAT-00148	KL61CMO	600 A	—	—	165
EDH-EAT-00142	KL61CMS	600 A	—	—	166
EDH-EAT-00160	KL61CVO	600 A	—	—	166
EDH-EAT-00154	KL61CVS	600 A	—	—	166
EDH-EAT-00149	KL61SMO	600 A	—	—	167
EDH-EAT-00143	KL61SMS	600 A	—	—	167
EDH-EAT-00161	KL61SVO	600 A	—	—	167
EDH-EAT-00155	KL61SVS	600 A	—	—	168
EDH-EAT-00150	KL61TMO	600 A	—	—	168
EDH-EAT-00144	KL61TMS	600 A	—	—	168
EDH-EAT-00162	KL61TVO	600 A	—	—	169
EDH-EAT-00156	KL61TVS	600 A	—	—	169
EDH-EAT-00145	KL63CMO	600 A	—	—	169
EDH-EAT-00139	KL63CMS	600 A	—	—	170
EDH-EAT-00157	KL63CVO	600 A	—	—	170
EDH-EAT-00151	KL63CVS	600 A	—	—	170
EDH-EAT-00146	KL63SMO	600 A	—	—	171
EDH-EAT-00140	KL63SMS	600 A	—	—	171
EDH-EAT-00158	KL63SVO	600 A	—	—	171

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00152	KL63SVS	600 A	—	—	172
EDH-EAT-00147	KL63TMO	600 A	—	—	172
EDH-EAT-00141	KL63TMS	600 A	—	—	172
EDH-EAT-00159	KL63TVO	600 A	—	—	173
EDH-EAT-00153	KL63TVS	600 A	—	—	173
EDH-EAT-00593	KPEK1	—	3	—	364
EDH-EAT-00591	KPEK12	—	2	—	365
EDH-EAT-00595	KPEK14	—	4	—	365
EDH-EAT-00597	KPEK2	—	3	—	373
EDH-EAT-00599	KPEK24	—	4	—	373
EDH-EAT-00601	KPEK3	—	3	—	391
EDH-EAT-00603	KPEK34	—	4	—	391
EDH-EAT-00605	KPEK4	—	3	—	400
EDH-EAT-00607	KPEK44	—	4	—	401
EDH-EAT-00594	KPEKM1	—	3	—	365
EDH-EAT-00592	KPEKM12	—	2	—	366
EDH-EAT-00596	KPEKM14	—	4	—	366
EDH-EAT-00598	KPEKM2	—	3	—	374
EDH-EAT-00600	KPEKM24	—	4	—	374
EDH-EAT-00602	KPEKM3	—	3	—	392
EDH-EAT-00604	KPEKM34	—	4	—	392
EDH-EAT-00606	KPEKM4	—	3	—	401
EDH-EAT-00608	KPEKM44	—	4	—	401
EDH-EAT-00801	KPHCC3175S	175 A	—	—	116
EDH-EAT-00166	KPRL1BAB	Max 140 A connected to any one connector	—	—	118
EDH-EAT-00167	KPRL2GHB	Max 140 A connected to any one connector	—	—	118
EDH-EAT-00184	KPRL3ABA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	223
EDH-EAT-00185	KPRL3ABA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	223
EDH-EAT-00186	KPRL3ABA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	224
EDH-EAT-00187	KPRL3ABA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	225
EDH-EAT-00188	KPRL3ABA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	226
EDH-EAT-00189	KPRL3ABA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	226
EDH-EAT-00190	KPRL3ABA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	227
EDH-EAT-00191	KPRL3ABA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	228
EDH-EAT-00206	KPRL3AFD2	140A max	Single-phase, three-phase	—	230
EDH-EAT-00205	KPRL3AFD3	140A max	Single-phase, three-phase	—	230

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00192	KPRL3AGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	231
EDH-EAT-00193	KPRL3AGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	232
EDH-EAT-00194	KPRL3AGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	232
EDH-EAT-00195	KPRL3AGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	233
EDH-EAT-00196	KPRL3AGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	234
EDH-EAT-00197	KPRL3AGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Single-phase	—	235
EDH-EAT-00198	KPRL3AGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	Three-phase	—	235
EDH-EAT-00199	KPRL3AGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	237
EDH-EAT-00788	KPRL3CF3	150 A max	—	—	97
EDH-EAT-00168	KPRL3XBA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	241
EDH-EAT-00169	KPRL3XBA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	242
EDH-EAT-00170	KPRL3XBA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	243
EDH-EAT-00171	KPRL3XBA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	244
EDH-EAT-00172	KPRL3XBA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	245
EDH-EAT-00173	KPRL3XBA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	246
EDH-EAT-00174	KPRL3XBA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	247
EDH-EAT-00175	KPRL3XBA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	248
EDH-EAT-00176	KPRL3XGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	249
EDH-EAT-00177	KPRL3XGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	250
EDH-EAT-00178	KPRL3XGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	251
EDH-EAT-00179	KPRL3XGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	252
EDH-EAT-00180	KPRL3XGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	253

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00181	KPRL3XGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	254
EDH-EAT-00182	KPRL3XGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	255
EDH-EAT-00183	KPRL3XGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	256
EDH-EAT-00331	KPRL44X	30-100A	Three-phase	—	298
EDH-EAT-00333	KPRL45X	100A	Three-phase	—	299
EDH-EAT-00334	KPRL45XS	100A	Three-phase	—	300
EDH-EAT-00308	KPRL4CA	225 A	2, 3	—	305
EDH-EAT-00784	KPRL4CD	225 A max	—	—	97
EDH-EAT-00783	KPRL4CED	225 A max	—	—	97
EDH-EAT-00322	KPRL4CKD	400A	2, 3	—	306
EDH-EAT-00324	KPRL4CND	1200A	3	—	307
EDH-EAT-00785	KPRL4CSL	600 A max	—	—	97
EDH-EAT-00786	KPRL4CSM	800 A max	—	—	98
EDH-EAT-00787	KPRL4CSN	1200 A max	—	—	98
EDH-EAT-00329	KPRL4ED	225 A	3	—	308
EDH-EAT-00327	KPRL4ED2	225 A	2	—	309
EDH-EAT-00311	KPRL4FBP	100A	3	—	310
EDH-EAT-00328	KPRL4FD	225 A	3	—	311
EDH-EAT-00325	KPRL4FD1	225 A	1 (two sets of twin-mounted single-pole)	—	313
EDH-EAT-00326	KPRL4FD2	225 A	2	—	314
EDH-EAT-00307	KPRL4FDCL	—	3	—	315
EDH-EAT-00309	KPRL4JDS	250 A	2, 3	—	315
EDH-EAT-00310	KPRL4JDT	250 A	2, 3	—	316
EDH-EAT-00312	KPRL4KDS	400A	2, 3	—	317
EDH-EAT-00313	KPRL4KDT	400A	2, 3	—	318
EDH-EAT-00317	KPRL4LAP	400A	2, 3	—	319
EDH-EAT-00314	KPRL4LC	600A	3	—	321
EDH-EAT-00318	KPRL4LCL	600A	2, 3	—	321
EDH-EAT-00330	KPRL4LD	600A	2, 3	—	323
EDH-EAT-00315	KPRL4LG	600A	3	—	324
EDH-EAT-00316	KPRL4MC	800A	2, 3	—	325
EDH-EAT-00323	KPRL4MD	—	3	—	326
EDH-EAT-00319	KPRL4NBP	800A	2, 3	—	326
EDH-EAT-00320	KPRL4NC	—	3	—	327
EDH-EAT-00321	KPRL4ND	1200A	2, 3	—	328
EDH-EAT-00338	KPRL4W11X	600-800A	Three-phase	—	301
EDH-EAT-00337	KPRL4W9X	400A	Three-phase	—	303
EDH-EAT-00299	KPRL4X12	—	1 (two sets of twin-mounted single-pole)	—	329
EDH-EAT-00300	KPRL4X22	—	2	—	330
EDH-EAT-00301	KPRL4X32	—	3	—	331
EDH-EAT-00302	KPRL4X334S	—	3	—	331
EDH-EAT-00303	KPRL4X334T	—	3	—	332
EDH-EAT-00304	KPRL4X336	—	3	—	333
EDH-EAT-00305	KPRL4X34	—	3	—	334
EDH-EAT-00306	KPRL4X35	—	3	—	335

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00560	L3RTWK	—	3	—	430
EDH-EAT-00561	L4RTWK	—	4	—	431
EDH-EAT-00564	LGTES3	—	3	—	431
EDH-EAT-00565	LGTES4	—	4	—	431
EDH-EAT-00562	LGTEW3	—	3	—	431
EDH-EAT-00563	LGTEW4	—	4	—	432
EDH-EAT-00558	LTS3K	—	3	—	430
EDH-EAT-00559	LTS4K	—	4	—	430
EDH-EAT-00798	MP40CHH	225 A maximum	—	—	108
EDH-EAT-00791	MP40ED225-3	225 A maximum	—	—	108
EDH-EAT-00790	MP40KC225-3	225 A maximum	—	—	109
EDH-EAT-00789	MP40KF100-3	100 A maximum	—	—	109
EDH-EAT-00792	MP40KJ225-3	225 A maximum	—	—	110
EDH-EAT-00793	MP40KK400-3	400 A maximum	—	—	110
EDH-EAT-00794	MP40KL400-3	400 A maximum	—	—	111
EDH-EAT-00795	MP40KL600-3	600 A maximum	—	—	111
EDH-EAT-00796	MP40KM800-3	800 A maximum	—	—	112
EDH-EAT-00797	MP40KN1200-3	1200 A maximum	—	—	112
EDH-EAT-00800	MPED1K	225 A	—	600 V	113
EDH-EAT-00297	PRXP4PD2FILL1	—	1	—	340
EDH-EAT-00764	RAABR10BXXX	60-125 A	—	—	34
EDH-EAT-00765	RAABR10BXXXA	60-125 A	—	—	34
EDH-EAT-00762	RAABR12L125	125 A	—	—	35
EDH-EAT-00763	RAABR12L125A	125 A	—	—	35
EDH-EAT-00748	RABR12B3XXX	60-100 A, 10K AIC	—	3-ph 240	36
EDH-EAT-00749	RABR12H3XXX	60-100 A, 22K AIC	—	3-ph 240	36
EDH-EAT-00756	RABR12L3125	125 A	—	3-ph 240	37
EDH-EAT-00737	RABR20BXXX	60-125 A, 10K AIC	—	1-ph 120/240	37
EDH-EAT-00738	RABR20HXXX	60-125 A, 22K AIC	—	1-ph 120/240	38
EDH-EAT-00744	RABR20L125	125 A	—	1-ph 120/240	38
EDH-EAT-00722	RACH18B3XXX	60-125 A, 10K AIC	—	3-ph 240	39
EDH-EAT-00706	RACH22BXXX	60-125 A, 10K AIC	—	1-ph 120/240	39
EDH-EAT-00712	RACH24L125	125 A	—	1-ph 120/240	40
EDH-EAT-00725	RACH24L3125	125 A	—	3-ph 240	40
EDH-EAT-00726	RACH30L3125	125 A	—	3-ph 240	41
EDH-EAT-00727	RACH30L3225	150-225 (chart rows 150 A 22.5-30 in #4-1/0 and 225 A 24.5-30 in #4-4/0 share this number) A	—	3-ph 240	41
EDH-EAT-00741	RBBR20BXXX	100-200 A, 25K AIC	—	1-ph 120/240	42
EDH-EAT-00758	RBBR24L3150	150 A	—	3-ph 240	42
EDH-EAT-00739	RBBR30BCXXX	60-125 A, 10K AIC	—	1-ph 120/240	43
EDH-EAT-00750	RBBR30BXXX	60-100 A, 10K AIC	—	3-ph 240	43
EDH-EAT-00751	RBBR30H3XXX	60-100 A, 22K AIC	—	3-ph 240	44
EDH-EAT-00740	RBBR30HCXXX	60-125 A, 22K AIC	—	1-ph 120/240	44
EDH-EAT-00745	RBBR30L200	200 A	—	1-ph 120/240	45
EDH-EAT-00757	RBBR30L3100	100 A	—	3-ph 240	45
EDH-EAT-00708	RBCH24BXXX	100-200 A, 35K AIC	—	1-ph 120/240	46
EDH-EAT-00718	RBCH24D225	225 A	—	1-ph 120/240	46
EDH-EAT-00733	RBCH24D3225	225 A	—	3-ph 240	47
EDH-EAT-00707	RBCH30BXXX	60-125 A, 10K AIC	—	1-ph 120/240	47
EDH-EAT-00734	RBCH30D3225	225 A	—	3-ph 240	48
EDH-EAT-00728	RBCH30L3225	225 A	—	3-ph 240	48
EDH-EAT-00719	RBCH32D225	225 A	—	1-ph 120/240	48

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00714	RBCH32L225	225 A	—	1-ph 120/240	49
EDH-EAT-00713	RBCH42L125	125 A	—	1-ph 120/240	50
EDH-EAT-00715	RBCH42L225	225 A	—	1-ph 120/240	50
EDH-EAT-00729	RBCH42L3125	125 A	—	3-ph 240	51
EDH-EAT-00730	RBCH42L3225	225 A	—	3-ph 240	51
EDH-EAT-00742	RCBR30BXXX	100-200 A, 25K AIC	—	1-ph 120/240	52
EDH-EAT-00759	RCBR30L3200	200 A	—	3-ph 240	52
EDH-EAT-00746	RCBR40L200	200 A	—	1-ph 120/240	53
EDH-EAT-00735	RCCH30D3225	225 A	—	3-ph 240	53
EDH-EAT-00709	RCCH32BXXX	100-225 A, 35K AIC	—	1-ph 120/240	54
EDH-EAT-00720	RCCH32D225	225 A	—	1-ph 120/240	54
EDH-EAT-00716	RCCH42L225	225 A	—	1-ph 120/240	55
EDH-EAT-00731	RCCH42L3225	225 A	—	3-ph 240	55
EDH-EAT-00752	RDBR30B3XXX	100-200 A, 10K AIC	—	3-ph 240	56
EDH-EAT-00753	RDBR30H3XXX	100-200 A, 100K AIC	—	3-ph 240	56
EDH-EAT-00743	RDBR40BXXX	100-200 A, 25K AIC	—	1-ph 120/240	57
EDH-EAT-00747	RDBR42L225	225 A	—	1-ph 120/240	57
EDH-EAT-00760	RDBR42L3225	225 A	—	3-ph 240	58
EDH-EAT-00723	RDCH42B3XXX	100-225 A, 10K AIC	—	3-ph 240	58
EDH-EAT-00710	RDCH42BXXX	100-225 A, 35K AIC	—	1-ph 120/240	59
EDH-EAT-00721	RDCH42D225	225 A	—	1-ph 120/240	59
EDH-EAT-00736	RDCH42D3225	225 A	—	3-ph 240	60
EDH-EAT-00724	RDCH42H3XXX	100-225 A, 100K AIC	—	3-ph 240	60
EDH-EAT-00711	RDCH42HXXX	100-225 A, 100K AIC	—	1-ph 120/240	61
EDH-EAT-00717	RDCH42L225	225 A	—	1-ph 120/240	61
EDH-EAT-00732	RDCH42L3225	225 A	—	3-ph 240	62
EDH-EAT-00754	REBR42B3XXX	100-225 A, 10K AIC	—	3-ph 240	62
EDH-EAT-00755	REBR42H3XXX	100-225 A, 100K AIC	—	3-ph 240	63
EDH-EAT-00761	REBR42L3225	225 A	—	3-ph 240	63
EDH-EAT-00527	T1000NB1	1000 A max breaker	—	—	408
EDH-EAT-00528	T1200NB3	1200 A max breaker	—	—	409
EDH-EAT-00529	T1200NB3M	1250 A	—	—	432
EDH-EAT-00531	T1600RD	1600 A max breaker	—	—	413
EDH-EAT-00541	T250FJ	250 A	—	—	421
EDH-EAT-00471	T250KB	250 A	—	—	368
EDH-EAT-00477	T300K	225 A max breaker	—	—	384
EDH-EAT-00478	T350K	350 A max breaker	—	—	384
EDH-EAT-00552	T350LK	400 A max breaker	—	—	429
EDH-EAT-00517	T600MA1	600 A max breaker	—	—	402
EDH-EAT-00508	T602LD	600 A max breaker	—	—	396
EDH-EAT-00526	T700NB1	700 A max breaker	—	—	409
EDH-EAT-00518	T800MA1	800 A max breaker	—	—	402
EDH-EAT-00523	TA1000NB1	1000 A max breaker	—	—	409
EDH-EAT-00524	TA1200NB1	1200 A max breaker	—	—	409
EDH-EAT-00525	TA1201NB1	1200 A max breaker	—	—	410
EDH-EAT-00530	TA1600RD	1600 A max breaker	—	—	414
EDH-EAT-00532	TA2000RD	2000 A max breaker	—	—	414
EDH-EAT-00542	TA250FJ	250 A	—	—	422
EDH-EAT-00470	TA250KB	250 A	—	—	369
EDH-EAT-00472	TA300K	225 A max breaker	—	—	385
EDH-EAT-00473	TA350K	350 A max breaker	—	—	385
EDH-EAT-00551	TA350LK	400 A max breaker	—	—	429

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00503	TA450LD	450 A max breaker	—	—	397
EDH-EAT-00504	TA602LD	500 A max breaker	—	—	397
EDH-EAT-00553	TA632L	630 A	—	—	429
EDH-EAT-00514	TA700MA1	600 (700 per KM/DC table) A max breaker	—	—	402
EDH-EAT-00522	TA700NB1	700 A max breaker	—	—	410
EDH-EAT-00515	TA800MA2	800 (std.) A max breaker	—	—	403
EDH-EAT-00516	TA801MA	800 A max breaker	—	—	403
EDH-EAT-00641	TS33LD	—	3	—	386
EDH-EAT-00639	TS33LN	—	2,3	—	387
EDH-EAT-00640	TS34LN	—	4	—	387
EDH-FPE-00007	KBDP1C	100 A	—	240 V (Superbreakers)	1135
EDH-FPE-00008	KBDP2C	225 A	—	600 V	1136
EDH-FPE-00010	KBDP4C	400 A max (per NJL3K)	—	—	1137
EDH-FPE-00001	KCDP1C	100 A max (per NEF1K listing)	—	600 V	1139
EDH-FPE-00002	KCDP2C	225 A max (per NEJ1K listing)	—	600 V	1139
EDH-FPE-00003	KCDP3C	225 A max (per NFJ1K listing)	—	—	1140
EDH-FPE-00004	KCDP4C	400 A max (per NJL1K listing)	—	—	1140
EDH-FPE-00005	KCDP5C	225 A (Superbreakers tag - doubtful for NM/NN frames)	—	600 V	1141
EDH-FPE-00018	KFDP46C	400 A, 600 V	—	—	1143
EDH-FPE-00017	KFDP4C	200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches	—	—	1144
EDH-FPE-00019	KFDP66C	600 A, 600 V	—	—	1144
EDH-FPE-00020	KFDP7C	1200 A, 600 V	—	—	1145
EDH-FPE-00021	KFDPD16C	100 A, 600 V	—	—	1145
EDH-FPE-00022	KFDPS16C	100 A, 600 V	—	—	1146
EDH-FPE-00025	KFDPV7C	1200 A, 600 V	—	—	1146
EDH-FPE-00013	NDPNE	100 A / 240 V per search snippet of relectric NDPNE page	—	—	1151
EDH-FPE-00012	NDPNEJ	225 A max	—	600 V max	1151
EDH-GEA-00408	121B7147P1	Used singly for 400 A mains and in pairs for 600 A mains	—	—	704
EDH-GEA-00027	315A7049P10	200 A (per description)	—	—	687
EDH-GEA-00405	75C140045G705	100 A or 225 A row (ambiguous)	—	—	703
EDH-GEA-00254	ACSMKSG	400/800 A max	—	—	712
EDH-GEA-00255	ACSMKSK	800/1200 A max	—	—	712
EDH-GEA-00246	ACTMKEB1P	150 A max	—	—	712
EDH-GEA-00247	ACTMKEB2P	150 A max	—	—	713
EDH-GEA-00248	ACTMKEB3P	150 A max	—	—	713
EDH-GEA-00252	ACTMKJD	400 A max	—	—	713
EDH-GEA-00250	ACTMKQD2P	225 A max	—	—	714
EDH-GEA-00251	ACTMKQD3P	225 A max	—	—	714
EDH-GEA-00245	ACTMKSE	150 A max	—	—	714
EDH-GEA-00249	ACTMKSF	250 A max	—	—	715
EDH-GEA-00253	ACTMKSG	400/600 A max	—	—	715
EDH-GEA-00243	AFL120	800/1200 A	—	—	737
EDH-GEA-00242	AFL600	250/400/600 A	—	—	737
EDH-GEA-00573	AMB2120CA	1200 A	2	—	718
EDH-GEA-00581	AMB2120DCA	1200 A	2	—	719
EDH-GEA-00561	AMB2120DMA	1200 A	2	—	719
EDH-GEA-00559	AMB2120DMC	1200 A	2	—	720
EDH-GEA-00565	AMB2120DN	1200 A	2	—	720
EDH-GEA-00556	AMB2120MA	1200 A	2	—	721

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00563	AMB2120N	1200 A	2	—	721
EDH-GEA-00567	AMB2250CA	250 A	2	—	722
EDH-GEA-00575	AMB2250DCA	250 A	2	—	722
EDH-GEA-00569	AMB2600CA	600 A	2	—	723
EDH-GEA-00577	AMB2600DCA	600 A	2	—	723
EDH-GEA-00552	AMB2600MA	600 A	2	—	724
EDH-GEA-00554	AMB2600MC	600 A	2	—	724
EDH-GEA-00571	AMB2800CA	800 A	2	—	725
EDH-GEA-00579	AMB2800DCA	800 A	2	—	725
EDH-GEA-00574	AMB3120CA	1200 A	3	—	726
EDH-GEA-00582	AMB3120DCA	1200 A	3	—	726
EDH-GEA-00562	AMB3120DMA	1200 A	3	—	727
EDH-GEA-00560	AMB3120DMC	1200 A	3	—	727
EDH-GEA-00566	AMB3120DN	1200 A	3	—	728
EDH-GEA-00557	AMB3120MA	1200 A	3	—	728
EDH-GEA-00558	AMB3120MC	1200 A	3	—	729
EDH-GEA-00564	AMB3120N	1200 A	3	—	729
EDH-GEA-00568	AMB3250CA	250 A	3	—	730
EDH-GEA-00576	AMB3250DCA	250 A	3	—	730
EDH-GEA-00570	AMB3600CA	600 A	3	—	731
EDH-GEA-00578	AMB3600DCA	600 A	3	—	731
EDH-GEA-00553	AMB3600MA	600 A	3	—	732
EDH-GEA-00555	AMB3600MC	600 A	3	—	732
EDH-GEA-00572	AMB3800CA	800 A	3	—	733
EDH-GEA-00580	AMB3800DCA	800 A	3	—	733
EDH-GEA-00181	AMC2FGMFP	600 A max breaker	—	—	770
EDH-GEA-00179	AMC2FJFP	250 A max breaker	—	—	770
EDH-GEA-00178	AMC2FJFPTF	225 A max breaker	—	—	771
EDH-GEA-00184	AMC2FLSFP	250 A max breaker	—	—	772
EDH-GEA-00182	AMC2GMFP	600 A max breaker	—	—	773
EDH-GEA-00180	AMC2JKFP	400/600 A max breaker	—	—	773
EDH-GEA-00183	AMC2KMFP	1200 A max breaker	—	—	774
EDH-GEA-00162	AMC3FGMFP	600 A max breaker	—	—	775
EDH-GEA-00160	AMC3FJFP	250 A max breaker	—	—	775
EDH-GEA-00159	AMC3FJFPTF	225 A max breaker	—	—	776
EDH-GEA-00165	AMC3FLSFP	250 A max breaker	—	—	777
EDH-GEA-00163	AMC3GMFP	600 A max breaker	—	—	777
EDH-GEA-00161	AMC3JKFP	400/600 A max breaker	—	—	778
EDH-GEA-00164	AMC3KMFP	1200 A max breaker	—	—	779
EDH-GEA-00167	AMC4EBFP	150 A max breaker	—	—	779
EDH-GEA-00176	AMC4EBSFP	150 A max breaker	—	—	780
EDH-GEA-00166	AMC4FDBFP	100 A max breaker	—	—	781
EDH-GEA-00175	AMC4FDSFP	100 A max breaker	—	—	782
EDH-GEA-00173	AMC4FGBFP	600 A max breaker	—	—	782
EDH-GEA-00171	AMC4FJFP	250 A max breaker	—	—	782
EDH-GEA-00170	AMC4FJFPTF	225 A max breaker	—	—	783
EDH-GEA-00177	AMC4FLSFP	250 A max breaker	—	—	784
EDH-GEA-00174	AMC4GBFP	600 A max breaker	—	—	785
EDH-GEA-00172	AMC4JKFP	400/600 A max breaker	—	—	785
EDH-GEA-00169	AMC4QDFP	225 A max breaker	—	—	786
EDH-GEA-00168	AMC4SEFP	150 A max breaker	—	—	787
EDH-GEA-00149	AMC6EBFP	150 A max breaker	—	—	788

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00157	AMC6EBSFP	150 A max breaker	—	—	788
EDH-GEA-00146	AMC6EYFP	100 A max breaker	—	—	789
EDH-GEA-00147	AMC6FBFP	100 A max breaker	—	—	791
EDH-GEA-00148	AMC6FDBFP	100 A max breaker	—	—	791
EDH-GEA-00156	AMC6FDSPF	100 A max breaker	—	—	792
EDH-GEA-00154	AMC6FGBFP	600 A max breaker	—	—	792
EDH-GEA-00152	AMC6FJFP	250 A max breaker	—	—	792
EDH-GEA-00151	AMC6FJFPTF	225 A max breaker	—	—	793
EDH-GEA-00158	AMC6FLSFP	250 A max breaker	—	—	794
EDH-GEA-00155	AMC6GBFP	600 A max breaker	—	—	795
EDH-GEA-00153	AMC6JKFP	400/600 A max breaker	—	—	795
EDH-GEA-00145	AMC6QBFP	100 A max breaker	—	—	796
EDH-GEA-00150	AMC6QDFP	225 A max breaker	—	—	796
EDH-GEA-00119	AMCB2FGMFP	—	2	—	740
EDH-GEA-00444	AMCB2FJ	—	2 (configurations per Table 3)	—	741
EDH-GEA-00117	AMCB2FJFP	—	2	—	742
EDH-GEA-00118	AMCB2FJFPTF	—	2	—	742
EDH-GEA-00446	AMCB2GM	—	2 (A&C or A&B locations)	—	743
EDH-GEA-00120	AMCB2GMFP	—	2	—	744
EDH-GEA-00450	AMCB2KM	—	2	—	744
EDH-GEA-00126	AMCB2KMFP	—	2	—	745
EDH-GEA-00123	AMCB3FGMFP	—	3	—	745
EDH-GEA-00443	AMCB3FJ	—	3	—	746
EDH-GEA-00121	AMCB3FJFP	—	3	—	746
EDH-GEA-00122	AMCB3FJFPTF	—	3	—	747
EDH-GEA-00447	AMCB3GM	—	3	—	747
EDH-GEA-00124	AMCB3GMFP	—	3	—	748
EDH-GEA-00451	AMCB3KM	—	3	—	749
EDH-GEA-00127	AMCB3KMFP	—	3	—	750
EDH-GEA-00125	AMCB3LBFP	—	2	—	750
EDH-GEA-00441	AMCB4EB	—	1- or 2-pole configurations per Table 2; alternate 2X bracket for 4-pole 2X double-branch TEB/TED	—	751
EDH-GEA-00098	AMCB4EBFP	—	2	—	752
EDH-GEA-00452	AMCB4EY	—	1- or 2-pole configurations (Table 2)	—	752
EDH-GEA-00099	AMCB4EYFP	—	2	—	753
EDH-GEA-00100	AMCB4FBFP	—	2	—	753
EDH-GEA-00101	AMCB4FDBFP	—	2	—	754
EDH-GEA-00113	AMCB4FGBFP	—	2	—	754
EDH-GEA-00445	AMCB4FJ	—	2 (configurations per Table 3)	—	755
EDH-GEA-00109	AMCB4FJFP	—	2	—	756
EDH-GEA-00111	AMCB4FJFPTF	—	2	—	756
EDH-GEA-00448	AMCB4GB	—	2 (A-B, A-C or B-C)	—	757

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00114	AMCB4GBFP	—	2	—	758
EDH-GEA-00102	AMCB4QDFP	—	2	—	758
EDH-GEA-00440	AMCB4SE	—	1/2-pole configurations per DEH047 Table 2	—	759
EDH-GEA-00103	AMCB4SEFP	—	2	—	760
EDH-GEA-00439	AMCB6EB	—	3 (three-phase, double-branch)	—	761
EDH-GEA-00104	AMCB6EBFP	—	3	—	761
EDH-GEA-00453	AMCB6EY	—	3	—	762
EDH-GEA-00105	AMCB6EYFP	—	3	—	762
EDH-GEA-00106	AMCB6FBFP	—	3	—	763
EDH-GEA-00107	AMCB6FDBFP	—	3	—	764
EDH-GEA-00115	AMCB6FGBFP	—	3	—	764
EDH-GEA-00442	AMCB6FJ	—	3	—	765
EDH-GEA-00110	AMCB6FJFP	—	3	—	765
EDH-GEA-00112	AMCB6FJFPTF	—	3	—	766
EDH-GEA-00449	AMCB6GB	—	3	—	766
EDH-GEA-00116	AMCB6GBFP	—	3	—	767
EDH-GEA-00108	AMCB6QDFP	—	3	—	768
EDH-GEA-00231	AML3120CFP	1200 A	—	—	734
EDH-GEA-00226	AML3120FP	1200 A	—	—	734
EDH-GEA-00227	AML3250CFP	250 A	—	—	734
EDH-GEA-00220	AML3250FP	250 A	—	—	734
EDH-GEA-00219	AML3250SFP	250 A	—	—	735
EDH-GEA-00228	AML3400CFP	400 A	—	—	735
EDH-GEA-00222	AML3400FP	400 A	—	—	735
EDH-GEA-00221	AML3400SFP	400 A	—	—	735
EDH-GEA-00229	AML3600CFP	600 A	—	—	736
EDH-GEA-00224	AML3600FP	600 A	—	—	736
EDH-GEA-00223	AML3600SFP	600 A	—	—	736
EDH-GEA-00230	AML3800CFP	800 A	—	—	736
EDH-GEA-00225	AML3800FP	800 A	—	—	737
EDH-GEA-00235	ANK120D	1200 A	—	—	799
EDH-GEA-00234	ANK800D	800 A	—	—	799
EDH-GEA-00233	ANKN120	600-1200 A	—	—	799
EDH-GEA-00232	ANKN400	250/400 A	—	—	800
EDH-GEA-00369	FCAL12	15-20 A	—	—	892
EDH-GEA-00371	FCAL13	25-60 A	—	—	892
EDH-GEA-00373	FCAL14	70-100 A	—	—	892
EDH-GEA-00375	FCAL15	150 A	—	—	894
EDH-GEA-00378	FCAL16	250 A	—	—	894
EDH-GEA-00370	FCALK12	15-20 A	—	—	891
EDH-GEA-00372	FCALK13	25-60 A	—	—	891
EDH-GEA-00374	FCALK14	70-100 A	—	—	891
EDH-GEA-00376	FCALK15	150 A	—	—	893
EDH-GEA-00377	FCALK15LV	150 A	—	—	893
EDH-GEA-00379	FCALK16	250 A	—	—	893
EDH-GEA-00380	FCALK16LV	250 A	—	—	894
EDH-GEA-00381	FCALK218H	—	2	—	895
EDH-GEA-00382	FCALK318H	—	3	—	895
EDH-GEA-00059	MB133	150 A	3	—	661

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00060	MB133WB	150 A	3	—	661
EDH-GEA-00051	MB233	225 A	3	—	661
EDH-GEA-00053	MB2332	400 A	6	—	662
EDH-GEA-00054	MB2332WB	400 A	6	—	662
EDH-GEA-00052	MB233WB	225 A	3	—	662
EDH-GEA-00045	MB332	400/600 A	2	—	663
EDH-GEA-00046	MB332WB	600 A	2	—	663
EDH-GEA-00055	MB333	400/600 A	3	—	663
EDH-GEA-00056	MB333WB	600 A	3	—	664
EDH-GEA-00057	MB423	100 A	3	—	664
EDH-GEA-00058	MB426	100 A	6	—	664
EDH-GEA-00044	MB512	225 A	2	—	665
EDH-GEA-00049	MB513	225 A	3	—	665
EDH-GEA-00050	MB516	400 A	6	—	665
EDH-GEA-00042	MB612	100 A	2	—	666
EDH-GEA-00047	MB613	100 A	3	—	666
EDH-GEA-00043	MB614	100 A	4	—	666
EDH-GEA-00048	MB616	100 A	6	—	667
EDH-GEA-00061	MLA1	225 A	—	—	668
EDH-GEA-00062	MLA2	225 A	—	—	668
EDH-GEA-00063	MLA41	400 A	—	—	668
EDH-GEA-00064	MLA61	600 A	—	—	668
EDH-GEA-00065	MLA62	400/600 A	—	—	669
EDH-GEA-00066	MLR1	225 A	—	—	669
EDH-GEA-00067	MLR2	225 A	—	—	669
EDH-GEA-00068	MLR41	400 A	—	—	669
EDH-GEA-00069	MLR61	400/600 A	—	—	670
EDH-GEA-00070	MLT1	225 A	—	—	670
EDH-GEA-00071	MLT2	225 A	—	—	670
EDH-GEA-00073	MLT41	400 A	—	—	670
EDH-GEA-00072	MLT42	400 A	—	—	671
EDH-GEA-00074	NKA	225 A	—	—	672
EDH-GEA-00075	NKA42	400 A	—	—	672
EDH-GEA-00080	NKA4FT	400 A	—	—	673
EDH-GEA-00076	NKR	225 A	—	—	673
EDH-GEA-00077	NKR4	400 A	—	—	673
EDH-GEA-00078	NKT	225 A	—	—	673
EDH-GEA-00079	NKT4	400 A	—	—	673
EDH-GEA-00262	SF2DPK	225 A	—	—	693
EDH-GEA-00432	SG6DPK	600 A	—	—	866
EDH-GEA-00433	SG6SPK	600 A	—	—	866
EDH-GEA-00434	SGS6K	600 A	—	—	867
EDH-GEA-00266	SK12SPK	1200 A	—	—	693
EDH-GEA-00265	SK8SPK	800 A	—	—	693
EDH-GEA-00419	TB1DPK	100 A max (spec) / 15-150 A (title)	—	—	693
EDH-GEA-00421	TB4SBK	400 A	—	—	694
EDH-GEA-00420	TB4SPK	400 A	—	—	694
EDH-GEA-00422	TB8SPK	800 A	—	—	694
EDH-GEA-00354	TC018	15-150 A	—	—	897
EDH-GEA-00284	TCAL12	15-60 A	—	—	868
EDH-GEA-00341	TCAL124	Cu 275-1200 A / Al 225-1100 A	—	—	908
EDH-GEA-00344	TCAL125	600-1200 A	—	—	908

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00285	TCAL12A	70-90 A	—	—	868
EDH-GEA-00283	TCAL14	15-30 A	—	—	869
EDH-GEA-00286	TCAL15	100-150 A	—	—	869
EDH-GEA-00335	TCAL18	15-150 A	—	—	898
EDH-GEA-00360	TCAL18LV	15-150 A	—	—	898
EDH-GEA-00363	TCAL19PD1	125 A max	—	—	898
EDH-GEA-00364	TCAL19PD3	125 A max	—	—	896
EDH-GEA-00365	TCAL28PD1	250 A max	—	—	900
EDH-GEA-00366	TCAL28PD3	250 A max	—	—	899
EDH-GEA-00337	TCAL29	70-250 A	—	—	901
EDH-GEA-00361	TCAL29LV	70-250 A	—	—	901
EDH-GEA-00367	TCAL40PD1	400 A max	—	—	904
EDH-GEA-00368	TCAL40PD3	400 A max	—	—	902
EDH-GEA-00308	TCAL81	300-800 A (SK1200 table)	—	—	887
EDH-GEA-00342	TCALK2124	Cu 275-1200 A / Al 225-1100 A	—	—	906
EDH-GEA-00345	TCALK2125	600-1200 A	—	—	907
EDH-GEA-00343	TCALK3124	Cu 275-1200 A / Al 225-1100 A	—	—	907
EDH-GEA-00346	TCALK3125	600-1200 A	—	—	907
EDH-GEA-00336	TCALK318	15-150 A	—	—	897
EDH-GEA-00338	TCALK329	70-250 A	—	—	900
EDH-GEA-00339	TCLK265	125-600 A	—	—	903
EDH-GEA-00340	TCLK365	125-600 A	—	—	903
EDH-GEA-00358	TCO124	600-1200 A	—	—	908
EDH-GEA-00359	TCO125	600-1200 A	—	—	909
EDH-GEA-00355	TCO29	70-250 A	—	—	901
EDH-GEA-00356	TCOK265	125-600 A	—	—	904
EDH-GEA-00357	TCOK365	125-600 A	—	—	904
EDH-GEA-00256	TED1DPK	150 A	—	—	694
EDH-GEA-00426	TED1DPK2	150 A	—	—	695
EDH-GEA-00261	TEL1DPK	150 A	—	—	695
EDH-GEA-00257	TF2DPK	225 A	—	—	695
EDH-GEA-00428	THFP63DPK	100 A	—	—	695
EDH-GEA-00429	THFP63SPK	100 A	—	—	696
EDH-GEA-00430	THFP64SPK	200 A	—	—	696
EDH-GEA-00431	THFP65SPK	400 A	—	—	696
EDH-GEA-00425	THJV6DPK	600 A	—	—	696
EDH-GEA-00259	TJ4DPK	400 A	—	—	697
EDH-GEA-00260	TJ6DPK	600 A	—	—	697
EDH-GEA-00424	TJ6SPK	600 A	—	—	697
EDH-GEA-00264	TK12SPK	1200 A	—	—	697
EDH-GEA-00263	TK8SPK	800 A	—	—	698
EDH-GEA-00427	TK9SPK	1200 A	—	—	698
EDH-GEA-00423	TP8SPK	800 A	—	—	698
EDH-GEA-00258	TQ2DPK	225 A	—	—	698
EDH-SIE-00040	2NLK42B	250A (18, 30, 42 ckt)	—	—	1046
EDH-SIE-00041	2NLK54B	250A (54, 66 ckt)	—	—	1047
EDH-SIE-00042	42NLK54B	all 400A (30, 54, 66 ckt)	—	—	1049
EDH-SIE-00029	4MLKA1	400A	—	—	922
EDH-SIE-00019	4MLKA1A	400A	—	—	1035
EDH-SIE-00023	4MLKA1B	400A	—	—	1036
EDH-SIE-00030	4MLKA3	400A	—	—	922
EDH-SIE-00020	4MLKA3A	400A	—	—	1036

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00024	4MLKA3B	400A	—	—	1038
EDH-SIE-00031	4MLKC1	400A	—	—	922
EDH-SIE-00021	4MLKC1A	400A	—	—	1038
EDH-SIE-00032	4MLKC3	400A	—	—	923
EDH-SIE-00022	4MLKC3A	400A	—	—	1039
EDH-SIE-00314	5EH2	150 A	—	—	1089
EDH-SIE-00315	5FJ2	225 A	—	—	1089
EDH-SIE-00316	5JJ2	400 A	—	—	1090
EDH-SIE-00155	6CLE2	125A max (table max-amp rating)	—	—	994
EDH-SIE-00321	6CLJ6	600 A	—	—	1090
EDH-SIE-00157	6QR2	225A max (table max-amp rating)	—	—	961
EDH-SIE-00102	BBKB32	100A max	—	—	926
EDH-SIE-00108	BBKQR1	225A max	—	—	930
EDH-SIE-00109	BBKQR2	225A max	—	—	950
EDH-SIE-00103	BBKVA4P2P3	125A max	—	—	931
EDH-SIE-00112	BBKVA5262P2S	250A max	—	—	932
EDH-SIE-00114	BBKVA52P3T	250A max	—	—	951
EDH-SIE-00331	CDP7MBKQJ3	225 A	—	—	912
EDH-SIE-00320	CDPFJ3	225 A	—	—	1093
EDH-SIE-00038	CNLK42B	250A (18, 30, 42 ckt)	—	—	1050
EDH-SIE-00039	CNLK54B	all 400A (30, 54, 66) and 250A 54/66 ckt	—	—	1051
EDH-SIE-00317	EH3K	150 A	—	—	1093
EDH-SIE-00318	FJ3K	225 A	—	—	1094
EDH-SIE-00319	JJ3K	400 A	—	—	1094
EDH-SIE-00357	K-11-D-2550-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1060
EDH-SIE-00358	K-11-D-2550-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1060
EDH-SIE-00359	K-11-D-2550-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1060
EDH-SIE-00360	K-11-D-2550-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1061
EDH-SIE-00361	K-11-D-2550-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1061
EDH-SIE-00347	K-11-D-2551-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1061
EDH-SIE-00348	K-11-D-2551-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1062
EDH-SIE-00349	K-11-D-2551-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1062
EDH-SIE-00350	K-11-D-2551-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1062

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00351	K-11-D-2551-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1063
EDH-SIE-00362	K-11-D-2552-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1063
EDH-SIE-00363	K-11-D-2552-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1063
EDH-SIE-00364	K-11-D-2552-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1064
EDH-SIE-00365	K-11-D-2552-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1064
EDH-SIE-00366	K-11-D-2552-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1064
EDH-SIE-00352	K-11-D-2553-01	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1065
EDH-SIE-00353	K-11-D-2553-02	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1065
EDH-SIE-00354	K-11-D-2553-03	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1065
EDH-SIE-00355	K-11-D-2553-04	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1066
EDH-SIE-00356	K-11-D-2553-05	Tested to 250 A in minimum enclosure 20 in W x 5.75 in D x 26 in H, Cu or Al bus	—	240 V max with BL/HBL/BLH/BLE/BLF branches; 480Y/277 V max with BQD branches	1066
EDH-SIE-00035	LNLK4X11B	250A & 400A	—	—	1053
EDH-SIE-00033	LNLK5X12A	250A & 400A	—	—	1054
EDH-SIE-00036	LNLK6X17B	250A & 400A	—	—	1054
EDH-SIE-00034	LNLK7X18A	250A & 400A	—	—	1056
EDH-SIE-00037	LNLK7X20B	250A & 400A	—	—	1056
EDH-SIE-00045	MBKBC3	100A max	—	—	916
EDH-SIE-00043	MBKBL1	100A max	—	—	916
EDH-SIE-00044	MBKBL3	100A max	—	—	916
EDH-SIE-00048	MBKED1	125A max	—	—	917
EDH-SIE-00003	MBKED1A	125A max	2-pole (1-phase)	—	1023
EDH-SIE-00049	MBKED3	125A max	—	—	917
EDH-SIE-00004	MBKED3A	125A max	3-pole (3-phase)	—	1024
EDH-SIE-00052	MBKFD1	250A max	—	—	917
EDH-SIE-00007	MBKFD1A	250A max	2-pole (1-phase)	—	1024
EDH-SIE-00053	MBKFD3	250A max	—	—	918

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00008	MBKFD3A	250A max	3-pole (3-phase)	—	1025
EDH-SIE-00054	MBKJD1	400A max	—	—	918
EDH-SIE-00055	MBKJD3	400A max	—	—	918
EDH-SIE-00012	MBKJD3B	400A max	—	—	1027
EDH-SIE-00046	MBKNB1	125A max	—	—	919
EDH-SIE-00047	MBKNB3	125A max	—	—	919
EDH-SIE-00050	MBKQR1	225A max	—	—	920
EDH-SIE-00005	MBKQR1A	225A max	2-pole (1-phase)	—	1028
EDH-SIE-00051	MBKQR3	225A max	—	—	921
EDH-SIE-00006	MBKQR3A	225A max	3-pole (3-phase)	—	1029
EDH-SIE-00001	MBKVA41A	125A max	2-pole (1-phase)	—	1029
EDH-SIE-00002	MBKVA41B	125A max	3-pole (3-phase)	—	1030
EDH-SIE-00009	MBKVA5262A	250A max	2-pole (1-phase)	—	1031
EDH-SIE-00010	MBKVA5262B	250A max	3-pole (3-phase)	—	1031
EDH-SIE-00011	MBKVA5363A	400A max	—	—	1032
EDH-SIE-00149	MG1	800A max (table max-amp rating)	—	—	964
EDH-SIE-00175	MG1D	800A max (table max-amp rating)	—	—	964
EDH-SIE-00025	MLKA1	250A	—	—	923
EDH-SIE-00015	MLKA1A	250A	—	—	1039
EDH-SIE-00026	MLKA3	250A	—	—	923
EDH-SIE-00016	MLKA3A	250A	—	—	1040
EDH-SIE-00027	MLKC1	250A	—	—	924
EDH-SIE-00017	MLKC1A	250A	—	—	1041
EDH-SIE-00028	MLKC3	250A	—	—	924
EDH-SIE-00018	MLKC3A	250A	—	—	1041
EDH-SIE-00323	NEB64K	125 A	—	—	1094
EDH-SIE-00322	NEB65K	125 A	—	—	1094
EDH-SIE-00179	NG1D	1200A max (table max-amp rating)	—	—	1000
EDH-SIE-00125	S3VA41T	125A max (table max-amp rating)	—	—	965
EDH-SIE-00151	S3VA41TD	125A max (table max-amp rating)	—	—	965
EDH-SIE-00152	S3VA41TDHD	125A max (table max-amp rating)	—	—	1000
EDH-SIE-00129	S3VA52T	150/250A max (table max-amp rating)	—	—	966
EDH-SIE-00156	S3VA52TD	150/250A max (table max-amp rating)	—	—	967
EDH-SIE-00135	S3VA53T	400A max (table max-amp rating)	—	—	968
EDH-SIE-00182	S3VA53T2D	400A max (table max-amp rating)	—	—	1001
EDH-SIE-00161	S3VA53TD	400A max (table max-amp rating)	—	—	968
EDH-SIE-00142	S3VA54T	600A max (table max-amp rating)	—	—	969
EDH-SIE-00185	S3VA54T2D	600A max (table max-amp rating)	—	—	1001
EDH-SIE-00168	S3VA54TD	600A max (table max-amp rating)	—	—	970
EDH-SIE-00186	S3VA55TD	800/1000A max (table max-amp rating)	—	—	1003
EDH-SIE-00187	S3VA57TD	1200A max (table max-amp rating)	—	—	1003
EDH-SIE-00136	S3VA63T	400A max (table max-amp rating)	—	—	971
EDH-SIE-00162	S3VA63TD	400A max (table max-amp rating)	—	—	1004
EDH-SIE-00143	S3VA64T	600A max (table max-amp rating)	—	—	971
EDH-SIE-00169	S3VA64TD	600A max (table max-amp rating)	—	—	1005
EDH-SIE-00124	SBL	100A max (table max-amp rating)	—	—	971
EDH-SIE-00150	SBLBD	100A max (table max-amp rating)	—	—	972

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00128	SCE	125A max (table max-amp rating)	—	—	973
EDH-SIE-00180	SCED	125A max (table max-amp rating)	—	—	1005
EDH-SIE-00134	SCF	250A max (table max-amp rating)	—	—	974
EDH-SIE-00160	SCFD	250A max (table max-amp rating)	—	—	1006
EDH-SIE-00139	SCJ	400A max (table max-amp rating)	—	—	974
EDH-SIE-00167	SCJD	400A max (table max-amp rating)	—	—	1006
EDH-SIE-00146	SCL	600A max (table max-amp rating)	—	—	975
EDH-SIE-00172	SCLD	600A max (table max-amp rating)	—	—	1007
EDH-SIE-00130	SDGD	150A max (table max-amp rating)	—	—	976
EDH-SIE-00127	SE6	125A max (table max-amp rating)	—	—	977
EDH-SIE-00154	SE6D	125A max (table max-amp rating)	—	—	1009
EDH-SIE-00133	SF6	250A max (table max-amp rating)	—	—	977
EDH-SIE-00159	SF6D	250A max (table max-amp rating)	—	—	1009
EDH-SIE-00132	SFG	250A max (table max-amp rating)	—	—	978
EDH-SIE-00158	SFGD	250A max (table max-amp rating)	—	—	978
EDH-SIE-00126	SGB2	125A max (table max-amp rating)	—	—	979
EDH-SIE-00153	SGB2D	125A max (table max-amp rating)	—	—	980
EDH-SIE-00138	SJ1	400A max (table max-amp rating)	—	—	981
EDH-SIE-00165	SJ1D	400A max (table max-amp rating)	—	—	1010
EDH-SIE-00166	SJ2D	400A max (table max-amp rating)	—	—	1011
EDH-SIE-00137	SJG	400A max (table max-amp rating)	—	—	981
EDH-SIE-00164	SJG1D	400A max (table max-amp rating)	—	—	981
EDH-SIE-00163	SJG2D	400A max (table max-amp rating)	—	—	1012
EDH-SIE-00145	SL6	600A max (table max-amp rating)	—	—	982
EDH-SIE-00171	SL6D	600A max (table max-amp rating)	—	—	1012
EDH-SIE-00144	SLG	600A max (table max-amp rating)	—	—	982
EDH-SIE-00170	SLGD	600A max (table max-amp rating)	—	—	983
EDH-SIE-00176	SLM1D	800A max (table max-amp rating)	—	—	984
EDH-SIE-00056	SMBKED1	125A max	—	—	1085
EDH-SIE-00057	SMBKED3	125A max	—	—	1086
EDH-SIE-00058	SMBKFD1	250A max	—	—	1086
EDH-SIE-00059	SMBKFD3	250A max	—	—	1086
EDH-SIE-00060	SMBKJD1	400A max	—	—	1087
EDH-SIE-00061	SMBKJD3	400A max	—	—	1087
EDH-SIE-00381	SMLK12	400-1200 A	—	—	960
EDH-SIE-00177	SMND	800/1200A max (table max-amp rating)	—	—	1014
EDH-SIE-00131	SQR	225A max (table max-amp rating)	—	—	984
EDH-SIE-00181	SQRD	225A max (table max-amp rating)	—	—	985
EDH-SIE-00141	SSCJ	400A max (table max-amp rating)	—	—	986
EDH-SIE-00184	SSCJD	400A max (table max-amp rating)	—	—	1106
EDH-SIE-00148	SSCL	600A max (table max-amp rating)	—	—	986
EDH-SIE-00174	SSCLD	600A max (table max-amp rating)	—	—	1014
EDH-SIE-00140	SSJ1	400A max (table max-amp rating)	—	—	987
EDH-SIE-00183	SSJ1D	400A max (table max-amp rating)	—	—	1015
EDH-SIE-00147	SSL6	600A max (table max-amp rating)	—	—	988
EDH-SIE-00173	SSL6D	600A max (table max-amp rating)	—	—	1016
EDH-SIE-00178	SSMND	800/1200A max (table max-amp rating)	—	—	1017
EDH-SQD-00268	32508	—	3	—	628
EDH-SQD-00269	32510	—	3	—	628
EDH-SQD-00306	AL1200P24TK	1200 A	—	—	657
EDH-SQD-00307	AL1200P25TK	1200 A	—	—	657
EDH-SQD-00308	AL1200P25TK4	1200 A	—	—	657

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00309	AL1200R53TK	1200 A	—	—	658
EDH-SQD-00082	AL150HD	15-150 A	—	—	595
EDH-SQD-00083	AL175JD	150-175 A	—	—	596
EDH-SQD-00084	AL250JD	150-250 A	—	—	597
EDH-SQD-00221	AL400L61K3	250 A	3	—	641
EDH-SQD-00222	AL400L61K4	250 A	4	—	642
EDH-SQD-00225	AL600LF52K3	400/600 A	3	—	642
EDH-SQD-00223	AL600LS52K3	400/600 A	3	—	642
EDH-SQD-00224	AL600LS52K4	400/600 A	4	—	643
EDH-SQD-00302	AL800M23TK	800 A	—	—	655
EDH-SQD-00304	AL800M23TK4	800 A	—	—	655
EDH-SQD-00303	AL800P6TK	800 A	—	—	656
EDH-SQD-00305	AL800P6TK4	800 A	—	—	656
EDH-SQD-00086	CU150HD	15-150 A	—	—	598
EDH-SQD-00087	CU250JD	150-250 A	—	—	598
EDH-SQD-00226	CU400L61K3	250/400 A	3	—	643
EDH-SQD-00227	CU400L61K4	250/400 A	4	—	643
EDH-SQD-00230	CU600LF52K3	400/600 A	3	—	644
EDH-SQD-00228	CU600LS52K3	400/600 A	3	—	644
EDH-SQD-00229	CU600LS52K4	400/600 A	4	—	644
EDH-SQD-00208	CYA060HD	<=60 A Cu (rating at 75 C)	3	—	630
EDH-SQD-00209	CYA150HD	<=150 A Cu (rating at 75 C)	3	—	630
EDH-SQD-00210	CYA150JD	<=150 A Cu (rating at 75 C)	3	—	635
EDH-SQD-00211	CYA250J3	<=250 A Cu (rating at 75 C)	3	—	636
EDH-SQD-00212	CYA400L31K3	285 A Cu (rating at 75 C)	3	—	645
EDH-SQD-00217	CYA400L31K4	285 A Cu (rating at 75 C)	4	—	645
EDH-SQD-00214	CYA400L51K3	380 A Cu (rating at 75 C)	3	—	645
EDH-SQD-00219	CYA400L51K4	380 A Cu (rating at 75 C)	4	—	646
EDH-SQD-00216	CYA400L71K3	475 A Cu (rating at 75 C)	3	—	646
EDH-SQD-00213	CYA600L32K3	570 A Cu (rating at 75 C)	3	—	646
EDH-SQD-00218	CYA600L32K4	570 A Cu (rating at 75 C)	4	—	647
EDH-SQD-00215	CYA600L52K3	760 A Cu (rating at 75 C)	3	—	647
EDH-SQD-00220	CYA600L52K4	760 A Cu (rating at 75 C)	4	—	647
EDH-SQD-00462	HC2SN	225 A	—	—	441
EDH-SQD-00463	HC4SN	400 A	—	—	441
EDH-SQD-00464	HC6SN	600 A	—	—	442
EDH-SQD-00472	HC6SNALCU	600 A	—	—	442
EDH-SQD-00480	HC6SNCU	600 A	—	—	442
EDH-SQD-00465	HC8SN	800 A	—	—	443
EDH-SQD-00473	HC8SNALCU	800 A	—	—	443
EDH-SQD-00481	HC8SNCU	800 A	—	—	443
EDH-SQD-00503	HCM400VCA	400 A	—	—	435
EDH-SQD-00504	HCM600VCA	600 A	—	—	435
EDH-SQD-00505	HCM800VCA	800 A	—	—	435
EDH-SQD-00478	HCP12SNALCU	1200 A	—	—	444
EDH-SQD-00486	HCP12SNCU	1200 A	—	—	444
EDH-SQD-00475	HCP4SNALCU	400 A	—	—	444
EDH-SQD-00476	HCP6SNALCU	600 A	—	—	445
EDH-SQD-00477	HCP8SNALCU	800 A	—	—	445
EDH-SQD-00466	HCPSU8SN	800 A	—	—	445
EDH-SQD-00474	HCPSU8SNALCU	800 A	—	—	446
EDH-SQD-00482	HCPSU8SNCU	800 A	—	—	446

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00479	HCR12SNALCU	1200 A	—	—	446
EDH-SQD-00489	HCR12SNCT	1200 A	—	—	447
EDH-SQD-00488	HCR12SNCU	1200 A	—	—	447
EDH-SQD-00509	HCW1200VCA	1200 A	—	—	436
EDH-SQD-00470	HCW12SN	1200 A	—	—	447
EDH-SQD-00487	HCW12SNCU	1200 A	—	—	448
EDH-SQD-00506	HCW400VCA	400 A	—	—	436
EDH-SQD-00467	HCW4SN	400 A	—	—	448
EDH-SQD-00483	HCW4SNCU	400 A	—	—	448
EDH-SQD-00507	HCW600VCA	600 A	—	—	436
EDH-SQD-00468	HCW6SN	600 A	—	—	449
EDH-SQD-00484	HCW6SNCU	600 A	—	—	449
EDH-SQD-00508	HCW800VCA	800 A	—	—	436
EDH-SQD-00469	HCW8SN	800 A	—	—	450
EDH-SQD-00485	HCW8SNCU	800 A	—	—	450
EDH-SQD-00471	HCWM12SN	1200 A	—	—	450
EDH-SQD-00375	N150MH	15-125 A interiors (H-frame 150 A max)	—	—	469
EDH-SQD-00376	N250MJ	125-250 A	—	—	470
EDH-SQD-00377	N400M	125-400 A	—	—	471
EDH-SQD-00378	N600MPPL	125-600 A main; 400 A max as SFB	—	—	471
EDH-SQD-00390	NF125FTL	125 A	—	—	481
EDH-SQD-00387	NF125SFL	125 A	—	—	480
EDH-SQD-00391	NF250FTL	250 A	—	—	481
EDH-SQD-00393	NF250SFBH	250 A mains	—	—	472
EDH-SQD-00394	NF250SFBJ	250 A mains	—	—	472
EDH-SQD-00388	NF250SFL	250 A	—	—	480
EDH-SQD-00392	NF400FTL	400 A	—	—	482
EDH-SQD-00389	NF400SFL	400 A	—	—	480
EDH-SQD-00395	NF600SFBH	400 A mains	—	—	472
EDH-SQD-00396	NF600SFBJ	400 A mains	—	—	473
EDH-SQD-00397	NF600SFBPPL	600 A	—	—	473
EDH-SQD-00404	NFALV1	125 A	—	—	474
EDH-SQD-00407	NFALV2	250 A	—	—	474
EDH-SQD-00410	NFALV4	400 A	—	—	475
EDH-SQD-00413	NFALV6	600 A	—	—	475
EDH-SQD-00405	NFCUM1	125 A	—	—	476
EDH-SQD-00408	NFCUM2	250 A	—	—	476
EDH-SQD-00411	NFCUM4	400 A	—	—	477
EDH-SQD-00414	NFCUM6	600 A	—	—	477
EDH-SQD-00406	NFCUV1	125 A	—	—	478
EDH-SQD-00409	NFCUV2	250 A	—	—	478
EDH-SQD-00412	NFCUV4	400 A	—	—	479
EDH-SQD-00415	NFCUV6	600 A	—	—	479
EDH-SQD-00401	NFN1CU	125 A	—	—	484
EDH-SQD-00402	NFN2CU	250 A	—	—	485
EDH-SQD-00403	NFN6CU	400/600 A	—	—	485
EDH-SQD-00398	NFNL1	125 A	—	—	485
EDH-SQD-00399	NFNL2	250 A	—	—	486
EDH-SQD-00400	NFNL4	400 A	—	—	486
EDH-SQD-00340	NQALMN6	600 A	—	—	509
EDH-SQD-00341	NQALV1	100 A	—	—	499
EDH-SQD-00344	NQALV2	225 A	—	—	500

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00347	NQALV4	400 A	—	—	500
EDH-SQD-00350	NQALV6	600 A	—	—	501
EDH-SQD-00342	NQCUM1	100 A	—	—	501
EDH-SQD-00345	NQCUM2	225 A	—	—	502
EDH-SQD-00348	NQCUM4	400 A	—	—	502
EDH-SQD-00351	NQCUM6	600 A	—	—	503
EDH-SQD-00343	NQCUV1	100 A	—	—	503
EDH-SQD-00346	NQCUV2	225 A	—	—	504
EDH-SQD-00349	NQCUV4	400 A	—	—	504
EDH-SQD-00352	NQCUV6	600 A	—	—	505
EDH-SQD-00324	NQFTL2H	225 A	—	—	507
EDH-SQD-00323	NQFTL2L	225 A	—	—	508
EDH-SQD-00326	NQFTL4H	400 A	—	—	508
EDH-SQD-00325	NQFTL4L	400 A	—	—	509
EDH-SQD-00315	NQMB2HJ	100 A interiors (H) and 225 A interiors (H or J)	—	—	493
EDH-SQD-00317	NQMB2KI	225 A max	—	—	494
EDH-SQD-00313	NQMB2Q	15-225 A (100-225 A per distributor)	—	—	494
EDH-SQD-00318	NQMB4LA	125-400 A	—	—	495
EDH-SQD-00336	NQN1CU	100 A	—	—	512
EDH-SQD-00337	NQN2CU	225 A	—	—	512
EDH-SQD-00339	NQN6CRUS	400/600 A	—	—	512
EDH-SQD-00338	NQN6CU	400 A	—	—	513
EDH-SQD-00332	NQNL1	100 A	—	—	513
EDH-SQD-00333	NQNL2	225 A	—	—	514
EDH-SQD-00334	NQNL2ACCY	225 A	—	—	514
EDH-SQD-00335	NQNL4	400 A	—	—	515
EDH-SQD-00328	NQSFB2HJ	225 A interiors (one SFB)	—	—	496
EDH-SQD-00327	NQSFB2Q	225 A interiors (one SFB)	—	—	497
EDH-SQD-00330	NQSFB4HJ	400 A interiors; one or two SFBs	—	—	497
EDH-SQD-00329	NQSFB4Q	400 A interiors; one or two SFBs (225 A max each)	—	—	498
EDH-SQD-00331	NQSFB6PPL	600 A interiors (one SFB); PowerPacT L requires 8.75 in. deep enclosure	—	—	498
EDH-SQD-00320	NQSFL1	100 A	—	—	505
EDH-SQD-00321	NQSFL2	225 A	—	—	506
EDH-SQD-00322	NQSFL4	400 A	—	—	506
EDH-SQD-00561	QM-1SN	200 A	—	—	582
EDH-SQD-00562	QM-2SN	200 A	—	—	583
EDH-SQD-00563	QM-4SN	400 A	—	—	583
EDH-SQD-00564	QM-6SN	600 A	—	—	583
EDH-SQD-00081	QMB12CLA	1200 A	—	—	533
EDH-SQD-00002	QMB221HW	30-blank (single switch in twin frame) A	2	240 Vac / 250 Vdc	549
EDH-SQD-00001	QMB221TW	30-30 (twin) A	2	240 Vac / 250 Vdc	550
EDH-SQD-00004	QMB222HW	60-blank A	2	240 Vac / 250 Vdc	550
EDH-SQD-00003	QMB222TW	60-60 (twin) A	2	240 Vac / 250 Vdc	551
EDH-SQD-00006	QMB223HW	100-blank A	2	240 Vac / 250 Vdc	551
EDH-SQD-00005	QMB223TW	100-100 (twin) A	2	240 Vac / 250 Vdc	552
EDH-SQD-00007	QMB224W	200 (single) A	2	240 Vac / 250 Vdc	552
EDH-SQD-00008	QMB225W	400 (single) A	2	240 Vac / 250 Vdc	553
EDH-SQD-00009	QMB225WT3	400 (single, 300 Vac Class T fuses only) A	2	240 Vac	553
EDH-SQD-00023	QMB261HW	30-blank A	2	600 Vac / 250 Vdc	554

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00022	QMB261TW	30-30 (twin) A	2	600 Vac / 250 Vdc	554
EDH-SQD-00025	QMB262HW	60-blank A	2	600 Vac / 250 Vdc	555
EDH-SQD-00024	QMB262TW	60-60 (twin) A	2	600 Vac / 250 Vdc	555
EDH-SQD-00027	QMB263HW	100-blank A	2	600 Vac / 250 Vdc	556
EDH-SQD-00026	QMB263TW	100-100 (twin) A	2	600 Vac / 250 Vdc	556
EDH-SQD-00028	QMB264W	200 (single) A	2	600 Vac / 250 Vdc	557
EDH-SQD-00011	QMB321HW	30-blank A	3	240 Vac	557
EDH-SQD-00010	QMB321TW	30-30 (twin) A	3	240 Vac	558
EDH-SQD-00013	QMB322HW	60-blank A	3	240 Vac	558
EDH-SQD-00012	QMB322TW	60-60 (twin) A	3	240 Vac	558
EDH-SQD-00015	QMB323HW	100-blank A	3	240 Vac	559
EDH-SQD-00014	QMB323TW	100-100 (twin) A	3	240 Vac	559
EDH-SQD-00016	QMB324W	200 (single) A	3	240 Vac	560
EDH-SQD-00017	QMB325W	400 (single) A	3	240 Vac	561
EDH-SQD-00018	QMB325WT3	400 (single, 300 Vac Class T fuses only) A	3	240 Vac	561
EDH-SQD-00019	QMB326W	600 (single) A	3	240 Vac	562
EDH-SQD-00020	QMB326WT3	600 (single, 300 Vac Class T fuses only) A	3	240 Vac	562
EDH-SQD-00021	QMB327WT3	800 (single, 300 Vac Class T fuses only) A	3	240 Vac	563
EDH-SQD-00030	QMB361HW	30-blank A	3	600 Vac	563
EDH-SQD-00029	QMB361TW	30-30 (twin) A	3	600 Vac	564
EDH-SQD-00032	QMB362HW	60-blank A	3	600 Vac	564
EDH-SQD-00033	QMB362T21W	60-30 (twin, unequal) A	3	600 Vac	565
EDH-SQD-00031	QMB362TW	60-60 (twin) A	3	600 Vac	565
EDH-SQD-00035	QMB363HW	100-blank A	3	600 Vac	566
EDH-SQD-00036	QMB363T31W	100-30 (twin, unequal) A	3	600 Vac	566
EDH-SQD-00037	QMB363T32W	100-60 (twin, unequal) A	3	600 Vac	567
EDH-SQD-00034	QMB363TW	100-100 (twin) A	3	600 Vac	567
EDH-SQD-00038	QMB364W	200 (single) A	3	600 Vac	568
EDH-SQD-00039	QMB365W	400 (single) A	3	600 Vac / 250 Vdc	568
EDH-SQD-00040	QMB365WT6	400 (single, 600 Vac Class T fuses only) A	3	600 Vac	569
EDH-SQD-00041	QMB366W	600 (single) A	3	600 Vac / 250 Vdc	569
EDH-SQD-00042	QMB367W	800 (single) A	3	600 Vac	570
EDH-SQD-00080	QMB8CLA	800 A	—	—	533
EDH-SQD-00044	QMJ361T	30-30 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	570
EDH-SQD-00045	QMJ362T	60-60 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	571
EDH-SQD-00047	QMJ363H	100-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	571
EDH-SQD-00046	QMJ363T	100-100 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	572
EDH-SQD-00049	QMJ364H	200-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	572
EDH-SQD-00048	QMJ364T	200-200 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	573
EDH-SQD-00050	QMJ365	400 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	573
EDH-SQD-00051	QMJ366	600 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	574
EDH-SQD-00542	QO-100ASF	100 A	—	—	526
EDH-SQD-00543	QO-225ASF	225 A	—	—	526
EDH-SQD-00368	QOB2125SL	125 A (from catalog number; not stated)	—	—	506

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00369	QOB3125SL	125 A (from catalog number; not stated)	—	—	507
EDH-SQD-00239	S32477	—	3	—	653
EDH-SQD-00240	S32478	—	4	—	653
EDH-SQD-00243	S32562	—	3	—	651
EDH-SQD-00244	S32563	—	4	—	652
EDH-SQD-00152	S33930	1200 A (100% rated, for R-frame applications)	3	—	591
EDH-SQD-00510	S33931	1200 A	3	—	437
EDH-SQD-00231	S37432	—	3	—	632
EDH-SQD-00232	S37433	—	2/3	—	634
EDH-SQD-00233	S37434	—	2/3	—	635
EDH-SQD-00234	S37436	—	3	—	632
EDH-SQD-00235	S37437	—	3	—	640
EDH-SQD-00236	S37438	—	2/3	—	640
EDH-SQD-00237	S37439	—	3	—	640
EDH-SQD-00238	S37440	—	3	—	637
EDH-SQD-00241	S432475	—	3	—	654
EDH-SQD-00242	S432476	—	3	—	654
EDH-SQD-00513	SF-100LP	100 A	—	—	526
EDH-SQD-00514	SF-225LP	225 A	—	—	527
EDH-SQD-00416	SKNF250	125-250 A interiors	—	—	483
EDH-SQD-00417	SKNF600	400-800 A (distributor listing)	—	—	484
EDH-SQD-00153	SL100	100 A	3	—	437
EDH-SQD-00149	SL1200P5	1200 A	3	—	592
EDH-SQD-00150	SL1200P6	1200 A	3	—	593
EDH-SQD-00151	SL1200P7	1200 A	3	—	593
EDH-SQD-00556	SL-225	225 A	—	—	438
EDH-SQD-00146	SL250	250 A	3	—	594
EDH-SQD-00147	SL400	400 A	3	—	594
EDH-SQD-00154	SL800	800 A	—	—	438
EDH-SQD-00148	SL800M5	800 A	3	—	595
EDH-SQD-00195	YA060HD	<=60 A Al/Cu (rating at 75 C)	3	—	631
EDH-SQD-00196	YA150HD	<=150 A (rating at 75 C)	3	—	631
EDH-SQD-00197	YA150JD	<=200 A (rating at 75 C)	3	—	637
EDH-SQD-00198	YA250J35	<=250 A (rating at 75 C)	3	—	637
EDH-SQD-00199	YA400L31K3	230 A Al / 285 A Cu @75C (rating at 75 C)	3	—	648
EDH-SQD-00201	YA400L51K3	310 A Al / 380 A Cu (rating at 75 C)	3	—	649
EDH-SQD-00205	YA400L51K4	310 A Al / 380 A Cu (rating at 75 C)	4	—	649
EDH-SQD-00203	YA400L71K3	385 A Al / 475 A Cu (rating at 75 C)	3	—	649
EDH-SQD-00207	YA400L71K4	385 A Al / 475 A Cu (rating at 75 C)	4	—	650
EDH-SQD-00200	YA600L32K3	460 A Al / 570 A Cu (rating at 75 C)	3	—	650
EDH-SQD-00204	YA600L32K4	460 A Al / 570 A Cu (rating at 75 C)	4	—	650
EDH-SQD-00202	YA600L52K3	620 A Al / 760 A Cu (rating at 75 C)	3	—	651
EDH-SQD-00206	YA600L52K4	620 A Al / 760 A Cu (rating at 75 C)	4	—	651
EDH-ZIN-00023	LK-15	150 A	—	—	1160
EDH-ZIN-00024	LK-22	225 A	—	—	1160
EDH-ZIN-00001	QSF100DS	100 A	—	—	1157
EDH-ZIN-00014	QSF100SB	100 A	—	—	1157
EDH-ZIN-00013	QSF100SS	100 A	—	—	1157
EDH-ZIN-00002	QSF200DS	200 A	—	—	1157
EDH-ZIN-00015	QSF200SB	200 A	—	—	1158
EDH-ZIN-00003	QSF400DS	400 A	—	—	1158

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-ZIN-00016	QSF400SB	listed '200A' - probably 400 A	—	—	1158
EDH-ZIN-00004	QSF600DS	600 A	—	—	1158
EDH-ZIN-00018	SECT	225 A	—	—	1158
EDH-ZIN-00017	SEHT	100 A	—	—	1159
EDH-ZIN-00019	SJD4T	400 A	—	—	1159
EDH-ZIN-00020	SKM8S	800 A	—	—	1159
EDH-ZIN-00025	UBIZRBK12	125 A	—	—	1161

12.7 Physical dimension and hole-pattern index

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00249	4180B08	Height 1.00-16.00 in by H number; width not stated **A**	—	195
EDH-EAT-00269	4176B72	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes) **A**	—	266
EDH-EAT-00285	42C8083H01	Length 4.220 in **C**	—	266
EDH-EAT-00291	3456B99H01	Height 3.00 in (76.2 mm) **A**	—	122
EDH-EAT-00292	3456B35H01	Height 6.00 in (152.4 mm) **A**	—	122
EDH-EAT-00293	3456B99H05	Height 15.00 in (381.0 mm) **A**	—	122
EDH-EAT-00294	6554C01	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in **A**	—	337
EDH-EAT-00295	6554C02	Width 25 in; height in X units (1X = 1.38 in) **A**	—	337
EDH-EAT-00296	P41X25	1.375 in H x 25 in W **C**	—	337
EDH-EAT-00299	KPRL4X12	Space required 2X (2.75 in) (1X = 1.38 in) **A**	—	329
EDH-EAT-00300	KPRL4X22	Space required 2X (2.75 in) (1X = 1.38 in) **A**	—	330
EDH-EAT-00301	KPRL4X32	Space required 3X (4.13 in) (1X = 1.38 in) **A**	—	331
EDH-EAT-00302	KPRL4X334S	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	331
EDH-EAT-00303	KPRL4X334T	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	332
EDH-EAT-00304	KPRL4X336	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in) **A**	—	333
EDH-EAT-00305	KPRL4X34	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	334
EDH-EAT-00306	KPRL4X35	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	335
EDH-EAT-00307	KPRL4FDCL	Space required 3X (4.13 in) (1X = 1.38 in) **A**	—	315
EDH-EAT-00308	KPRL4CA	Space required 2X/3X (1X = 1.38 in) **A**	—	305
EDH-EAT-00309	KPRL4JDS	Space required 3X (4.13 in) (1X = 1.38 in) **A**	—	315
EDH-EAT-00310	KPRL4JDT	Space required 3X (4.13 in) (1X = 1.38 in) **A**	—	316
EDH-EAT-00311	KPRL4FBP	Space required 3X (4.13 in) (1X = 1.38 in) **A**	—	310
EDH-EAT-00312	KPRL4KDS	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	317
EDH-EAT-00313	KPRL4KDT	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	318
EDH-EAT-00314	KPRL4LC	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	321
EDH-EAT-00315	KPRL4LG	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	324
EDH-EAT-00316	KPRL4MC	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	325
EDH-EAT-00317	KPRL4LAP	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	319
EDH-EAT-00318	KPRL4LCL	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	321
EDH-EAT-00319	KPRL4NBP	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	326
EDH-EAT-00320	KPRL4NC	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	327
EDH-EAT-00321	KPRL4ND	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	328
EDH-EAT-00322	KPRL4CKD	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	306
EDH-EAT-00323	KPRL4MD	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	326
EDH-EAT-00324	KPRL4CND	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	307
EDH-EAT-00325	KPRL4FD1	2X space (1X = 1.38 in) **A**	—	313
EDH-EAT-00326	KPRL4FD2	2X space (1X = 1.38 in) **A**	—	314
EDH-EAT-00327	KPRL4ED2	2X space (1X = 1.38 in) **A**	—	309
EDH-EAT-00328	KPRL4FD	3X space (1X = 1.38 in) **A**	—	311

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00329	KPRL4ED	3X space (1X = 1.38 in) A	—	308
EDH-EAT-00330	KPRL4LD	6X space (1X = 1.38 in) A	—	323
EDH-EAT-00331	KPRL44X	Switch space 4X (5.50 in) A	—	298
EDH-EAT-00332	KPRL45X1	Switch space 5X (6.88 in) A	—	300
EDH-EAT-00333	KPRL45X	Switch space 5X (6.88 in) A	—	299
EDH-EAT-00334	KPRL45XS	Switch space unknown D	—	300
EDH-EAT-00335	KPRL4B6XS	Switch space 6X (8.25 in) A	—	301
EDH-EAT-00336	KPRL4B6XT	Switch space 6X (8.25 in) A	—	301
EDH-EAT-00337	KPRL4W9X	Switch space 9X (12.38 in) A	—	303
EDH-EAT-00338	KPRL4W11X	Switch space 11X (15.13 in) A	—	301
EDH-EAT-00339	KPRL4W15X	Switch space 15X (20.63 in) A	—	303
EDH-EAT-00340	KCDPFB100	3X space (1X = 1.38 in) A	—	71
EDH-EAT-00341	KCDPED225	3X space (1X = 1.38 in) A	—	70
EDH-EAT-00342	KCDPFBP	3X space (1X = 1.38 in) A	—	71
EDH-EAT-00343	KCDPCA	3X space (1X = 1.38 in) A	—	69
EDH-EAT-00344	KCDPKB	3X space (1X = 1.38 in) A	—	72
EDH-EAT-00345	KCDPLB	4X space (1X = 1.38 in) A	—	74
EDH-EAT-00346	KCDPLA400	6X space (1X = 1.38 in) A	—	73
EDH-EAT-00347	KCDPLA600	6X space (1X = 1.38 in) A	—	73
EDH-EAT-00348	KCDPLCL	6X space (1X = 1.38 in) A	—	75
EDH-EAT-00349	KCDPMC	6X space (1X = 1.38 in) A	—	75
EDH-EAT-00350	KCDPNC	6X space (1X = 1.38 in) A	—	76
EDH-EAT-00351	KCDPNBP	6X space (1X = 1.38 in) A	—	76
EDH-EAT-00352	KCDP_X	Height = n x 1.38 in (35.1 mm) A	—	78
EDH-EAT-00366	KFDP4XT	4X space A	—	65
EDH-EAT-00367	KFDP5XT	5X space A	—	66
EDH-EAT-00368	KFDPB6X-2	6X space A	—	66
EDH-EAT-00369	KFDPW9X-4	9X space A	—	68
EDH-EAT-00370	KFDPW11X-6	11X space A	—	67
EDH-EAT-00371	KFDPW11X-8	11X space A	—	67
EDH-EAT-00372	KFDPW15X-12	15X space A	—	68
EDH-EAT-00374	5PLUG3400SC	8X space A	—	341
EDH-EAT-00375	5PLUG3600SC	8X space A	—	341
EDH-EAT-00376	5PLUG3800SC	8X space A	—	341
EDH-EAT-00377	5PLUG31200TC	7X space A	—	340
EDH-EAT-00384	5PFP1S	1X height (1X = 1.38 in) A	—	343
EDH-EAT-00385	5PFP1T	1X height (1X = 1.38 in) A	—	343
EDH-EAT-00386	5PFP2S	2X height (1X = 1.38 in) A	—	344
EDH-EAT-00387	5PFP2T	2X height (1X = 1.38 in) A	—	344
EDH-EAT-00388	5PFP3S	3X height (1X = 1.38 in) A	—	344
EDH-EAT-00389	5PFP3T	3X height (1X = 1.38 in) A	—	344
EDH-EAT-00390	5PFP4S	4X height (1X = 1.38 in) A	—	345
EDH-EAT-00391	5PFP4T	4X height (1X = 1.38 in) A	—	345
EDH-EAT-00392	5PFP5S	5X height (1X = 1.38 in) A	—	345
EDH-EAT-00393	5PFP5T	5X height (1X = 1.38 in) A	—	345
EDH-EAT-00394	5PFP6S	6X height (1X = 1.38 in) A	—	346
EDH-EAT-00395	5PFP6T	6X height (1X = 1.38 in) A	—	346
EDH-EAT-00403	5155C81G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	196
EDH-EAT-00405	K80522	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	198

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00407	8450C62H39	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	197
EDH-EAT-00408	K80429	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	197
EDH-EAT-00411	114C247G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	122
EDH-EAT-00412	3457B16G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	123
EDH-EAT-00420	414A380G02	Overall length 2.50 in (63.5 mm) A	—	79
EDH-EAT-00424	KFDPWT3211R	4X of chassis height A	—	104
EDH-EAT-00425	KFDPWT3611R	4X of chassis height A	—	105
EDH-EAT-00426	KFDPWT3222R	4X of chassis height A	—	105
EDH-EAT-00427	KFDPWT3622R	4X of chassis height A	—	106
EDH-EAT-00428	KFDPWT3233R	4X of chassis height A	—	105
EDH-EAT-00429	KFDPWT3633R	5X of chassis height A	—	106
EDH-EAT-00430	KFDPBS324R	6X of chassis height A	—	102
EDH-EAT-00431	KFDPBS364R	6X of chassis height A	—	102
EDH-EAT-00432	KFDPW325R	9X of chassis height A	—	102
EDH-EAT-00433	KFDPW365R	9X of chassis height A	—	103
EDH-EAT-00434	KFDPW326R	11X of chassis height A	—	103
EDH-EAT-00435	KFDPW366R	11X of chassis height A	—	103
EDH-EAT-00436	KFDPW367	11X of chassis height A	—	104
EDH-EAT-00437	KFDPW368	15X of chassis height A	—	104
EDH-EAT-00445	0080429	approx. 2.50 in (63.5 mm) per drawing C	—	78
EDH-EAT-00446	414A380G01	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 C	—	123
EDH-EAT-00645	TEC1	conductor opening diameter 0.25 in (6.35 mm) A	—	361
EDH-EAT-00646	TEC2	conductor opening diameter 0.41 in (10.41 mm) A	—	361
EDH-EAT-00664	314C960G07	length / back-of-breaker dimension 5.47 in (L) / 5.91 in back of breaker (M) A	—	399
EDH-EAT-00665	314C960G08	length / back-of-breaker dimension 7.97 in (L) / 8.41 in (M) A	—	400
EDH-EAT-00666	314C960G09	length / back-of-breaker dimension 10.47 in (L) / 10.91 in (M) A	—	400
EDH-EAT-00667	314C960G01	length / back-of-breaker dimension 3.66 in A	—	406
EDH-EAT-00668	314C960G04	length / back-of-breaker dimension 5.91 in A	—	406
EDH-EAT-00669	314C960G05	length / back-of-breaker dimension 8.41 in A	—	406
EDH-EAT-00670	314C960G06	length / back-of-breaker dimension 10.91 in A	—	407
EDH-EAT-00671	314C960G10	length / back-of-breaker dimension 5.91 in A	—	407
EDH-EAT-00672	314C960G11	length / back-of-breaker dimension 8.41 in A	—	407
EDH-EAT-00673	314C960G12	length / back-of-breaker dimension 10.91 in A	—	408
EDH-EAT-00674	623B222G01	length / back-of-breaker dimension 5.5 in A	—	412
EDH-EAT-00675	623B222G02	length / back-of-breaker dimension 8.0 in A	—	413
EDH-EAT-00676	623B222G03	length / back-of-breaker dimension 10.5 in A	—	413
EDH-EAT-00677	373B375G04	length / back-of-breaker dimension 5.5 in A	—	412
EDH-EAT-00678	373B375G03	length / back-of-breaker dimension 10.5 in A	—	412
EDH-EAT-00706	RACH22BXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in A	—	39
EDH-EAT-00707	RBCH30BXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in A	—	47
EDH-EAT-00708	RBCH24BXXX	Fits existing box height 29-30 in (#2-250 kcmil) / 30.5-36 in (#2-300 kcmil); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in A	—	46

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00709	RCCH32BXXX	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	54
EDH-EAT-00710	RDCH42BXXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	59
EDH-EAT-00711	RDCH42HXXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	61
EDH-EAT-00712	RACH24L125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	40
EDH-EAT-00713	RBCH42L125	Fits existing box height 25-26 in (#4-#1) / 26.5-30 in (#4-1/0); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	50
EDH-EAT-00714	RBCH32L225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	49
EDH-EAT-00715	RBCH42L225	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	50
EDH-EAT-00716	RCCH42L225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	55
EDH-EAT-00717	RDCH42L225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	61
EDH-EAT-00718	RBCH24D225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	46
EDH-EAT-00719	RBCH32D225	Fits existing box height 31-33.5 in (#6-250) / 34-36 in (#6-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00720	RCCH32D225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	54
EDH-EAT-00721	RDCH42D225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	59
EDH-EAT-00722	RACH18B3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	39
EDH-EAT-00723	RDCH42B3XXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	58
EDH-EAT-00724	RDCH42H3XXX	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	60
EDH-EAT-00725	RACH24L3125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	40
EDH-EAT-00726	RACH30L3125	Fits existing box height 22-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	41
EDH-EAT-00727	RACH30L3225	Fits existing box height 22.5-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	41
EDH-EAT-00728	RBCH30L3225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00729	RBCH42L3125	Fits existing box height 25-28 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	51
EDH-EAT-00730	RBCH42L3225	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	51
EDH-EAT-00731	RCCH42L3225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	55
EDH-EAT-00732	RDCH42L3225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	62
EDH-EAT-00733	RBCH24D3225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	47
EDH-EAT-00734	RBCH30D3225	Fits existing box height 31-33.5 in / 34-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00735	RCCH30D3225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	53
EDH-EAT-00736	RDCH42D3225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	60
EDH-EAT-00737	RABR20BXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	37

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00738	RABR20HXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	38
EDH-EAT-00739	RBBR30BCXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00740	RBBR30HCXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	44
EDH-EAT-00741	RBBR20BXXX	Fits existing box height 29-30.5 in (#2-250) / 31-36 in (#2-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	42
EDH-EAT-00742	RCBR30BXXX	Fits existing box height 34-35.5 in (#2-250) / 36-41 in (#2-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	52
EDH-EAT-00743	RDBR40BXXX	Fits existing box height 37-38.5 in (#2-4/0) / 39-40.5 in (#2-250) / 41-45 in (#2-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	57
EDH-EAT-00744	RABR20L125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	38
EDH-EAT-00745	RBBR30L200	Fits existing box height 29-31.5 in (#1-250) / 32-36 in (#1-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	45
EDH-EAT-00746	RCBR40L200	Fits existing box height 34-36.5 in / 37-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	53
EDH-EAT-00747	RDBR42L225	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	57
EDH-EAT-00748	RABR12B3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	36
EDH-EAT-00749	RABR12H3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	36
EDH-EAT-00750	RBBR30BXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00751	RBBR30H3XXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	44
EDH-EAT-00752	RDBR30B3XXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	56
EDH-EAT-00753	RDBR30H3XXX	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	56
EDH-EAT-00754	REBR42B3XXX	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	62
EDH-EAT-00755	REBR42H3XXX	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	63
EDH-EAT-00756	RABR12L3125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	37
EDH-EAT-00757	RBBR30L3100	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	45
EDH-EAT-00758	RBBR24L3150	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	42
EDH-EAT-00759	RCBR30L3200	Fits existing box height 34-35.5 in (#4-250) / 36-41 in (#4-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	52
EDH-EAT-00760	RDBR42L3225	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	58
EDH-EAT-00761	REBR42L3225	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	63
EDH-EAT-00762	RAABR12L125	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall **A**	—	35
EDH-EAT-00763	RAABR12L125A	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall **A**	—	35

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00764	RAABR10BXXX	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall A	—	34
EDH-EAT-00765	RAABR10BXXXA	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall A	—	34
EDH-EAT-00799	MP403XBLANK	3X high (3 x 1.38 in = 4.14 in) - X unit from Vol 12 C	—	113
EDH-FPE-00004	KCDP4C	Shipping weight 7 lb (aftermarket NJL1K equivalent) C	—	1140
EDH-FPE-00006	KCDP-1A	Shipping package 4 x 3 x 3 in, 1 lb (listing; not part dimensions) C	—	1149
EDH-GEA-00029	911E347P3	3X vertical (1X = 1-3/8 in per GE convention) B	—	689
EDH-GEA-00098	AMCB4EBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	752
EDH-GEA-00099	AMCB4EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	753
EDH-GEA-00100	AMCB4FBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	753
EDH-GEA-00101	AMCB4FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	754
EDH-GEA-00102	AMCB4QDFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in A	—	758
EDH-GEA-00103	AMCB4SEFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	760
EDH-GEA-00104	AMCB6EBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	761
EDH-GEA-00105	AMCB6EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	762
EDH-GEA-00106	AMCB6FBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	763
EDH-GEA-00107	AMCB6FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	764
EDH-GEA-00108	AMCB6QDFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	768
EDH-GEA-00109	AMCB4FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	756
EDH-GEA-00110	AMCB6FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	765
EDH-GEA-00111	AMCB4FJFPTF	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in A	—	756
EDH-GEA-00112	AMCB6FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in A	—	766
EDH-GEA-00113	AMCB4FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	754
EDH-GEA-00114	AMCB4GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	758
EDH-GEA-00115	AMCB6FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	764
EDH-GEA-00116	AMCB6GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	767
EDH-GEA-00117	AMCB2FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	742
EDH-GEA-00118	AMCB2FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	742
EDH-GEA-00119	AMCB2FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	740
EDH-GEA-00120	AMCB2GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	744
EDH-GEA-00121	AMCB3FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	746

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00122	AMCB3FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	747
EDH-GEA-00123	AMCB3FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	745
EDH-GEA-00124	AMCB3GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	748
EDH-GEA-00125	AMCB3LBFP	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in A	—	750
EDH-GEA-00126	AMCB2KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	745
EDH-GEA-00127	AMCB3KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	750
EDH-GEA-00128	AFP2QDD	2X vertical; box width 27-44 in A	—	831
EDH-GEA-00129	AFP2TED	2X vertical; box width 27-44 in A	—	832
EDH-GEA-00130	AFP3EYD	3X vertical; box width 27-44 in A	—	832
EDH-GEA-00131	AFP2FBD	2X vertical; box width 27-44 in A	—	831
EDH-GEA-00132	AFP3FBD	3X vertical; box width 27-44 in A	—	833
EDH-GEA-00133	AFP3QDD	3X vertical; box width 27-44 in A	—	833
EDH-GEA-00134	AFP3SED	3X vertical; box width 27-44 in A	—	834
EDH-GEA-00135	AFP3SFD	3X vertical; box width 31-44 in A	—	834
EDH-GEA-00136	AFP3TFD	2X, 3X vertical; box width 36-44 in A	—	835
EDH-GEA-00137	AFP4FGD	4X vertical; box width 40, 44 in A	—	835
EDH-GEA-00138	AFP4SGD	4X vertical; box width 40-44 in A	—	837
EDH-GEA-00139	AFP3SFS	3X vertical; box width 27-44 in A	—	834
EDH-GEA-00140	AFP3TFS	3X vertical; box width 27-44 in A	—	835
EDH-GEA-00141	AFP4FGS	4X vertical; box width 27-44 in A	—	836
EDH-GEA-00142	AFP4SGS	4X vertical; box width 27-44 in A	—	837
EDH-GEA-00143	AFP5LCS	6X vertical; box width 27-44 in A	—	838
EDH-GEA-00144	AFP6SKS	6X vertical; box width 44 in A	—	838
EDH-GEA-00145	AMC6QBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	796
EDH-GEA-00146	AMC6EYFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	789
EDH-GEA-00147	AMC6FBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	791
EDH-GEA-00148	AMC6FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	791
EDH-GEA-00149	AMC6EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	788
EDH-GEA-00150	AMC6QDFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	796
EDH-GEA-00151	AMC6FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	793
EDH-GEA-00152	AMC6FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	792
EDH-GEA-00153	AMC6JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in A	—	795
EDH-GEA-00154	AMC6FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	792
EDH-GEA-00155	AMC6GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	795
EDH-GEA-00156	AMC6FDSPF	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	792
EDH-GEA-00157	AMC6EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	788
EDH-GEA-00158	AMC6FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	794
EDH-GEA-00159	AMC3FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	776

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00160	AMC3FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	775
EDH-GEA-00161	AMC3JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	778
EDH-GEA-00162	AMC3FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	775
EDH-GEA-00163	AMC3GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	777
EDH-GEA-00164	AMC3KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	779
EDH-GEA-00165	AMC3FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	777
EDH-GEA-00166	AMC4FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	781
EDH-GEA-00167	AMC4EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	779
EDH-GEA-00168	AMC4SEFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	787
EDH-GEA-00169	AMC4QDFP	2X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	786
EDH-GEA-00170	AMC4FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	783
EDH-GEA-00171	AMC4FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	782
EDH-GEA-00172	AMC4JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in A	—	785
EDH-GEA-00173	AMC4FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	782
EDH-GEA-00174	AMC4GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	785
EDH-GEA-00175	AMC4FDSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	782
EDH-GEA-00176	AMC4EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	780
EDH-GEA-00177	AMC4FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	784
EDH-GEA-00178	AMC2FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	771
EDH-GEA-00179	AMC2FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	770
EDH-GEA-00180	AMC2JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	773
EDH-GEA-00181	AMC2FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	770
EDH-GEA-00182	AMC2GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	773
EDH-GEA-00183	AMC2KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	774
EDH-GEA-00184	AMC2FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	772
EDH-GEA-00201	APP1S	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	841
EDH-GEA-00202	APP1	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	840
EDH-GEA-00203	APP1W	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	841
EDH-GEA-00204	APP2S	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	842
EDH-GEA-00205	APP2	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	841
EDH-GEA-00206	APP2W	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	842

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00207	APP3S	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	843
EDH-GEA-00208	APP3	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	842
EDH-GEA-00209	APP3W	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	843
EDH-GEA-00210	APP4S	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	844
EDH-GEA-00211	APP4	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	843
EDH-GEA-00212	APP4W	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	844
EDH-GEA-00213	APP5S	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	845
EDH-GEA-00214	APP5	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	844
EDH-GEA-00215	APP5W	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	845
EDH-GEA-00216	APP6S	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in A	—	846
EDH-GEA-00217	APP6	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in A	—	845
EDH-GEA-00218	APP6W	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	846
EDH-GEA-00219	AML3250SFP	4X module height; box width 27, 36 in A	—	735
EDH-GEA-00220	AML3250FP	6X module height; box width 36 in A	—	734
EDH-GEA-00221	AML3400SFP	4X module height; box width 27, 36, 44 in A	—	735
EDH-GEA-00222	AML3400FP	6X module height; box width 36, 44 in A	—	735
EDH-GEA-00223	AML3600SFP	4X module height; box width 27, 36, 44 in A	—	736
EDH-GEA-00224	AML3600FP	6X module height; box width 36, 44 in A	—	736
EDH-GEA-00225	AML3800FP	6X module height; box width 36, 44 in A	—	737
EDH-GEA-00226	AML3120FP	6X module height; box width 36, 44 in A	—	734
EDH-GEA-00227	AML3250CFP	6X module height; box width 36 in A	—	734
EDH-GEA-00228	AML3400CFP	6X module height; box width 36, 44 in A	—	735
EDH-GEA-00229	AML3600CFP	6X module height; box width 36, 44 in A	—	736
EDH-GEA-00230	AML3800CFP	6X module height; box width 36, 44 in A	—	736
EDH-GEA-00231	AML3120CFP	6X module height; box width 36, 44 in A	—	734
EDH-GEA-00242	AFL600	9X; box width 27, 36, 44 in A	—	737
EDH-GEA-00243	AFL120	12X; box width 36, 44 in A	—	737
EDH-GEA-00244	AMCB6TEDL	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards A	—	840
EDH-GEA-00386	TEF1	Length behind back of breaker: 2 25/32 in (short) A	—	870
EDH-GEA-00387	TEF2	Length behind back of breaker: 4 13/32 in (long) A	—	870
EDH-GEA-00388	TEF3	Length behind back of breaker: 3 13/32 in (short) A	—	870
EDH-GEA-00389	TEF4	Length behind back of breaker: 5 25/32 in (long) A	—	871
EDH-GEA-00390	TFK1	Length behind back of breaker: 2 23/32 in (short) A	—	873
EDH-GEA-00391	TFK2	Length behind back of breaker: 5 31/32 in (long) A	—	873
EDH-GEA-00392	SGBCS1	Length behind back of breaker: 2 13/16 in (short) A	—	905
EDH-GEA-00393	SGBCS2	Length behind back of breaker: 6 1/16 in (long) A	—	906
EDH-GEA-00394	TKM11	Length behind back of breaker: 5 1/2 in A	—	890
EDH-GEA-00395	TKM12	Length behind back of breaker: 8 in A	—	890
EDH-GEA-00436	GAVFP2	4.125 in H x 17 in W C	—	700
EDH-GEA-00438	QMRFP3	4.125 in H x 24 in W (3X at 1.375 in) C	—	701
EDH-GEA-00439	AMCB6EB	—	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap A	761

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00440	AMCB4SE	—	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap **A**	759
EDH-GEA-00441	AMCB4EB	Alternate mounting bracket for four-pole 2X (2 x 1.38 in) double-branch assembly of TEB/TED breakers; both breakers in each branch fastened to center hole of each bracket **A**	Outer (A, C) pole straps mounted back-to-back; leave 1.38 in (1X) between outer straps for the center (B) pole strap **A**	751
EDH-GEA-00446	AMCB2GM	Vertical space required 5.50 in (4X) **A**	—	743
EDH-GEA-00447	AMCB3GM	Vertical space required 5.50 in (4X) **A**	—	747
EDH-GEA-00448	AMCB4GB	Vertical space required 5.50 in (4X) **A**	—	757
EDH-GEA-00449	AMCB6GB	Vertical space required 5.50 in (4X) **A**	—	766
EDH-GEA-00487	208C4262G32	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	821
EDH-GEA-00488	208C4262G33	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	821
EDH-GEA-00489	208C4262G34	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	822
EDH-GEA-00490	208C4262G35	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	822
EDH-GEA-00491	208C4262G36	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	823
EDH-GEA-00492	208C4262G53	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	824
EDH-GEA-00493	208C4262G54	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	824
EDH-GEA-00494	208C4262G55	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	825
EDH-GEA-00495	208C4262G56	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	825
EDH-GEA-00496	208C4262G57	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	826
EDH-GEA-00497	208C4262G58	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	826
EDH-GEA-00498	208C4262G59	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	827
EDH-GEA-00499	208C4262G60	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	828
EDH-GEA-00500	208C4262G61	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	828
EDH-GEA-00501	208C4262G62	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	829
EDH-GEA-00502	208C4262G26	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	817
EDH-GEA-00503	208C4262G27	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	818
EDH-GEA-00504	208C4262G28	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard **A**	—	818
EDH-GEA-00505	208C4262G29	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	819
EDH-GEA-00506	208C4262G30	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	820
EDH-GEA-00507	208C4262G31	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	820
EDH-GEA-00508	208C4262G1	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	809
EDH-GEA-00509	208C4262G2	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	814
EDH-GEA-00510	208C4262G3	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	819

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00511	208C4262G6	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	827
EDH-GEA-00512	208C4262G7	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	829
EDH-GEA-00513	208C4262G20	Cover height 2-3/4 in (2X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	814
EDH-GEA-00514	208C4262G21	Cover height 2-3/4 in (2X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	815
EDH-GEA-00515	208C4262G22	Cover height 2-3/4 in (2X); for box width: 44 in panelboard / 45 in switchboard **A**	—	815
EDH-GEA-00516	208C4262G23	Cover height 4-1/8 in (3X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	816
EDH-GEA-00517	208C4262G24	Cover height 4-1/8 in (3X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	816
EDH-GEA-00518	208C4262G25	Cover height 4-1/8 in (3X); for box width: 44 in panelboard / 45 in switchboard **A**	—	817
EDH-GEA-00519	208C4262G10	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	809
EDH-GEA-00520	208C4262G11	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	810
EDH-GEA-00521	208C4262G12	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	810
EDH-GEA-00522	208C4262G13	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	810
EDH-GEA-00523	208C4262G14	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	811
EDH-GEA-00524	208C4262G15	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	811
EDH-GEA-00525	208C4262G16	Cover height 5-1/2 in (4X); for box width: 27 & 31 in panelboard / 35 in switchboard **A**	—	812
EDH-GEA-00526	208C4262G17	Cover height 5-1/2 in (4X); for box width: 36 & 40 in panelboard / 40 in switchboard **A**	—	812
EDH-GEA-00527	208C4262G18	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	813
EDH-GEA-00528	208C4262G49	Cover height 5-1/2 in (4X); for box width: 40 in wide panelboards or switchboards only (36/40 column, footnote *) **A**	—	823
EDH-GEA-00529	208C4262G19	Cover height 5-1/2 in (4X); for box width: 44 in panelboard / 45 in switchboard **A**	—	813
EDH-GEA-00544	AFP10T	For box width 36, 44 in; X height per description (1X = 1-3/8 in) **A**	—	830
EDH-GEA-00545	AFP10X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	830
EDH-GEA-00546	AFP19X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	831
EDH-GEA-00547	AFP4X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	837
EDH-GEA-00548	AFP5X	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	838
EDH-GEA-00549	AFP7T	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	839
EDH-GEA-00550	AFP7X2	For box width 44 in; X height per description (1X = 1-3/8 in) **A**	—	840
EDH-GEA-00551	AFP7X	For box width 36, 44 in; X height per description (1X = 1-3/8 in) **A**	—	839
EDH-GEA-00552	AMB2600MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	724
EDH-GEA-00553	AMB3600MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	732

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00554	AMB2600MC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	724
EDH-GEA-00555	AMB3600MC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	732
EDH-GEA-00556	AMB2120MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	721
EDH-GEA-00557	AMB3120MA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	728
EDH-GEA-00558	AMB3120MC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	729
EDH-GEA-00559	AMB2120DMC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	720
EDH-GEA-00560	AMB3120DMC	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	727
EDH-GEA-00561	AMB2120DMA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	719
EDH-GEA-00562	AMB3120DMA	—	Lug tang mounting holes align with the first and second bus holes from the box end stamped LINE, rear row of holes **A**	727
EDH-GEA-00563	AMB2120N	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	721
EDH-GEA-00564	AMB3120N	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	729
EDH-GEA-00565	AMB2120DN	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	720
EDH-GEA-00566	AMB3120DN	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	728
EDH-GEA-00567	AMB2250CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	722
EDH-GEA-00568	AMB3250CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	730
EDH-GEA-00569	AMB2600CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	723
EDH-GEA-00570	AMB3600CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	731
EDH-GEA-00571	AMB2800CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	725
EDH-GEA-00572	AMB3800CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	733
EDH-GEA-00573	AMB2120CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	718
EDH-GEA-00574	AMB3120CA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	726

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00575	AMB2250DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	722
EDH-GEA-00576	AMB3250DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	730
EDH-GEA-00577	AMB2600DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	723
EDH-GEA-00578	AMB3600DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	731
EDH-GEA-00579	AMB2800DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	725
EDH-GEA-00580	AMB3800DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	733
EDH-GEA-00581	AMB2120DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	719
EDH-GEA-00582	AMB3120DCA	—	Lug strap mounting holes align with the first and third bus holes from the box end stamped LINE, rear row of holes **A**	726
EDH-GEA-00585	APN49	—	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws **A**	865
EDH-GEA-00586	APN99	—	Drill 0.120 in (#31 drill) hole at each end of the marker strip using the strip as template; strips fixed to front shield with #6-32 pan-head thread-forming screws **A**	865
EDH-GEA-00607	SR1XBF	3X (1X = 1.385 in) **A**	—	710
EDH-GEA-00608	SR2XBF	5X (1X = 1.385 in) **A**	—	711
EDH-GEA-00609	SR5XBF	11X (1X = 1.385 in) **A**	—	711
EDH-SIE-00011	MBKVA5363A	Breaker support location 11.23 in (top/bottom feed configurations, Fig. 2) **A**	—	1032
EDH-SIE-00033	LNLK5X12A	strip length 5.80 in **A**	—	1054
EDH-SIE-00034	LNLK7X18A	strip length 8.14 in **A**	—	1056
EDH-SIE-00035	LNLK4X11B	strip length 6.17 in **A**	—	1053
EDH-SIE-00036	LNLK6X17B	strip length 8.67 in **A**	—	1054
EDH-SIE-00037	LNLK7X20B	strip length 9.92 in **A**	—	1056
EDH-SIE-00076	DFFP3	3in high (P3 plate 2.97in) **A**	—	943
EDH-SIE-00077	DFFP6	6in high (P3 plate 5.97in) **A**	—	944
EDH-SIE-00080	BBKQRP1FK	6.00 in kit unit space; 2.50 in and 1.50 in connector spacing (horizontal 2-pole) **A**	—	947
EDH-SIE-00086	DFK07	Center plate flange length 21 in **A**	—	939
EDH-SIE-00087	DFK08	Center plate flange length 24 in **A**	—	939
EDH-SIE-00102	BBKB32	Unit space: 3in / 6 circuits **A**	—	926
EDH-SIE-00103	BBKVA4P2P3	Unit space: 3in / 6 circuits **A**	—	931
EDH-SIE-00104	BBKED32	Unit space: 3in / 6 circuits **A**	—	927
EDH-SIE-00105	BBKNB32	Unit space: 3in / 6 circuits **A**	—	929
EDH-SIE-00106	BBKGB32	Unit space: 3in / 6 circuits **A**	—	928
EDH-SIE-00107	BBKEB32	Unit space: 3in / 6 circuits **A**	—	949
EDH-SIE-00108	BBKQR1	Unit space: 6in / 1 breaker **A**	—	930
EDH-SIE-00109	BBKQR2	Unit space: 6in / 2 breakers **A**	—	950
EDH-SIE-00110	BBKQ1	Unit space: 6in / 1 breaker **A**	—	930

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00111	BBKQ2	Requires 6 in of branch unit space (figure: 5.5 in, 2.5 in, 6.0 in) A	—	949
EDH-SIE-00112	BBKVA5262P2S	Unit space: 6in / 1 breaker A	—	932
EDH-SIE-00114	BBKVA52P3T	Unit space: 6in / 2 breakers A	—	951
EDH-SIE-00124	SBL	Unit height 3.75 in A	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact A	971
EDH-SIE-00125	S3VA41T	Unit height 3.75 in A	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top A	965
EDH-SIE-00126	SGB2	Unit height 3.75 in A	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space A	979
EDH-SIE-00127	SE6	Unit height 3.75 in A	—	977
EDH-SIE-00128	SCE	Unit height 3.75 in A	—	973
EDH-SIE-00129	S3VA52T	Unit height 5.00 in A	—	966
EDH-SIE-00130	SDGD	Unit height 5.00 in A	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link A	976
EDH-SIE-00131	SQR	Unit height 5.00 in A	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes A	984

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00132	SFG	Unit height 5.00 in A	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap A	978
EDH-SIE-00133	SF6	Unit height 5.00 in A	—	977
EDH-SIE-00134	SCF	Unit height 5.00 in A	—	974
EDH-SIE-00135	S3VA53T	Unit height 6.25 in A	—	968
EDH-SIE-00136	S3VA63T	Unit height 6.25 in A	—	971
EDH-SIE-00137	SJG	Unit height 6.25 in A	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes A	981
EDH-SIE-00138	SJ1	Unit height 8.75 in A	—	981
EDH-SIE-00139	SCJ	Unit height 8.75 in A	—	974
EDH-SIE-00140	SSJ1	Unit height 8.75 in A	—	987
EDH-SIE-00141	SSCJ	Unit height 8.75 in A	—	986
EDH-SIE-00142	S3VA54T	Unit height 6.25 in A	—	969
EDH-SIE-00143	S3VA64T	Unit height 6.25 in A	—	971
EDH-SIE-00144	SLG	Unit height 6.25 in A	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes A	982
EDH-SIE-00145	SL6	Unit height 8.75 in A	—	982
EDH-SIE-00146	SCL	Unit height 8.75 in A	—	975
EDH-SIE-00147	SSL6	Unit height 8.75 in A	—	988
EDH-SIE-00148	SSCL	Unit height 8.75 in A	—	986
EDH-SIE-00149	MG1	Unit height 8.75 in A	—	964

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00150	SBLBD	Unit height 3.75 in **A**	A/C straps: two 1/4-20 thread-forming screws through two 0.281 in strap holes into two 0.228 in holes in A bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; top barrier 1/4-20 x 3/8 through 0.25 in holes into 0.228 holes; branch connectors 10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker 10-24 x 3/32 (sic) screw into 0.20 in hole in breaker metal contact **A**	972
EDH-SIE-00151	S3VA41TD	Unit height 3.75 in **A**	A/C runbacks on two 0.228 in holes in A/C bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets into 0.228 in Z-rail hole 1.88 in below top **A**	965
EDH-SIE-00152	S3VA41TDHD	Unit height 7.50 in **A**	Locate 0.228 in hole in A-phase bus 1.25 in down from top of the 7.5 in unit space **A**	1000
EDH-SIE-00153	SGB2D	Unit height 3.75 in **A**	A/C runbacks on two 0.228 in holes in A (and C) bus 1.25 in down from top of 3.75 in unit space; B runback on 0.228 in hole 1.25 in up from bottom; barrier support brackets 1/4-20 x 3/8 into 0.228 in Z-rail holes 1.88 in below top of unit space **A**	980
EDH-SIE-00154	SE6D	Unit height 3.75 in **A**	—	1009
EDH-SIE-00155	6CLE2	Unit height 3.75 in **A**	—	994
EDH-SIE-00156	S3VA52TD	Unit height 5.00 in **A**	—	967
EDH-SIE-00157	6QR2	Unit height 5 / 5.00 in **A**	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes **A**	961
EDH-SIE-00158	SFGD	Unit height 5.00 in **A**	B strap two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A straps 1-1/4 in down, C straps 3.75 in down; B links via 0.281 in holes (offset, not symmetrical); mounting brackets 1/4-20 x 3/8 through 0.312 in hole into 0.228 Z-rail hole 5/8 in below A-strap screws; breaker line contacts 1/4-20 SHCS + washer into 0.228 in link holes; load side 8-32 screws into tapped bracket holes; barrier rivet 0.25 in into 0.156 in hole of B strap **A**	978
EDH-SIE-00159	SF6D	Unit height 5.00 in **A**	—	1009
EDH-SIE-00160	SCFD	Unit height 5.00 in **A**	—	1006
EDH-SIE-00161	S3VA53TD	Unit height 6.25 in **A**	—	968
EDH-SIE-00162	S3VA63TD	Unit height 6.25 in **A**	—	1004

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00163	SJG2D	Unit height 6.25 in **A**	B strap two 0.228 in holes in B-phase bus 5.00 in down from top of 6.25 in unit space; A straps 1-1/4 in down; C straps 5.00 in down; B link half-punch into 0.218 in hole of B strap, 5/16-18 screw through 0.375 in link hole into 0.281 in strap hole; breaker line contacts 5/16-18 into 0.281 in strap holes; mounting brackets on 0.228 in Z-rail holes 1.875 in down; breaker load end 1/4-20 x 3-3/4 into 0.228 in bracket holes **A**	1012
EDH-SIE-00164	SJG1D	Unit height 6.25 in **A**	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes **A**	981
EDH-SIE-00165	SJ1D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1010
EDH-SIE-00166	SJ2D	Unit height 8.75 in **A**	—	1011
EDH-SIE-00167	SCJD	Unit height 8.75 in **A**	—	1006
EDH-SIE-00168	S3VA54TD	Unit height 6.25 in **A**	—	970
EDH-SIE-00169	S3VA64TD	Unit height 6.25 in **A**	—	1005
EDH-SIE-00170	SLGD	Unit height 6.25 in **A**	Right-feed strap assembly (flip for left feed): long connector two 0.228 in holes A-phase bus 1-1/4 in down; medium connector four 0.228 in holes B-phase bus 2-1/2 in down; short connector two 0.228 in holes C-phase bus 5.00 in down; breaker mount on 0.228 in Z-rail hole 1-7/8 in down (1/4-20 x 1/2); breaker line contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; load end 1/4-20 x 3-3/4 into 0.228 holes **A**	983
EDH-SIE-00171	SL6D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1012
EDH-SIE-00172	SCLD	Unit height 8.75 in **A**	—	1007

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00173	SSL6D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1016
EDH-SIE-00174	SSCLD	Unit height 8.75 in **A**	—	1014
EDH-SIE-00175	MG1D	Unit height 8.75 in **A**	—	964
EDH-SIE-00176	SLM1D	Unit height 8.75 in **A**	—	984
EDH-SIE-00177	SMND	Unit height 10 / 10.00 in **A**	—	1014
EDH-SIE-00178	SSMND	Unit height 10 / 10.00 in **A**	—	1017
EDH-SIE-00179	NG1D	Unit height 10 / 10.00 in **A**	—	1000
EDH-SIE-00180	SCED	Unit height 3.75 in **A**	—	1005
EDH-SIE-00181	SQRD	Unit height 5.00 in **A**	Straps on two 0.228 in holes in section bus 1-1/4 in down from top of 5.0 in unit space (B then A), C-phase two 0.228 in holes 2.50 in below; link bars via 0.281 in holes; breaker ON-side contacts 1/4-20 x 5/8 into 0.228 in holes at link bar ends; QR mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; breaker OFF-side 1/4-20 x 2-3/4 into 0.228 in bracket holes **A**	985
EDH-SIE-00182	S3VA53T2D	Unit height 6.25 in **A**	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each **A**	1001
EDH-SIE-00183	SSJ1D	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	1015
EDH-SIE-00184	SSCJD	Unit height 8.75 in **A**	—	1106
EDH-SIE-00185	S3VA54T2D	Unit height 6.25 in **A**	B-phase strap: four 1/4-20 screws through strap into B bus; A/C straps four 1/4-20 screws each **A**	1001
EDH-SIE-00186	S3VA55TD	Unit height 8.75 in **A**	—	1003
EDH-SIE-00187	S3VA57TD	Unit height 10.00 in **A**	Straps land on bus mounting holes, four screws per phase, strap assembly vertically centered in 10 in unit space **A**	1003
EDH-SIE-00188	6E62	Unit height 3.75 in **A**	—	1100
EDH-SIE-00189	6QJ2	Unit height 5 in **A**	—	1092
EDH-SIE-00190	6F62	Unit height 5 in **A**	—	1101
EDH-SIE-00191	6CLF1	Unit height 5 in **A**	—	1097

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00192	6JJ61	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	995
EDH-SIE-00193	6JJ62	Unit height 8.75 in **A**	—	1102
EDH-SIE-00194	6CLJ1	Unit height 8.75 in **A**	—	1098
EDH-SIE-00195	6SJL1	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	996
EDH-SIE-00196	6SCJ1	Unit height 8.75 in **A**	—	1092
EDH-SIE-00197	6LL61	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	995
EDH-SIE-00198	6CLL1	Unit height 8.75 in **A**	—	1099
EDH-SIE-00199	6SLL1	Unit height 8.75 in **A**	Barrier mounts: 1/4-20 x 1/2 through 0.312 in holes into 0.228 in holes; breaker mounting bracket 1/4-20 x 9/16 through 0.438 in holes into threaded inserts on strap support barrier; support barrier into 0.228 in Z-rail holes 1-7/8 in down; phase connectors four 1/4-20 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker line contacts 5/16-18 x 1-1/8 into 0.281 in connector holes; load side 1/4-20 x 2-3/4 thread-forming into 0.228 in bracket holes **A**	997
EDH-SIE-00200	6SCL1	Unit height 8.75 in **A**	—	1103
EDH-SIE-00201	6BL2C	Unit height 3.75 in **A**	—	1090
EDH-SIE-00202	6SCL61C	Unit height 8.75 in **A**	—	1093
EDH-SIE-00203	6M61C	Unit height 10 in **A**	—	1091
EDH-SIE-00204	6N61C	Unit height 10 in **A**	—	1091
EDH-SIE-00211	6FPB01	1.25in unit height **A**	—	990
EDH-SIE-00212	6FPB02	2.5in unit height **A**	—	990
EDH-SIE-00213	6FPB03	3.75in unit height **A**	—	990
EDH-SIE-00214	6FPB05	5in unit height **A**	—	991
EDH-SIE-00215	6FPB10	10in unit height **A**	—	991

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00216	6FPB15	15.00in (381mm) A	—	1106
EDH-SIE-00222	SEBP5V3	Bracket on base rail X from nearest end: X = 5.63 in (200A), 4.38 in (400A) A	—	1018
EDH-SIE-00226	SEBKRP1V3	—	Bracket mounts to pair of base-rail holes 2 in apart at interior corner; OUTER bracket holes for BL/BQD, INNER for xGB A	1069
EDH-SIE-00227	SEBKRP1V4	—	Inner pair of bracket holes aligned to base-rail holes 2 in apart A	1070
EDH-SIE-00231	SEBKP1P2P3V1	—	Mounting hole legend: RP1 holes A&D #10-24; P2 std A&D #8-32; P2 SEM3 A&B #8-32; P3 C&E #8-32 (symmetrical both sides); offsets 1 in (JD), 1.5 in (CJD/CLD), 2 in (LD); 2.50 in (JD/CJD) or 3.00 in (LD/CLD); SEM3 P2: remove perforated ~1-7/8 x 6-1/8 in piece A	1068
EDH-SIE-00235	SEBKP2V4	Mounted X above (top-fed) or below breaker support: X = 2.00 in FD/CFD in P2, 1.50 in QJ/QR in P2 A	—	936
EDH-SIE-00237	SEBKP2V6	Mount 1 in above/below breaker support A	—	937
EDH-SIE-00239	SEBKP3V1	X = 1.63 in from breaker support (1.00 in breaker support to P3 adapter mount hole) A	—	953
EDH-SIE-00240	EWK1	20in W x 5.75in D A	—	1079
EDH-SIE-00241	EWK2	24in W x 7.75in D A	—	1079
EDH-SIE-00242	EWK3	20in W x 5.75in D A	—	1080
EDH-SIE-00243	EWK1B	20in W x 5.75in D A	—	1079
EDH-SIE-00244	EWK2B	24in W x 7.75in D A	—	1080
EDH-SIE-00289	NDTS	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25) A	—	1130
EDH-SIE-00299	RS2643	Extension behind breaker 2.38 in A	—	1116
EDH-SIE-00300	RS2644	Extension behind breaker 2.38 in A	—	1116
EDH-SIE-00301	RS2641	Extension behind breaker 4.88 in A	—	1115
EDH-SIE-00302	RS2642	Extension behind breaker 4.88 in A	—	1115
EDH-SIE-00303	RS4756	Extension behind breaker 3.12 in A	—	1118
EDH-SIE-00304	RS4755	Extension behind breaker 7.06 in A	—	1118
EDH-SIE-00305	RS5774	Extension behind breaker 5.85 in A	—	1122
EDH-SIE-00306	RS5773	Extension behind breaker 11.20 in A	—	1122
EDH-SIE-00307	RS5784	Extension behind breaker 5.85 in A	—	1123
EDH-SIE-00308	RS5783	Extension behind breaker 11.20 in A	—	1123
EDH-SIE-00309	RS5788	Extension behind breaker 5.85 in A	—	1125
EDH-SIE-00310	RS5787	Extension behind breaker 11.20 in A	—	1125
EDH-SIE-00311	RS5786	Extension behind breaker 5.50 in A	—	1131
EDH-SIE-00312	RS5785	Extension behind breaker 8.00 in A	—	1130
EDH-SIE-00347	K-11-D-2551-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1061
EDH-SIE-00348	K-11-D-2551-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1062
EDH-SIE-00349	K-11-D-2551-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1062
EDH-SIE-00350	K-11-D-2551-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in A	—	1062

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00351	K-11-D-2551-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1063
EDH-SIE-00352	K-11-D-2553-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1065
EDH-SIE-00353	K-11-D-2553-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1065
EDH-SIE-00354	K-11-D-2553-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1065
EDH-SIE-00355	K-11-D-2553-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1066
EDH-SIE-00356	K-11-D-2553-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1066
EDH-SIE-00357	K-11-D-2550-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1060
EDH-SIE-00358	K-11-D-2550-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1060
EDH-SIE-00359	K-11-D-2550-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1060
EDH-SIE-00360	K-11-D-2550-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1061
EDH-SIE-00361	K-11-D-2550-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1061
EDH-SIE-00362	K-11-D-2552-01	Chassis length L = 9 in (18 ckt); dimension A 5 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1063
EDH-SIE-00363	K-11-D-2552-02	Chassis length L = 15 in (30 ckt); dimension A 8 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1063
EDH-SIE-00364	K-11-D-2552-03	Chassis length L = 21 in (42 ckt); dimension A 11 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1064
EDH-SIE-00365	K-11-D-2552-04	Chassis length L = 27 in (54 ckt); dimension A 14 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1064
EDH-SIE-00366	K-11-D-2552-05	Chassis length L = 33 in (66 ckt); dimension A 17 in; 12.63 in typical at main and subfeed ends; 1.57 in between panel bus and base; 4.37 in to back of deadfront; breaker cut-outs 2.156 / 2.313 in **A**	—	1064

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00367	SEB	Requires 3-3/4 in of unit space **A**	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector **A**	1104
EDH-SIE-00368	SEBD	Requires 3-3/4 in of unit space **A**	A/C straps: two 0.281 in holes, fastened with 1/4-20 thread-forming screws into two 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C-phase strap 1-1/4 in down from A holes; B strap into 0.228 holes in B bus 1-1/4 in down; mounting brackets with 1/4-20 x 5/8 screws through 0.312 in hole into 0.228 in Z-rail hole 5/8 in below top of unit space; line connectors to breaker 10-24 x 5/8 into 0.203 in hole; barrier 1/4-20 x 3/8 through 0.25 in holes into 0.218 in holes of line connector **A**	1104
EDH-SIE-00369	SDG	Requires 5 in of unit space; A/C link bars 1.375 in vertically between centers **A**	B-phase strap into two 0.228 in holes in B-phase section bus 3.75 in down from top of 5.0 in unit space; A and C straps into 0.228 in holes 1-1/4 in (A) / 3.75 in (C) down; B links (offset 0.281 holes) with 1/4-20 x 1-1/4 screws; breaker line contacts 10-24 socket head cap screws into 0.173 in holes of phase links; mounting brackets 1/4-20 x 3/8 through 0.312 in holes into 0.228 in Z-rail holes 5/8 in below A-strap screws; load side two 8-32 screws into tapped bracket holes; barrier christmas-tree rivet 0.25 in hole into 0.156 in hole of B strap; provision barrier 10-24 SHCS through 0.228 hole into 0.173 hole of B link **A**	1104
EDH-SIE-00371	SNB	Requires 3-3/4 in of unit space **A**	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws **A**	1105
EDH-SIE-00372	SNBD	Requires 3-3/4 in of unit space **A**	A/C straps: two 1/4-20 thread-forming screws through 0.281 in strap holes into 0.228 in holes in A-phase bus 1-1/4 in down from top of 3-3/4 in unit space; C strap 0.228 in holes 1-1/4 in down from A holes; B strap 0.281 hole into 0.228 hole in B bus 1-1/4 in down and 3-5/8 in right of A holes; barrier supports 1/4-20 x 3/8 through 0.312 in hole into 0.228 in Z-rail hole 1-7/8 in below top; branch connectors #10-24 x 3/8 through 0.218 in hole into 0.171 in strap hole; breaker line tabs #10-32 washer head screws **A**	1105

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00375	SMBKL6	—	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4) **A**	958
EDH-SIE-00376	SMBKL6D	—	P5: support barrier assembly via 0.228 in Z-rail holes 1.875 in down from top of unit space; phase connectors (short/medium/long) four 1/4-20 x 1-1/4 thread-forming screws through 0.312 in holes into 0.228 in section-bus holes; breaker mounts via 0.312 holes into 0.228 holes; P4: breaker mounting bracket 1/4-20 x 1/2 through 0.438 in holes into threaded inserts on strap support barrier (item 8 brackets omitted in P4) **A**	958
EDH-SIE-00377	SMBKLG	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail **A**	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes **A**	959
EDH-SIE-00378	SMBKLG1D	Uses 6-1/4 in unit space; main position 15 in from top (or bottom) of Z-rail **A**	Long connector two 0.228 in section-bus holes 1-1/4 in down; center connector four 1/4-20 x 1-1/4 screws at 2.5 in mark; short connector 0.228 holes 5.0 in down; breaker mount 0.228 in Z-rail hole 1-7/8 in down; breaker load contacts 5/16-18 x 3/4 hex bolts + lock + flat washers into tapped connector ends; line end 1/4-20 x 3-3/4 into 0.228 in bracket holes **A**	959
EDH-SIE-00379	SMBKMG	—	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier **A**	959
EDH-SIE-00380	SMBKMG1D	—	P5: support barrier 0.228 in Z-rail hole 1.875 in down; P4: 3.125 in down; phase straps four 1/4-20 x 1-1/4 thread-forming screws through 0.312 holes into 0.228 section-bus holes; breaker load contacts 3/8-16 x 1.25 machine screw + Belleville washer into 0.344 in holes at strap ends; line side 1/4-20 x 4-1/4 into 0.228 in holes in support barrier **A**	959

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00381	SMLK12	—	Lug elevation 13.75 in from top (or bottom) of Z-rail aligning with 0.228 in section-bus holes; four 1/4-20 x 1-3/4 screws per lug through lug 4-hole pattern; 1.69 in minimum clearance between lug and section bus; lugs on end of section bus closest to neutral A	960
EDH-SIE-00398	DFK09	Center plate flange length 27 in A	—	939
EDH-SIE-00399	DFK10	Center plate flange length 30 in A	—	940
EDH-SIE-00400	DFK11	Center plate flange length 33 in A	—	940
EDH-SIE-00401	DFK12	Center plate flange length 36 in A	—	940
EDH-SIE-00402	DFK13	Center plate flange length 39 in A	—	941
EDH-SIE-00403	DFK14	Center plate flange length 42 in A	—	941
EDH-SIE-00404	DFK15	Center plate flange length 45 in A	—	941
EDH-SIE-00405	DFK16	Center plate flange length 48 in A	—	941
EDH-SIE-00406	DFK17	Center plate flange length 51 in A	—	942
EDH-SIE-00407	DFK18	Center plate flange length 54 in A	—	942
EDH-SIE-00408	DFK19	Center plate flange length 57 in A	—	942
EDH-SIE-00409	DFK20	Center plate flange length 60 in A	—	942
EDH-SIE-00410	DFK21	Center plate flange length 63 in A	—	943
EDH-SIE-00412	LPLOCK01A	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W A	—	1084
EDH-SIE-00413	LPLOCK02A	For door holes 3.120 in (+0.005/-0.000) H x 1.135 in (+0.005/-0.000) W A	—	1084
EDH-SIE-00419	F602	0.312 in dia (4) holes, 0.375 in dia (3) holes; 1.250 / 2.500 / 3.750 / 5.000 in; 0.625 in; 17.000 in overall A	—	962
EDH-SIE-00420	F657	17.000 in overall A	—	963
EDH-SIE-00421	F671	17.000 in overall A	—	963
EDH-SQD-00001	QMB221TW	Unit mounting height 4.5 in. (114 mm) A	—	550
EDH-SQD-00002	QMB221HW	Unit mounting height 4.5 in. (114 mm) A	—	549
EDH-SQD-00003	QMB222TW	Unit mounting height 4.5 in. (114 mm) A	—	551
EDH-SQD-00004	QMB222HW	Unit mounting height 4.5 in. (114 mm) A	—	550
EDH-SQD-00005	QMB223TW	Unit mounting height 6 in. (152 mm) A	—	552
EDH-SQD-00006	QMB223HW	Unit mounting height 6 in. (152 mm) A	—	551
EDH-SQD-00007	QMB224W	Unit mounting height 9 in. (229 mm) A	—	552
EDH-SQD-00008	QMB225W	Unit mounting height 15 in. (381 mm) A	—	553
EDH-SQD-00009	QMB225WT3	Unit mounting height 9 in. (229 mm) A	—	553
EDH-SQD-00010	QMB321TW	Unit mounting height 4.5 in. (114 mm) A	—	558
EDH-SQD-00011	QMB321HW	Unit mounting height 4.5 in. (114 mm) A	—	557
EDH-SQD-00012	QMB322TW	Unit mounting height 4.5 in. (114 mm) A	—	558
EDH-SQD-00013	QMB322HW	Unit mounting height 4.5 in. (114 mm) A	—	558
EDH-SQD-00014	QMB323TW	Unit mounting height 6 in. (152 mm) A	—	559
EDH-SQD-00015	QMB323HW	Unit mounting height 6 in. (152 mm) A	—	559
EDH-SQD-00016	QMB324W	Unit mounting height 9 in. (229 mm) A	—	560
EDH-SQD-00017	QMB325W	Unit mounting height 15 in. (381 mm) A	—	561
EDH-SQD-00018	QMB325WT3	Unit mounting height 9 in. (229 mm) A	—	561
EDH-SQD-00019	QMB326W	Unit mounting height 15 in. (381 mm) A	—	562
EDH-SQD-00020	QMB326WT3	Unit mounting height 15 in. (381 mm) A	—	562
EDH-SQD-00021	QMB327WT3	Unit mounting height 15 in. (381 mm) A	—	563
EDH-SQD-00022	QMB261TW	Unit mounting height 4.5 in. (114 mm) A	—	554
EDH-SQD-00023	QMB261HW	Unit mounting height 4.5 in. (114 mm) A	—	554
EDH-SQD-00024	QMB262TW	Unit mounting height 6 in. (152 mm) A	—	555
EDH-SQD-00025	QMB262HW	Unit mounting height 6 in. (152 mm) A	—	555
EDH-SQD-00026	QMB263TW	Unit mounting height 7.5 in. (191 mm) A	—	556

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00027	QMB263HW	Unit mounting height 7.5 in. (191 mm) **A**	—	556
EDH-SQD-00028	QMB264W	Unit mounting height 9 in. (229 mm) **A**	—	557
EDH-SQD-00029	QMB361TW	Unit mounting height 4.5 in. (114 mm) **A**	—	564
EDH-SQD-00030	QMB361HW	Unit mounting height 4.5 in. (114 mm) **A**	—	563
EDH-SQD-00031	QMB362TW	Unit mounting height 6 in. (152 mm) **A**	—	565
EDH-SQD-00032	QMB362HW	Unit mounting height 6 in. (152 mm) **A**	—	564
EDH-SQD-00033	QMB362T21W	Unit mounting height 6 in. (152 mm) **A**	—	565
EDH-SQD-00034	QMB363TW	Unit mounting height 7.5 in. (191 mm) **A**	—	567
EDH-SQD-00035	QMB363HW	Unit mounting height 7.5 in. (191 mm) **A**	—	566
EDH-SQD-00036	QMB363T31W	Unit mounting height 7.5 in. (191 mm) **A**	—	566
EDH-SQD-00037	QMB363T32W	Unit mounting height 7.5 in. (191 mm) **A**	—	567
EDH-SQD-00038	QMB364W	Unit mounting height 9 in. (229 mm) **A**	—	568
EDH-SQD-00039	QMB365W	Unit mounting height 15 in. (381 mm) **A**	—	568
EDH-SQD-00040	QMB365WT6	Unit mounting height 9 in. (229 mm) **A**	—	569
EDH-SQD-00041	QMB366W	Unit mounting height 15 in. (381 mm) **A**	—	569
EDH-SQD-00042	QMB367W	Unit mounting height 15 in. (381 mm) **A**	—	570
EDH-SQD-00043	QMB368W	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2 **A**	—	609
EDH-SQD-00044	QMJ361T	Unit mounting height 4.5 in. (114 mm) **A**	—	570
EDH-SQD-00045	QMJ362T	Unit mounting height 6 in. (152 mm) **A**	—	571
EDH-SQD-00046	QMJ363T	Unit mounting height 6 in. (152 mm) **A**	—	572
EDH-SQD-00047	QMJ363H	Unit mounting height 6 in. (152 mm) **A**	—	571
EDH-SQD-00048	QMJ364T	Unit mounting height 7.5 in. (191 mm) **A**	—	573
EDH-SQD-00049	QMJ364H	Unit mounting height 7.5 in. (191 mm) **A**	—	572
EDH-SQD-00050	QMJ365	Unit mounting height 9 in. (229 mm) **A**	—	573
EDH-SQD-00051	QMJ366	Unit mounting height 15 in. (381 mm) **A**	—	574
EDH-SQD-00089	QMB1BLW	Covers 1.5 in. of QMB mounting space **A**	—	540
EDH-SQD-00090	QMB3BLW	Covers 3 in. of QMB mounting space **A**	—	540
EDH-SQD-00091	QMB6BLW	Covers 6 in. of QMB mounting space **A**	—	541
EDH-SQD-00092	QMB15BLW	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) **A**	—	540
EDH-SQD-00137	HNM1BL	1.5 in. wide **A**	—	605
EDH-SQD-00138	HNM4BL	4.5 in. wide **A**	—	606
EDH-SQD-00139	HLN1BL	Covers 1.5 in. (38.1 mm) of breaker mounting height **A**	—	602
EDH-SQD-00140	HLN4BL	Covers 4.5 in. (114.3 mm) of breaker mounting height **A**	—	602
EDH-SQD-00141	HLN4EBL	Covers 4.5 in. (114.3 mm) of breaker mounting height **A**	—	603
EDH-SQD-00142	HLW1BL	Covers 1.5 in. (38.1 mm) of breaker mounting height **A**	—	603
EDH-SQD-00143	HLW4BL	Covers 4.5 in. (114.3 mm) of breaker mounting height **A**	—	604
EDH-SQD-00144	HLW4EBL	Covers 4.5 in. (114.3 mm) of breaker mounting height **A**	—	605
EDH-SQD-00146	SL250	Mounting height 5 in. (114 mm); lug wire (1) #4 AWG-300 kcmil **A**	—	594
EDH-SQD-00147	SL400	Mounting height 6 in. (152 mm); lug wire (1) #1 AWG-600 kcmil or 2 #1-250 kcmil **A**	—	594
EDH-SQD-00148	SL800M5	Mounting height 9 in. (229 mm); lug wire (3) #3/0-500 kcmil **A**	—	595
EDH-SQD-00149	SL1200P5	Mounting height 9 in. (229 mm); lug wire (4) #3/0-500 kcmil **A**	—	592
EDH-SQD-00150	SL1200P6	Mounting height 9 in. (229 mm); lug wire (3) 350-600 kcmil **A**	—	593

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00151	SL1200P7	Mounting height 9 in. (229 mm); lug wire (3) #3/0-750 kcmil **A**	—	593
EDH-SQD-00152	S33930	Mounting height 15 in. (381 mm); lug wire (4) #3/0-600 kcmil **A**	—	591
EDH-SQD-00153	SL100	lug wire #14-1/0 Cu or #12-1/0 Al **A**	—	437
EDH-SQD-00245	S37446	dimension B (extension past breaker end) = 0.50 in **A**	—	632
EDH-SQD-00246	S37447	dimension B (extension past breaker end) = 0.50 in **A**	—	633
EDH-SQD-00247	S37448	dimension B (extension past breaker end) = 0.24 in **A**	—	638
EDH-SQD-00248	S37449	dimension B (extension past breaker end) = 2.24 in **A**	—	633
EDH-SQD-00249	S37450	dimension B (extension past breaker end) = 1.68 in **A**	—	638
EDH-SQD-00272	VC100FA	Dimension A (max extension past end of breaker) 1.3 in **A**	—	615
EDH-SQD-00273	VC250KA3	Dimension A (max extension past end of breaker) 1.5 in **A**	—	617
EDH-SQD-00274	VC250KA35	Dimension A (max extension past end of breaker) 1.5 in **A**	—	617
EDH-SQD-00275	VC400LA35	Dimension A (max extension past end of breaker) 1.25 in **A**	—	621
EDH-SQD-00276	VC400LA3	Dimension A (max extension past end of breaker) 1.0 in **A**	—	620
EDH-SQD-00277	VC400LA5	Dimension A (max extension past end of breaker) 2.2 in **A**	—	621
EDH-SQD-00278	VC400LA7	Dimension A (max extension past end of breaker) 2.5 in **A**	—	621
EDH-SQD-00279	VC600LI3	Dimension A (max extension past end of breaker) 1.05 in **A**	—	625
EDH-SQD-00280	VC600LI5	Dimension A (max extension past end of breaker) 3.20 in **A**	—	625
EDH-SQD-00281	VC600LI7	Dimension A (max extension past end of breaker) 3.45 in **A**	—	625
EDH-SQD-00282	CVC100FA	Dimension A (max extension past end of breaker) 1.4 in **A**	—	614
EDH-SQD-00283	CVC250KA3	Dimension A (max extension past end of breaker) 1.5 in **A**	—	617
EDH-SQD-00284	CVC400LA3	Dimension A (max extension past end of breaker) 1.3 in **A**	—	619
EDH-SQD-00285	CVC400LA5	Dimension A (max extension past end of breaker) 2.3 in **A**	—	619
EDH-SQD-00286	CVC600LI5	Dimension A (max extension past end of breaker) 3.20 in **A**	—	624
EDH-SQD-00287	PDC6FA6	Dimension A 1.0 in **A**	—	615
EDH-SQD-00288	PDC3FA2	Dimension A 1.2 in **A**	—	614
EDH-SQD-00289	PDC6LA20	Dimension A 2.25 in **A**	—	620
EDH-SQD-00290	PDC12LA4	Dimension A 1.25 in **A**	—	619
EDH-SQD-00291	PDC4LA250	Dimension A 2.0 in **A**	—	620
EDH-SQD-00292	PDC5DG20	Dimension A 1.28-1.31 in **A**	—	629
EDH-SQD-00293	PDC12DG4	Dimension A 1.28-1.31 in **A**	—	628
EDH-SQD-00320	NQSFL1	Wire range per phase one #6-2/0 Al/Cu in and out **A**	—	505
EDH-SQD-00321	NQSFL2	Wire range per phase one 1/0-350 kcmil Al/Cu **A**	—	506
EDH-SQD-00322	NQSFL4	Wire range per phase one 1/0-750 kcmil Cu only **A**	—	506
EDH-SQD-00323	NQFTL2L	Wire range per phase one #6-350 Al/Cu **A**	—	508
EDH-SQD-00324	NQFTL2H	Wire range per phase one #6-350 Al/Cu **A**	—	507

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00325	NQFTL4L	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu A	—	509
EDH-SQD-00326	NQFTL4H	Wire range per phase one 1/0-750 or two 1/0-350 Al/Cu A	—	508
EDH-SQD-00332	NQNL1	space factor 0 A	—	513
EDH-SQD-00333	NQNL2	space factor 0 A	—	514
EDH-SQD-00334	NQNL2ACCY	space factor 6 in. A	—	514
EDH-SQD-00335	NQNL4	space factor 0 A	—	515
EDH-SQD-00341	NQALV1	Lug wire range: one #8-1/0 (AWG-kcmil) A	—	499
EDH-SQD-00342	NQCUM1	Lug wire range: one #6-2/0 (AWG-kcmil) A	—	501
EDH-SQD-00343	NQCUV1	Lug wire range: one #6-1/0 (AWG-kcmil) A	—	503
EDH-SQD-00344	NQALV2	Lug wire range: one #4-300 (AWG-kcmil) A	—	500
EDH-SQD-00345	NQCUM2	Lug wire range: one #6-250 (AWG-kcmil) A	—	502
EDH-SQD-00346	NQCUV2	Lug wire range: one 2/0-300 (AWG-kcmil) A	—	504
EDH-SQD-00347	NQALV4	Lug wire range: two 2/0-500 (AWG-kcmil) A	—	500
EDH-SQD-00348	NQCUM4	Lug wire range: one 1/0-750 or two 1/0-350 (AWG-kcmil) A	—	502
EDH-SQD-00349	NQCUV4	Lug wire range: one 400-700 (AWG-kcmil) A	—	504
EDH-SQD-00350	NQALV6	Lug wire range: two 2/0-500 (AWG-kcmil) A	—	501
EDH-SQD-00351	NQCUM6	Lug wire range: (not printed) (AWG-kcmil) A	—	503
EDH-SQD-00352	NQCUV6	Lug wire range: two 250-500 (AWG-kcmil) A	—	505
EDH-SQD-00404	NFALV1	Lug wire range one #4-300 kcmil A	—	474
EDH-SQD-00405	NFCUM1	Lug wire range #6-2/0 A	—	476
EDH-SQD-00406	NFCUV1	Lug wire range one #6-1/0 A	—	478
EDH-SQD-00407	NFALV2	Lug wire range one 250-350 kcmil A	—	474
EDH-SQD-00408	NFCUM2	Lug wire range #6-250 kcmil A	—	476
EDH-SQD-00409	NFCUV2	Lug wire range one 2/0-300 kcmil A	—	478
EDH-SQD-00410	NFALV4	Lug wire range two 2/0-500 kcmil A	—	475
EDH-SQD-00411	NFCUM4	Lug wire range one 1/0-750 or two 1/0-350 A	—	477
EDH-SQD-00412	NFCUV4	Lug wire range one 400-750 kcmil A	—	479
EDH-SQD-00413	NFALV6	Lug wire range two 2/0-500 kcmil A	—	475
EDH-SQD-00414	NFCUM6	Lug wire range two 1/0-750 kcmil A	—	477
EDH-SQD-00415	NFCUV6	Lug wire range two 250-500 kcmil A	—	479
EDH-SQD-00426	NFNQCRBOND46	Strap heights 1.4 in. (100%) and 1.7 in. (200%) A	—	491
EDH-SQD-00445	MH62D9	20 in. W x 8.75 in. D; height 62 in. (box catalog number = height) A	—	522
EDH-SQD-00446	MH68D9	20 in. W x 8.75 in. D; height 68 in. (box catalog number = height) A	—	522
EDH-SQD-00447	MH74D9	20 in. W x 8.75 in. D; height 74 in. (box catalog number = height) A	—	522
EDH-SQD-00448	MH80D9	20 in. W x 8.75 in. D; height 80 in. (box catalog number = height) A	—	523
EDH-SQD-00449	MH86D9	20 in. W x 8.75 in. D; height 86 in. (box catalog number = height) A	—	523
EDH-SQD-00450	MH92D9	20 in. W x 8.75 in. D; height 92 in. (box catalog number = height) B	—	523
EDH-SQD-00462	HC2SN	Main terminals (1) 6-300 kcmil; branch terminals (1) 6-300, (9) #1/0-14, (45) #4-14 A	—	441
EDH-SQD-00463	HC4SN	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (45) #4-14 A	—	441
EDH-SQD-00464	HC6SN	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 A	—	442
EDH-SQD-00465	HC8SN	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	443
EDH-SQD-00466	HCPSU8SN	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14 A	—	445

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00467	HCW4SN	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14 **A**	—	448
EDH-SQD-00468	HCW6SN	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	449
EDH-SQD-00469	HCW8SN	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	450
EDH-SQD-00470	HCW12SN	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	447
EDH-SQD-00471	HCWM12SN	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	450
EDH-SQD-00472	HC6SNALCU	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	442
EDH-SQD-00473	HC8SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	443
EDH-SQD-00474	HCPSU8SNALCU	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	446
EDH-SQD-00475	HCP4SNALCU	Main terminals (2) 4-600 kcmil; branch terminals (2) 4-600, (7) 6-350, (45) #4-14 **A**	—	444
EDH-SQD-00476	HCP6SNALCU	Main terminals (2) 4-600 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	445
EDH-SQD-00477	HCP8SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	445
EDH-SQD-00478	HCP12SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	444
EDH-SQD-00479	HCR12SNALCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (34) #4-14 **A**	—	446
EDH-SQD-00480	HC6SNCU	Main terminals (2) 4-600 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	442
EDH-SQD-00481	HC8SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	443
EDH-SQD-00482	HCPSU8SNCU	Main terminals (4) 3/0-600 kcmil; branch terminals (4) 3/0-600, (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	446
EDH-SQD-00483	HCW4SNCU	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	448
EDH-SQD-00484	HCW6SNCU	Main terminals (2) 4-600 kcmil; branch terminals (2) 2-600, (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	449
EDH-SQD-00485	HCW8SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	450
EDH-SQD-00486	HCP12SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	444
EDH-SQD-00487	HCW12SNCU	Main terminals (8) 250-500 kcmil (crimp); branch terminals (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	448
EDH-SQD-00488	HCR12SNCU	Main terminals (4) 3/0-750 kcmil; branch terminals (4) 3/0-750, (7) 6-350, (9) #1/0-14, (28) #4-14 **A**	—	447
EDH-SQD-00490	ILHCJ27ESN	Terminations added: +20 (#14-2/0), +10 (#6-350) **A**	—	451
EDH-SQD-00491	ILHCJ1ESN	Terminations added: +30 (#14-2/0), +16 (#6-350) **A**	—	451
EDH-SQD-00492	ILHCJ2ESN	Terminations added: +30 (#14-2/0), +32 (#6-350); not with PowerPacT L vertical main **A**	—	452
EDH-SQD-00493	ILHCPSU1ESN	Terminations added: +30 (#14-2/0), +16 (#6-350), +7 (2/0-750) **A**	—	454
EDH-SQD-00494	ILHCPSU2ESN	Terminations added: +21 (2/0-750) **A**	—	454
EDH-SQD-00495	ILHCPRU1ESN	Terminations added: +30 (#14-2/0), +16 (#6-350), +8 (2/0-750) **A**	—	452
EDH-SQD-00496	ILHCPRU2ESN	Terminations added: +16 (#6-350), +16 (2/0-750) **A**	—	453
EDH-SQD-00497	ILHCJ1ESNC	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350); not in 27 in. HCJ **A**	—	451
EDH-SQD-00498	ILHCJ2ESNC	Terminations added: +21 (#6-350); not in 27 in. HCJ; not with PowerPacT L vertical main **A**	—	452

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00499	ILHCPSU1ESNC	Terminations added: +18 (#14-4), +9 (#14-1/0), +14 (#6-350) A	—	454
EDH-SQD-00500	ILHCPSU2ESNC	Terminations added: +21 (#6-350) A	—	455
EDH-SQD-00501	ILHCPRU1ESNC	Terminations added: +14 (#6-350), +3 (#2-600) A	—	453
EDH-SQD-00502	ILHCPRU2ESNC	Terminations added: +21 (#6-350) A	—	453
EDH-SQD-00510	S33931	lug wire (4) #3/0-600 kcmil Al/Cu A	—	437
EDH-SQD-00554	HNM-3BL	3 in high B	—	459
EDH-SQD-00557	QM-1BL	1-1/2 in high B	—	584
EDH-SQD-00558	QM-3BL	3 in high B	—	584
EDH-SQD-00559	QM-6BL	6 in high B	—	584
EDH-SQD-00560	QM-9BL	9 in high B	—	584
EDH-ZIN-00022	QFP2T	Listing package dims 4.25 x 4.5 x 1.125 in, 0.1 lb (may be item size) C	—	1160

Appendix A Documentation Library

OEM and supporting documents, grouped by manufacturer lineage and document type. 'Local' identifies documents preserved in docs/library/ (see docs/DOCUMENT_INDEX.csv for checksums). Documents not preserved are cited by URL; inaccessible documents are listed as research leads.

Eaton lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S317	KPRL3AED3 spec sheet	Eaton product specifications - KPRL3AED3 (Elliott Electric hosted Eaton spec sheet) 2024	distributor	Local	1
S6	CA08100003E	Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control 2020-06	catalog	Local	0
S118	CA08100005E	Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (excerpt pages V4-T2-188, 190, 203, 334, 345, 354, 356), October 2015 2015-10	catalog	Local	37
S119	CA08100005E	Volume 4 - Circuit Protection, Series G EG-Frame pages V4-T2-16..V4-T2-27, April 2014 2014-04	catalog	Local	19
S127	CA08100005E	Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (current) 2026-04	catalog	blocked	0
S116	CA08101001E	Molded Case Circuit Breakers (Tab 12) - Consulting Application Guide / catalog, November 2008 2008-11	catalog	Local	242
S117	CA08101001E	Series C Molded Case Circuit Breakers 70-250 Amperes J-Frame (pp.12-87..12-92), May 2008 2008-05	catalog	Local	2
S120	CA08101001E (excerpt)	Series C Molded Case Circuit Breakers 70-400 Amperes K-Frame p.12-98 (May 2008) - Types KD, HKD, KDC electronic 2008-05	catalog	Local	3
S7	CA08104001E (Tab 22)	Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R) 2018-01	catalog	Local	10
S17	CA08104001E Tab 21 (TB01500003E)	Switchboards—Low Voltage (Consulting Application Guide Tab 21) 2018-04	catalog	Local	18
S314	DG014001EN	Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024) 2024-11	catalog	Local	6
S315	DG014003EN	Design Guide DG014003EN Pow-R-Line 4X panelboards (Effective March 2025) 2025-03	catalog	Local	6
S250	PL01400003E	Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E 2008-01	catalog	blocked	0
S162		Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (Type CH and BR) selection guide	catalog	Local	60
S313	E3A1071 RevG	Pow-R-Line 3FQS Fusible Panelboard Instruction Leaflet E3A1071 RevG (December 2010) 2010-12	instruction	Local	95
S21	IB015002EN	Eaton Pow-R-Line CS switchboards instruction manual 2021-11	instruction	ok	0
S318	IL014069EN	Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interiors (Effective February 2024) 2024-02	instruction	Local	0
S311	IL01417001E	Instruction Manual Pow-R-Line Retrofit Panelboards, P1R & P2R Retrofit Panels (IL01417001E, Effective November 2007) 2007-11	instruction	Local	0
S22	IM01500001E	Pow-R-Line switchboards instruction manual 2021-05	instruction	Local	0
S310	MN015002EN	Pow-R-Line XD switchboards Instruction Manual MN015002EN (Effective July 2019) 2019-07	instruction	Local	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S312	PUB50895	Instruction Manual PUB50895 Pow-R-Line Retrofit Panelboards P1R 240Vac Max & P2R 347/600Vac Max (Effective May 2016, Rev.004) 2016-05	instruction	Local	0
S13	CA08100014E	Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions 2018-06	renewal_parts	Local	16
S20	CA08100014E Tab 5	Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt 2016-10	renewal_parts	Local	13
S2	RP01400001E	Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command) 2009-02	renewal_parts	Local	282
S3	RP01400001E	Renewal Parts RP01400001E - Current Eaton panelboards 2017-10	renewal_parts	Local	141
S16	RP01400001E (2017)	Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P) 2017-10	renewal_parts	Local	39
S1	RP01400001E (Z25020)	Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4) 2021-04	renewal_parts	Local	361
S14	RP01400002E	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	75
S15	RP01400002E (2009)	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition) 2009-04	renewal_parts	Local	32
S5	RP01400002E (Z13209)	Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	57
S249	RP01400003E	Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40, MP-200, PB, PH, PH-L, EP, EE) 2013-02	renewal_parts	blocked	0
S4	RP01414001E	Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E 2011-01	renewal_parts	Local	80
S121	3TA150FB spec sheet	Eaton product specifications 3TA150FB unknown	web	Local	1
S122	ID-SPE-v2-3TA632LK	Eaton Series G molded case circuit breaker accessories and terminals - 3TA632LK (pe.eaton.com spec) unknown	web	Local	1
S18	KPRL4KDS spec sheet	Eaton product specifications — KPRL4KDS	web	Local	1
S19	KPRL4KDT spec sheet	Eaton product specifications — KPRL4KDT	web	Local	1
S248		Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page	web	ok	9
S316		Eaton online product catalog SKU pages (https://www.eaton.com/us/en-us/skuPage.<catalog number>.html): General/Product specifications tables 2026-10	web	ok	82

Square D / Schneider Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S59	0600DB1004	Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin 2010-12-01	bulletin	blocked	0
S182		Square D NQ and NF Lighting Panelboards brochure unknown	bulletin	Local	0
S177	0100CT2401-SEC-09	Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards) 2026-07-16	catalog	Local	186
S112	0611CT1001 R01/13	PowerPact H-, J-, and L-Frame Circuit Breakers Catalog 2013-01	catalog	Local	78
S179	1640CT0801	NQ Circuit Breaker Panelboards Catalog, Class 1640 2021-08	catalog	Local	3
S180	2110CT9701	I-Line Circuit Breaker Panelboards Class 2110 Catalog 2025-02-18	catalog	Local	4

Ref	Doc no.	Title / date	Type	Avail.	Entries
S27	2110CT9701R07/19	I-Line Circuit Breaker Panelboards Catalog, Class 2110 2019-07	catalog	Local	12
S26	2700CT1101	Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742) 2012-02	catalog	Local	43
S57	2700CT1601	OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog 2023-01-11 (v1.3)	catalog	blocked	5
S28	4620CT9601R07/15	QMB Fusible Panelboards Catalog, Class 4620 2015-07	catalog	Local	93
S178	Digest 0100CT2401 (online)	Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard Accessories, NQ Merchandised Main Circuit Breaker Interiors, NF Panelboard Accessories, I-Line Merchandised Panelboard Accessories, etc.) 2026	catalog	ok	0
S270	Digest 152	Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution Panelboards section pp.55-86 (index p.55, NQO/NQOB pp.56-65, NA1B pp.66-67, NH1B p.68, I-Line pp.72-75, NTFB/NTHB p.76, QMB pp.78-83, accessories p.84, ordering/replacement p.85) 1970	catalog	ok	58
S114	Digest 176 Section 3 (Class 612)	Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2012) 2012	catalog	Local	65
S115	Digest Section 3 (Class 612, ref. catalog 0612CT0101)	Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2016) 2016-09-24	catalog	Local	39
S309	CF16KF63C117UMS-03	Square D CF16KF63C STEP model page "1600A 63H DR I-LINE CENTER FEED COPPER BUS OEM QED2 INTERIOR" 2017-03-10	drawing	ok	1
S307	48040-651-03	SL400, SL800, SL800FT and SL1200 Sub-feed Lugs Instruction Bulletin 2006-05	instruction	Local	4
S306	48040-651-03 Rev. 01	SL400 Sub-feed Lugs Installation Instruction Bulletin 2025-09	instruction	Local	2
S305	48049-250-01	S33930 Sub-feed Lugs Instruction Bulletin 2001-05	instruction	Local	4
S126	48940-221-02 (v05, 2019-12)	Mechanical Lug Kits Installation Instructions (AL150HD, AL150HDS, CU150HD, AL175JD, AL250JD, CU250JD) 2019-12	instruction	blocked	5
S29	80030-695-02	I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110 2011-09	instruction	Local	8
S304	80043-055-13	Power-Style QED-2 Switchboards Instruction Bulletin (English section, (c)1988-2018) 2018-03	instruction	ok	3
S58	80043-055-16	Power-Style QED-2 Switchboards Instruction Bulletin 2024-06	instruction	blocked	0
S181	80043-309-20 Rev. 10	I-Line Circuit Breaker Power Distribution Panelboards Information Manual, Class 2110 2026-07	instruction	Local	3
S232	80043-312-03	I-Line Panelboard Grounding Bar Mounting Instructions 2006-11	instruction	Local	1
S233	80043-339-04	QMBHW and QMBJW Circuit Breaker Adapter Units Installation, Class 4620 2005-05	instruction	Local	4
S184	80043-699-03	NQOD Panelboard Main Circuit Breaker (250 A Maximum) and Adapter Kit Installation, Class 1630 2006-03	instruction	Local	2
S185	80043-722-02	Q-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard, Class 1640 2009-03	instruction	Local	2
S186	80043-724-01	NQ Panelboard Mechanical Main Lug Kit (100, 225, 400, and 600 Amp) 2008-01	instruction	Local	5
S187	80043-725-02	H- or J-Frame Main Circuit Breaker and Adapter Kit (NQ), Rev. 01 2015-09	instruction	Local	4

Ref	Doc no.	Title / date	Type	Avail.	Entries
S188	80043-726-01	KI-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	1
S189	80043-727-02	LA/LH Main Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard, Class 1640 2010-05	instruction	Local	1
S190	80043-728-01	225 A Feed-Through Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	2
S191	80043-729-01	100 and 225 A Sub-Feed Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	2
S192	80043-730-01	Sub-Feed Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard unknown (08/2018 addendum attached)	instruction	Local	2
S193	80043-731-02	Dual Sub-Feed Circuit Breaker and Adapter Kit Installation onto NQ Panelboard, Rev. 02 2024-07	instruction	Local	2
S194	80043-732-02	NQ Panelboard 3-, 6-, 12-, 18-, and 24-inch Trim and Rail Extension Kit 2012-01	instruction	Local	5
S195	80043-733-01	NQ Panelboard Crimp Main Lug Kit (100, 225, 400, and 600 Amp), Class 1640 2008-01	instruction	Local	8
S196	80043-734-01	Neutral Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	7
S197	80043-735-01	NQ Branch Connector Replacement Kit, Installation onto an NQ Panelboard, Class 1640 2008-02	instruction	Local	1
S198	80043-741-03	NF/NFOM Panelboards Class 1670 Instruction Bulletin, Rev. 06 2023-02	instruction	Local	0
S199	80043-745-01	400 A Sub-Feed Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	1
S200	80043-746-01	400 A Feed-Through Lug Kit Installation onto an NQ Panelboard 2008-01	instruction	Local	2
S201	80043-753-01	NQ and NF Equipment Space Kit 2008-03	instruction	Local	2
S202	80043-754-02	NF Panelboard Neutral Kit Installation onto an NF Panelboard 2009-01	instruction	Local	6
S203	80043-755-01	NF Panelboard 125 A and 250 A Sub-Feed Lug Kit 2008-04	instruction	Local	2
S204	80043-756-01	NF Panelboard 400 A Sub-Feed Lug Kit 2008-04	instruction	Local	1
S205	80043-757-02	NF Panelboard 125 A and 250 A Feed-Through Lug Kit Installation onto an NF Panelboard 2009-01	instruction	Local	2
S206	80043-758-02	NF Panelboard 400 A Feed-Through Lug Kit Installation onto an NF Panelboard 2009-01	instruction	Local	1
S207	80043-760-03	NF Panelboard Dual Sub-Feed Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 02 2024-07	instruction	Local	2
S208	80043-761-01	NF Panelboard Mechanical Main Lug Kit (125, 250, 400, and 600 Amp) 2008-05	instruction	Local	4
S209	80043-762-01	NF Panelboard Crimp Main Lug Kit (125, 250, 400, and 600 A) 2008-06	instruction	Local	8
S210	80043-763-01	NF Panelboard Trim and Rail Extension Kit (6-, 12-, and 18-inch) 2008-06	instruction	Local	3
S211	80043-764-03	NF Panelboard H- or J-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 01 2015-09	instruction	Local	4
S212	80043-765-02	NF Panelboard FI- or KI-Frame Main Circuit Breaker and Adapter Kit Installation onto an NF Panelboard 2009-01	instruction	Local	2
S213	80043-766-03	NF Panelboard L-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard 2009-08	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S214	80043-767-01	NF Panelboards Branch Connector Kit Installation onto an NF Panelboard 2008-08	instruction	Local	2
S215	80043-768-01	NF Panelboards Gutter-Mounted Neutral Bonding Strap Installation onto an NF Panelboard 2008-08	instruction	Local	0
S216	80043-770-01	NF Column-Width Panelboards Branch Connector Kit Installation onto an NF Panelboard 2008-09	instruction	Local	0
S217	80043-774-01	Backfed Main Circuit Breaker Barrier Kit Installation onto an NQ or NF Panelboard, Classes 1640 and 1670 2009-04	instruction	Local	2
S218	80043-778-01	Condo Riser Neutral Assembly Kit Installation onto an NQ Condo Riser Panelboard, Class 1640 2009-01	instruction	Local	1
S219	80043-786-01	Neutral Bonding Screw Kit Installation onto an NQ 14 Inch Panelboard 2010-01	instruction	Local	0
S220	80043-792-01	Liebert 400 A Sub-Feed Lug Kit Installation onto a Liebert NQ Panelboard 2012-03	instruction	Local	1
S221	80043-809-01	QOB Circuit Breaker Installation when Equipped with Jaw Accessory Kit QO1PJ15, Class 7267 (NQ Panelboards) 2013-11	instruction	Local	1
S222	80043-839-01	Installation and Replacement of Fingersafe IP2X per IEC 60529 Main Circuit Breaker Covers and U.S. Service Entrance Devices, Rev. 04 2023-04	instruction	Local	18
S223	80043-844-01	I-Line Panelboards - Barrier Kits Installation Instructions, Rev. 03 2026-06	instruction	Local	0
S224	80043-845-01	I-Line Panelboards - Expanded Neutral Assembly Installation 2020-05	instruction	Local	40
S225	80043-847-01	Main Circuit Breaker 400/600 A and Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NQ Panelboard (NQMB6PPL) 2021-11	instruction	Local	1
S226	80043-848-01	Main Circuit Breaker and Sub-Feed Circuit Breaker Deadfront Replacement Kit for PowerPacT L-Frame (NQRPLMB6PPL, NFRPLMB6PPL, NQRPLMB63RPPL, NFRPLMB63RPPL) 2020-10	instruction	Local	2
S227	80043-853-01	NQ/NF U.S. Condo Riser Panelboards Neutral Bonding Strap Installation (NFNQCRBOND46, NFCRBOND8) 2020-08	instruction	Local	3
S228	80043-858-01	NQ200AN Neutral Terminal Kit 2020-08	instruction	Local	1
S229	80043-861-01	Main Circuit Breaker Deadfront Replacement Kit for PowerPacT M-Frame and P-Frame (NFRPLMB8PPMP) 2021-07	instruction	Local	1
S230	80043-866-01	Main Circuit Breaker 400/600 A or Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (N600MPPL), Class 1670 2021-10	instruction	Local	1
S231	80043-868-01	Sub-Feed Circuit Breaker 600 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (NF600SFBPPL), Class 1670 2021-10	instruction	Local	1
S63	FA92286	FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)	renewal_parts	ok	10
S62	FA92305	FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)	renewal_parts	ok	9
S113	AL175JD data sheet	Product data sheet AL175JD - Circuit breaker accessory, PowerPacT J, lug kit, mechanical, 150A to 175A, aluminum, qty 3 unknown	web	Local	1
S32	FA100365	FAQ FA100365: blank filler catalog numbers for current design QMB panelboards	web	ok	4
S67	FA100372	FAQ FA100372: replacement for a QMB3260 600 A QMB switch	web	ok	5
S234	FA102748	Schneider Electric FAQ FA102748: What is the SKNQOD225 and where is it used? unknown	web	ok	1
S39	FA103561	FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker	web	ok	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S36	FA108059	FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?	web	ok	8
S44	FA108122	FAQ FA108122: QED cover screw part number	web	blocked	1
S34	FA112712	FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?	web	ok	3
S72	FA113960	FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4	web	ok	3
S43	FA116225	FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)	web	ok	1
S37	FA117096	FAQ FA117096: difference between plug-on and bolt-on I-Line connections	web	ok	0
S73	FA118445	FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard	web	ok	2
S42	FA118475	FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard	web	ok	2
S64	FA119872	FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch	web	ok	4
S239	FA121228	Schneider Electric FAQ FA121228: What is the part number for the branch fingers or connector kits for a 125 amp and 250 amp NF panelboard interiors? 2007-04-10 (modified 2026-06-15)	web	ok	1
S48	FA121592	FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?	web	ok	0
S71	FA122202	FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution	web	ok	4
S69	FA122651	FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch	web	ok	5
S61	FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified)	QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)	web	blocked	5
S237	FA123424	Schneider Electric FAQ FA123424: Will the main breaker adapter kits for NQ panelboards work with NQOD panelboards? 2008-04-07 (modified 2022-12-05)	web	ok	1
S235	FA124209	Schneider Electric FAQ FA124209: What is the parts breakdown on an SKNQOD225? 2008-06-06 (modified 2026-04-22)	web	ok	1
S46	FA124494	FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard	web	ok	7
S45	FA125924	FAQ FA125924: replacement handle for an outdoor QED switchboard	web	ok	1
S41	FA125949	FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?	web	ok	0
S65	FA127541	FAQ FA127541: replacement for a QMB3620	web	ok	3
S238	FA128003	Schneider Electric FAQ FA128003: What is the replacement for NQOD30L400CU? 2009-07-14 (modified 2026-04-17)	web	ok	1
S68	FA128647	FAQ FA128647: replacement parts for a QMB3240	web	ok	5
S38	FA129562	FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket	web	ok	1
S240	FA166748	Schneider Electric FAQ FA166748 (NEHB obsolescence / NF replacement) unknown	web	blocked	0
S125	FA221892	Can the AL400L61K3 lug be installed on the 400 amp or 600 amp Powerpact L frame breaker? (FAQ FA221892) unknown	web	blocked	1
S31	FA225625	FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?	web	ok	4
S70	FA242815	FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?	web	ok	1
S33	FA243887	FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?	web	ok	9
S49	FA308905	FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?	web	ok	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S236	FA332061	Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO / NQOB / NQOD / NEHB / NF panelboards 2017-11-17 (modified 2023-03-07)	web	ok	0
S66	FA88047	FAQ FA88047: replacement for a QMB3606T	web	ok	4
S35	FA93287	FAQ FA93287: blank extensions for the wide side of an HCW panelboard	web	ok	2
S47	FA96877	FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)	web	ok	1
S50	FAQ000269509	FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)	web	blocked	9
S40	FAQ000274446	FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard	web	ok	0
S51	FAQ000279508 / FAQ000257217	Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)	web	blocked	1
S183	NQMB2HJ datasheet	Product data sheet NQMB2HJ - NQ Panelboard Acc. Main Breaker Kit 225A, H/J Frame 2018-02	web	Local	1
S30	QMB15BLW data sheet	Product data sheet QMB15BLW - Panelboard blank filler plate 2023-04-12	web	Local	1
S149		Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards; NBLP panelboards take NB type breakers	web	blocked	0
S150		Federal Pioneer / Schneider Canada FAQ FA234570	web	blocked	0
S263		Schneider Electric FAQ FA130530 - MLN panelboards and replacement circuit breakers (MLN panelboards and switchboards sold in the USA 1962-1968)	web	ok	4
S264		Schneider Electric FAQ FA233845 - Are NY1B panelboard replacement breakers still available?	web	ok	0
S265		Schneider Electric FAQ FA96717 - What is the QSFB switch/fuse unit and is it available? (NQOB panelboards)	web	ok	1
S266		Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, FA87904, FA100575, FA332061, FAQ000266417, FA129512, FA119163, FA122757, FA166748, FA121261, FA125651, FA128561) - content known only from search-engine result summaries	web	blocked	4
S308		Product data sheet SL400 - Panelboard accessory, I-Line, lug kit, subfeed, 400A, 6 in 2026-06	web	Local	1

GE / ABB lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S90	1SXU900191B0201	ReliaGear neXT Power Panelboards (brochure) 2022-01	catalog	ok	0
S75	BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014)	BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts) 2014-07	catalog	Local	242
S133	BuyLog Section 3, Rev. 1/08	GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.) 2008-01	catalog	Local	2
S132	BuyLog Section 3, Rev. 9/12	GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices) 2012-09	catalog	Local	86
S130	BuyLog Section 6, Rev. 1/19	GE Products BuyLog, Section 6: Molded Case Circuit Breakers 2019-01	catalog	Local	115
S131	BuyLog Section 6, Rev. 11/13	GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers 2013-11	catalog	Local	0
S134	BuyLog p. 6-103 Rev. 7/13	GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13 2013-07	catalog	Local	4
S76	BuyLog p.11-10 Rev. 11/13	GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts 2013-11	catalog	Local	6
S93		BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)	catalog	blocked	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S302		ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. Tmax XT Retrofit Kits for Spectra Panelboards, ReliaGear neXT renewal parts, Spectra renewal parts	catalog	Local	26
S303		ReliaGear neXT power panelboards - typical layouts / X-space brochure	catalog	Local	3
S427	11-A-1078-01 Rev. 02	Trim & Hinge Installation Instructions (P4 / P5)	instruction	Local	0
S451	12-A-1082-01 Rev. 0	P2 Panelboard Kit DFK1 For Dead Front Coverage of 1in Pole Breaker Modules	instruction	Local	1
S452	12-A-1083-01 Rev. 0	P2 & P3 Panelboard Kit DFFP3 For Dead Front Coverage of a 3 in Unallocated Branch Space	instruction	Local	1
S453	12-A-1084-01 Rev. 0	P2 & P3 Panelboard Kit DFFP6 For Dead Front Coverage of a 6 in Unallocated Branch Space	instruction	Local	1
S281	DEH042 R03	Spectra Series Power Panelboards - Circuit Breaker Cover (SE, SF, TE, TF, TQ, TEL) 2001	instruction	Local	36
S280	DEH044 R02	Spectra Series Power Panelboards - Circuit Breaker Cover Plate (TEY, THQB, THHQB) 2001-08	instruction	Local	10
S282	DEH045 R05	Spectra Series Power Panelboards - Circuit Breaker Cover (SGDA, SGHA, SGLA, SGPA) 2001-08	instruction	Local	5
S272	DEH047 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits, Catalog Numbers AMCB6EB, AMCB4SE, AMCB4EB 2001-04	instruction	Local	13
S273	DEH059 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6FJ, AMCB3FJ, AMCB2FJ, AMCB4FJ 2001-09	instruction	Local	19
S274	DEH060 R04	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3GM and AMCB2GM 2001-09	instruction	Local	22
S275	DEH061 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3KM and AMCB2KM 2001-09	instruction	Local	4
S276	DEH062 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6EY and AMCB4EY 2001-09	instruction	Local	4
S86	DEH065 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD) 2001-09	instruction	ok	32
S293	DEH070 R02	Spectra Series Power Panelboards - Type AMB Main Lug Kit 2001	instruction	Local	13
S294	DEH071 R02	Spectra Series Power Panelboards - Bolt-On Main Lug Kits (AMB...N/CA/DCA) 2001-10	instruction	Local	22
S89	DEH212 R02	Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S 2001-04	instruction	ok	2
S277	DEH40129 R03	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6GB and AMCB4GB 2001-09	instruction	Local	19
S77	DEH40150 Rev.No.03	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S78	DEH40151 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S79	DEH40152 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S80	DEH40153 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S81	DEH40154 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5

Ref	Doc no.	Title / date	Type	Avail.	Entries
S82	DEH40155 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S83	DEH40156 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S84	DEH40157 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S85	DEH40158 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S88	DEH40392 R01	Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL 2001-04	instruction	Local	8
S297	DEH40471 R02	Spectra Series Power Panelboards - Neutral and Ground Wire Kit for TVSS, Catalog Number ATHMEGNDN 2001-10	instruction	Local	1
S284	GEH5583 R03	Spectra Series Power Panelboards - Type APP Filler Plates 2001-03	instruction	Local	18
S295	GEH5585 R05	Spectra Series Power Panelboards - Type ANK Neutrals (Model 2) 2001-04	instruction	Local	4
S296	GEH5586 R02	Spectra Series Power Panelboards - Equipment Grounds, Types AEG 10, 21, 21S, 31S 2001-04	instruction	Local	4
S285	GEH5589 R07	Spectra Series Power Panelboards - Type APN and APNB Panelboard Interiors into Type APB Panelboard Enclosures 2001-05	instruction	Local	0
S283	GEH5590 R03	Spectra Series Power Panelboards - Type AFP Filler Plates 2001-07	instruction	Local	8
S299	GEH5598 R02	Spectra Series Power Panelboards - Permanent Circuit Markers (APN49, APN99) 2001-05	instruction	Local	2
S287	GEH5623 R04	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC3KM, AMC2KM) 2001-07	instruction	Local	2
S289	GEH5624 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6JK, AMC4JK, AMC3JK, AMC2JK) 2001-10	instruction	Local	6
S292	GEH5625 R04	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EB, AMC4EB, AMC6EL, AMC6EBS, AMC4EBS, AMC4SE) 2001-07	instruction	Local	10
S286	GEH5626 R04	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC2FLS, AMC4FLS) 2001-07	instruction	Local	16
S279	GEH5629 R05	Spectra Series Power Panelboards - Filler Plate Kit AFP6SKS 2001-08	instruction	Local	7
S291	GEH5643 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6QD, AMC4QD) 2001-07	instruction	Local	4
S288	GEH5673 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC4GB, AMC6GB) 2001-07	instruction	Local	3
S87	GEH5674 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM) 2001-07	instruction	Local	41
S290	GEH5677 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EY, AMC6QB) 2001-07	instruction	Local	4
S300	GEH5683 R02	Spectra Series Power Panelboards - Ground Fault Neutral, 1200 A Maximum 2001-10	instruction	Local	0

Ref	Doc no.	Title / date	Type	Avail.	Entries
S278	GEH5913 R02	Spectra Series Power Panelboards - Circuit Breaker Mounting Hardware Kits (AHKE1, AHKEL1, AHKF1, AHKG1, AHKJ1, AHKLB1, AHKQ1) 2001-07	instruction	Local	7
S298	GEH5930 R04	Spectra Series Power Panelboards - Type ADF Dead Fronts & Type APF Door Fronts 2001	instruction	Local	3
S260	GEJ-3006A / GEG-13610B	GE Installation and Maintenance Instructions GEJ-3006A 'Circuit Breaker Panelboards' with renewal parts list GEG-13610B 'Types DB, NLTQ and NLAB Panelboards, Style 5' (Distribution Assemblies Department) 1969-08	instruction	paywalled	21
S301		ABB empower e-catalog product pages (Spectra Series / A-Series accessories and parts) 2026-10	web	Local	140

Siemens lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S104	SI-LP-1633	NextGen P1 panelboard brochure (Siemens Canada) unknown (c.2020)	bulletin	Local	3
S101	SIE_CS_P1 / Siemens SIOS 109799956	Type P1 Panelboard data sheet (SIE_CS_P1) 2021-10	bulletin	Local	10
S102		Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf) 2021	bulletin	Local	14
S103		New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf) c.2015-2019	bulletin	Local	22
S99	Discount Schedule A, page 8-13	2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits 2005	catalog	Local	26
S98	Power Product Catalogue Section 11	Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS) 2025-05	catalog	Local	53
S135	SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020)	Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers 2020-09	catalog	Local	68
S106	SIE Selection And Application Guide Panelboards (SIOS 109792056)	Panelboards Selection and Application Guide 2016	catalog	Local	48
S100	SPEEDFAX 2007-2008 pp.10-17..10-22	SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22 2007	catalog	Local	0
S319	SPEEDFAX 2017 p. 11-48 (rev 05/15/18)	Siemens SPEEDFAX 2017 Product Catalog p. 11-48 'Type P3 Panelboard Kits and Accessories Selection' (revised 05/15/18) 2018-05	catalog	ok	39
S97	SPEEDFAX Section 11 (last modified 06/24/21)	SPEEDFAX Product Catalog - Section 11 Panelboards 2021-06	catalog	Local	214
S136	SPEEDFAX Section 7 (2021 revision)	Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21) 2021-08	catalog	Local	68
S460	#8177 (12.09.09)	Installation Instructions for TPS3 09 in Lighting Panelboards Type P1 2009-12	instruction	Local	1
S449	11-A-1002-01 Rev. 4	Mounting and Leveling Kit IMK1 instruction card	instruction	Local	1
S417	11-A-1004-01 Rev. 01	EWK1 / EWK2 / EWK1B / EWK2B box end wall kits	instruction	Local	4
S320	11-A-1072-01 Rev. 1	P1SCRWS Branch Connector Screw Kit Instructions	instruction	Local	1
S450	11-A-1096-01 Rev. 02	BK1A Bonding Kit for P1-250 & P1-400 instruction card	instruction	Local	1
S321	11-A-1102-01 Rev. 00	P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)	instruction	Local	3
S322	11-A-1103-01 Rev. 00	P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions	instruction	Local	3

Ref	Doc no.	Title / date	Type	Avail.	Entries
S323	11-A-1104-01 Rev. 00	P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions	instruction	Local	3
S324	11-A-1105-01 Rev. 00	P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions	instruction	Local	2
S325	11-A-1106-01 Rev. 00	P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions	instruction	Local	2
S326	11-A-1107-01 Rev. 01	P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral	instruction	Local	3
S327	11-A-1108-01 Rev. 01	P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions	instruction	Local	2
S328	11-A-1109-01 Rev. 00	P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions	instruction	Local	2
S329	11-A-1110-01 Rev. 01	P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions	instruction	Local	2
S330	11-A-1111-01 Rev. 00	P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S331	11-A-1113-01 Rev. 00	P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S332	11-A-1114-01 Rev. 00	P1-250 Panelboard Kit MBKBFA for BL/BQD/GB Main Breaker Installation Instructions	instruction	Local	1
S333	11-A-1115-01 Rev. 02	P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions	instruction	Local	2
S377	11-A-1115-01 Rev. 05	P1-400 Panelboard Kit MBKJD1A & MBKJD3A (MBKJD3B) JD Main Breaker Kit Instructions, Rev. 05	instruction	Local	1
S334	11-A-1117-01 Rev. 01	250A OEM Chassis Instructions (Revised P1)	instruction	Local	20
S335	11-A-1119-01 Rev. 00	P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions	instruction	Local	2
S336	11-A-1122-01 Rev. 00	P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions	instruction	Local	2
S420	11-A-1129-01 Rev. 00	B74FLR preparation for installation instructions (74 in box)	instruction	Local	1
S366	11-A-1131-01 Rev. 00	P2 Panelboard Kit BBKQR1 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	instruction	Local	1
S367	11-A-1132-01 Rev. 00	P3 Panelboard Kit BBKQR2 Installation Instructions for Branch Mounting of 225A MAX QR Breakers	instruction	Local	1
S338	11-A-1133-01 Rev. 00	Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers	instruction	Local	3
S382	11-A-1134-01 Rev. 00	MBKQRFK P1 / RP1 Filler Kit for QR Breaker Installation Instructions	instruction	Local	1
S380	11-A-1135-01 Rev. 00	BBKQRP1FK filler kit for horizontally or vertically mounted 225A MAX QR breaker (P2)	instruction	Local	1
S381	11-A-1136-01 Rev. 00	BBKQRP2FK filler kit for dual-mounted horizontal 225A MAX QR breakers (P3)	instruction	Local	1
S379	11-A-1137-01 Rev. 00	MBKQRC1FK C1 Filler Kit for QR Breaker Installation Instructions	instruction	Local	1
S378	11-A-1138-01 Rev. 00	S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)	instruction	Local	2
S425	11-A-1139-01 Rev. 00	SQRC QR Breaker Retrofit Field Kit Installation Instructions for P4/P5/SB	instruction	Local	1
S372	11-A-1140-01 Rev. 00	P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S373	11-A-1141-01 Rev. 01	P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)	instruction	Local	2
S418	11-A-1143-01 Rev. 00	EWK3 instructions for special open endwall	instruction	Local	1
S419	11-A-1144-01 Rev. 00	BXXCVR extension cover mounting instructions	instruction	Local	1
S388	11-A-1148-01 Rev. 00	SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards	instruction	Local	2
S389	11-A-1149-01 Rev. 00	SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards	instruction	Local	2
S393	11-A-1151-01 Rev. 00	SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards	instruction	Local	2
S394	11-A-1153-01 Rev. 00	SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)	instruction	Local	2
S395	11-A-1154-01 Rev. 00	SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3	instruction	Local	3

Ref	Doc no.	Title / date	Type	Avail.	Entries
S396	11-A-1155-01 Rev. 00	SEBKP2V5 Service Entrance Barrier Kit for P2 (ED/CED main)	instruction	Local	1
S397	11-A-1156-01 Rev. 00	SEBKP2V6 Service Entrance Barrier Kit for P2 (vertical ED main)	instruction	Local	1
S398	11-A-1157-01 Rev. 00	SEBKP1P2P3V1 Service Entrance Barrier Kit for Revised P1, P2 or P3	instruction	Local	1
S399	11-A-1158-01 Rev. 00	SEBP4V1 Service Entrance Barrier Kit for P4 or P5	instruction	Local	1
S400	11-A-1159-01 Rev. 00	SEBP4V2 Service Entrance Barrier Kit for P4 or P5	instruction	Local	1
S402	11-A-1160-01 Rev. 00	SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5	instruction	Local	2
S401	11-A-1162-01 Rev. 00	SEBP4V3 Service Entrance Barrier Kit for P4 or P5	instruction	Local	1
S403	11-A-1163-01 Rev. 00	SEBP5V3 Service Entrance Barrier Kit for P5 (Vacu-Break main switch)	instruction	Local	1
S404	11-A-1164-01 Rev. 00	SEBP5V4 Service Entrance Barrier Kit for P5 (HCP main)	instruction	Local	1
S390	11-A-1165-01 Rev. 00	SEBKRP1V5 Service Entrance Barrier Kit for Revised P1 Panelboards	instruction	Local	1
S370	11-A-1166-01 Rev. 00	BBKVA52P3HW hardware kit instructions (3VA52 FAS breaker in P3 twin strap kit; supersedes breaker instructions above 500 V)	instruction	Local	1
S371	11-A-1167-01 Rev. 00	P3 Panelboard Kit BBKVA52P3T Installation Instructions for Branch Mounting of Twin FAS (3VA52) Breakers	instruction	Local	1
S346	11-A-1168-01 Rev. 02	Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker	instruction	Local	2
S376	11-A-1169-01 Rev. 02	MBKVA5363A 3VA Main Strap Kit Installation Instructions for P1-400 Panelboards	instruction	Local	1
S424	11-A-1171-01 Rev. 01	S3VA52PR provision kit (3VA52/61/62 nut keepers and bus extensions)	instruction	Local	1
S416	11-A-1175-01 Rev. 00	LPLOCK01A / LPLOCK02A replacement panelboard door locks	instruction	Local	2
S461	11-A-1176-01 Rev. 00	LPJSPDNUT01 J-type speed nut replacement kit	instruction	Local	1
S414	11-A-1177-01 Rev. 00	BNK350N 350 MCM narrow neutral lug replacement kit for P2 and P3	instruction	Local	1
S412	11-A-1178-01 Rev. 00	DFP3AP01 replacement Adaptor Plate for BL/BQD/ED/GB/GB2 breaker in P3	instruction	Local	1
S413	11-A-1179-01 Rev. 00	LPP2NB01 neutral lug replacement / addition kit for P2 panelboard	instruction	Local	1
S407	11-A-1180-01 Rev. 01	DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels	instruction	Local	7
S411	11-A-1182-01 Rev. 00	DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards	instruction	Local	15
S415	11-A-1184-01 Rev. 00	LPDC01 panelboard directory card kit	instruction	Local	1
S423	11-A-1190-01 Rev. 00	P1DFS400A RP1-400 Panel Deadfront Supports	instruction	Local	1
S374	11-A-1193-01 Rev. 00	MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	instruction	Local	2
S391	11-A-1194-01 Rev. 00	SEBKRP1V6 Service Entrance Barrier Kit for Revised P1 Panelboard	instruction	Local	1
S422	11-A-1196-01 Rev. 00	P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports	instruction	Local	2
S421	11-A-1197-00 Rev. 00	NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1	instruction	Local	3
S454	11-B-1001-01 Rev. 3	CAT. NO. F602 Vacu-Break mounting F1 branch kit, 2.5 in & 5 in high twin units (drawing 11-B-2000-00 Rev 3 / BOM 11-B-2000-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	instruction	Local	1
S455	11-B-1002-01 Rev. 1	CAT. NO. F657 Vacu-Break mounting F1 branch kit, 7.5 in high twin units (drawing 11-B-2001-00 Rev 3 / BOM 11-B-2001-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)	instruction	Local	1
S456	11-B-1004-01 Rev. 1	CAT. NO. F671 Vacu-Break mounting F1 branch kit, 7.5 in & 10 in high single units (10 in unit) (drawing 11-B-2002-00 Rev 2 / BOM 11-B-2002-04 Rev 7) for SPP/FPP/S4/F1/P4 (shallow box)	instruction	Local	1
S429	11-B-1012-01 Rev. 2	Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)	instruction	Local	8
S428	11-B-1013-01 Rev. 0	Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)	instruction	Local	2
S342	11-B-1016-01 Rev. 3	Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers	instruction	Local	4
S349	11-B-1019-01 Rev. 01	Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers	instruction	Local	2
S337	11-B-1020-01 Rev. 1	SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards	instruction	Local	2
S339	11-B-1023-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers	instruction	Local	2

Ref	Doc no.	Title / date	Type	Avail.	Entries
S446	11-B-1024-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)	instruction	Local	2
S341	11-B-1025-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers	instruction	Local	4
S340	11-B-1026-01 Rev. 1	Switchboard (SB1, SB2, SB3) / Power Panel Kit (P5) SJG2D for Branch Mounting Type VL JG Frame Breakers	instruction	Local	1
S383	11-B-1032-01 Rev. 00	LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)	instruction	Local	3
S385	11-B-1033-01 Rev. 00	CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	instruction	Local	2
S386	11-B-1034-01 Rev. 00	2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)	instruction	Local	2
S387	11-B-1035-01 Rev. 00	42NLK54B 200% Neutral Lug Kit for 30, 42, 54 or 66 Circuit P1-400 Panels (Revised P1 only)	instruction	Local	1
S384	11-B-1036-01 Rev. 00	LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)	instruction	Local	2
S368	11-B-1050-01 Rev. 01	BBKVA5262P2HW hardware kit instructions (3VA52/61/62 breaker to P2/P3 strap kit)	instruction	Local	1
S369	11-B-1051-01 Rev. 01	P2 / P3 Panelboard Kit BBKVA5262P2S Installation Instructions for Branch Mounting 3VA52 / 3VA61 / 3VA62 Circuit Breakers	instruction	Local	1
S409	11-B-1052-01 Rev. 00	DFFPVA5262P2A filler plate (3VA52/61/62 single mount) installation	instruction	Local	1
S410	11-B-1053-01 Rev. 00	DFFPVA5262P2B Provision Plate kit installation	instruction	Local	1
S365	11-B-1055-01 Rev. 02	BBKVA4P2P3 Type 3VA41 or xGB Branch Breaker Mounting Kit Installation Instructions for P2 or P3 Panelboards	instruction	Local	1
S344	11-B-1057-01 Rev. 00	P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers	instruction	Local	2
S345	11-B-1058-01 Rev. 00	Distribution Switchboard / Power Panel Kit S3VA41TDHD for Branch Mounting of 2-pole 3VA41 or xGB Breakers (high density)	instruction	Local	1
S375	11-B-1059-01 Rev. 00	MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)	instruction	Local	8
S392	11-B-1060-01 Rev. 00	SEBKRP1V7 Service Entrance Barrier Kit for RP1 Panelboard	instruction	Local	1
S408	11-B-1061-01 Rev. 00	DFFPVA5262A Filler Plate Kit replacement filler plate (3VA52/61/62)	instruction	Local	1
S353	11-B-1086-01 Rev. 00	Distribution Switchboard / P5 38in wide Power Panel Mounting Kit S3VA53T2D / S3VA54T2D Instructions for Twin-mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers	instruction	Local	2
S406	11-B-1095-01 Rev. 00	SEBPPVA2 Service Entrance Barrier Kit for 3VA55, 3VA65 or 3VA66 Breaker in a P5 Panelboard	instruction	Local	1
S354	11-B-1097-01 Rev. 00	Distribution Switchboard or P5 Power Panel Strap Mounting Kit S3VA55TD for 800A 3VA55/65 or 1000A 3VA66 Breaker	instruction	Local	1
S355	11-B-1101-01 Rev. 00	Switchboard / P5 Powerpanel Strap Mounting Kit S3VA57TD for a 1,200A 3VA57 or 3VA67 Breaker	instruction	Local	1
S448	11-D-1007-01 Rev. 1	P3 Bonding Kit P3BK1 instruction card (drawing 11-D-1007)	instruction	Local	1
S360	11-D-1013-01 Rev. 00	Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH)	instruction	Local	1
S447	11-D-1017-01 Rev. 0	EB Deadfront Filler EBF1 installation instruction card (drawing 11-D-1017)	instruction	Local	1
S359	11-D-1018-01 Rev. 0	Power Panel Kit (P4, P5) SMLK12 for Main Lug Mounting (400-1200A)	instruction	Local	1
S356	11-D-1019-01 Rev. 0	Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers	instruction	Local	2
S358	11-D-1020-01 Rev. 0	Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers	instruction	Local	2
S357	11-D-1022-01 Rev. 1	Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers	instruction	Local	2
S362	11-D-1030-01 Rev. 03	Revised P1 (P1-250 / P1-400) Hardware Tightening Torque instructions label	instruction	Local	0
S363	12-A-1030-01 Rev. 01	P2 & P3 Panelboard Kit BBKGB32 Installation Instructions for Branch Mounting Type GB2 Breakers	instruction	Local	1
S343	12-A-1031-01 Rev. 00	Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers	instruction	Local	2
S430	12-A-1078-01 Rev. 0	P2 & P3 Panelboard Kit BBKB32 For Branch Mounting of BL & BQD Breakers (scanned; read visually)	instruction	Local	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S431	12-A-1079-01 Rev. 0	P2 & P3 Panelboard Kit BBKED32 For Branch Mounting of ED Breakers (scanned; read visually)	instruction	Local	1
S432	12-A-1081-01 Rev. 1	P3 Panelboard Kit BBKQ2 For Branch Mounting of QJ Breakers (scanned; read visually)	instruction	Local	1
S364	12-A-1092-01 Rev. 02	P2 & P3 Panelboard Kit BBKNB32 Installation Instructions for Branch Mounting Type GB Breakers	instruction	Local	1
S433	12-A-1093-01 Rev. 1	P3 Panelboard Kit BBKEB32 For Branch Mounting of EB Breakers (scanned; read visually)	instruction	Local	1
S361	12-B-1015-01 Rev. 03	P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards	instruction	Local	0
S347	15-A-1078-01 Rev. 00	Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker	instruction	Local	2
S348	15-A-1079-01 Rev. 00	Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker	instruction	Local	2
S405	15-A-1081-01 Rev. 00	SEBPPVA1 Service Entrance Barrier Kit for Switchboard or P4/P5 (3VA53/63/54/64)	instruction	Local	1
S350	31-1143-01 Rev. 4	CAT. NO. 6E62 instruction sheet with drawing 11-5079-00 Rev 10 'ED2, ED4 & ED6 Mounting Series 6 Branch Bus' and BOM 11-5079-05 Rev 8	instruction	Local	1
S351	31-1145-01 Rev. 4	CAT. NO. 6F62 instruction sheet with drawing 11-5098-00 Rev 6 'FD Frame Mounting Series 6 Branch Bus', BOM 11-5098-04 Rev 8, Series 5 adaptor kit 11-5570-01 Rev 3	instruction	Local	2
S352	31-1169-01 Rev. 3	CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02	instruction	Local	3
S434	31-1200-01 Rev. 1	CAT. NO. SCE - CED6 breaker mounting, S4 copper branch bus (drawing 15-B-2012-00 / BOM 15-B-2012-05 Rev 4)	instruction	Local	1
S435	31-1202-01 Rev. 3	CAT. NO. SF6 - F6 frame mounting S4 copper branch bus (drawing 15-B-2014-00 Rev 4 / BOM 15-B-2014-03 Rev 7)	instruction	Local	1
S436	31-1204-01 Rev. 1	CAT. NO. SCF - 225 A CLF breaker, S4 copper branch bus (drawing 15-B-2016-00 Rev 2 'CLF main/branch kit SPP (shallow)' / BOM 15-B-2016-03 Rev 5)	instruction	Local	1
S437	31-1208-01 Rev. 2	CAT. NO. SCJ - CJD6 (CLJ, CJD6) breaker mounting, S4 copper branch bus (drawing 12-B-2002-00 Rev 6 / BOM 12-B-2002-03 Rev 4)	instruction	Local	1
S438	31-1212-01 Rev. 1	CAT. NO. SCL - CLD6 (CLL, CLD) breaker mounting, S4 copper branch bus (drawing 12-B-2006-00 Rev 7 / BOM 12-B-2006-03 Rev 7)	instruction	Local	1
S439	31-1213-01 Rev. 2	CAT. NO. SSCL - SCLD6 breaker mounting, S4 copper branch bus (drawing 12-B-2013-00 Rev 4 / BOM 12-B-2013-03 Rev 7)	instruction	Local	1
S445	31-1216-01 Rev. 1	CAT. NO. SCED - CED6 branch breaker mounting S5 copper branch bus (drawing 11-5068-00 Rev 2 / BOM 11-5068-06 Rev 3)	instruction	Local	1
S440	31-1218-01 Rev. 2	CAT. NO. SF6D - FD6 frame mounting S4/S5 copper branch bus (drawing 11-5098-00 Rev 6 / BOM 11-5098-03 Rev 9)	instruction	Local	1
S441	31-1220-01 Rev. 1	CAT. NO. SCFD - CFD6 branch breaker mounting S4/S5 copper bus (drawing 11-5383-00 Rev 5 / BOM 11-5383-02 Rev 8)	instruction	Local	1
S442	31-1225-01 Rev. 1	CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'	instruction	Local	2
S444	31-1229-01 Rev. 2	CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)	instruction	Local	2
S443	31-1230-01 Rev. 1	CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'	instruction	Local	2
S457	31-1239-01 Rev. 2	CAT. NO. F602D Vacu-Break mounting kit for 2.5 in high twin units (30A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	instruction	Local	1
S458	31-1240-01 Rev. 2	CAT. NO. F657D Vacu-Break mounting kit for 5 in and 7.5 in high twin units (30, 60, 100A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	instruction	Local	1
S459	31-1242-01 Rev. 2	CAT. NO. F671D Vacu-Break mounting kit for 7.5 in and 10 in high single units (200A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)	instruction	Local	1
S426		Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)	instruction	Local	4
S105	US2:MBKBFA	Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER 2021-01-06	web	Local	1

Federal Pacific Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S144		Federal Pacific Electric panelboard connector kits	web	ok	0
S145		About Federal Pacific Electric Equipment (history)	web	ok	0

Other manufacturers

Ref	Doc no.	Title / date	Type	Avail.	Entries
S12		Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"	distributor	Local	1

Appendix B Bibliography and Source Register

S1 [SRC-00001] Eaton. *Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4)*. RP01400001E (Z25020). 2021-04. Type: oem_renewal_parts. URL: https://eatonarabia.com/wp-content/uploads/2022/03/pow-r-line-1.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-1.pdf Note: Effective April 2021, supersedes December 2020. 40 pp. Mirror hosted on eatonarabia.com (Eaton distributor site). Primary source for kit tables.

S2 [SRC-00002] Eaton / Cutler-Hammer. *Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command)*. RP01400001E. 2009-02. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_426974_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_426974_catalog.pdf Note: Effective February 2009; supersedes RP.38F.01.T.E pages 1-48 dated February 2000. 44 pp. Distributor-hosted (US Electrical Services) copy of OEM PDF. Contains older PRL4 kit numbers (KPRL4FD etc.) and PRL5P section.

S3 [SRC-00003] Eaton. *Renewal Parts RP01400001E - Current Eaton panelboards*. RP01400001E. 2017-10. Type: oem_renewal_parts. URL: https://elliottelectric.com/Media/5155C62H01-CHS (accessed 2026-10-21) Local copy: docs/library/EAT/rp01400001e_2022_cl.pdf Note: Effective October 2017, supersedes February 2009. Served by Elliott Electric as the spec sheet for 5155C62H01. Used to bracket when part numbers changed (still lists KPRL4FD, 4180B03, 4176B68, 4178B06H01).

S4 [SRC-00004] Eaton. *Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E*. RP01414001E. 2011-01. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_196328_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_196328_catalog.pdf Note: Effective January 2011. 16 pp. Identical content also at https://assets.usesi.com/product-media/brochures/USESI_426974_brochure.pdf (saved as USESI_426974_brochure.pdf). Includes PRL3a blank cover widths, PRL4 blank cover widths, PRL4 connector kits (KPRL4LD/MD/ND/45XS) and Pow-R-Kit order form.

S5 [SRC-00005] Eaton. *Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP)*. RP01400002E (Z13209). 2013-02. Type: oem_renewal_parts. URL: https://novapart.co/media/2/6/6/F38703722D40D662.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_novapart_mirror.pdf Note: Effective February 2013, supersedes April 2009. 20 pp. Mirror on novapart.co (landing page https://novapart.co/datasheet/farnell:2192454/ contains promotional text aimed at AI assistants - ignored).

S6 [SRC-00006] Eaton. *Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control*. CA08100003E. 2020-06. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/panelboard-and-lighting-control.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/panelboard-and-lighting-control.pdf Note: 135 pp. Pow-R-Line Xpert (PRL1X/2X/3X/3E/4X/4DX/4F) selection guide p. V2-T3-2, panelboard selection guide p. V2-T3-11, terminal tables V2-T3-12/13.

S7 [SRC-00007] Eaton. *Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R)*. CA08104001E (Tab 22). 2018-01. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/eaton-panelboard-cag-tb01400003e-tab-22.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-cag-tb01400003e-tab-22.pdf Note: 84 pp, January 2018 sheets. Table 22.0-2 selection guide p. 22.0-5; PRL1a p. 22.1-1; PRL2a p. 22.2-1; PRL3a p. 22.3-1/22.3-2; PRL3E p. 22.3-5; PRL4 p. 22.4-1/22.4-2.

S8 [SRC-00008] Rexel USA. *Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019 (42C8083H01)*. Type: distributor. URL: https://www.rexelusa.com/p/2273430/eaton/filler-plate-panelboard-prl3a-for-panelboards-built-after-april-2019/42c8083h01 (accessed 2026-10-21) Note: Spec: Type Filler Plate; Length 4.220 in.

S9 [SRC-00009] Rexel USA. *Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B06H01)*. Type: distributor. URL: https://rexelusa.com/p/120408/eaton/panel-board-prl3a-cover-filler-plate-1p-for-f-frame-breakers/786685467672/4178b06h01 (accessed 2026-10-21) Note: UPC 786685467672; description says 'for panels built PRIOR to April 2019'; color black; 1 pole.

S10 [SRC-00010] Elliott Electric Supply. *Elliott Electric listing: KPRL4FD - PRL4 Connector Kit For Twin MTD 3P EHD, FD, FDB, HFD*. Type: distributor. URL: https://elliottelectric.com/P/Item/CHD/KPRL4FD/Alternate (accessed 2026-10-21) Note: UPC 782114795941; 225 A; 3-phase; product type 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR'; package dims 9.0 x 1.5 x 3.0 in; listed weight 17 lb (as given); UL 67; shown in stock.

S11 [SRC-00011] Rexel USA. *Rexel USA listing: PRL4X PD2 1 POLE FILLER (PRXP4PD2FILL1)*. Type: distributor. URL: https://www.rexelusa.com/p/2925374/eaton/prl4x-pd2-1-pole-filler/786689814915/prxp4pd2fill1 (accessed 2026-10-21) Note: UPC 786689814915; Pow-R-Xpress (unassembled PRL4X) context.

S12 [SRC-00012] Elliott Electric Supply. *Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"*. Type: distributor. URL: https://www.elliottelectric.com/Media/P41X25-ETN (accessed 2026-10-21) Local copy: docs/library/OTH/P41X25-ETN_elliott_spec.pdf Note: Description 'Eaton, PRL4- 1X Blank Cover'; UPC 621037246102; 2.0 lb.

S13 [SRC-00013] Eaton. *Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions*. CA08100014E. 2018-06. Type: oem_renewal_parts. URL: https://www.revereelectric.com/ASSETS/DOCUMENTS/ITEMS/EN/EATON_1MMMSB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_CA08100014E_revereelectric_EATON_1MMMSB_Catalog.pdf Note: Full 734-page Volume 12 hosted by distributor Revere Electric (mirror of OEM PDF). Tabs carry mixed dates: Tab 4 Panelboards dated June 2018; Tab 3 MCCB, Tab 5 Loadcenters and Tab 15 Distribution Switchboards dated October 2016. Key pages: V12-T4-1..T4-23 (panelboards: replacement charts, CDP/FDP/PRL layouts, renewal-parts doc index), V12-T15-1..T15-6 (switchboards incl. WF/WRP, ES, Pow-R-Line C history), V12-T3-10..T3-12 (Westinghouse breaker dimensions, last-manufactured dates), V12-T3-80..87 (panelboard-only replacement breakers RE/REH/RHF...). Eaton-hosted tab copy: https://www.eaton.com/content/dam/eaton/support/poweredge/aftermarket/vol12-tab04.pdf (eaton.com fetch failed from container).

S14 [SRC-00014] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP)*. RP01400002E. 2013-02. Type: oem_renewal_parts. URL: https://www.farnell.com/datasheets/2307937.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2013_farnell.pdf Note: 20 pages, Publication No. RP01400002E / Z13209, effective February 2013, supersedes April 2009. Distributor (Farnell) mirror of OEM PDF. Contains CDP connector kits (Table 19 p.14), CDP retrofit kits (Tables 16-18 pp.12-13), FDP connector/retrofit kits (Tables 20-21 pp.17-18), PRL1/2/3 replacement connectors, neutral/ground bars, trim locks and clamps. Pricing in PL01400002E (not found).

S15 [SRC-00015] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)*. RP01400002E (2009). 2009-04. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/brochures/USESI_501159_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2009_usesi.pdf Note: Earlier edition hosted by distributor US Electrical Services. Kit catalog numbers identical to 2013 edition except the hardware-only example: 2009 shows 'KCDPFD100H', 2013 shows 'KCDPFB100-H'.

S16 [SRC-00016] Eaton. *Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P)*. RP01400001E (2017). 2017-10. Type: oem_renewal_parts. URL: https://www.elliottelectric.com/Media/5155C62H01-CHS-2-1-SpecificationSheet.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400001E_2017_elliott.pdf Note: 36 pages, effective October 2017, supersedes February 2009. Distributor (Elliott Electric) mirror. PRL4 breaker connector kits Table 37 p.24, fusible connector kits Table 38 p.25, retrofit kits Tables 39-40 p.26, PRL4 blank covers Table 36 p.24.

S17 [SRC-00017] Eaton. *Switchboards—Low Voltage (Consulting Application Guide Tab 21)*. CA08104001E Tab 21 (TB01500003E). 2018-04. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_515260_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_515260_catalog_CA08104001E_Tab21.pdf Note: Distributor-hosted copy of Eaton Consulting Application Guide Section 21 (April 2018). Pow-R-Line C description p.21.0-8/21.0-9, Pow-R-Line i p.21.0-11, PRLC distribution layout guide with device X-space Figure 21.1-9 p.21.1-12, main lug space Table 21.1-11 p.21.1-11, Integrated Facility System p.21.6-1.

S18 [SRC-00018] Eaton. *Eaton product specifications — KPRL4KDS*. KPRL4KDS spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDS-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDS-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114795996; 25.5 x 9.3 x 3.2 in; 9.25 lb; UL Listed.

S19 [SRC-00019] Eaton. *Eaton product specifications — KPRL4KDT*. KPRL4KDT spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDT-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDT-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114796412; 9.85 lb; 'UL 67'; '44-inch box width required'. Listed dimensions 9 x 2 x 3.2 in look like packaging/data error.

S20 [SRC-00020] Eaton. *Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt*. CA08100014E Tab 5. 2016-10. Type: oem_renewal_parts. URL: https://media.suthlbr.com/images/downloads/vendor/18446/EATON_102581945_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_Tab5_2016_suthlbr_EATON_102581945_Catalog.pdf Note: 30-page excerpt; BR history (Bryant, Bridgeport CT; Challenger 1988; Jackson MS; Lincoln IL) p.V12-T5-2; BR replacement parts pp.V12-T5-14..16.

S21 [SRC-00021] Eaton. *Eaton Pow-R-Line CS switchboards instruction manual*. IB015002EN. 2021-11. Type: oem_instruction. URL: https://www.manualslib.com/manual/2585212/Eaton-Pow-R-Line-Cs.html (accessed 2026-10-21) Note: Read via ManualsLib web view (pages 3, 8, 17). Eaton-hosted PDF https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/canada/eaton-pow-r-line-cs-switchboards-instruction-manual-ib015002en-ca.pdf could not be downloaded (timeout). Appendix A Table 2 busbar torque p.17.

S22 [SRC-00022] Eaton. *Pow-R-Line switchboards instruction manual*. IM01500001E. 2021-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-switchboard-manual-im01500001e.pdf (accessed 2026-10-21) Status: blocked. Local copy: docs/library/EAT/pow-r-line-switchboard-manual-im01500001e.pdf Note: Download from eaton.com and eaton.com.cn failed (timeout). Known only from search snippet (effective May 2021, supersedes Feb 2020).

S23 [SRC-00023] eBay seller (surplus). *eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P*. Type: surplus. URL: https://www.ebay.de/itm/187106607578 (accessed 2026-10-21) Note: Seen only as search-result title/snippet; page not opened. Listing title associates KPRL4KDS with 'Pow-R-Line C'.

S24 [SRC-00024] various distributors. *Distributor listings for Eaton PRL4 connector kits (Crescent Electric, Rexel, Platt, Elliott, Gexpro, Dixon)*. Type: distributor. URL: https://crescentelectric.com/product/57375/eaton-panelboard-connector-kit-copper-connectors-mounting-brackets-covers-hardware-and-instructions-for-ehd-fd-fdb-hfd-fdc-breakers-three-phase-three-pole-225a (accessed 2026-10-21) Note: Seen as search snippets: KPRL4FD described 'for EHD, FD, FDB, HFD, FDC breakers three-phase three-pole 225A'; Elliott marks KPRL4FD inactive; Dixon lists KPRL4LFD3 'CON KIT FD+LFD PRL4'; Gexpro lists KPRL4MC as single-mount kit for MDL/HMDL; Crescent lists KPRL4ND 'PRL4 connector kit for ND/HND breakers'.

S25 [SRC-00025] Surplus Record. *Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard*. Type: surplus. URL: https://surplusrecord.com/listing/westinghouse-pow-r-line-c-4000-amp-240v-3ph3w-2-section-switchboard-367548/ (accessed 2026-10-21) Note: Search snippet only: 'PROVISIONS FOR (2) KD, (4) LD, (2) ND, 3 POLE CIRCUIT BREAKERS' — shows Westinghouse-branded PRLC with Series C group-mounted provisions.

S26 [SRC-00026] Schneider Electric (Square D). *Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742)*. 2700CT1101. 2012-02. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider_synd/2023q1/documents/3ec11ffaa483c317fee9fe851a4472117ace727c.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_3ec11.pdf Note: Distributor-hosted (DistributorDataSolutions) copy of OEM PDF, 60 pp. A newer 2700CT1101 (v02, 2025-12, ~140 MB) exists on se.com but was not retrieved.

S27 [SRC-00027] Schneider Electric (Square D). *I-Line Circuit Breaker Panelboards Catalog, Class 2110*. 2110CT9701R07/19. 2019-07. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider2/2020q1/20ebda625aea586bc898b8e30954a51d38425d30.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_20ebda.pdf Note: Distributor-hosted copy of OEM PDF, 24 pp. Current revision is v2.1 2025-02-18 (se.com, blocked).

S28 [SRC-00028] Schneider Electric (Square D). *QMB Fusible Panelboards Catalog, Class 4620*. 4620CT9601R07/15. 2015-07. Type: oem_catalog. URL: https://download.se.com/files?p_Doc_Ref=4620CT9601&p_enDocType=Catalog&p_File_Name=4620CT9601.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/4620CT9601.pdf Note: Retrieved via WebFetch (curl 403). se.com page says document is current but may reference obsolete products.

S29 [SRC-00029] Schneider Electric (Square D). *I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110*. 80030-695-02. 2011-09. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider/2018q1/f4c97d51a6c117544e2493c3367e6bba5774eb47 (accessed 2026-10-21) Local copy: docs/library/SQD/dds_f4c97d.pdf Note: Trilingual EN/ES/FR, 10 pp. States it applies to I-Line panelboards and QED2 switchboards manufactured after 2011.

S30 [SRC-00030] Schneider Electric. *Product data sheet QMB15BLW - Panelboard blank filler plate*. QMB15BLW data sheet. 2023-04-12. Type: oem_web. URL: https://media.distributordatasolutions.com/schneider_synd/2023q2/documents/55f1316a17cc332c2db81fbd11361b088e686058.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_55f131.pdf

S31 [SRC-00031] Schneider Electric. *FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?*. FA225625. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA225625 (accessed 2026-10-21)

S32 [SRC-00032] Schneider Electric Canada. *FAQ FA100365: blank filler catalog numbers for current design QMB panelboards*. FA100365. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA100365 (accessed 2026-10-21)

S33 [SRC-00033] Schneider Electric. *FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?*. FA243887. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA243887 (accessed 2026-10-21) Note: Gives internal part numbers for HNM/HLN/HLW fillers and extensions; WebFetch summary (not verbatim).

S34 [SRC-00034] Schneider Electric. *FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?*. FA112712. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA112712 (accessed 2026-10-21)

S35 [SRC-00035] Schneider Electric. *FAQ FA93287: blank extensions for the wide side of an HCW panelboard*. FA93287. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA93287 (accessed 2026-10-21)

S36 [SRC-00036] Schneider Electric Canada. *FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?*. FA108059. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA108059 (accessed 2026-10-21)

S37 [SRC-00037] Schneider Electric. *FAQ FA117096: difference between plug-on and bolt-on I-Line connections*. FA117096. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA117096 (accessed 2026-10-21) Note: References Data Bulletin 0600DB1004.

S38 [SRC-00038] Schneider Electric. *FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket*. FA129562. Type: oem_web. URL: https://www.se.com/au/en/faqs/FA129562/ (accessed 2026-10-21)

S39 [SRC-00039] Schneider Electric. *FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker*. FA103561. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA103561 (accessed 2026-10-21)

S40 [SRC-00040] Schneider Electric. *FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard*. FAQ000274446. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000274446 (accessed 2026-10-21)

S41 [SRC-00041] Schneider Electric. *FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?*. FA125949. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125949 (accessed 2026-10-21)

S42 [SRC-00042] Schneider Electric. *FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard*. FA118475. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118475 (accessed 2026-10-21)

S43 [SRC-00043] Schneider Electric. *FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)*. FA116225. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA116225 (accessed 2026-10-21)

S44 [SRC-00044] Schneider Electric. *FAQ FA108122: QED cover screw part number*. FA108122. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA108122 (accessed 2026-10-21) Status: blocked. Note: 403 on direct fetch; content (21427-20401, 1/4-20 x 1-1/4 self-tapping screw) seen only in search-engine snippet.

S45 [SRC-00045] Schneider Electric. *FAQ FA125924: replacement handle for an outdoor QED switchboard*. FA125924. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125924 (accessed 2026-10-21)

S46 [SRC-00046] Schneider Electric Canada. *FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard*. FA124494. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA124494 (accessed 2026-10-21)

S47 [SRC-00047] Schneider Electric. *FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)*. FA96877. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA96877 (accessed 2026-10-21)

S48 [SRC-00048] Schneider Electric. *FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?*. FA121592. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA121592 (accessed 2026-10-21)

S49 [SRC-00049] Schneider Electric. *FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?*. FA308905. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA308905/ (accessed 2026-10-21)

S50 [SRC-00050] Schneider Electric. *FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)*. FAQ000269509. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FAQ000269509/ (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summary only (direct fetch 403).

S51 [SRC-00051] Schneider Electric. *Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)*. FAQ000279508 / FAQ000257217. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000279508 (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summaries only (direct fetch 403).

S52 [SRC-00052] Standard Electric Supply / Steiner Electric / Crescent Electric. *Distributor listings for QMB blank fillers (QMB1BLW, QMB3BLW, QMB6BLW) - kit contents*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-QMB3BLW-Filler-Plate-Kit (accessed 2026-10-21) Note: Seen via search summaries; Crescent lists QMB1BLW as discontinued.

S53 [SRC-00053] Standard Electric Supply / Crescent Electric / Steiner Electric / Rexel. *Distributor listings for I-Line blank extensions (HLW4BL qty 5, 6.35 in W x 4.5 in H; HLW1BL qty 3; HLN4BL)*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-HLW4BL-I-Line-Blank-Plate (accessed 2026-10-21) Note: Seen via search summaries. Note conflicting qty for HLW1BL (se.com product title says qty 5; distributors and FAQ FA112712 say kit of 3).

S54 [SRC-00054] Rexel USA / Royal Wholesale Electric / others. *Distributor listings for QED-2 OEM I-Line switchboard interiors (CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36)*. Type: distributor. URL: https://www.rexelusa.com/p/1207792/square-d/panelboard-interior-qed-2-i-line-63-height-3000a-copper-bus-center-feed/cf30rj63c (accessed 2026-10-21) Note: Seen via search summaries only.

S55 [SRC-00055] Crescent Electric / Steiner Electric / Forberg Smith. *Distributor listings for QMB switch units (QMB368W 1200 A 24 in.; QMB322TD; QMB362T1; QMB323TD)*. Type: distributor. URL: https://www.crescentelectric.com/product/90087/switch-unit-qmb-fusible-panelboards-1200a-24-inch-3-pole-600vac-max (accessed 2026-10-21) Note: Seen via search summaries.

S56 [SRC-00056] Crescent Electric / Steiner Electric / MB Glick. *Distributor listings for SL400 I-Line sub-feed lug kit*. Type: distributor. URL: https://www.crescentelectric.com/product/227088/panelboard-accessory-i-line-lug-kit-subfeed-400a-6-in (accessed 2026-10-21) Note: Crescent title: 'I-Line, lug kit, subfeed, 400A, 6 in'.

S57 [SRC-00057] Schneider Electric (Square D). *OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog*. 2700CT1601. 2023-01-11 (v1.3). Type: oem_catalog. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/2700ct1601-oem-qed-2-switchboard-i-linetm-interiors-catalog/English/2700CT1601.pdf (accessed 2026-10-21) Status: blocked. Note: Akamai 403 via curl and WebFetch; download.se.com also 403. HIGH-VALUE: contains OEM interior selection tables.

S58 [SRC-00058] Schneider Electric (Square D). *Power-Style QED-2 Switchboards Instruction Bulletin*. 80043-055-16. 2024-06. Type: oem_instruction. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/80043-055-power-style-qed-2-switchboards-instruction-bulletin/English/80043-055-016_en.pdf (accessed 2026-10-21) Status: blocked.

S59 [SRC-00059] Schneider Electric (Square D). *Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin*. 0600DB1004. 2010-12-01. Type: oem_bulletin. URL: https://www.se.com/us/en/download/document/0600DB1004 (accessed 2026-10-21) Status: blocked.

S60 [SRC-00060] forums.mikeholt.com. *Mike Holt forum thread: SQ-D replacement parts (I-Line bussing not sold as DIY parts)*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1409627 (accessed 2026-10-21) Note: Anecdotal; seen via search summary.

S61 [SRC-00061] Schneider Electric. *QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)*. FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA123288 (accessed 2026-10-21) Status: blocked. Note: Direct fetch 403 (rate-limited); content seen only through search-engine summary - treat as C until verified.

S62 [SRC-00062] Schneider Electric Canada. *FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)*. FA92305. Type: oem_renewal_parts. URL: https://www.se.com/ca/en/faqs/FA92305 (accessed 2026-10-21)

S63 [SRC-00063] Schneider Electric. *FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)*. FA92286. Type: oem_renewal_parts. URL: https://www.se.com/us/en/faqs/FA92286 (accessed 2026-10-21)

S64 [SRC-00064] Schneider Electric. *FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch*. FA119872. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA119872 (accessed 2026-10-21)

S65 [SRC-00065] Schneider Electric. *FAQ FA127541: replacement for a QMB3620*. FA127541. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA127541 (accessed 2026-10-21)

S66 [SRC-00066] Schneider Electric. *FAQ FA88047: replacement for a QMB3606T*. FA88047. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA88047 (accessed 2026-10-21)

S67 [SRC-00067] Schneider Electric. *FAQ FA100372: replacement for a QMB3260 600 A QMB switch*. FA100372. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA100372 (accessed 2026-10-21)

S68 [SRC-00068] Schneider Electric. *FAQ FA128647: replacement parts for a QMB3240*. FA128647. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA128647 (accessed 2026-10-21)

S69 [SRC-00069] Schneider Electric. *FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch*. FA122651. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122651 (accessed 2026-10-21)

S70 [SRC-00070] Schneider Electric. *FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?*. FA242815. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA242815 (accessed 2026-10-21)

S71 [SRC-00071] Schneider Electric. *FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution*. FA122202. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122202 (accessed 2026-10-21)

S72 [SRC-00072] Schneider Electric. *FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4*. FA113960. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA113960 (accessed 2026-10-21)

S73 [SRC-00073] Schneider Electric. *FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard*. FA118445. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118445 (accessed 2026-10-21)

S74 [SRC-00074] MB Glick / others. *MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series 4 (and used QMB 3606T Series 2 Saflex twin unit listing)*. Type: surplus. URL: https://mbglick.com/shop/panelboard-switch/square-d-qmb3606t-qmb-saflex-panelboard-switch-unit-60a-max-600hp-series-4 (accessed 2026-10-21) Note: Seen via search summary only.

S75 [SRC-00075] GE Industrial Solutions. *BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts)*. BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014). 2014-07. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_18438_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_18438_catalog.pdf Note: 52-page OEM PDF (PDF title 'GE BuyLog - Section 11: Panelboards') mirrored by distributor US Electrical Services (USESI). OEM original URL https://electrification.us.abb.com/catalog/buylog/GE%20Products%20BuyLog%202019/11_GE%20Products%20BuyLog_Panelboards.pdf returned HTTP/2 INTERNAL_ERROR / 503 from this container. Text extracted to buylog11.txt.

S76 [SRC-00076] GE Industrial Solutions. *GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts*. BuyLog p.11-10 Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/specification-sheets/USESI_49199_specification_sheets.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_49199_specification_sheets.pdf Note: Single-page extract of BuyLog p.11-10 mirrored by USESI; heading reads 'A-Series II Panelboards'.

S77 [SRC-00077] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits*. DEH40150 Rev.No.03. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/rYlgoZ/DEH40150rev03.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40150rev03.pdf Note: Distributor mirror (Carbon Controls). Original yodify mirror links now 404.

S78 [SRC-00078] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits*. DEH40151 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/vYA1QZ/DEH40151.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40151.pdf

S79 [SRC-00079] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits*. DEH40152 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/BnbG3Z/DEH40152.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40152.pdf Note: Same file also mirrored at https://cdn.lsicloud.net/kendall/Resources/AD/GE_ASPP6QD6D_Manual.pdf

S80 [SRC-00080] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits*. DEH40153 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/lYWwVZ/DEH40153.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40153.pdf

S81 [SRC-00081] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole)*. DEH40154 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/LeQrBZ/DEH40154.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40154.pdf

S82 [SRC-00082] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole)*. DEH40155 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/YjVDgZ/DEH40155.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40155.pdf

S83 [SRC-00083] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits*. DEH40156 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/KOrvrZ/DEH40156.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40156.pdf Note: Also rendered as text at https://www.manualsdir.com/manuals/295079/ge-industrial-solutions-a-series-ii-panelboards-fb.html

S84 [SRC-00084] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole)*. DEH40157 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/AelGOZ/DEH40157.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40157.pdf

S85 [SRC-00085] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole)*. DEH40158 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/mDAggZ/DEH40158.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40158.pdf

S86 [SRC-00086] GE Industrial Systems. *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD)*. DEH065 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295540/ge-industrial-solutions-spectra-series-power-panelboards-amcb4qd-and-amcb6qd.html (accessed 2026-10-21) Note: Text rendering on manualsdir.com (4 pages); footer 'DEH065 R02 0901 (c) 2001 General Electric Company'. Table 1 quantities not captured in the text rendering.

S87 [SRC-00087] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM)*. GEH5674 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294735/ge-industrial-solutions-spectra-series-power-panelboards-amc2gm-and-amc3gm.html (accessed 2026-10-21) Local copy: docs/library/GEA/294735.txt Note: Footer 'GEH5674 R03 0701'.

S88 [SRC-00088] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL*. DEH40392 R01. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295049/ge-industrial-solutions-spectra-series-power-panelboards.html (accessed 2026-10-21) Local copy: docs/library/GEA/295049.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S89 [SRC-00089] GE Industrial Systems. *Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S*. DEH212 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294723/ge-industrial-solutions-spectra-series-power-panelboards-aeg47-and-aeg47s.html (accessed 2026-10-21)

S90 [SRC-00090] ABB. *ReliaGear neXT Power Panelboards (brochure)*. 1SXU900191B0201. 2022-01. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnextpanelboards?textonly=1 (accessed 2026-10-21) Note: Read via simplebooklet text-only rendering; no kit catalog numbers present.

S91 [SRC-00091] Relectric. *NHB150PK General Electric / GE Mounting Hardware (product page)*. Type: surplus. URL: https://www.relectric.com/nhb150pk (accessed 2026-10-21)

S92 [SRC-00092] SuperBreakers. *General Electric NHB150PK Twin Mount Mounting Hardware (product page)*. Type: surplus. URL: https://www.superbreakers.com/collections/mounting-kits-panels-accessories/products/general-electric-nhb150pk-mounting-hardware (accessed 2026-10-21) Note: Content seen only via search-engine summary; page not fetched directly.

S93 [SRC-00093] ABB. *BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)*. Type: oem_catalog. URL: https://electrification.us.abb.com/catalog/buylog/11_BuyLog_Panelboards.pdf (accessed 2026-10-21) Status: blocked. Note: curl: empty reply; WebFetch: HTTP 503. Contents known only from search-engine summary (TOC mentions ReliaGear neXT nomenclature and 'Spectra (obsoleted) bolt-on panelboard mounting hardware'; 'Retrofit kit for Spectra panelboards').

S94 [SRC-00094] manualmachine.com (mirror of GE documents). *GE Industrial Solutions manuals on manualmachine.com (DEH061 AMCB3KM/AMCB2KM; DEH042 cover supports SE/SF/TE/TF/TQ/TEL; GEH5589 APN/APNB interiors; AMCB4GB/AMCB6GB; AMCB2GM/AMCB3GM; A-Series II TQD)*. Type: archive. URL: https://manualmachine.com/ge/amcb3km/12960805-user-manual/ (accessed 2026-10-21) Status: blocked. Note: HTTP 403 to both curl and WebFetch. Existence/titles known only from search results.

S95 [SRC-00095] Stanion Wholesale Electric. *TQ2DPK GE product page*. Type: distributor. URL: https://www.stanion.com/Product/tq2dpkge (accessed 2026-10-21) Status: 404. Note: Description known only from search-engine summary; direct fetch returned 404.

S96 [SRC-00096] Surplus Record. *Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)*. Type: surplus. URL: https://surplusrecord.com/listing/1600-amp-general-electric-av-line-switchboard-480-volts-3ph-4w-10-breaker-power-break-dist-main-1086962/ (accessed 2026-10-21) Note: Seen via search-engine summary only.

S97 [SRC-00097] Siemens Industry, Inc.. *SPEEDFAX Product Catalog - Section 11 Panelboards*. SPEEDFAX Section 11 (last modified 06/24/21). 2021-06. Type: oem_catalog. URL: https://media.distributordatasolutions.com/siemenscomplete/2021q3/documents/4c3c521171b400657d1e4257e047beee1a99295b.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/speedfax_sec11_2021q3.pdf Note: 132 pages. Distributor-hosted (DDS syndication) copy of OEM PDF. Key pages: 11-7 (UPB coding), 11-13/11-14 (Revised P1 kits), 11-15 (Original P1 / S1-S2-SE kits), 11-20..11-23 (spare parts, filler chart), 11-53/11-54 (P2/P3 spare parts), 11-66/11-67 (P3 kits), 11-96 (P4 strap kits), 11-110 (P5 strap kits). Individual pages carry their own 'Revised on' dates (2019-2021).

S98 [SRC-00098] Siemens Canada Limited. *Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS)*. Power Product Catalogue Section 11. 2025-05. Type: oem_catalog. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:ac958a69-a1ee-45e7-95f6-152fe9153d31/s11-switchboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/s11-switchboards.pdf Note: PDF metadata creation 2025-05-30. p.11-5: SB1/SB2/SB3 connection strap kit table; p.11-14: S3VA52PR/S3VA53PR provision kits, nut keeper kits, 6FPB blank plates; p.11-15: CSA SMP/Series 6 strap kits (6BL2C, 6E62, 6F62, 6JJ62, 6M61C, 6N61C etc.).

S99 [SRC-00099] Siemens Energy & Automation. *2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits*. Discount Schedule A, page 8-13. 2005. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_93250_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/USESI_93250_brochure.pdf Note: Single catalog page hosted by distributor (USESI). Strap kits 'for Series 5 or 6 CDP Circuit Breaker Panelboards or FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, and SB3 Switchboards ... for switchboards manufactured since 1974'. Includes list prices (2005).

S100 [SRC-00100] Siemens Power Distribution & Control. *SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22*. SPEEDFAX 2007-2008 pp.10-17..10-22. 2007. Type: oem_catalog. URL: https://www.nooutage.com/pdf/Siemens-PanelboardsP1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens-PanelboardsP1.pdf Note: Original (pre-revision) P1 pages; lists P1 branch breakers BL/BLH/HBL/BQD/NGB, subfeed QJ2/ED4/FXD6. No kit tables on these pages.

S101 [SRC-00101] Siemens Industry, Inc.. *Type P1 Panelboard data sheet (SIE_CS_P1)*. SIE_CS_P1 / Siemens SIOS 109799956. 2021-10. Type: oem_bulletin. URL: https://cache.industry.siemens.com/dl/files/956/109799956/att_1147894/v1/SIE_CS_P1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_CS_P1.pdf Note: (c) 10.2021. Revised P1 specification + main strap kit list; states 'Revised P1 kits cannot be used with original P1'.

S102 [SRC-00102] Siemens Industry, Inc.. *Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)*. 2021. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/30WD80V.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/30WD80V.pdf Note: Lists P2/P3 branch unit-space strap kits BBKB32, BBKVA4P2P3, BBKQR2, BBKVA5262S (sic; SpeedFax spells BBKVA5262P2S), BBKVA52P3T; strap kit for 1in frame breakers uses 3in unit space.

S103 [SRC-00103] Siemens Industry, Inc.. *New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf)*. c.2015-2019. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/MBKQR3150HA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/MBKQR3150HA.pdf Note: Earlier (pre-April-2020 neutral update) Revised P1 kit list: MBK..A breaker kits, CNLK30A/42A/54A, LNLK30A/42A/54A, 2NLK..A, 42NLK..A, MBKDFA back-fed label kit, DFFP1.

S104 [SRC-00104] Siemens Canada Limited. *NextGen P1 panelboard brochure (Siemens Canada)*. SI-LP-1633. unknown (c.2020). Type: oem_bulletin. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:f264c377-e970-40b2-b60d-155bc2e52f40/ca-si-lv-en-NextGen-P1-brochure-SI-LP-1633.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/NextGen-P1-brochure-SI-LP-1633.pdf Note: Canadian Revised P1 kit table; references MBKBFA back-fed main label kit and Canadian kit numbers (e.g. MBKQR12225A, MBKFD33250A, MBKJD33400A).

S105 [SRC-00105] Siemens. *Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER*. US2:MBKBFA. 2021-01-06. Type: oem_web. URL: https://res.cloudinary.com/wholesale-plumbing/image/upload/Documents2/Siemens_MBKBFA_Specification_Sheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens_MBKBFA_Specification_Sheet.pdf Note: Minimal data sheet (title + 'Field installable kit').

S106 [SRC-00106] Siemens Industry, Inc.. *Panelboards Selection and Application Guide*. SIE Selection And Application Guide Panelboards (SIOS 109792056). 2016. Type: oem_catalog. URL: https://cache.industry.siemens.com/dl/files/056/109792056/att_1049678/v1/SIE_Selection_And_Application_Guide_Panelboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_Selection_And_Application_Guide_Panelboards.pdf Note: (c) 2016. Only cross-checked by part-number grep in this batch (BBKB32, BBKED32, BBKNB32, BBKQR1, BBKQR2, BBKQRP1FK, BBKQRP2FK, DFFP3, DFFP6, LNLK30A/42A/54A, SEB kits, SF6/SF6D, SJ1/SJ1D, SE6/SE6D, SQR/SQRC/SQRD, 6FPB01..10). Not fully mined.

S107 [SRC-00107] Lumen. *Lumen (Canada) product listing - Siemens 6BL2C switchboards breaker mounting kit copper 3 ph 240 V 100 A*. Type: distributor. URL: https://lumen.ca/en/products/20-power-distribution/08-panelboards/01-main-breaker-kits/p-U0lFNkJMMkM=-sie6bl2c-siemens-6bl2c-switchboards-breaker-mounting-kit-copper-3-ph-240-v-100-a (accessed 2026-10-21) Note: Seen via search summary only; breaker list varies between distributors (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB).

S108 [SRC-00108] various. *Distributor listings for Siemens SBL (sydist.com SIEM-SBL-50631; superbreakers.com/products/sbl; steinerelectric 'BL BKR MTG KIT FOR P4/S4/SPP PNLBD')*. Type: distributor. URL: https://www.sydist.com/Product/SIEM-SBL-50631 (accessed 2026-10-21) Note: Search-summary only. Distributor descriptions are inconsistent (one wrongly calls it a padlock kit / QR frame); SpeedFax p.11-96 is authoritative.

S109 [SRC-00109] Crescent Electric Supply. *Crescent Electric listing - QF3 Load Center Filler Plate (sub no. 12-1800-01), for QP/BQ/ED2/EQL/SEQ/EQG*. Type: distributor. URL: https://crescentelectric.com/product/47056/qpbqed2-filler-plate-sub-no-12-1800-01 (accessed 2026-10-21) Note: Search-summary only.

S110 [SRC-00110] Mike Holt Enterprises forum. *Mike Holt forum thread - Gould panels and switchboards*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1425085 (accessed 2026-10-21) Note: Anecdotal: ITE/Gould lineage, Bulldog Pushmatic not supported by Siemens.

S111 [SRC-00111] Franklin Empire. *Franklin Empire listing - Siemens 6F62 Connecting Strap Kit, For Use With SPP/FPP/S5/F2 Panelboards, 600 VAC, 70 to 250 A, Copper, 5 in H*. Type: distributor. URL: https://franklinempire.com/en/6f62-4114-6f62.html (accessed 2026-10-21) Note: Search-summary only.

S112 [SRC-00112] Schneider Electric / Square D. *PowerPact H-, J-, and L-Frame Circuit Breakers Catalog*. 0611CT1001 R01/13. 2013-01. Type: oem_catalog. URL: https://docs.rs-online.com/c13a/0900766b813b5fa7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/0611CT1001_R01-13_rs-mirror.pdf Note: Distributor-hosted (RS Components) copy of OEM catalog. Section 9 'Circuit Breaker Mounting and Connections' pp.117-129: Tables 118-130 (rear connections, mechanical lug kits, control wire terminals, terminal nuts, PDCs, compression lugs, terminal shields). Superseded by 0611CT1001 v5.0 (2024-09-30) which could not be downloaded (se.com 403).

S113 [SRC-00113] Schneider Electric. *Product data sheet AL175JD - Circuit breaker accessory, PowerPacT J, lug kit, mechanical, 150A to 175A, aluminum, qty 3*. AL175JD data sheet. unknown. Type: oem_web. URL: https://docs.rs-online.com/4ce1/A700000013719674.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/rs_A700000013719674.pdf Note: Distributor-hosted copy of Schneider product data sheet.

S114 [SRC-00114] Schneider Electric / Square D. *Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2012)*. Digest 176 Section 3 (Class 612). 2012. Type: oem_catalog. URL: https://www.farnell.com/datasheets/1883762.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/farnell_1883762_SquareD_Digest_Sec3_2012.pdf Note: Farnell-hosted copy. Table 3.61/3.62 (control wire terminations, tapped PowerPact lugs) p.3-17; Table 3.71 termination clip p.3-20; Table 3.88 mechanical lug kits, 3.89 D-frame lugs, 3.90 terminal shields p.3-28; Table 3.91 compression lugs, 3.92/3.93 PDC p.3-29. Digest edition number inferred from 2012 copyright (not printed in extracted text).

S115 [SRC-00115] Schneider Electric / Square D. *Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2016)*. Digest Section 3 (Class 612, ref. catalog 0612CT0101). 2016-09-24. Type: oem_catalog. URL: https://cdn.lsicloud.net/kendall/Resources/AD/Square_D_FA24020AB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/Square_D_FA24020AB_Catalog.pdf Note: Kendall Electric-hosted copy. Table 3.44/3.45 p.3-14; Table 3.69 p.3-25; Table 3.70 mechanical lug kits p.3-26; Table 3.71 compression lugs and 3.72 PDC p.3-27.

S116 [SRC-00116] Eaton (Cutler-Hammer). *Molded Case Circuit Breakers (Tab 12) - Consulting Application Guide / catalog, November 2008*. CA08101001E. 2008-11. Type: oem_catalog. URL: https://files.kempstoncontrols.com/files/13de8777fba90a2d4f0dd1d8944292ca/JT3225FA.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/JT3225FA.pdf Note: Kempston Controls-hosted copy of full Eaton Tab 12 (pp.12-1..). Terminal tables: EG 12-19, JG 12-28, LG 12-37, NG 12-48, F 12-91, J 12-97, K 12-113, L 12-132, M 12-140, N 12-162, R 12-181; External accessories 12-243..12-261 (end caps, keeper nuts, plug nut, control wire kits, multiwire, terminal shields, end covers, interphase barriers, rear connecting studs, panelboard straps).

S117 [SRC-00117] Eaton (Cutler-Hammer). *Series C Molded Case Circuit Breakers 70-250 Amperes J-Frame (pp.12-87..12-92), May 2008*. CA08101001E. 2008-05. Type: oem_catalog. URL: https://rexel-cdn.com/products/eaton-distribution-breakers-moldedcase-j-frame.pdf?i=46AAC28F-3990-44C5-A4CE-75139B8D2493 (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-distribution-breakers-moldedcase-j-frame.pdf Note: Rexel-hosted excerpt. Table 12-163 J-frame line/load terminals p.12-91.

S118 [SRC-00118] Eaton. *Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (excerpt pages V4-T2-188, 190, 203, 334, 345, 354, 356), October 2015*. CA08100005E. 2015-10. Type: oem_catalog. URL: https://cdn.lsicloud.net/warshauers/Resources/EATCORE00136_V4T2_188_V4T2_190_V4T2_203_V4T2_334_V4T2_345_V4T2_354_V4T2_356.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/EATCORE00136_V4T2_188_V4T2_190_V4T2_203_V4T2_334_V4T2_345_V4T2_354_V4T2_356.pdf Note: Warshauer Electric-hosted excerpt. V4-T2-203 L-frame terminal table; V4-T2-334 definite purpose terminals; V4-T2-345 Series G enclosed terminals; V4-T2-356 DC breaker terminal wire ranges table.

S119 [SRC-00119] Eaton. *Volume 4 - Circuit Protection, Series G EG-Frame pages V4-T2-16..V4-T2-27, April 2014*. CA08100005E. 2014-04. Type: oem_catalog. URL: https://www.cmafh.com/images/Master%20PDFs/Eaton/Eaton%20MCCB/Eaton%20MCCB%20EG-Frame.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Eaton_MCCB_EG-Frame.pdf Note: CMA/Flodyne-hosted excerpt. EG terminals V4-T2-23/24; control wire kit, interphase barriers, end covers, multiwire, terminal shields V4-T2-25.

S120 [SRC-00120] Eaton (Cutler-Hammer). *Series C Molded Case Circuit Breakers 70-400 Amperes K-Frame p.12-98 (May 2008) - Types KD, HKD, KDC electronic*. CA08101001E (excerpt). 2008-05. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_563623_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_563623_brochure.pdf Note: USESI-hosted single page; shows standard terminals per K-frame electronic rating plug (TA300K, TA350K, 3TA400K).

S121 [SRC-00121] Eaton. *Eaton product specifications 3TA150FB*. 3TA150FB spec sheet. unknown. Type: oem_web. URL: https://www.elliottelectric.com/Media/3TA150FB-ETN-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/3TA150FB-ETN-1021-3-Attachment.pdf Note: Elliott Electric-hosted auto-generated Eaton spec sheet. Taxonomy field 'Frame J-K' appears to be a generic web-taxonomy value (contradicts catalog); treat frame field with caution.

S122 [SRC-00122] Eaton. *Eaton Series G molded case circuit breaker accessories and terminals - 3TA632LK (pe.eaton.com spec)*. ID-SPE-v2-3TA632LK. unknown. Type: oem_web. URL: https://www.ideadigitalcontent.com/files/10964/ID-SPE-v2-3TA632LK.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/ID-SPE-v2-3TA632LK.pdf

S123 [SRC-00123] KM Parts (klocknermoeller.com). *Eaton Series-C Molded Case Circuit Breakers External Accessories (KM Parts web page)*. unknown. Type: distributor. URL: https://klocknermoeller.com/sc-externalaccessories-2/ (accessed 2026-10-21) Note: Reseller page reproducing a newer Eaton catalog's external-accessory tables; some values differ from 2008 OEM catalog (interphase barrier numbering, J-frame shield location).

S124 [SRC-00124] KM Parts (klocknermoeller.com). *Eaton Series-C F/K/L/M/N/R-frame pages (KM Parts web pages sc-f, sc-k, sc-m, sc-n, sc-r)*. unknown. Type: distributor. URL: https://klocknermoeller.com/sc-k/ (accessed 2026-10-21) Note: Reproduces Eaton terminal tables (newer edition than 2008). Also https://klocknermoeller.com/sc-f/, /sc-m/, /sc-n/, /sc-r/.

S125 [SRC-00125] Schneider Electric. *Can the AL400L61K3 lug be installed on the 400 amp or 600 amp Powerpact L frame breaker? (FAQ FA221892)*. FA221892. unknown. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA221892/ (accessed 2026-10-21) Status: blocked. Note: Direct fetch blocked (se.com 403); content known only from web-search snippet: lug accepts (1) #2 AWG-500 kcmil Al or (1) #2 AWG-600 kcmil Cu, 3 lugs per kit, may be used as optional lug on 400/600 A L-frame subject to wire size/rating limits.

S126 [SRC-00126] Schneider Electric. *Mechanical Lug Kits Installation Instructions (AL150HD, AL150HDS, CU150HD, AL175JD, AL250JD, CU250JD)*. 48940-221-02 (v05, 2019-12). 2019-12. Type: oem_instruction. URL: https://www.schneider-electric.us/en/download/document/48940-221-02/ (accessed 2026-10-21) Status: blocked. Note: Download returned 403; existence and part list known from search snippet only.

S127 [SRC-00127] Eaton. *Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (current)*. CA08100005E. 2026-04. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/electrical-circuit-protection/molded-case-circuit-breakers/mccb-catalog-v4-t2-ca08100005e.pdf (accessed 2026-10-21) Status: blocked. Note: eaton.com returns empty reply/503 from this container (curl and WebFetch).

S128 [SRC-00128] various distributors. *Distributor listings AL800M23K / AL800P7K (Steiner Electric, Stoneway, Lakeland)*. unknown. Type: distributor. URL: https://steinerelectric.com/Product/Square-D-AL800M23K-Mechanical-Lug-KitFor-Use-With-PowerPact-M-and-P-Frame-800-A-Circuit-Breaker-390767 (accessed 2026-10-21) Note: Seen via web-search result summaries only; also https://www.stoneway.com/product/206142/Shared.ContactForPricing.ContactLink (AL800P7K).

S129 [SRC-00129] various distributors. *Distributor listings AL250KA (Stanion, Steiner, Stoneway)*. unknown. Type: distributor. URL: https://www.stanion.com/Product/al250kasqd (accessed 2026-10-21) Note: Seen via web-search result summaries; listings state use with KA, KH, KI, KC frames, 4 AWG-350 kcmil.

S130 [SRC-00130] ABB (GE Industrial Solutions). *GE Products BuyLog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 1/19. 2019-01. Type: oem_catalog. URL: https://assets.unilogcorp.com/2/ITEM/DOC/GE_SEFFMI_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/GE_SEFFMI_Catalog.pdf Note: Distributor-hosted mirror of the OEM PDF, 106 pp. Key pages: 6-36/6-37 (TJJ/TJK lugs), 6-48 (SG600 lugs), 6-73/6-78/6-81/6-88 (Record Plus lugs), 6-101 (mounting hardware and studs), 6-102 (lugs, line shields, lug covers), 6-103 (Spectra lugs and covers), 6-104 (power distribution lugs). CAUTION: footnote superscripts are run into the part numbers in the extracted text (e.g. 'TCAL1212' = TCAL121 + footnote 2), so numbers were reconciled against the 2012 edition.

S131 [SRC-00131] GE Industrial Solutions. *GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_107433_catalog_1.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_107433_catalog_1.pdf Note: Distributor mirror. Its lug tables carry the same part numbers as the Rev. 1/19 edition.

S132 [SRC-00132] GE Industrial Solutions. *GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices)*. BuyLog Section 3, Rev. 9/12. 2012-09. Type: oem_catalog. URL: https://www.usesi.com/media/product-media/catalogs/USESI_14306_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_14306_catalog.pdf Note: Key pages: 3-120 (lugs and associated hardware, with footnotes 1-10), 3-121 (Spectra lugs), the TKMA tables (TCAL81/TCAL121) and the TJJ/TJK tables. Footnote numbers here differ from the 2019 edition, which made it possible to separate base part numbers from footnote digits. Lists the TCAL27, TCALK341, TCALK343, TCALK347 and TJLVK items that the 2013/2019 tables drop.

S133 [SRC-00133] GE Consumer & Industrial. *GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.)*. BuyLog Section 3, Rev. 1/08. 2008-01. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003579.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/W1003579.pdf Note: Excerpt hosted by IPS. Mentions only TCAL81 and TCAL125. Used for corroboration.

S134 [SRC-00134] GE Industrial Solutions. *GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13*. BuyLog p. 6-103 Rev. 7/13. 2013-07. Type: oem_catalog. URL: https://cdn.shopify.com/s/files/1/0074/7149/7286/files/TCAL12_Catalogue.pdf?v=1680355092 (accessed 2026-10-21) Local copy: docs/library/GEA/TCAL12_Catalogue.pdf Note: Single-page extract (2013 pagination) of the general lug table hosted by a reseller. Its content matches 2019 p. 6-102.

S135 [SRC-00135] Siemens Industry, Inc.. *Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers*. SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020). 2020-09. Type: oem_catalog. URL: http://library.coburns.com/specs/SF-17-Sect-07-ALL-web.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SF-17-Sect-07-ALL-web.pdf Note: 240 pp. Mirror (Coburn's). The OEM URL https://support.industry.siemens.com/cs/attachments/109983309/SF-17-Sect-07-ALL-web.pdf returned a 470-byte HTML stub to curl. Key pages: 7-39 (BQXD lugs, finger-safe shields), 7-40 (QR2 lugs), ED/FD/JD/LD/MD/ND/PD pages (lug notes), 7-153 (mechanical lugs, rev 06/30/19), 7-154 (aluminum body lugs, rev 05/31/18), 7-155 (optional Cu lugs, compression and distribution lugs, rev 11/30/19), 7-160 (terminal shields, rev 02/28/19), 7-165 (plug-in and rear-connecting studs, rev 09/30/20).

S136 [SRC-00136] Siemens Industry, Inc.. *Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21)*. SPEEDFAX Section 7 (2021 revision). 2021-08. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003585.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/W1003585.pdf Note: 242 pp. Later revision. Its set of TA/TC lug catalog numbers is identical to s6, so it was used only for corroboration and to show the parts were still listed in 2021.

S137 [SRC-00137] BSP Automation (distributor). *Siemens TA1Q300 product page*. Type: distributor. URL: https://bspautomation.com/brand/siemens/ta1q300 (accessed 2026-10-21) Note: Describes TA1Q300 as a 3-lug kit for QJ breakers, Al/Cu, single wire up to 300 kcmil. A search snippet from superbreakers.com (HTTP 429 when fetched) lists QJ2, QJH2, QJ2H and HQJ2H, 60-225 A.

S138 [SRC-00138] Breaker King (distributor). *Breaker Mounting Kits :: Federal Pacific Electric (category listing)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_189 (accessed 2026-10-21) Note: Aftermarket FPE bus-connection kits with explicit 'replaces OEM K?DP?C' cross references (NEF1K/NEJ1K/NFJ1K/NJL1K/NEF3K/NEJ3K/NJL3K).

S139 [SRC-00139] Breaker King (distributor). *Federal Pacific CDP [BCDPNJLFPE] product page*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=product_info&products_id=1938 (accessed 2026-10-21) Note: Kit contents statement: screws, brackets, deadfront cover plate, instructions; ship wt 7 lb.

S140 [SRC-00140] R&D Electric / relectric.com (surplus/recertifier). *Federal Pacific Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/federal-pacific-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 49 FPE accessory part numbers incl. KCDP-1C..5C, KBDP-1C..4C, KFDP-*, KQB-*, NDPNE/NDPNEJ, NAIB-NEF, NM lugs NM34/NM36/NM38, N32.

S141 [SRC-00141] Superbreakers (distributor/recertifier). *Superbreakers Federal Pacific collection (Shopify products.json, 639 items)*. Type: distributor. URL: https://superbreakers.com/collections/federal-pacific (accessed 2026-10-21) Note: Machine-read via /collections/federal-pacific/products.json?limit=250&page=1..3. Descriptions are partly marketing copy; ratings treated as max conf C.

S142 [SRC-00142] Electrical Power and Control (surplus). *Federal Pacific KCDP-1A Kit (for NH/NA-Type Panel, NE/NEF Frame)*. Type: surplus. URL: https://electricalpowerandcontrol.com/product/federal-pacific-kcdp-1a-kit-for-nh-na-type-panel-ne-nef-frame (accessed 2026-10-21) Note: Used kit; label text 'For NH1B/NA1B Type Panels', '(2) 3 Pole Breakers', 'J25 (HM1)', 'LA25037'.

S143 [SRC-00143] R&D Electric / relectric.com. *NDPNEJ mounting hardware strap kit detail*. Type: surplus. URL: https://www.relectric.com/ndpnej (accessed 2026-10-21)

S144 [SRC-00144] Federal Pacific Equipment / Circuit Breaker Sales (fpeparts.com). *Federal Pacific Electric panelboard connector kits*. Type: oem_web. URL: https://fpeparts.com/pages/fpe-panelboard.html (accessed 2026-10-21) Note: Successor-to-tooling site; lists kit families FDP, QMQB, NDP, NHDP, NAIB, NHIB, LDP, CDP, BDP (names only, no part numbers). States no residential Stab-Lok parts.

S145 [SRC-00145] Federal Pacific Equipment / Circuit Breaker Sales (fpeparts.com). *About Federal Pacific Electric Equipment (history)*. Type: oem_web. URL: https://fpeparts.com/pages/history.html (accessed 2026-10-21)

S146 [SRC-00146] Wikipedia. *Federal Pacific Electric Corporation*. Type: other. URL: https://en.wikipedia.org/wiki/Federal_Pacific_Electric_Corporation (accessed 2026-10-21) Note: Cites 406 F.3d 577 and InspectApedia for 1986 split (ACBC breakers / Electro-Mechanical Corp non-breaker), 1993 ACBC->Schneider contract manufacture.

S147 [SRC-00147] Superbreakers. *Federal Pacific panelboard/kits: KBDP1C, KCDP1C, KFDP4C product pages*. Type: distributor. URL: https://superbreakers.com/products/federal-pacific-kbdp1c-mounting-hardware (accessed 2026-10-21) Note: Individual product JSON read for KCDP1C, KBDP1C, KFDP4C.

S148 [SRC-00148] Mike Holt Forums. *Retrofit kit for Federal Pacific (forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/retrofit-kit-for-federal-pacific.53588/post-867625 (accessed 2026-10-21) Note: Read via search summary only (site returns 403 to fetch). Eaton/Square D custom retrofit interiors for existing FPE enclosures.

S149 [SRC-00149] Schneider Electric. *Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards; NBLP panelboards take NB type breakers*. Type: oem_web. URL: https://www.se.com/nl/en/faqs/FAQ000278110/ (accessed 2026-10-21) Status: blocked. Note: 403 to fetch; content known only from search-result snippet: 'Schneider Electric does no longer offer replacement breakers for Federal pacific switchboard, panelboards' and 'The NBLP panelboards take NB type breakers'.

S150 [SRC-00150] Schneider Electric Canada. *Federal Pioneer / Schneider Canada FAQ FA234570*. Type: oem_web. URL: https://se.com/ca/en/faqs/FA234570/ (accessed 2026-10-21) Status: blocked.

S151 [SRC-00151] Wikipedia. *Zinsco*. Type: other. URL: https://en.wikipedia.org/wiki/Zinsco (accessed 2026-10-21) Note: History Frank Adam->Zinsmeyer->Zinsco (1943)->GTE-Sylvania (1973)->Challenger (1978/1981)->Westinghouse (1994 per article)->T&B molds; Connecticut Electric bus kits. Cites InterNACHI forum 2007.

S152 [SRC-00152] InspectAPedia. *GTE Sylvania Zinsco breaker & panel identification*. Type: other. URL: https://inspectapedia.com/electric/GTE_Sylvania_Zinsco.htm (accessed 2026-10-21) Note: Reader-submitted panel labels: ML12(12-24)C, MLB20(..)C, MOB20(20-40)C, MT12MBB, MTMB20(20-40)F/S, 390-205-09; breaker types Q, QC, QCN, Q24, R38, RC38, HRGF, QFP; main lug blocks LK-15 (150A), LK-22 (225A).

S153 [SRC-00153] Superbreakers. *Superbreakers Zinsco + Sylvania collections (Shopify products.json)*. Type: distributor. URL: https://superbreakers.com/collections/zinsco (accessed 2026-10-21) Note: 95 Zinsco + 48 Sylvania items; QSF fusible panelboard switches, QFP/QFL/QFB/QFBL mains, QB/QCB bolt-on, UBIZ cross refs.

S154 [SRC-00154] The Home Depot (retailer). *Zinsco 125-Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers UBIZRBK12*. Type: distributor. URL: https://www.homedepot.com/p/Zinsco-125-Amp-Type-RBK-UBI-Replacement-Buss-Bar-Kit-for-Zinsco-Load-Centers-UBIZRBK12/100669974 (accessed 2026-10-21) Note: Read via search summary: '2 copper-plated buss bars, lugs, screws, insulators included'.

S155 [SRC-00155] Dale Electric / Sonic Electric / Ace Hardware (retailers). *Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings*. Type: distributor. URL: https://dale-electric.com/products/UBIZ30 (accessed 2026-10-21) Note: UBIZ (Zinsco Q-type), UBIF (FPE Stab-Lok NA/NC), UBIP (Pushmatic/Bulldog) 10kAIC ETL-listed replacement breakers; read via search summaries.

S156 [SRC-00156] Mike Holt Forums / InterNACHI forum. *Challenger / GTE / Zinsco ownership discussion*. Type: forum. URL: https://forums.mikeholt.com/threads/challenger-brand-history.55618/post-924498 (accessed 2026-10-21) Note: Via search summary: Westinghouse acquired Challenger late 1980s (NACHI timeline says 1988); T&B took Zinsco/Challenger breaker lines.

S157 [SRC-00157] InspectAPedia. *Frank Adam Electrical Panels*. Type: other. URL: https://inspectapedia.com/electric/Frank-Adam-Electrical-Panels.php (accessed 2026-10-21) Note: Model labels PULFUZSW, KLAMPSWFUZ; Zinsco-type QSF breakers/switches in some Frank Adam panelboards; Fuselok switch; era c.1900-1950 (to 1970).

S158 [SRC-00158] Mike Holt Forums / InterNACHI / ECN forums. *Trumbull Electric panel / GE-Trumbull discussions*. Type: forum. URL: https://forum.nachi.org/t/trumbull-electric-panel/39581 (accessed 2026-10-21) Note: Label 'Trumbull Electric Mfg. Co. Plainville Conn. USA. A General Electric Organization'; GE/Trumbull breaker numbers same.

S159 [SRC-00159] Mike Holt Forums. *Bulldog Pushmatic forum threads (3-phase Pushmatic, ITE/Siemens lineage)*. Type: forum. URL: https://forums.mikeholt.com/threads/bulldog-pushmatic.2562559/post-2688682 (accessed 2026-10-21)

S160 [SRC-00160] JRL Electric Supply (dealer blog). *What is a Federal Pacific NE and NEF Circuit Breaker?*. Type: distributor. URL: https://jrlelectricsupplyinc.com/?p=12855 (accessed 2026-10-21) Note: Fetch returned 429; content from search summary: NE and NEF obsolete, same dimensions, fit same panels; NEF 2-3P rated 480 VAC / 250 VDC; voltage and AIC differ.

S161 [SRC-00161] Superbreakers. *Superbreakers Murray + Wadsworth collections (products.json)*. Type: distributor. URL: https://superbreakers.com/collections/murray (accessed 2026-10-21)

S162 [SRC-00162] Eaton Electrical / Cutler-Hammer (mirror hosted by InspectAPedia on its FPE pages). *Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (Type CH and BR) selection guide*. Type: oem_catalog. URL: https://inspectapedia.com/fpe/CHRetrofitGuide.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/CHRetrofitGuide.pdf Note: 10 pp. Undated (Eaton Electrical/Cutler-Hammer branding suggests c.2004-2008). Selection charts 1-11 give ~60 retrofit kit catalog numbers by box height, wire size, circuits, main type. Lincoln Flex Center 800-330-6479. Interiors 'UL recognized under UL67'. Mirror URL; original Eaton URL not known.

S163 [SRC-00163] Mike Holt Forums. *Eaton's retrofit panel assemblies are not UL listed (forum thread) and related threads*. Type: forum. URL: https://forums.mikeholt.com/threads/eaton%E2%80%99s-retrofit-panel-assemblies-are-not-ul-listed.122367/ (accessed 2026-10-21) Note: Via search summary: components listed but installed assembly in existing enclosure not; UL paths = interior listed for enclosure or field evaluation; claim that interiors not marked for the existing enclosure revert to 10 kA SCCR (unverified).

S164 [SRC-00164] R&D Electric / relectric.com. *Zinsco Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/zinsco-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 12 items: DSLNEJT, DSLNET, DSLNFT, DSLNJT, DSLNM, DSLNMS, DSLQB, DSLQFB, QSF100DS, QSF200DS, QSF400DS, QSF600DS.

S165 [SRC-00165] R&D Electric / relectric.com. *Sylvania Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/sylvania-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 10 items: SEHT, SECT, SJD4T, SKM8S, FPENEFT, QSF100SS, QSF100SB, QSF200SB, QSF400SB, QSF400DS.

S166 [SRC-00166] R&D Electric / relectric.com. *Challenger Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/challenger-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 41 items: C?D?K twin/single mounting kits (CCA4K, CED3K, CED4K, CED4BK, CFD3K, CFD4K, CFD4BK, CJD4K, CJDS4K, CJDS4BK, CKD4K, CKDS4K, CKDS4BK, CLD4K, CLDS4BK, CMD4K, CND4K), KPRL4C*/KPRL4AC*/KPRL4BC*/KPRL3CF3 kits, CKT trip units, rating plugs. 'PM4a'/'PM4b' annotations.

S167 [SRC-00167] Electrical Power and Control (surplus). *Zinsco QFP2T Main Breaker Panelboard Mounting Hardware / Feet*. Type: surplus. URL: https://electricalpowerandcontrol.com/product/zinsco-qfp2t-main-breaker-panelboard-mounting-hardware-feet (accessed 2026-10-21)

S168 [SRC-00168] R&D Electric / relectric.com. *Frank Adams Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/frank-adams-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: Single item CU-NFJ 'FAM; CU-NFJ; Hardware Kit'.

S169 [SRC-00169] IAEI Magazine / UL. *Circuit breakers and old panelboard; will anything work? (UL Question Corner)*. 2010-03. Type: other. URL: https://iaeimagazine.org/2010/march2010/circuit-breakers-and-old-panelboard-will-anything-work/ (accessed 2026-10-21) Note: UL guidance: only classified breakers (DIXF, 15-60 A, 120/240 V, panels <=225 A, <=10 kA) may substitute; otherwise use breakers named on panel marking.

S170 [SRC-00170] InspectAPedia. *Pushmatic / Bulldog design history*. Type: other. URL: https://inspectapedia.com/electric/Pushmatic_Design_History.php (accessed 2026-10-21) Note: Bulldog Electric Products Co. (Detroit); ITE (Gould) purchase stated 1976; Siemens c.1984; US 2,428,320 (1947) Platz panelboard with detachably mounted devices = Pushmatic panel; installed mainly 1950-1970.

S171 [SRC-00171] Mike Holt Forums. *Murray / Crouse-Hinds / Siemens lineage (forum threads)*. Type: forum. URL: https://forums.mikeholt.com/threads/siemens-and-murray-interchangable.46702/post-737356 (accessed 2026-10-21) Note: Via search summary: Murray -> Crouse-Hinds (Cooper) late 1970s -> Siemens (c.1992, restored Murray name) -> Murray brand phase-out c.2019 (unverified).

S172 [SRC-00172] Bay Power / Mike Holt Forums. *Wadsworth breaker listings and forum discussion*. Type: distributor. URL: https://www.baypower.com/wadsworth/circuit-breakers/wadsworth-a360-3-pole-60-amp-molded-case-circuit-breaker (accessed 2026-10-21) Note: Via search summary; Wadsworth A-series (e.g., A360 3P 60A, A320) and B-series (B1515) breakers; Superbreakers Wadsworth collection SKUs A15NI..A260NI, B1530NI, B3020NI.

S173 [SRC-00173] Mike Holt Forums. *Kinney Panel (forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/kinney-panel.104222/post-1650904 (accessed 2026-10-21) Note: Via search summary: Kinney 'still in Elgin, IL'; Eaton vintage products group may support breakers.

S174 [SRC-00174] Midwest Switchgear Group (surplus). *Midwest Switchgear: Zinsco/Sylvania QSF fusible panelboard switch listings (QSFT1033B, QSF-4033)*. Type: surplus. URL: https://www.swgr.com/store/Fusible-Panelboard-Switch/product/QSFT1033B,27-6809.aspx (accessed 2026-10-21) Note: Via search summary.

S175 [SRC-00175] R&D Electric / relectric.com. *Breaker parts & accessories: Mounting Hardware (listing page 12)*. Type: surplus. URL: https://www.relectric.com/circuit-breaker-parts-and-accessories/mounting-hardware?page=12 (accessed 2026-10-21) Note: Shows CMD4K (Challenger single 800 A 600 V, $568.70), SKM8S (Sylvania 800 A single kit), QSF100DS, QSF200SB, KQB-4C.

S176 [SRC-00176] InspectAPedia. *Pushmatic - Bulldog panels & breakers*. Type: other. URL: https://inspectapedia.com/electric/Pushmatic.php (accessed 2026-10-21) Note: P1515 condensed-space dual 15 A will not fit older Gould ITE Pushmatic panels; 3-phase Pushmatic version reported (Rossi); Electri-Center name; Bulldog Electric Products Co., Detroit; US 1,982,289 (1934).

S177 [SRC-00177] Schneider Electric (Square D). *Panelboards: Digest Section 9 (Square D Digest, Section 9 Panelboards)*. 0100CT2401-SEC-09. 2026-07-16. Type: oem_catalog. URL: https://download.schneider-electric.com/files?p_Doc_Ref=0100CT2401-SEC-09 (accessed 2026-10-21) Local copy: docs/library/SQD/0100CT2401-SEC-09.pdf Note: 75 pp. PDF page N = printed page 9-N. Same tables are published online in Digest Plus (s_dightml). Fetched via download.schneider-electric.com with p_Doc_Ref only (www.se.com returns 403).

S178 [SRC-00178] Schneider Electric (Square D). *Schneider Electric Digest Plus - Section 9: Panelboards (online HTML pages: NQ Panelboard Accessories, NQ Merchandised Main Circuit Breaker Interiors, NF Panelboard Accessories, I-Line Merchandised Panelboard Accessories, etc.)*. Digest 0100CT2401 (online). 2026. Type: oem_catalog. URL: https://productinfo.se.com/nadigest/5c51d645347bdf0001f1f280/Master/17709_MAIN%20(bookmap)_0000061751.xml/$/NQPanelboardAccessories-369ADC9F (accessed 2026-10-21) Note: HTML pages fetched with curl (browser UA) for all 40 Section 9 topics; text identical to s_dig tables. WebFetch returned 403.

S179 [SRC-00179] Schneider Electric (Square D). *NQ Circuit Breaker Panelboards Catalog, Class 1640*. 1640CT0801. 2021-08. Type: oem_catalog. URL: https://download.schneider-electric.com/files?p_Doc_Ref=1640CT0801 (accessed 2026-10-21) Local copy: docs/library/SQD/1640CT0801.pdf Note: 36 pp.; PDF metadata 2021-10-11.

S180 [SRC-00180] Schneider Electric (Square D). *I-Line Circuit Breaker Panelboards Class 2110 Catalog*. 2110CT9701. 2025-02-18. Type: oem_catalog. URL: https://download.schneider-electric.com/files?p_Doc_Ref=2110CT9701 (accessed 2026-10-21) Local copy: docs/library/SQD/2110CT9701.pdf Note: Downloaded as zip containing the PDF (bookmap dated 02.18.25). 56 pp.

S181 [SRC-00181] Schneider Electric (Square D). *I-Line Circuit Breaker Power Distribution Panelboards Information Manual, Class 2110*. 80043-309-20 Rev. 10. 2026-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-309-20 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-309-20.pdf Note: Breaker installation/removal, neutral bonding strap torque, PJC-7201 joint compound, blank fillers.

S182 [SRC-00182] Schneider Electric (Square D). *Square D NQ and NF Lighting Panelboards brochure*. unknown. Type: oem_bulletin. URL: https://media.distributordatasolutions.com/schneider/2018q1/a23e368f6ea0182c58fb583425aad3af83156efc (accessed 2026-10-21) Local copy: docs/library/SQD/NQ_NF_Lighting_Panelboards_brochure_dds.pdf Note: Distributor-hosted (DDS) copy of OEM brochure; general marketing only.

S183 [SRC-00183] Schneider Electric (Square D). *Product data sheet NQMB2HJ - NQ Panelboard Acc. Main Breaker Kit 225A, H/J Frame*. NQMB2HJ datasheet. 2018-02. Type: oem_web. URL: https://media.distributordatasolutions.com/schneider/2018q1/03b2d20294d188dd4e4c0c4480124bfe3e1deed7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/NQMB2HJ_datasheet_dds.pdf Note: Schneider-generated product data sheet mirrored by distributor data service.

S184 [SRC-00184] Schneider Electric (Square D). *NQOD Panelboard Main Circuit Breaker (250 A Maximum) and Adapter Kit Installation, Class 1630*. 80043-699-03. 2006-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-699-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-699-03.pdf Note: Replaces 80043-699-02 (02/2005). Kit catalog number not printed in bulletin.

S185 [SRC-00185] Schneider Electric (Square D). *Q-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard, Class 1640*. 80043-722-02. 2009-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-722-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-722-02.pdf Note: Replaces 80043-722-01 (01/2008). Covers NQMB2Q and NQMB2Q14.

S186 [SRC-00186] Schneider Electric (Square D). *NQ Panelboard Mechanical Main Lug Kit (100, 225, 400, and 600 Amp)*. 80043-724-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-724-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-724-01.pdf Note: Covers NQCUM1, NQCUM2, NQCUM4, NQCUM6, NQALMA6.

S187 [SRC-00187] Schneider Electric (Square D). *H- or J-Frame Main Circuit Breaker and Adapter Kit (NQ), Rev. 01*. 80043-725-02. 2015-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-725-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-725-02.pdf Note: Covers NQMB2HJ and NQMB2HJ14.

S188 [SRC-00188] Schneider Electric (Square D). *KI-Frame Main Circuit Breaker (225 A Maximum) and Adapter Kit Installation onto an NQ Panelboard*. 80043-726-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-726-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-726-01.pdf Note: Covers NQMB2KI.

S189 [SRC-00189] Schneider Electric (Square D). *LA/LH Main Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard, Class 1640*. 80043-727-02. 2010-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-727-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-727-02.pdf Note: Covers NQMB4LA.

S190 [SRC-00190] Schneider Electric (Square D). *225 A Feed-Through Lug Kit Installation onto an NQ Panelboard*. 80043-728-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-728-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-728-01.pdf Note: Covers NQFTL2L and NQFTL2H.

S191 [SRC-00191] Schneider Electric (Square D). *100 and 225 A Sub-Feed Lug Kit Installation onto an NQ Panelboard*. 80043-729-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-729-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-729-01.pdf Note: Covers NQSFL1 and NQSFL2.

S192 [SRC-00192] Schneider Electric (Square D). *Sub-Feed Circuit Breaker and Adapter Kit Installation onto an NQ Panelboard*. 80043-730-01. unknown (08/2018 addendum attached). Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-730-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-730-01.pdf Note: Covers NQSFB2Q and NQSFB2HJ (225 A max).

S193 [SRC-00193] Schneider Electric (Square D). *Dual Sub-Feed Circuit Breaker and Adapter Kit Installation onto NQ Panelboard, Rev. 02*. 80043-731-02. 2024-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-731-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-731-02.pdf Note: Replaces Rev. 01 09/2015. Covers NQSFB4Q and NQSFB4HJ.

S194 [SRC-00194] Schneider Electric (Square D). *NQ Panelboard 3-, 6-, 12-, 18-, and 24-inch Trim and Rail Extension Kit*. 80043-732-02. 2012-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-732-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-732-02.pdf Note: Replaces 80043-732-01 (01/2008). Covers NQ3RDE..NQ24RDE.

S195 [SRC-00195] Schneider Electric (Square D). *NQ Panelboard Crimp Main Lug Kit (100, 225, 400, and 600 Amp), Class 1640*. 80043-733-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-733-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-733-01.pdf Note: Covers NQALV1/2/4/6, NQCUV1/2/4/6.

S196 [SRC-00196] Schneider Electric (Square D). *Neutral Kit Installation onto an NQ Panelboard*. 80043-734-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-734-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-734-01.pdf Note: Covers NQN1CU, NQN2CU, NQN6CU, NQNL1, NQNL2, NQNL2ACCY, NQNL4.

S197 [SRC-00197] Schneider Electric (Square D). *NQ Branch Connector Replacement Kit, Installation onto an NQ Panelboard, Class 1640*. 80043-735-01. 2008-02. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-735-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-735-01.pdf Note: Covers SKNQBC.

S198 [SRC-00198] Schneider Electric (Square D). *NF/NFOM Panelboards Class 1670 Instruction Bulletin, Rev. 06*. 80043-741-03. 2023-02. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-741-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-741-03.pdf Note: General NF panelboard bulletin.

S199 [SRC-00199] Schneider Electric (Square D). *400 A Sub-Feed Lug Kit Installation onto an NQ Panelboard*. 80043-745-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-745-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-745-01.pdf Note: Covers NQSFL4.

S200 [SRC-00200] Schneider Electric (Square D). *400 A Feed-Through Lug Kit Installation onto an NQ Panelboard*. 80043-746-01. 2008-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-746-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-746-01.pdf Note: Covers NQFTL4L and NQFTL4H.

S201 [SRC-00201] Schneider Electric (Square D). *NQ and NF Equipment Space Kit*. 80043-753-01. 2008-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-753-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-753-01.pdf Note: Covers NQES18 and NFES18.

S202 [SRC-00202] Schneider Electric (Square D). *NF Panelboard Neutral Kit Installation onto an NF Panelboard*. 80043-754-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-754-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-754-02.pdf Note: Covers NFN1CU, NFN2CU, NFN6CU, NFNL1, NFNL2, NFNL4.

S203 [SRC-00203] Schneider Electric (Square D). *NF Panelboard 125 A and 250 A Sub-Feed Lug Kit*. 80043-755-01. 2008-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-755-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-755-01.pdf Note: Covers NF125SFL, NF250SFL.

S204 [SRC-00204] Schneider Electric (Square D). *NF Panelboard 400 A Sub-Feed Lug Kit*. 80043-756-01. 2008-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-756-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-756-01.pdf Note: Covers NF400SFL.

S205 [SRC-00205] Schneider Electric (Square D). *NF Panelboard 125 A and 250 A Feed-Through Lug Kit Installation onto an NF Panelboard*. 80043-757-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-757-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-757-02.pdf Note: Covers NF125FTL, NF250FTL.

S206 [SRC-00206] Schneider Electric (Square D). *NF Panelboard 400 A Feed-Through Lug Kit Installation onto an NF Panelboard*. 80043-758-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-758-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-758-02.pdf Note: Covers NF400FTL.

S207 [SRC-00207] Schneider Electric (Square D). *NF Panelboard Dual Sub-Feed Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 02*. 80043-760-03. 2024-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-760-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-760-03.pdf Note: Replaces Rev. 01 09/2015. Covers NF600SFBH, NF600SFBJ.

S208 [SRC-00208] Schneider Electric (Square D). *NF Panelboard Mechanical Main Lug Kit (125, 250, 400, and 600 Amp)*. 80043-761-01. 2008-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-761-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-761-01.pdf Note: Covers NFCUM1, NFCUM2, NFCUM4, NFCUM6.

S209 [SRC-00209] Schneider Electric (Square D). *NF Panelboard Crimp Main Lug Kit (125, 250, 400, and 600 A)*. 80043-762-01. 2008-06. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-762-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-762-01.pdf Note: Covers NFALV1/2/4, NFCUV1/2/4 (and 600 A versions).

S210 [SRC-00210] Schneider Electric (Square D). *NF Panelboard Trim and Rail Extension Kit (6-, 12-, and 18-inch)*. 80043-763-01. 2008-06. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-763-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-763-01.pdf Note: Covers NF6RDE, NF12RDE, NF18RDE.

S211 [SRC-00211] Schneider Electric (Square D). *NF Panelboard H- or J-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard, Rev. 01*. 80043-764-03. 2015-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-764-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-764-03.pdf Note: Covers N150MH, N250MJ.

S212 [SRC-00212] Schneider Electric (Square D). *NF Panelboard FI- or KI-Frame Main Circuit Breaker and Adapter Kit Installation onto an NF Panelboard*. 80043-765-02. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-765-02 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-765-02.pdf Note: Covers N100MFI, N250MKC.

S213 [SRC-00213] Schneider Electric (Square D). *NF Panelboard L-Frame Main Circuit Breaker Adapter Kit Installation onto an NF Panelboard*. 80043-766-03. 2009-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-766-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-766-03.pdf Note: LA/LH (L-frame) main kit; catalog number not printed in extracted text (Digest lists N400M for LA/LH).

S214 [SRC-00214] Schneider Electric (Square D). *NF Panelboards Branch Connector Kit Installation onto an NF Panelboard*. 80043-767-01. 2008-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-767-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-767-01.pdf Note: Covers SKNF250, SKNF600.

S215 [SRC-00215] Schneider Electric (Square D). *NF Panelboards Gutter-Mounted Neutral Bonding Strap Installation onto an NF Panelboard*. 80043-768-01. 2008-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-768-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-768-01.pdf Note: No catalog number found in text.

S216 [SRC-00216] Schneider Electric (Square D). *NF Column-Width Panelboards Branch Connector Kit Installation onto an NF Panelboard*. 80043-770-01. 2008-09. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-770-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-770-01.pdf Note: No catalog number found in text.

S217 [SRC-00217] Schneider Electric (Square D). *Backfed Main Circuit Breaker Barrier Kit Installation onto an NQ or NF Panelboard, Classes 1640 and 1670*. 80043-774-01. 2009-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-774-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-774-01.pdf Note: Replaces 80043-687-03 (08/2007). Covers NQODBFMB20, NFBFMB20.

S218 [SRC-00218] Schneider Electric (Square D). *Condo Riser Neutral Assembly Kit Installation onto an NQ Condo Riser Panelboard, Class 1640*. 80043-778-01. 2009-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-778-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-778-01.pdf Note: Mentions NQN6CR, NQNL6CR.

S219 [SRC-00219] Schneider Electric (Square D). *Neutral Bonding Screw Kit Installation onto an NQ 14 Inch Panelboard*. 80043-786-01. 2010-01. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-786-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-786-01.pdf Note: Kit: one 10-32 x 1 3/4 in neutral bonding screw; torque 10-12 lb-in. No catalog number in text.

S220 [SRC-00220] Schneider Electric (Square D). *Liebert 400 A Sub-Feed Lug Kit Installation onto a Liebert NQ Panelboard*. 80043-792-01. 2012-03. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-792-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-792-01.pdf Note: Mentions NQSFL4L.

S221 [SRC-00221] Schneider Electric (Square D). *QOB Circuit Breaker Installation when Equipped with Jaw Accessory Kit QO1PJ15, Class 7267 (NQ Panelboards)*. 80043-809-01. 2013-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-809-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-809-01.pdf

S222 [SRC-00222] Schneider Electric (Square D). *Installation and Replacement of Fingersafe IP2X per IEC 60529 Main Circuit Breaker Covers and U.S. Service Entrance Devices, Rev. 04*. 80043-839-01. 2023-04. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-839-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-839-01.pdf Note: Tables 1-6: I-Line, NQ, NF line lug cover / SE barrier kits.

S223 [SRC-00223] Schneider Electric (Square D). *I-Line Panelboards - Barrier Kits Installation Instructions, Rev. 03*. 80043-844-01. 2026-06. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-844-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-844-01.pdf Note: RPINTBK800HCP, RPINTBK1200HCPC(IP2X), RPINTBK1200HCR.

S224 [SRC-00224] Schneider Electric (Square D). *I-Line Panelboards - Expanded Neutral Assembly Installation*. 80043-845-01. 2020-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-845-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-845-01.pdf Note: Expanded neutral kit table (ILHCJ..ESN, ILHCPSU..ESN, ILHCPRU..ESN).

S225 [SRC-00225] Schneider Electric (Square D). *Main Circuit Breaker 400/600 A and Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NQ Panelboard (NQMB6PPL)*. 80043-847-01. 2021-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-847-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-847-01.pdf

S226 [SRC-00226] Schneider Electric (Square D). *Main Circuit Breaker and Sub-Feed Circuit Breaker Deadfront Replacement Kit for PowerPacT L-Frame (NQRPLMB6PPL, NFRPLMB6PPL, NQRPLMB63RPPL, NFRPLMB63RPPL)*. 80043-848-01. 2020-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-848-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-848-01.pdf

S227 [SRC-00227] Schneider Electric (Square D). *NQ/NF U.S. Condo Riser Panelboards Neutral Bonding Strap Installation (NFNQCRBOND46, NFCRBOND8)*. 80043-853-01. 2020-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-853-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-853-01.pdf

S228 [SRC-00228] Schneider Electric (Square D). *NQ200AN Neutral Terminal Kit*. 80043-858-01. 2020-08. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-858-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-858-01.pdf

S229 [SRC-00229] Schneider Electric (Square D). *Main Circuit Breaker Deadfront Replacement Kit for PowerPacT M-Frame and P-Frame (NFRPLMB8PPMP)*. 80043-861-01. 2021-07. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-861-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-861-01.pdf

S230 [SRC-00230] Schneider Electric (Square D). *Main Circuit Breaker 400/600 A or Sub-Feed Circuit Breaker 400 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (N600MPPL), Class 1670*. 80043-866-01. 2021-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-866-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-866-01.pdf

S231 [SRC-00231] Schneider Electric (Square D). *Sub-Feed Circuit Breaker 600 A Kit for PowerPacT L-Frame, Installation onto an NF Panelboard (NF600SFBPPL), Class 1670*. 80043-868-01. 2021-10. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-868-01 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-868-01.pdf

S232 [SRC-00232] Schneider Electric (Square D). *I-Line Panelboard Grounding Bar Mounting Instructions*. 80043-312-03. 2006-11. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-312-03 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-312-03.pdf Note: ECN 06H0252.

S233 [SRC-00233] Schneider Electric (Square D). *QMBHW and QMBJW Circuit Breaker Adapter Units Installation, Class 4620*. 80043-339-04. 2005-05. Type: oem_instruction. URL: https://download.schneider-electric.com/files?p_Doc_Ref=80043-339-04 (accessed 2026-10-21) Local copy: docs/library/SQD/80043-339-04.pdf Note: Replaces 80043-339-03.

S234 [SRC-00234] Schneider Electric (Square D). *Schneider Electric FAQ FA102748: What is the SKNQOD225 and where is it used?*. FA102748. unknown. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA102748 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S235 [SRC-00235] Schneider Electric (Square D). *Schneider Electric FAQ FA124209: What is the parts breakdown on an SKNQOD225?*. FA124209. 2008-06-06 (modified 2026-04-22). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA124209 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S236 [SRC-00236] Schneider Electric (Square D). *Schneider Electric FAQ FA332061: What are the product time lines of availability for NQO / NQOB / NQOD / NEHB / NF panelboards*. FA332061. 2017-11-17 (modified 2023-03-07). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA332061 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S237 [SRC-00237] Schneider Electric (Square D). *Schneider Electric FAQ FA123424: Will the main breaker adapter kits for NQ panelboards work with NQOD panelboards?*. FA123424. 2008-04-07 (modified 2022-12-05). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA123424 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S238 [SRC-00238] Schneider Electric (Square D). *Schneider Electric FAQ FA128003: What is the replacement for NQOD30L400CU?*. FA128003. 2009-07-14 (modified 2026-04-17). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA128003 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S239 [SRC-00239] Schneider Electric (Square D). *Schneider Electric FAQ FA121228: What is the part number for the branch fingers or connector kits for a 125 amp and 250 amp NF panelboard interiors?*. FA121228. 2007-04-10 (modified 2026-06-15). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA121228 (accessed 2026-10-21) Note: Read via WebFetch (summarised by fetch tool, not verbatim).

S240 [SRC-00240] Schneider Electric (Square D). *Schneider Electric FAQ FA166748 (NEHB obsolescence / NF replacement)*. FA166748. unknown. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA166748 (accessed 2026-10-21) Status: blocked. Note: Page itself returned 403; content known only from web-search snippet: NEHB obsoleted 1995, EH/EHB no longer available, replaced by NF with EDB/EGB/EJB.

S241 [SRC-00241] Crescent Electric Supply. *Crescent Electric listing: NQ Panelboard Acc. Connector Kit 225A 3P (SKNQOD225)*. unknown. Type: distributor. URL: https://www.crescentelectric.com/product/178985/nq-panelboard-acc-connector-kit-225a-3p (accessed 2026-10-21) Note: Search-snippet only; listing marked Discontinued.

S242 [SRC-00242] Crescent Electric Supply. *Crescent Electric listing: NQMB2Q NQ Adapter Kit, For Use With QBL/QDL/QGL/QJL Main Circuit Breaker, 100 to 225 A*. unknown. Type: distributor. URL: https://www.crescentelectric.com/product/44398/panelboard-accessory-nq-main-breaker-kit-225a-q-frame (accessed 2026-10-21) Note: Search-snippet only.

S243 [SRC-00243] McGraw-Hill (Westinghouse advertising/catalog pages). *Electrical Construction and Maintenance, Vol 45, September 1946 (Electrical Contracting) - Westinghouse catalog insert 'NOFUZE Circuit Breaker Panelboards' (NMIB, NMM Multibreaker, NLAB Quicklag De-ion, NLAB Single Row Quicklag, NA1B-AB De-ion, MH Multibreaker, AB De-ion Convertible)*. sim_ecm_1946-09_45. 1946-09. Type: archive. URL: https://archive.org/details/sim_ecm_1946-09_45 (accessed 2026-10-21) Note: Full djvu text downloaded from archive.org (https://archive.org/download/sim_ecm_1946-09_45/sim_ecm_1946-09_45_djvu.txt); Westinghouse catalog section around djvu text lines 24280-24705 (page ref B62).

S244 [SRC-00244] McGraw-Hill (General Electric advertisement). *Electrical Construction and Maintenance, Vol 54 No 3, March 1955 - General Electric 'System Engineered' equipment advertisement listing GE panelboard types*. sim_ecm_1955-03_54_3. 1955-03. Type: archive. URL: https://archive.org/details/sim_ecm_1955-03_54_3 (accessed 2026-10-21) Note: OEM-authored advertisement: 'Panelboards - Types NAB, NHB, NLAB, NLTQ, NLTQX, NTP, NTC for lighting - types NCB, CCB, Swing-WA* and Converti-Fuse* for power distribution'. *Registered trade-mark of General Electric Company.

S245 [SRC-00245] McGraw-Hill (Square D advertisement). *Electrical Construction and Maintenance, Vol 59 No 5, May 1960 - Square D advertisement 'Same panelboard combines both lighting and power' (NQO plug-in and NQOB bolted connection panelboards)*. sim_ecm_1960-05_59_5. 1960-05. Type: archive. URL: https://archive.org/details/sim_ecm_1960-05_59_5 (accessed 2026-10-21) Note: Square D Company, Mercer Road, Lexington KY. Breaker ratings table: 1-pole 15-50 A, 2-pole 15-70 A, 3-pole 15-50 A, 2/3-pole 70-100 A.

S246 [SRC-00246] McGraw-Hill (Square D advertisement). *Electrical Construction and Maintenance, Vol 59 No 9, September 1960 - Square D advertisement 'Exclusive Non-Interchangeable Construction standard on all 250 Volt, 100 Amp branch circuit breaker panelboards' (NQO, NQOB, NA1B)*. sim_ecm_1960-09_59_9. 1960-09. Type: archive. URL: https://archive.org/details/sim_ecm_1960-09_59_9 (accessed 2026-10-21) Note: NA1B: E frame, bolted connection, AC or DC; NQO: plug-in connection, AC only; NQOB: bolted connection, AC only; NEC 240-25(g) non-interchangeability.

S247 [SRC-00247] Copel Inc. (distributor catalogue). *Electrozad (Electrozad Supply Co. catalogue / price book, Copel Inc. 1985) - ITE-Siemens, Square D, Federal Pioneer distribution equipment sections (Canada)*. bwb_P9-BJG-737. 1985. Type: archive. URL: https://archive.org/details/bwb_P9-BJG-737 (accessed 2026-10-21) Status: paywalled. Note: archive.org lending item; djvu text download returns 401. Content read only through archive.org full-text-search highlight snippets (services/search/beta/page_production, service_backend=fts, query 'identifier:bwb_P9-BJG-737 AND <term>'). Canadian market products. No page numbers available from snippets except printed page numbers 401/402/409/410 for ITE-Siemens safety switch / CDP pages.

S248 [SRC-00248] Eaton. *Eaton Bid Manager help - 'Panel Board Aftermarket' (PNLA) take-off help page*. Type: oem_web. URL: https://bidmanager.eaton.com/BidManager/Help/Sales/en-US/TakeOff_Help_Files/PNLAHelp/PNLAHelp/PNLAHelp.htm (accessed 2026-10-21) Note: Read via WebFetch. Describes CDP, FDP (Westinghouse), MP40 and MP100 (Cutler-Hammer) branch kits; MP40 kits also add devices to MP2 group-mounted switchboards, Cutler-Hammer-labelled CDP panelboards and NFB panelboards 26.5-36 in wide; FDP kits fit only 3.50 in phase spacing (not 4.25 in).

S249 [SRC-00249] Eaton. *Renewal Parts Data RP01400003E - Vintage Cutler-Hammer panelboards and switchboards (MP40, MP-200, PB, PH, PH-L, EP, EE)*. RP01400003E. 2013-02. Type: oem_renewal_parts. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/eaton-vintage-cutler-hammer-swithboard-panelboard-rp01400003e-en-us.pdf (accessed 2026-10-21) Status: blocked. Note: eaton.com refused (HTTP/2 INTERNAL_ERROR, empty reply over HTTP/1.1; WebFetch 503). usermanual.wiki mirror (152612Attachmenturl.613627626.pdf) redirects to manuals.plus security check. web.archive.org unreachable from container. Search-engine snippets only: effective February 2013; retrofit kits = breaker + copper connectors (twin) + covers + brackets + hardware + instructions; kits from Sumter SC Aftermarket Center; all breakers in one 'B' space must be same family (EHD, F-frame, CC/CCH/CHH); trim locks for MP100, MP2, M50.

S250 [SRC-00250] Eaton. *Vintage Cutler-Hammer Panelboards and Switchboards Price List PL01400003E*. PL01400003E. 2008-01. Type: oem_catalog. URL: https://buy.wesco.com/static/catalog/products/images/PDF/EATON_pl01400003e.pdf (accessed 2026-10-21) Status: blocked. Note: Wesco copy returns HTTP 403 / HTML; carltonbates.com copy (https://carltonbates.com/static/catalog/products/images/PDF/EATON_pl01400003e.pdf) behind Cloudflare challenge. Search snippets: effective January 2008, supersedes February 2004; MP40 breaker retrofit kits also install in MP200 switchboards; covers trim locks, filler plates, deadfront kits, neutral assemblies, ground bars.

S251 [SRC-00251] Relectric (surplus/recertified dealer). *Relectric - Breaker Parts & Accessories: Mounting Hardware (listing pages 1-42, 981 items) and individual product detail pages*. Type: surplus. URL: https://www.relectric.com/breaker-parts-and-accessories/mounting-hardware (accessed 2026-10-21) Note: Listing fetched page=1..42; product 'Product Specifications' blocks (Panel Type / Breaker Types / Mounting / Amps Max) read from detail pages e.g. https://www.relectric.com/mp40kl400-3, /tb1dpk, /5eh2, /ml1kapt. Dealer data: compatibility max conf C.

S252 [SRC-00252] Superbreakers (surplus dealer). *Superbreakers - Mounting Kits, Panels & Accessories collection (Shopify products.json, 140 items)*. Type: surplus. URL: https://superbreakers.com/collections/mounting-kits-panels-accessories (accessed 2026-10-21) Note: Product body text for MP40ED2253, MP40KC2253, MP40KF1003, MP40KJ2253, MP40KK4003, MP40KL4003, MP40KM8003, MP40KN12003 and NHB150PK. Superbreakers writes the MP40 kits without the hyphen (e.g. MP40KL4003 = Relectric MP40KL400-3).

S253 [SRC-00253] Essential Electric (dealer; states it is not an authorized distributor). *Essential Electric - MPED1K Cutler Hammer 225A Dual Branch Panelboard Connector Kit 600V*. Type: surplus. URL: https://essentialparts.com/products/mped1k-cutler-hammer-225a-dual-branch-panelboard-connector-kit-600v?variant=62518414377119 (accessed 2026-10-21)

S254 [SRC-00254] McGraw-Hill / Electrical South. *Electrical Construction and Maintenance June 1958 / Electrical South June 1958 - Westinghouse installation story: 'More than 40 Westinghouse Panelboards (Type NLAB & Type CDP) provide for lighting and distribution'*. sim_ecm_1958-06_57_6; sim_electrical-south_1958-06_38_6. 1958-06. Type: archive. URL: https://archive.org/details/sim_ecm_1958-06_57_6 (accessed 2026-10-21) Note: Full-text-search snippet only.

S255 [SRC-00255] Technical Publishing (Westinghouse advertisement). *Plant Engineering Vol 14 No 4-6 (April-June 1960) - Westinghouse ad: flush-mounted type NLAB panelboard; 'Westinghouse Bus Duct and Panelboard Specialist inspect a type CDP convertible'*. sim_plant-engineering_1960-04_14_4. 1960-04. Type: archive. URL: https://archive.org/details/sim_plant-engineering_1960-04_14_4 (accessed 2026-10-21) Note: Full-text-search snippet; also says '*NBQ (plug-in) and NQOB (bolted connection) panelboards are also available' in a Square D ad in the same issue (OCR of NQO likely garbled to NBQ).

S256 [SRC-00256] Prentice-Hall (textbook). *Industrial Electrical Wiring: Design and Application (1987), section 'Type NQOB Panelboards' p.132-133*. industrialelectr0000earl. 1987. Type: archive. URL: https://archive.org/details/industrialelectr0000earl (accessed 2026-10-21) Status: paywalled. Note: Lending item; full-text-search snippets only: 'breakers are bolted in place in NQOB panelboards, rather than plugged into the busbars. NQOB panelboards are suitable ...'.

S257 [SRC-00257] McGraw-Hill (reference book). *Standard Application of Electrical Details (1984) - panel schedules showing 'NLAB 100 THQB 20' and TEB 70 3P main*. standardapplicat0000muel. 1984. Type: archive. URL: https://archive.org/details/standardapplicat0000muel (accessed 2026-10-21) Status: paywalled. Note: Lending item; full-text-search snippets only. Schedules pair 'NLAB' panels with GE THQB branch and TEB main breakers, corroborating a GE NLAB designation in addition to the Westinghouse NLAB.

S258 [SRC-00258] McGraw-Hill. *Electrical Construction and Maintenance, February 1959 - article text: 'Two of the panelboards are NLAB 120/240v, one is a NHIB 277/480v'*. sim_ecm_1959-02_58_2. 1959-02. Type: archive. URL: https://archive.org/details/sim_ecm_1959-02_58_2 (accessed 2026-10-21) Note: Full-text-search snippet; manufacturer not identified in snippet.

S259 [SRC-00259] General Electric Supply Corporation (GE subsidiary distributor). *Wiring Materials, Power Apparatus - General Electric Supply Corporation catalog (copyright 1951), pp. 441-448 'Trumbull Lighting Panelboards' (NAB, NLAB, NLTQ, NTP/NTC) and 'Trumbull Panelboards for Power Distribution' (Converti-Fuse, Swing-Wa, Convertible Circuit Breaker, Type ABH) and Trumbull switchboards*. wiringmaterialsp00unse. 1951. Type: archive. URL: https://archive.org/details/wiringmaterialsp00unse (accessed 2026-10-21) Note: Full djvu text downloaded (https://archive.org/download/wiringmaterialsp00unse/wiringmaterialsp00unse_djvu.txt); panelboard pages at text lines ~69790-71300. Product text authored for GE/Trumbull products; UL file E2366 cited for Trumbull NLTQ.

S260 [SRC-00260] General Electric. *GE Installation and Maintenance Instructions GEJ-3006A 'Circuit Breaker Panelboards' with renewal parts list GEG-13610B 'Types DB, NLTQ and NLAB Panelboards, Style 5' (Distribution Assemblies Department)*. GEJ-3006A / GEG-13610B. 1969-08. Type: oem_instruction. URL: https://archive.org/details/General_Electric_Circuit_Breaker_Panelboard_GEJ_3006A_ (accessed 2026-10-21) Status: paywalled. Note: archive.org item (access-restricted; djvu text returns 401). Content read through archive.org full-text-search highlight snippets (query identifier:General_Electric_Circuit_Breaker_Panelboard_GEJ_3006A_ AND <term>). Item date 1969, file name says 'August'. Part-number-to-description mapping inferred from OCR line order (description followed by catalog number); lug table column order is ambiguous.

S261 [SRC-00261] McGraw-Hill (Westinghouse advertisement / product news). *Electrical Construction and Maintenance, Vol 56 No 6, June 1957 - Westinghouse distribution panelboard advertisement (Type CDP and Type FDP ratings) and new-product note on GE Type TQLP/TQLA plug-in lighting and power panel*. sim_ecm_1957-06_56_6. 1957-06. Type: archive. URL: https://archive.org/details/sim_ecm_1957-06_56_6 (accessed 2026-10-21) Note: Full djvu text downloaded; Westinghouse ad pp.188-189; GE TQLA/TQLP news item.

S262 [SRC-00262] McGraw-Hill (FPE / Cutler-Hammer advertisements). *Electrical Construction and Maintenance, Vol 61 No 5, May 1962 - Federal Pacific Electric advertisement (NHDP and CDP distribution panelboards with rotary-handle breakers; HCB and VCB switchboards) and Cutler-Hammer advertisement listing divisions (AIL; Mullenbach)*. sim_ecm_1962-05_61_5. 1962-05. Type: archive. URL: https://archive.org/details/sim_ecm_1962-05_61_5 (accessed 2026-10-21) Note: Full djvu text downloaded. Also contains I-T-E 'New EQ-225 amp breaker' advertisement.

S263 [SRC-00263] Schneider Electric. *Schneider Electric FAQ FA130530 - MLN panelboards and replacement circuit breakers (MLN panelboards and switchboards sold in the USA 1962-1968)*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA130530/ (accessed 2026-10-21) Note: Read via WebFetch (US page; CA page 403). Published 2010-06-02, modified 2026-04-22.

S264 [SRC-00264] Schneider Electric. *Schneider Electric FAQ FA233845 - Are NY1B panelboard replacement breakers still available?*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA233845 (accessed 2026-10-21) Note: Read via WebFetch. Published 2015-02-25.

S265 [SRC-00265] Schneider Electric. *Schneider Electric FAQ FA96717 - What is the QSFB switch/fuse unit and is it available? (NQOB panelboards)*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA96717/ (accessed 2026-10-21) Note: Read via WebFetch. Published 2002-08-13.

S266 [SRC-00266] Schneider Electric. *Schneider Electric FAQ group on NQO/NQOB, NEHB, NA1B, NY1B (FA97632, FA124608, FA232958, FA87904, FA100575, FA332061, FAQ000266417, FA129512, FA119163, FA122757, FA166748, FA121261, FA125651, FA128561) - content known only from search-engine result summaries*. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA97632/ (accessed 2026-10-21) Status: blocked. Note: All returned HTTP 403 to WebFetch and curl on 2026-10-21 after the first few fetches. Statements attributed to this group are search-engine summaries not mapped to an individual FAQ number; treat as conf C/D until each FAQ is read.

S267 [SRC-00267] Mike Holt Enterprises forum. *Mike Holt forum - 'Square D - Legacy Breaker Information' (ML line superseded by I-Line in the 1960s; ML breakers identified by side label part number 999xxx)*. Type: forum. URL: https://forums.mikeholt.com/threads/square-d-legacy-breaker-information.2588165/post-3009160 (accessed 2026-10-21) Note: Search-result summary only.

S268 [SRC-00268] McGraw-Hill / Technical Publishing (Trumbull Electric advertisements). *Electrical Wholesaling Oct 1953 / Plant Engineering Jul 1951 - Trumbull advertisements for NLTQ and NLTQX (column type) panelboards with plug-in TQL breakers (Bulletin TEB-14)*. sim_electrical-wholesaling_1953-10_34_10; sim_plant-engineering_1951-07_5_7. 1951-1953. Type: archive. URL: https://archive.org/details/sim_electrical-wholesaling_1953-10_34_10 (accessed 2026-10-21) Note: Full-text-search snippets: 'Trumbull's new NLTQ Panelboard introduces the first plug-in circuit breaker' (quick-make quick-break); 'NLTQ Panelboards incorporate plug-in type TQL breakers'; interiors readily removable.

S269 [SRC-00269] John Wiley (textbook reproducing GE data). *Electrical Wiring and Design: A Practical Approach (1983) - 'For designer's use (AV-Line switchboards)', publications list 'AV-Line Switchboards GEA-7931'*. electricalwiring0000star. 1983. Type: archive. URL: https://archive.org/details/electricalwiring0000star (accessed 2026-10-21) Status: paywalled. Note: Lending item; full-text-search snippet only.

S270 [SRC-00270] Square D Company. *Square D Digest 152 (1970) - Distribution Equipment catalog; Lighting & Distribution Panelboards section pp.55-86 (index p.55, NQO/NQOB pp.56-65, NA1B pp.66-67, NH1B p.68, I-Line pp.72-75, NTFB/NTHB p.76, QMB pp.78-83, accessories p.84, ordering/replacement p.85)*. Digest 152. 1970. Type: oem_catalog. URL: https://archive.org/details/squareddigest152 (accessed 2026-10-21) Note: Open archive.org item (folkscanomy_engineering). Full djvu text downloaded from https://archive.org/download/squareddigest152/Square%20D%20Digest%20152%20%281970%29_djvu.txt ; OCR has minor digit/letter errors (noted per claim). Panelboard section at text lines ~40200-65250.

S271 [SRC-00271] The Trademark Register (Washington DC). *The Trademark Register of the United States 1976 - entry 'POW-R-LINE - US 21 - 10-14-75 - 1,022,520'*. trademarkregiste0000vari_k3n0. 1976. Type: archive. URL: https://archive.org/details/trademarkregiste0000vari_k3n0 (accessed 2026-10-21) Status: paywalled. Note: Full-text-search snippet only; registrant not shown in snippet.

S272 [SRC-00272] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits, Catalog Numbers AMCB6EB, AMCB4SE, AMCB4EB*. DEH047 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295375/ge-industrial-solutions-spectra-series-power-panelboards-amcb6eb-amcb4se-amcb4eb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295375.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S273 [SRC-00273] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6FJ, AMCB3FJ, AMCB2FJ, AMCB4FJ*. DEH059 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295228/ge-industrial-solutions-spectra-series-power-panelboards-amcb6fj-amcb3fj-amcb2fj-and-amcb4fj.html (accessed 2026-10-21) Local copy: docs/library/GEA/295228.txt Note: Text rendering on manualsdir.com (6 pp.); figures not legible in text mode.

S274 [SRC-00274] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3GM and AMCB2GM*. DEH060 R04. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295227/ge-industrial-solutions-spectra-series-power-panelboards-amcb2gm-and-amcb3gm.html (accessed 2026-10-21) Local copy: docs/library/GEA/295227.txt Note: Text rendering on manualsdir.com (8 pp.); figures not legible in text mode.

S275 [SRC-00275] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB3KM and AMCB2KM*. DEH061 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295149/ge-industrial-solutions-spectra-series-power-panelboards-amcb2km-and-amcb3km.html (accessed 2026-10-21) Local copy: docs/library/GEA/295149.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S276 [SRC-00276] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6EY and AMCB4EY*. DEH062 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295168/ge-industrial-solutions-spectra-series-power-panelboards-amcb4ey-and-amcb6ey.html (accessed 2026-10-21) Local copy: docs/library/GEA/295168.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S277 [SRC-00277] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits AMCB6GB and AMCB4GB*. DEH40129 R03. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295503/ge-industrial-solutions-spectra-series-power-panelboards-amcb4gb-and-amcb6gb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295503.txt Note: Text rendering on manualsdir.com (6 pp.); figures not legible in text mode.

S278 [SRC-00278] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Mounting Hardware Kits (AHKE1, AHKEL1, AHKF1, AHKG1, AHKJ1, AHKLB1, AHKQ1)*. GEH5913 R02. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295175/ge-industrial-solutions-spectra-series-power-panelboards-circuit-breaker-mounting-hardware-kits.html (accessed 2026-10-21) Local copy: docs/library/GEA/295175.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode. Table 1 columns (line-end screw/torque, load-end screw/torque) are run together in the text rendering; some torque cells appear merged.

S279 [SRC-00279] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Filler Plate Kit AFP6SKS*. GEH5629 R05. 2001-08. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295080/ge-industrial-solutions-spectra-series-power-panelboards-afp6sks.html (accessed 2026-10-21) Local copy: docs/library/GEA/295080.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S280 [SRC-00280] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Cover Plate (TEY, THQB, THHQB)*. DEH044 R02. 2001-08. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295327/ge-industrial-solutions-spectra-series-power-panelboards-circuit-breaker-cover-plate.html (accessed 2026-10-21) Local copy: docs/library/GEA/295327.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S281 [SRC-00281] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Cover (SE, SF, TE, TF, TQ, TEL)*. DEH042 R03. 2001. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294860/ge-industrial-solutions-spectra-series-power-panelboards-se-sf-te-tf-tq-and-tel.html (accessed 2026-10-21) Local copy: docs/library/GEA/294860.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode. Back page with date code not rendered.

S282 [SRC-00282] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breaker Cover (SGDA, SGHA, SGLA, SGPA)*. DEH045 R05. 2001-08. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294801/ge-industrial-solutions-spectra-series-power-panelboards-sgda-sgha-sgla-and-sgpa.html (accessed 2026-10-21) Local copy: docs/library/GEA/294801.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S283 [SRC-00283] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type AFP Filler Plates*. GEH5590 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295586/ge-industrial-solutions-spectra-series-power-panelboards-afp-filler-plates.html (accessed 2026-10-21) Local copy: docs/library/GEA/295586.txt Note: Text rendering on manualsdir.com (1 pp.); figures not legible in text mode.

S284 [SRC-00284] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type APP Filler Plates*. GEH5583 R03. 2001-03. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295532/ge-industrial-solutions-spectra-series-power-panelboards-app-filler-plates.html (accessed 2026-10-21) Local copy: docs/library/GEA/295532.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S285 [SRC-00285] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type APN and APNB Panelboard Interiors into Type APB Panelboard Enclosures*. GEH5589 R07. 2001-05. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295071/ge-industrial-solutions-spectra-series-power-panelboards-apn-and-apnb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295071.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S286 [SRC-00286] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC2FLS, AMC4FLS)*. GEH5626 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295056/ge-industrial-solutions-spectra-series-power-panelboards-amc2fj-amc6fls-amc3fls-amc2fls.html (accessed 2026-10-21) Local copy: docs/library/GEA/295056.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S287 [SRC-00287] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC3KM, AMC2KM)*. GEH5623 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295161/ge-industrial-solutions-spectra-series-power-panelboards-amc3km-and-amc2km.html (accessed 2026-10-21) Local copy: docs/library/GEA/295161.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S288 [SRC-00288] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC4GB, AMC6GB)*. GEH5673 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295270/ge-industrial-solutions-spectra-series-power-panelboards-amc4gb-and-amc6gb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295270.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S289 [SRC-00289] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6JK, AMC4JK, AMC3JK, AMC2JK)*. GEH5624 R03. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295363/ge-industrial-solutions-spectra-series-power-panelboards-amc6jk-amc4jk-acm3jk-and-amc2jk.html (accessed 2026-10-21) Local copy: docs/library/GEA/295363.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S290 [SRC-00290] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EY, AMC6QB)*. GEH5677 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295477/ge-industrial-solutions-spectra-series-power-panelboards-amc6ey-and-amc6qb.html (accessed 2026-10-21) Local copy: docs/library/GEA/295477.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S291 [SRC-00291] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6QD, AMC4QD)*. GEH5643 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295509/ge-industrial-solutions-spectra-series-power-panelboards-amc6qd-and-amc4qd.html (accessed 2026-10-21) Local copy: docs/library/GEA/295509.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S292 [SRC-00292] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC6EB, AMC4EB, AMC6EL, AMC6EBS, AMC4EBS, AMC4SE)*. GEH5625 R04. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295561/ge-industrial-solutions-spectra-series-power-panelboards-amc6ebs-amc4ebs-and-amc4se.html (accessed 2026-10-21) Local copy: docs/library/GEA/295561.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S293 [SRC-00293] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type AMB Main Lug Kit*. DEH070 R02. 2001. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294898/ge-industrial-solutions-spectra-series-power-panelboards-amb-main-lug-kit.html (accessed 2026-10-21) Local copy: docs/library/GEA/294898.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode. Back page with date code not rendered.

S294 [SRC-00294] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Bolt-On Main Lug Kits (AMB...N/CA/DCA)*. DEH071 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294936/ge-industrial-solutions-spectra-series-power-panelboards-bolt-on-main-lug-kits.html (accessed 2026-10-21) Local copy: docs/library/GEA/294936.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S295 [SRC-00295] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type ANK Neutrals (Model 2)*. GEH5585 R05. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295538/ge-industrial-solutions-spectra-series-power-panelboards-ank-neutrals-model-2.html (accessed 2026-10-21) Local copy: docs/library/GEA/295538.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S296 [SRC-00296] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Equipment Grounds, Types AEG 10, 21, 21S, 31S*. GEH5586 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295598/ge-industrial-solutions-spectra-series-power-panelboards-aeg-10-21-21s-31s.html (accessed 2026-10-21) Local copy: docs/library/GEA/295598.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S297 [SRC-00297] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Neutral and Ground Wire Kit for TVSS, Catalog Number ATHMEGNDN*. DEH40471 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295027/ge-industrial-solutions-spectra-series-power-panelboards-athmegndn.html (accessed 2026-10-21) Local copy: docs/library/GEA/295027.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S298 [SRC-00298] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Type ADF Dead Fronts & Type APF Door Fronts*. GEH5930 R04. 2001. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295209/ge-industrial-solutions-spectra-series-adf-dead-fronts-type-apf-door-fronts.html (accessed 2026-10-21) Local copy: docs/library/GEA/295209.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S299 [SRC-00299] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Permanent Circuit Markers (APN49, APN99)*. GEH5598 R02. 2001-05. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295347/ge-industrial-solutions-spectra-series-power-panelboards-permanent-circuit-markers.html (accessed 2026-10-21) Local copy: docs/library/GEA/295347.txt Note: Text rendering on manualsdir.com (2 pp.); figures not legible in text mode.

S300 [SRC-00300] GE Industrial Systems (General Electric Company). *Spectra Series Power Panelboards - Ground Fault Neutral, 1200 A Maximum*. GEH5683 R02. 2001-10. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294946/ge-industrial-solutions-spectra-series-power-panelboards-ground-fault-neutral-1200-a-maximum.html (accessed 2026-10-21) Local copy: docs/library/GEA/294946.txt Note: Text rendering on manualsdir.com (4 pp.); figures not legible in text mode.

S301 [SRC-00301] ABB. *ABB empower e-catalog product pages (Spectra Series / A-Series accessories and parts)*. 2026-10. Type: oem_web. URL: https://empower.abb.com/ecatalog/ec/EN_NA/p/<catalog number> (accessed 2026-10-21) Local copy: docs/library/GEA/empower_ge.json Note: Per-part pages fetched by curl 2026-10-21 (e.g. https://empower.abb.com/ecatalog/ec/EN_NA/p/AMCB6FJFP). Description/UPC/spec text stored in empower_ge.json. Absence of a page is NOT evidence of obsolescence (about 200 of 300 numbers returned no product block).

S302 [SRC-00302] ABB. *ABB Quick Selector Guide - Small Projects (distributor edition, Viking Electric) - incl. Tmax XT Retrofit Kits for Spectra Panelboards, ReliaGear neXT renewal parts, Spectra renewal parts*. Type: oem_catalog. URL: https://simplebooklet.com/unnamedsimplebooklet1310?textonly=1 (accessed 2026-10-21) Local copy: docs/library/GEA/sb_unnamedsimplebooklet1310.txt Note: ABB-authored guide republished by distributor on simplebooklet (text-only view). Undated (contains GIZ-1345E 9/19 page). Product number columns of the Spectra renewal-part tables (pp.31-32) are images/missing in text view.

S303 [SRC-00303] ABB. *ReliaGear neXT power panelboards - typical layouts / X-space brochure*. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnexttypicals?textonly=1 (accessed 2026-10-21) Local copy: docs/library/GEA/sb_abbreliagearnexttypicals.txt Note: Text-only flip book view.

S304 [SRC-00304] Schneider Electric (Square D). *Power-Style QED-2 Switchboards Instruction Bulletin (English section, (c)1988-2018)*. 80043-055-13. 2018-03. Type: oem_instruction. URL: https://www.manualslib.com/manual/1766524/Square-Qed-2.html (accessed 2026-10-21) Note: Read page-by-page via ManualsLib viewer (WebFetch; direct curl blocked by Cloudflare). Viewer page = printed page + 2. Table cell pairing in Section 9 is partly ambiguous in the text rendering. OEM hosts (productinfo.se.com, download.se.com, download.schneider-electric.com) returned 403 for 80043-055-13/-16.

S305 [SRC-00305] Schneider Electric (Square D). *S33930 Sub-feed Lugs Instruction Bulletin*. 48049-250-01. 2001-05. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider_synd_rework/2024q1/documents/e02de0c618489b3ef1b26c3339d7910be3202941.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/48049-250-01_S33930.pdf Note: ECN K512, Cedar Rapids; DistributorDataSolutions mirror.

S306 [SRC-00306] Schneider Electric (Square D). *SL400 Sub-feed Lugs Installation Instruction Bulletin*. 48040-651-03 Rev. 01. 2025-09. Type: oem_instruction. URL: https://images.salsify.com/image/upload/s--vVhIL9Pf--/0cf478d3b3df8a5337f5f8fbda83bb6e1052aaed.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/48040-651-03_Rev01_2025.pdf Note: Linked from graybar.com product page 88243518 (Salsify CDN). Replaces 48040-651-03 ECN 266C 05/2006.

S307 [SRC-00307] Schneider Electric (Square D). *SL400, SL800, SL800FT and SL1200 Sub-feed Lugs Instruction Bulletin*. 48040-651-03. 2006-05. Type: oem_instruction. URL: https://images.salsify.com/image/upload/s--ER73lPOC--/0326786488e6051f5e5b759829da584e174fd205.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/48040-651-03_2006.pdf Note: Older edition covering SL400/SL800/SL800FT/SL1200 (figures only; strip-length table p.3).

S308 [SRC-00308] Schneider Electric. *Product data sheet SL400 - Panelboard accessory, I-Line, lug kit, subfeed, 400A, 6 in*. 2026-06. Type: oem_web. URL: https://images.salsify.com/image/upload/s---BbixrkA--/15ab86f3244aabf9d3a65fe8fc69b8a59c7955a7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/SL400_datasheet.pdf

S309 [SRC-00309] Schneider Electric. *Square D CF16KF63C STEP model page "1600A 63H DR I-LINE CENTER FEED COPPER BUS OEM QED2 INTERIOR"*. CF16KF63C117UMS-03. 2017-03-10. Type: oem_drawing. URL: https://www.se.com/us/en/download/document/CF16KF63C117UMS-03 (accessed 2026-10-21) Note: Only the document-page metadata was readable (WebFetch); STEP file not downloaded.

S310 [SRC-00310] Eaton. *Pow-R-Line XD switchboards Instruction Manual MN015002EN (Effective July 2019)*. MN015002EN. 2019-07. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-xd-switchboards-instruction-manual-mn015002en.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-xd-switchboards-instruction-manual-mn015002en.pdf Note: Downloaded via Eaton-owned mirror host cooperindustries.com (same DAM path).

S311 [SRC-00311] Eaton (Cutler-Hammer, Eaton Canada). *Instruction Manual Pow-R-Line Retrofit Panelboards, P1R & P2R Retrofit Panels (IL01417001E, Effective November 2007)*. IL01417001E. 2007-11. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-1r-and-2r-retrofit-panels-instruction-manual.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-1r-and-2r-retrofit-panels-instruction-manual.pdf Note: 14 pp. Downloaded via cooperindustries.com mirror. Also mirrored at https://www.texasinspector.com/files/EatonRetrofitPanels.pdf

S312 [SRC-00312] Eaton (Eaton Canada). *Instruction Manual PUB50895 Pow-R-Line Retrofit Panelboards P1R 240Vac Max & P2R 347/600Vac Max (Effective May 2016, Rev.004)*. PUB50895. 2016-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/canada/eaton-pow-r-line-retrofit-panelboards-instruction-manual-pub50895-ca.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-pow-r-line-retrofit-panelboards-instruction-manual-pub50895-ca.pdf Note: 15 pp. Downloaded via cooperindustries.com mirror.

S313 [SRC-00313] Eaton (Cooper Bussmann heritage). *Pow-R-Line 3FQS Fusible Panelboard Instruction Leaflet E3A1071 RevG (December 2010)*. E3A1071 RevG. 2010-12. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-3fqs-fusible-panelboard-instruction-leaflet-e3a1071.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-3fqs-fusible-panelboard-instruction-leaflet-e3a1071.pdf Note: 16 pp incl. replacement-parts lists pp.12-14. Downloaded via cooperindustries.com mirror. Product is the former Bussmann Quik-Spec Coordination Panelboard (QSCP).

S314 [SRC-00314] Eaton. *Design Guide DG014001EN Pow-R-Line 1X, 2X and 3X panelboards (Effective November 2024)*. DG014001EN. 2024-11. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/design-guides---consultant-audience/eaton-panelboard-prl1x-2x-3x-design-guide-dg014001en.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-prl1x-2x-3x-design-guide-dg014001en.pdf Note: Downloaded via cooperindustries.com mirror.

S315 [SRC-00315] Eaton. *Design Guide DG014003EN Pow-R-Line 4X panelboards (Effective March 2025)*. DG014003EN. 2025-03. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/design-guides---consultant-audience/eaton-panelboard-prl4x-design-guide-dg014003en.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-prl4x-design-guide-dg014003en.pdf Note: Downloaded via cooperindustries.com mirror.

S316 [SRC-00316] Eaton. *Eaton online product catalog SKU pages (https://www.eaton.com/us/en-us/skuPage.<catalog number>.html): General/Product specifications tables*. 2026-10. Type: oem_web. URL: https://www.eaton.com/us/en-us/skuPage.KPRL4FD.html (accessed 2026-10-21) Note: Fetched 2026-10-21 for 334 catalogue part numbers via Eaton-owned mirror host cooperindustries.com/us/en-us/skuPage.<pn>.html; 82 pages exist (KPRL3*, KPRL4*, PRLSEB*, BR kits). All KB*, KL*, KCDP*, KFDP*, 1C966xx/2C11642 branch assemblies returned 404 (no current SKU page). 'Product Length/Depth/Height/Width/Weight' attributes are Eaton logistics data (several are placeholders such as 1x1x1 in or 0.01 in) - treat as package/shipping data, never as component dimensions. Page cited per claim.

S317 [SRC-00317] Eaton (via Elliott Electric). *Eaton product specifications - KPRL3AED3 (Elliott Electric hosted Eaton spec sheet)*. KPRL3AED3 spec sheet. 2024. Type: distributor. URL: https://www.elliottelectric.com/Media/KPRL3AED3-CHD-1021-2-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL3AED3-CHD-1021-2-Attachment.pdf Note: Eaton-generated product specification PDF (c) 2024 Eaton, distributor hosted.

S318 [SRC-00318] Eaton. *Instruction Leaflet IL014069EN Pow-R-Line 1X/2X/3X Installation reference for tall interiors (Effective February 2024)*. IL014069EN. 2024-02. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/eaton-pow-r-line-1x2x3x-installation-reference-for-tall-interiors-il014069en-en-us.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-pow-r-line-1x2x3x-installation-reference-for-tall-interiors-il014069en-en-us.pdf Note: Downloaded via cooperindustries.com mirror.

S319 [SRC-00319] Siemens Industry, Inc.. *Siemens SPEEDFAX 2017 Product Catalog p. 11-48 'Type P3 Panelboard Kits and Accessories Selection' (revised 05/15/18)*. SPEEDFAX 2017 p. 11-48 (rev 05/15/18). 2018-05. Type: oem_catalog. URL: https://my.goagilix.com/assets/8e/ae/8eae8069-ae72-4c43-884e-ced7a932dac0/IDW_DOCUMENT_0a99b8af4a8d4007e49c8b7c5bf43b3a0181bf98c101e2c9da4d60b95cb45b84.pdf (accessed 2026-10-21) Note: Single catalog page hosted by distributor (goagilix IDW document).

S320 [SRC-00320] Siemens Industry, Inc.. *P1SCRWS Branch Connector Screw Kit Instructions*. 11-A-1072-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1072-01_P1SCRWS.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1072-01_P1SCRWS.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S321 [SRC-00321] Siemens Industry, Inc.. *P1-250 Panelboard Kit CNLK30A, CNLK42A & CNLK54A 250A Copper Neutral Lug Kits Installation Instructions (also for P1-400 subfeed)*. 11-A-1102-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1102-01_CNLKxxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1102-01_CNLKxxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S322 [SRC-00322] Siemens Industry, Inc.. *P1 Panelboard Kit LNLK30A, LNLK42A & LNLK54A 2/0 Neutral Lug Kits Installation Instructions*. 11-A-1103-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1103-01_LNLKxxA_instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1103-01_LNLKxxA_instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S323 [SRC-00323] Siemens Industry, Inc.. *P1-250 Panelboard Kit 2NLK30A, 2NLK42A & 2NLK54A 200% Neutral Lug Kits Installation Instructions*. 11-A-1104-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1104-01_2NLKxxA_instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1104-01_2NLKxxA_instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S324 [SRC-00324] Siemens Industry, Inc.. *P1-250 Panelboard Kit MLKA1A & MLKA3A Main / Feed Thru Lugs Installation Instructions*. 11-A-1105-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1105-01_MLKAxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1105-01_MLKAxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S325 [SRC-00325] Siemens Industry, Inc.. *P1-250 Panelboard Kit MLKC1A & MLKC3A Main / Feed-thru (copper) Lugs Installation Instructions*. 11-A-1106-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1106-01_MLKCxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1106-01_MLKCxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S326 [SRC-00326] Siemens Industry, Inc.. *P1-400 Panelboard Kit 42NLK30A, 42NLK42A, 42NLK54A Installation Instructions with 200% Neutral*. 11-A-1107-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1107-01_42NLKxxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1107-01_42NLKxxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S327 [SRC-00327] Siemens Industry, Inc.. *P1-400 Panelboard Kit 4MLKA1A, 4MLKA3A Main / Feed-thru Lugs Installation Instructions*. 11-A-1108-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1108-01_4MLKAxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1108-01_4MLKAxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S328 [SRC-00328] Siemens Industry, Inc.. *P1-400 Panelboard Kit 4MLKC1A, 4MLKC3A Copper Lugs Installation Instructions*. 11-A-1109-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1109-01_4MLKCxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1109-01_4MLKCxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S329 [SRC-00329] Siemens Industry, Inc.. *P1-400 Panelboard Kit 4MLKA1B, 4MLKA3B 750 kcmil Main / Feed-thru Lugs Instructions*. 11-A-1110-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1110-01_4MLKAxB_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1110-01_4MLKAxB_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S330 [SRC-00330] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKFD1A & MBKFD3A FD Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1111-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1111-01_MBKFDxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1111-01_MBKFDxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S331 [SRC-00331] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKED1A & MBKED3A ED Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1113-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1113-01_MBKEDxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1113-01_MBKEDxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S332 [SRC-00332] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKBFA for BL/BQD/GB Main Breaker Installation Instructions*. 11-A-1114-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1114-01_MBKBFA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1114-01_MBKBFA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S333 [SRC-00333] Siemens Industry, Inc.. *P1-400 Panelboard Kit MBKJD1A & MBKJD3A JD Main Breaker Kit Instructions*. 11-A-1115-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1115-01_MBKJDxA_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1115-01_MBKJDxA_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S334 [SRC-00334] Siemens Industry, Inc.. *250A OEM Chassis Instructions (Revised P1)*. 11-A-1117-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1117-01_250A_OEM_Chassis_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1117-01_250A_OEM_Chassis_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S335 [SRC-00335] Siemens Industry, Inc.. *P1 Panelboard Replacement Parts Kit P1CONACPHAL & P1CONACPHCU A/C-Phase Connector Kits Instructions*. 11-A-1119-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1119-01_P1CONACPHxx_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1119-01_P1CONACPHxx_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S336 [SRC-00336] Siemens Industry, Inc.. *P1 Panelboard Replacement Parts Kit P1CONBPHAL & P1CONBPHCU B-Phase Connector Kits Instructions*. 11-A-1122-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1122-01_P1CONBPHxx_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1122-01_P1CONBPHxx_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S337 [SRC-00337] Siemens Industry, Inc.. *SEB / SEBD Installation Instructions - Siemens EB circuit breakers in switchboard or shallow/deep panelboards*. 11-B-1020-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEB_SEBD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEB_SEBD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S338 [SRC-00338] Siemens Industry, Inc.. *Switchboard/Powerpanel Kit SQRD / 6QR2 / SQR Installation Instructions for Branch Mounting of 225A MAX QR Breakers*. 11-A-1133-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SQRD6QR2SQR.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SQRD6QR2SQR.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S339 [SRC-00339] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel (P4, P5) Kit SDG, SDGD for Branch Mounting Type VL DG Frame Breakers*. 11-B-1023-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SDG_SDGD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SDG_SDGD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S340 [SRC-00340] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel Kit (P5) SJG2D for Branch Mounting Type VL JG Frame Breakers*. 11-B-1026-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJG2D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJG2D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S341 [SRC-00341] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SJG, SJG1D, SLG, SLGD for Branch Mounting Type VL JG, LG Frame Breakers*. 11-B-1025-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJG_SJG1D_SLG_SLGD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJG_SJG1D_SLG_SLGD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S342 [SRC-00342] Siemens Industry, Inc.. *Switchboard/Power Panel Kit MG1/MG1D/SLM1/SLM1D for Branch Mounting Sentron LMD and VL MG Frame Breakers*. 11-B-1016-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MG1_MG1D_SLM1_SLM1D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MG1_MG1D_SLM1_SLM1D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S343 [SRC-00343] Siemens Industry, Inc.. *Power Panel / Switchboard Kit SGB2 / SGB2D Instructions for Branch Mounting Type GB2 Breakers*. 12-A-1031-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_12-A-1031-01_SGB2_SGB2D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_12-A-1031-01_SGB2_SGB2D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S344 [SRC-00344] Siemens Industry, Inc.. *P4 and P5 Power Panel / Distribution Switchboard Kit S3VA41T / S3VA41TD for Branch Mounting of Type 3VA41 or xGB Breakers*. 11-B-1057-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1057-01_S3VA41T_S3VA41TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1057-01_S3VA41T_S3VA41TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S345 [SRC-00345] Siemens Industry, Inc.. *Distribution Switchboard / Power Panel Kit S3VA41TDHD for Branch Mounting of 2-pole 3VA41 or xGB Breakers (high density)*. 11-B-1058-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1058-01_S3VA41TDHD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1058-01_S3VA41TDHD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S346 [SRC-00346] Siemens Industry, Inc.. *Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA52T / S3VA52TD Installation Instructions for Type 3VA52/61/62 Breaker*. 11-A-1168-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Switchboard-PowerPanels_11-A-1168-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Switchboard-PowerPanels_11-A-1168-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S347 [SRC-00347] Siemens Industry, Inc.. *Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA53T / S3VA53TD for Single-Mount 3VA53 / 3VA63 Breaker*. 15-A-1078-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_S3VA53T-TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_S3VA53T-TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S348 [SRC-00348] Siemens Industry, Inc.. *Distribution Switchboard Section / Power Panel Branch Mounting Kit S3VA54T / S3VA54TD for Single-Mount 3VA54 / 3VA64 Breaker*. 15-A-1079-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_S3VA54T-TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_S3VA54T-TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S349 [SRC-00349] Siemens Industry, Inc.. *Switchboard/Power Panel Kit SNBD/SNB for Branch Mounting Type GB Breakers*. 11-B-1019-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SNBDSNB.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SNBDSNB.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S350 [SRC-00350] Siemens Industry, Inc.. *CAT. NO. 6E62 instruction sheet with drawing 11-5079-00 Rev 10 'ED2, ED4 & ED6 Mounting Series 6 Branch Bus' and BOM 11-5079-05 Rev 8*. 31-1143-01 Rev. 4. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6E62_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6E62_old.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S351 [SRC-00351] Siemens Industry, Inc.. *CAT. NO. 6F62 instruction sheet with drawing 11-5098-00 Rev 6 'FD Frame Mounting Series 6 Branch Bus', BOM 11-5098-04 Rev 8, Series 5 adaptor kit 11-5570-01 Rev 3*. 31-1145-01 Rev. 4. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6F62_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6F62_old.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S352 [SRC-00352] Siemens Industry, Inc.. *CAT. NO. 6JJ62 instruction sheet with drawing 12-5721 Rev 11 'JD Frame Twin Mounting Series 6 Branch' (-01 = 6JJ62, -02 = SJ2D) and Series 5 adaptor kit 11-5570-02*. 31-1169-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_6JJ62_old.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_6JJ62_old.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S353 [SRC-00353] Siemens Industry, Inc.. *Distribution Switchboard / P5 38in wide Power Panel Mounting Kit S3VA53T2D / S3VA54T2D Instructions for Twin-mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers*. 11-B-1086-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SB_11-B-1086-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SB_11-B-1086-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S354 [SRC-00354] Siemens Industry, Inc.. *Distribution Switchboard or P5 Power Panel Strap Mounting Kit S3VA55TD for 800A 3VA55/65 or 1000A 3VA66 Breaker*. 11-B-1097-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SB_S3VA55TD_11-B-1097-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SB_S3VA55TD_11-B-1097-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S355 [SRC-00355] Siemens Industry, Inc.. *Switchboard / P5 Powerpanel Strap Mounting Kit S3VA57TD for a 1,200A 3VA57 or 3VA67 Breaker*. 11-B-1101-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-B-1101-01_S3VA55TD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-B-1101-01_S3VA55TD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S356 [SRC-00356] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMBKL6 / SMBKL6D for Main Mounting Sentron JD & LD Frame Breakers*. 11-D-1019-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMBKL6SMBKL6D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMBKL6SMBKL6D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S357 [SRC-00357] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMBKLG, SMBKLG1D for Main Mounting Type VL JG, LG Frame Breakers*. 11-D-1022-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMBKLG_SMBKL_G1D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMBKLG_SMBKL_G1D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S358 [SRC-00358] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMBKMG, SMBKMG1D for Main Mounting Type VL MG Frame Breakers*. 11-D-1020-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMBKMGSMBKMG1DP.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMBKMGSMBKMG1DP.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S359 [SRC-00359] Siemens Industry, Inc.. *Power Panel Kit (P4, P5) SMLK12 for Main Lug Mounting (400-1200A)*. 11-D-1018-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SMLK12.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SMLK12.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S360 [SRC-00360] Siemens Industry, Inc.. *Installation Instructions - general use of Siemens P5 32in or 38in wide Power Panel (P5X60MC120EH32, P5X75MC120EH32, P5X90MC120EH32, P5X90MC120EH)*. 11-D-1013-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_P5_11-D-1013-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_P5_11-D-1013-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S361 [SRC-00361] Siemens Industry, Inc.. *P4 / P5 Series Panelboard Box Installation For Seismic-Rated Panelboards*. 12-B-1015-01 Rev. 03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SeismicP4-P5_Panelboard.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SeismicP4-P5_Panelboard.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S362 [SRC-00362] Siemens Industry, Inc.. *Revised P1 (P1-250 / P1-400) Hardware Tightening Torque instructions label*. 11-D-1030-01 Rev. 03. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-D-1030-01_RP1-Torque_Val.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-D-1030-01_RP1-Torque_Val.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S363 [SRC-00363] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKGB32 Installation Instructions for Branch Mounting Type GB2 Breakers*. 12-A-1030-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKGB32_12-a-1030-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKGB32_12-a-1030-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S364 [SRC-00364] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKNB32 Installation Instructions for Branch Mounting Type GB Breakers*. 12-A-1092-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1092-01_BBKNB32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1092-01_BBKNB32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S365 [SRC-00365] Siemens Industry, Inc.. *BBKVA4P2P3 Type 3VA41 or xGB Branch Breaker Mounting Kit Installation Instructions for P2 or P3 Panelboards*. 11-B-1055-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKVA4P2P3_InstructionSheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKVA4P2P3_InstructionSheet.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S366 [SRC-00366] Siemens Industry, Inc.. *P2 Panelboard Kit BBKQR1 Installation Instructions for Branch Mounting of 225A MAX QR Breakers*. 11-A-1131-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKQR1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKQR1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S367 [SRC-00367] Siemens Industry, Inc.. *P3 Panelboard Kit BBKQR2 Installation Instructions for Branch Mounting of 225A MAX QR Breakers*. 11-A-1132-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1132-01_BBKQR2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1132-01_BBKQR2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S368 [SRC-00368] Siemens Industry, Inc.. *BBKVA5262P2HW hardware kit instructions (3VA52/61/62 breaker to P2/P3 strap kit)*. 11-B-1050-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKVA5262P2HW_11-B-1050-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKVA5262P2HW_11-B-1050-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S369 [SRC-00369] Siemens Industry, Inc.. *P2 / P3 Panelboard Kit BBKVA5262P2S Installation Instructions for Branch Mounting 3VA52 / 3VA61 / 3VA62 Circuit Breakers*. 11-B-1051-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BBKVA5262P2S_11-B-1051-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BBKVA5262P2S_11-B-1051-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S370 [SRC-00370] Siemens Industry, Inc.. *BBKVA52P3HW hardware kit instructions (3VA52 FAS breaker in P3 twin strap kit; supersedes breaker instructions above 500 V)*. 11-A-1166-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-a-1166-01_BBKVA52P3HW_3VA52.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-a-1166-01_BBKVA52P3HW_3VA52.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S371 [SRC-00371] Siemens Industry, Inc.. *P3 Panelboard Kit BBKVA52P3T Installation Instructions for Branch Mounting of Twin FAS (3VA52) Breakers*. 11-A-1167-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-a-1167-01_BBKVA52P3T_3VA52.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-a-1167-01_BBKVA52P3T_3VA52.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S372 [SRC-00372] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKBL1A & MBKBL3A BL Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1140-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-a-1140-01_MBKBLxA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-a-1140-01_MBKBLxA.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S373 [SRC-00373] Siemens Industry, Inc.. *P1-250 Panelboard Kit MBKBC1NBA & MBKBC3NBA BQD / GB Main/Subfeed Breaker Instructions (also P1-400 subfeed)*. 11-A-1141-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKBCxNBA_11-a-1141-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKBCxNBA_11-a-1141-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S374 [SRC-00374] Siemens Industry, Inc.. *MBKVA41A or MBKVA41B BL / BQD / xGB / 3VA4 Main / Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)*. 11-A-1193-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1193-01_MBKVA41x_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1193-01_MBKVA41x_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S375 [SRC-00375] Siemens Industry, Inc.. *MBKVA5262A / MBKVA5262B 3VA52 / 3VA61 / 3VA62 Main or Subfeed Breaker Kit for P1-250 Panelboard (or P1-400 Subfeed)*. 11-B-1059-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_MBKVAxx_11-B-1059-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_MBKVAxx_11-B-1059-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S376 [SRC-00376] Siemens Industry, Inc.. *MBKVA5363A 3VA Main Strap Kit Installation Instructions for P1-400 Panelboards*. 11-A-1169-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1169-01_MBKVA5363A.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1169-01_MBKVA5363A.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S377 [SRC-00377] Siemens Industry, Inc.. *P1-400 Panelboard Kit MBKJD1A & MBKJD3A (MBKJD3B) JD Main Breaker Kit Instructions, Rev. 05*. 11-A-1115-01 Rev. 05. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1115-01_MBKJD3B_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1115-01_MBKJD3B_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S378 [SRC-00378] Siemens Industry, Inc.. *S1 & P1 Panelboard Kit MBKQR1 & MBKQR3 for 225A MAX QR Main/Subfeed Breaker (NOT for Revised P1)*. 11-A-1138-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKQR1_MBKQR3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKQR1_MBKQR3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S379 [SRC-00379] Siemens Industry, Inc.. *MBKQRC1FK C1 Filler Kit for QR Breaker Installation Instructions*. 11-A-1137-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKQRC1FK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKQRC1FK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S380 [SRC-00380] Siemens Industry, Inc.. *BBKQRP1FK filler kit for horizontally or vertically mounted 225A MAX QR breaker (P2)*. 11-A-1135-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1135-01_BBKQRP1FK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1135-01_BBKQRP1FK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S381 [SRC-00381] Siemens Industry, Inc.. *BBKQRP2FK filler kit for dual-mounted horizontal 225A MAX QR breakers (P3)*. 11-A-1136-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1136-01_BBKQRP2FK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1136-01_BBKQRP2FK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S382 [SRC-00382] Siemens Industry, Inc.. *MBKQRFK P1 / RP1 Filler Kit for QR Breaker Installation Instructions*. 11-A-1134-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_MBKQRFK.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_MBKQRFK.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S383 [SRC-00383] Siemens Industry, Inc.. *LNLK4X11B, LNLK6X17B or LNLK7X20B 2/0 Neutral Lug Kit Instructions for P1 or P3 Panelboards (Revised P1 only)*. 11-B-1032-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1032-01_LNLKxxxxB_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1032-01_LNLKxxxxB_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S384 [SRC-00384] Siemens Industry, Inc.. *LNLK5X12A or LNLK7X18A 1/0 Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)*. 11-B-1036-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1036-01_LNLKxxxxA_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1036-01_LNLKxxxxA_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S385 [SRC-00385] Siemens Industry, Inc.. *CNLK42B or CNLK54B Copper Neutral Lug Kit Instructions for P1 Panelboards (Revised P1 only)*. 11-B-1033-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1033-01_CNLKxxB_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1033-01_CNLKxxB_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S386 [SRC-00386] Siemens Industry, Inc.. *2NLK42B or 2NLK54B 200% Neutral Lug Kit for P1-250 Panels (Revised P1 only)*. 11-B-1034-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1034-01_2NLKxxB_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1034-01_2NLKxxB_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S387 [SRC-00387] Siemens Industry, Inc.. *42NLK54B 200% Neutral Lug Kit for 30, 42, 54 or 66 Circuit P1-400 Panels (Revised P1 only)*. 11-B-1035-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1035-01_42NLK54B_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1035-01_42NLK54B_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S388 [SRC-00388] Siemens Industry, Inc.. *SEBKRP1V1 / SEBKRP1V2 Service Entrance Barrier Kits for Revised P1 Panelboards*. 11-A-1148-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1148-01_SEBKRP1V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1148-01_SEBKRP1V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S389 [SRC-00389] Siemens Industry, Inc.. *SEBKRP1V3 / SEBKRP1V4 Service Entrance Barrier Kits for Revised P1 Panelboards*. 11-A-1149-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1149-01_SEBKRP1V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1149-01_SEBKRP1V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S390 [SRC-00390] Siemens Industry, Inc.. *SEBKRP1V5 Service Entrance Barrier Kit for Revised P1 Panelboards*. 11-A-1165-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1165-01_SEBKRP1V5.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1165-01_SEBKRP1V5.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S391 [SRC-00391] Siemens Industry, Inc.. *SEBKRP1V6 Service Entrance Barrier Kit for Revised P1 Panelboard*. 11-A-1194-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1194-01_SEBKRP1V6_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1194-01_SEBKRP1V6_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S392 [SRC-00392] Siemens Industry, Inc.. *SEBKRP1V7 Service Entrance Barrier Kit for RP1 Panelboard*. 11-B-1060-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-B-1060-01_SEBKRP1V7.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-B-1060-01_SEBKRP1V7.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S393 [SRC-00393] Siemens Industry, Inc.. *SEBKP2V1 / SEBKP2V2 Service Entrance Barrier Kit for P2 Panelboards*. 11-A-1151-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1151-01_SEBKP2V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1151-01_SEBKP2V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S394 [SRC-00394] Siemens Industry, Inc.. *SEBKP2V3 Service Entrance Barrier Kit for P2 or P3 Panelboards (with or without SEM3)*. 11-A-1153-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1153-01_SEBKP2V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1153-01_SEBKP2V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S395 [SRC-00395] Siemens Industry, Inc.. *SEBKP2V4 / SEBKP3V1 Service Entrance Barrier Kits (vertical mains) for P2 / P3*. 11-A-1154-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1154-01_SEBKP2V4_SEBKP3V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1154-01_SEBKP2V4_SEBKP3V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S396 [SRC-00396] Siemens Industry, Inc.. *SEBKP2V5 Service Entrance Barrier Kit for P2 (ED/CED main)*. 11-A-1155-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1155-01_SEBKP2V5.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1155-01_SEBKP2V5.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S397 [SRC-00397] Siemens Industry, Inc.. *SEBKP2V6 Service Entrance Barrier Kit for P2 (vertical ED main)*. 11-A-1156-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1156-01_SEBKP2V6.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1156-01_SEBKP2V6.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S398 [SRC-00398] Siemens Industry, Inc.. *SEBKP1P2P3V1 Service Entrance Barrier Kit for Revised P1, P2 or P3*. 11-A-1157-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1157-01_SEBKP1P2P3V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-A-1157-01_SEBKP1P2P3V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S399 [SRC-00399] Siemens Industry, Inc.. *SEBP4V1 Service Entrance Barrier Kit for P4 or P5*. 11-A-1158-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP4V1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP4V1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S400 [SRC-00400] Siemens Industry, Inc.. *SEBP4V2 Service Entrance Barrier Kit for P4 or P5*. 11-A-1159-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP4V2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP4V2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S401 [SRC-00401] Siemens Industry, Inc.. *SEBP4V3 Service Entrance Barrier Kit for P4 or P5*. 11-A-1162-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP4V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP4V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S402 [SRC-00402] Siemens Industry, Inc.. *SEBP5V1 / SEBP5V2 Service Entrance Barrier Kit for P5*. 11-A-1160-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP5V1_SEBP5V2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP5V1_SEBP5V2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S403 [SRC-00403] Siemens Industry, Inc.. *SEBP5V3 Service Entrance Barrier Kit for P5 (Vacu-Break main switch)*. 11-A-1163-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP5V3.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP5V3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S404 [SRC-00404] Siemens Industry, Inc.. *SEBP5V4 Service Entrance Barrier Kit for P5 (HCP main)*. 11-A-1164-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SEBP5V4.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SEBP5V4.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S405 [SRC-00405] Siemens Industry, Inc.. *SEBPPVA1 Service Entrance Barrier Kit for Switchboard or P4/P5 (3VA53/63/54/64)*. 15-A-1081-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_15-A-1081-01_SEBPPVA1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_15-A-1081-01_SEBPPVA1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S406 [SRC-00406] Siemens Industry, Inc.. *SEBPPVA2 Service Entrance Barrier Kit for 3VA55, 3VA65 or 3VA66 Breaker in a P5 Panelboard*. 11-B-1095-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-B-1095-01_SEBPPVA2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-B-1095-01_SEBPPVA2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S407 [SRC-00407] Siemens Industry, Inc.. *DFFP01A / DFFP01B / DFFP01C / DFFPJD01 / DFFPJD02 / DFFPVA41A / DFFPV5363A replacement filler plates for Siemens Lighting Panels*. 11-A-1180-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1180-01_DFFPxxxx_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1180-01_DFFPxxxx_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S408 [SRC-00408] Siemens Industry, Inc.. *DFFPVA5262A Filler Plate Kit replacement filler plate (3VA52/61/62)*. 11-B-1061-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DFFPVA5262A_FillerPlateKit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DFFPVA5262A_FillerPlateKit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S409 [SRC-00409] Siemens Industry, Inc.. *DFFPVA5262P2A filler plate (3VA52/61/62 single mount) installation*. 11-B-1052-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DFFPVA5262P2A_FillerPlate.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DFFPVA5262P2A_FillerPlate.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S410 [SRC-00410] Siemens Industry, Inc.. *DFFPVA5262P2B Provision Plate kit installation*. 11-B-1053-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_DFFPVA5262P2B_ProvisionPlate.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_DFFPVA5262P2B_ProvisionPlate.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S411 [SRC-00411] Siemens Industry, Inc.. *DFK07-DFK21 replacement deadfront center strip for P2 and P3 panelboards*. 11-A-1182-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1182-01_DFKxx.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1182-01_DFKxx.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S412 [SRC-00412] Siemens Industry, Inc.. *DFP3AP01 replacement Adaptor Plate for BL/BQD/ED/GB/GB2 breaker in P3*. 11-A-1178-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1178-01_DFP3AP01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1178-01_DFP3AP01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S413 [SRC-00413] Siemens Industry, Inc.. *LPP2NB01 neutral lug replacement / addition kit for P2 panelboard*. 11-A-1179-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1179-01_LPP2NB01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1179-01_LPP2NB01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S414 [SRC-00414] Siemens Industry, Inc.. *BNK350N 350 MCM narrow neutral lug replacement kit for P2 and P3*. 11-A-1177-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1177-01_BNK350N.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1177-01_BNK350N.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S415 [SRC-00415] Siemens Industry, Inc.. *LPDC01 panelboard directory card kit*. 11-A-1184-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1184-01_LPDC01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1184-01_LPDC01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S416 [SRC-00416] Siemens Industry, Inc.. *LPLOCK01A / LPLOCK02A replacement panelboard door locks*. 11-A-1175-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1175-01_LPLOCK0xA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1175-01_LPLOCK0xA.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S417 [SRC-00417] Siemens Industry, Inc.. *EWK1 / EWK2 / EWK1B / EWK2B box end wall kits*. 11-A-1004-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_EWK1-2-1B-2B-11-A-1004-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_EWK1-2-1B-2B-11-A-1004-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S418 [SRC-00418] Siemens Industry, Inc.. *EWK3 instructions for special open endwall*. 11-A-1143-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_EWK3_11-A-1143-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_EWK3_11-A-1143-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S419 [SRC-00419] Siemens Industry, Inc.. *BXXCVR extension cover mounting instructions*. 11-A-1144-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_BXXCVR_11-A-1144-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_BXXCVR_11-A-1144-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S420 [SRC-00420] Siemens Industry, Inc.. *B74FLR preparation for installation instructions (74 in box)*. 11-A-1129-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_B74FLR_11-A-1129-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_B74FLR_11-A-1129-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S421 [SRC-00421] Siemens Industry, Inc.. *NBK01A / NBK02A / NBK03A circuit numbering strips for Revised P1*. 11-A-1197-00 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1197_NBK0xA_kit.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1197_NBK0xA_kit.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S422 [SRC-00422] Siemens Industry, Inc.. *P1DFS250AFT or P1DFS250ANFT RP1-250 Panelboard Deadfront Supports*. 11-A-1196-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1196-01_P1DFS250AxFT.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1196-01_P1DFS250AxFT.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S423 [SRC-00423] Siemens Industry, Inc.. *P1DFS400A RP1-400 Panel Deadfront Supports*. 11-A-1190-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_RP1_11-A-1190-01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_RP1_11-A-1190-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S424 [SRC-00424] Siemens Industry, Inc.. *S3VA52PR provision kit (3VA52/61/62 nut keepers and bus extensions)*. 11-A-1171-01 Rev. 01. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_11-A-1171-01_S3VA52PR.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_11-A-1171-01_S3VA52PR.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S425 [SRC-00425] Siemens Industry, Inc.. *SQRC QR Breaker Retrofit Field Kit Installation Instructions for P4/P5/SB*. 11-A-1139-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SQRC.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SQRC.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S426 [SRC-00426] Siemens Industry, Inc.. *Lighting Panel Ground Bus Information: P1-P2-P3 (EGK / ECGK / IGK / ICGK)*. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_EGK_LightingPanel_GroundBus_Information.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_EGK_LightingPanel_GroundBus_Information.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S427 [SRC-00427] Siemens Industry, Inc.. *Trim & Hinge Installation Instructions (P4 / P5)*. 11-A-1078-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-A-1078-01.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_Panelboard_11-A-1078-01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S428 [SRC-00428] Siemens Industry, Inc.. *Switchboard/Powerpanel Kit SBLBD/SBL for Branch Mounting Type BL/BQDH Breakers (scanned; read visually)*. 11-B-1013-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SBL_SBLBD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SBL_SBLBD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S429 [SRC-00429] Siemens Industry, Inc.. *Switchboard/Distribution Panel Kit 6JJ61/SJ1D/6SJL1/SSJ1D, 6LL61/SL6D/SSL6D/6SLL1 for Branch Mounting Type JD/SJD/LD/SLD Breakers (scanned; read visually)*. 11-B-1012-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_SJ1D_SSJ1D_SL6D_SSL6D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_SJ1D_SSJ1D_SL6D_SSL6D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S430 [SRC-00430] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKB32 For Branch Mounting of BL & BQD Breakers (scanned; read visually)*. 12-A-1078-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1078-01_BBKB32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1078-01_BBKB32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S431 [SRC-00431] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit BBKED32 For Branch Mounting of ED Breakers (scanned; read visually)*. 12-A-1079-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1079-01_BBKED32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1079-01_BBKED32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S432 [SRC-00432] Siemens Industry, Inc.. *P3 Panelboard Kit BBKQ2 For Branch Mounting of QJ Breakers (scanned; read visually)*. 12-A-1081-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1081-01_BBKQ2.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1081-01_BBKQ2.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S433 [SRC-00433] Siemens Industry, Inc.. *P3 Panelboard Kit BBKEB32 For Branch Mounting of EB Breakers (scanned; read visually)*. 12-A-1093-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1093-01_BBKEB32.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_12-A-1093-01_BBKEB32.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S434 [SRC-00434] Siemens Industry, Inc.. *CAT. NO. SCE - CED6 breaker mounting, S4 copper branch bus (drawing 15-B-2012-00 / BOM 15-B-2012-05 Rev 4)*. 31-1200-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1200-01_SCE.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1200-01_SCE.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S435 [SRC-00435] Siemens Industry, Inc.. *CAT. NO. SF6 - F6 frame mounting S4 copper branch bus (drawing 15-B-2014-00 Rev 4 / BOM 15-B-2014-03 Rev 7)*. 31-1202-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1202-01_SF6.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1202-01_SF6.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S436 [SRC-00436] Siemens Industry, Inc.. *CAT. NO. SCF - 225 A CLF breaker, S4 copper branch bus (drawing 15-B-2016-00 Rev 2 'CLF main/branch kit SPP (shallow)' / BOM 15-B-2016-03 Rev 5)*. 31-1204-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1204-01_SCF.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1204-01_SCF.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S437 [SRC-00437] Siemens Industry, Inc.. *CAT. NO. SCJ - CJD6 (CLJ, CJD6) breaker mounting, S4 copper branch bus (drawing 12-B-2002-00 Rev 6 / BOM 12-B-2002-03 Rev 4)*. 31-1208-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1208-01_SCJ.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1208-01_SCJ.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S438 [SRC-00438] Siemens Industry, Inc.. *CAT. NO. SCL - CLD6 (CLL, CLD) breaker mounting, S4 copper branch bus (drawing 12-B-2006-00 Rev 7 / BOM 12-B-2006-03 Rev 7)*. 31-1212-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1212-01_SCL.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1212-01_SCL.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S439 [SRC-00439] Siemens Industry, Inc.. *CAT. NO. SSCL - SCLD6 breaker mounting, S4 copper branch bus (drawing 12-B-2013-00 Rev 4 / BOM 12-B-2013-03 Rev 7)*. 31-1213-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1213-01_SSCL.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1213-01_SSCL.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S440 [SRC-00440] Siemens Industry, Inc.. *CAT. NO. SF6D - FD6 frame mounting S4/S5 copper branch bus (drawing 11-5098-00 Rev 6 / BOM 11-5098-03 Rev 9)*. 31-1218-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1218-01_SF6D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1218-01_SF6D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S441 [SRC-00441] Siemens Industry, Inc.. *CAT. NO. SCFD - CFD6 branch breaker mounting S4/S5 copper bus (drawing 11-5383-00 Rev 5 / BOM 11-5383-02 Rev 8)*. 31-1220-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1220-01_SCFD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1220-01_SCFD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S442 [SRC-00442] Siemens Industry, Inc.. *CAT. NO. SCJD - drawing 12-5719 Rev 10 'CJD frame mount Series 6 - branch'*. 31-1225-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1225-01_SCJD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1225-01_SCJD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S443 [SRC-00443] Siemens Industry, Inc.. *CAT. NO. SSCLD - drawing 12-5772 Rev 8 'SCLD frame mount Series 6 - branch'*. 31-1230-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1230-01_SSCLD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1230-01_SSCLD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S444 [SRC-00444] Siemens Industry, Inc.. *CAT. NO. SCLD - drawing 12-5720 Rev 11 'CLD frame mount Series 6 - branch' (-01 = 6CLL1, -02 = SCLD)*. 31-1229-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_12-5720-02_SCLD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_12-5720-02_SCLD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S445 [SRC-00445] Siemens Industry, Inc.. *CAT. NO. SCED - CED6 branch breaker mounting S5 copper branch bus (drawing 11-5068-00 Rev 2 / BOM 11-5068-06 Rev 3)*. 31-1216-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-5068-01_SCED.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-5068-01_SCED.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S446 [SRC-00446] Siemens Industry, Inc.. *Switchboard (SB1, SB2, SB3) / Power Panel Kit (P4, P5) SFG, SFGD for Branch Mounting Type VL FG Frame Breakers (scanned; read visually)*. 11-B-1024-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1024-01_SFG_SFGD.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1024-01_SFG_SFGD.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S447 [SRC-00447] Siemens Industry, Inc.. *EB Deadfront Filler EBF1 installation instruction card (drawing 11-D-1017)*. 11-D-1017-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_EBF1_11-d-1017.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_EBF1_11-d-1017.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S448 [SRC-00448] Siemens Industry, Inc.. *P3 Bonding Kit P3BK1 instruction card (drawing 11-D-1007)*. 11-D-1007-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_P3BK1_11-d-1007.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_P3BK1_11-d-1007.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S449 [SRC-00449] Siemens Industry, Inc.. *Mounting and Leveling Kit IMK1 instruction card*. 11-A-1002-01 Rev. 4. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_LP_IMK1_11-a-1002.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_LP_IMK1_11-a-1002.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S450 [SRC-00450] Siemens Industry, Inc.. *BK1A Bonding Kit for P1-250 & P1-400 instruction card*. 11-A-1096-01 Rev. 02. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1096-01_BLK1A_Instructions.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1096-01_BLK1A_Instructions.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S451 [SRC-00451] Siemens Industry, Inc.. *P2 Panelboard Kit DFK1 For Dead Front Coverage of 1in Pole Breaker Modules*. 12-A-1082-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1082-01_DFK1.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_12-A-1082-01_DFK1.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S452 [SRC-00452] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit DFFP3 For Dead Front Coverage of a 3 in Unallocated Branch Space*. 12-A-1083-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1083-01_DFFP3.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_12-A-1083-01_DFFP3.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S453 [SRC-00453] Siemens Industry, Inc.. *P2 & P3 Panelboard Kit DFFP6 For Dead Front Coverage of a 6 in Unallocated Branch Space*. 12-A-1084-01 Rev. 0. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_12-A-1084-01_DFFP6.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/SIE_IS_12-A-1084-01_DFFP6.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S454 [SRC-00454] Siemens Industry, Inc.. *CAT. NO. F602 Vacu-Break mounting F1 branch kit, 2.5 in & 5 in high twin units (drawing 11-B-2000-00 Rev 3 / BOM 11-B-2000-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)*. 11-B-1001-01 Rev. 3. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1001-01_F602.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1001-01_F602.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S455 [SRC-00455] Siemens Industry, Inc.. *CAT. NO. F657 Vacu-Break mounting F1 branch kit, 7.5 in high twin units (drawing 11-B-2001-00 Rev 3 / BOM 11-B-2001-02 Rev 6) for SPP/FPP/S4/F1/P4 (shallow box)*. 11-B-1002-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1002-01_F657.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1002-01_F657.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S456 [SRC-00456] Siemens Industry, Inc.. *CAT. NO. F671 Vacu-Break mounting F1 branch kit, 7.5 in & 10 in high single units (10 in unit) (drawing 11-B-2002-00 Rev 2 / BOM 11-B-2002-04 Rev 7) for SPP/FPP/S4/F1/P4 (shallow box)*. 11-B-1004-01 Rev. 1. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_11-B-1004-01_F671.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_11-B-1004-01_F671.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S457 [SRC-00457] Siemens Industry, Inc.. *CAT. NO. F602D Vacu-Break mounting kit for 2.5 in high twin units (30A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)*. 31-1239-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1239-01_F602D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1239-01_F602D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S458 [SRC-00458] Siemens Industry, Inc.. *CAT. NO. F657D Vacu-Break mounting kit for 5 in and 7.5 in high twin units (30, 60, 100A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)*. 31-1240-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1240-01_F657D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1240-01_F657D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S459 [SRC-00459] Siemens Industry, Inc.. *CAT. NO. F671D Vacu-Break mounting kit for 7.5 in and 10 in high single units (200A) mounted in SPP/FPP/S5/F2/P5 panelboards (deep box)*. 31-1242-01 Rev. 2. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_Panelboard_31-1242-01_F671D.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_Panelboard_31-1242-01_F671D.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S460 [SRC-00460] Siemens Industry, Inc.. *Installation Instructions for TPS3 09 in Lighting Panelboards Type P1*. #8177 (12.09.09). 2009-12. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/TPS3_09_P1_Installation.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/TPS3_09_P1_Installation.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

S461 [SRC-00461] Siemens Industry, Inc.. *LPJSPDNUT01 J-type speed nut replacement kit*. 11-A-1176-01 Rev. 00. Type: oem_instruction. URL: https://s3.amazonaws.com/dcc-data-extract/new-delta/asset/Compas/daily/Compas/Instruction%20Sheet%20Quick%20Guide/SIE_IS_11-A-1176-01_LPJSPDNUT01.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_IS_11-A-1176-01_LPJSPDNUT01.pdf Note: Siemens kit instruction sheet (SIE_IS_* file) hosted in a public distributor content bucket (dcc-data-extract, Compas 'Instruction Sheet Quick Guide' folder); original Siemens document.

Appendix C Research Status and Open Questions

Evidence class	Part claims
A OEM Verified	17412
B Strongly Corroborated	837
C Tentative	1279
D Unverified	290

Most frequent documentation gaps

Field	Parts lacking it
Dimensions	1624
Material	1471
Torque values	1330
Mounting-hole pattern	1181
OEM instruction document	845
Finish / plating	724
Fasteners	705
Status	649
Identification features	580
Aftermarket / reproduction	422
Kit contents	157
current_status	57
oem_status_confirmation	55
weight	47
orderable catalog (AFP) kit containing this cover	43
bus clip/connector part numbers	40
lug type per suffix (MA/MC/CA/N)	31
hole pattern	30
strap dimensions	30
separate orderability	26
current_availability	21
wire range	19
Current rating	19
field-installation into factory-assembled (non Pro-Stock) panels	19
width	18
exact plate dimensions per box width	17
applicability to other QMB unit sizes	17
renewal parts	16
lug count	13
bus connection hole pattern	13
install_doc number	12
date of instruction	9
crimp tool/die	9
stud size	9
quantity per package	8
kit_contents (washers, quantities)	7
use on I-Line versions of same frames not stated in this source	7
mounting height (except SL400)	7
key_code	6
Breaker compatibility	6
mounting height	6
ratings	6
exact per-wire torque mapping (see Table 127)	6

Field	Parts lacking it
lug_count	5
capacity code digits	5
bus material confirm	5
feed configuration	5
full ratings	5
wire range (verify against PDF p.124)	5
which A-Series types (AQ/AE/AD) each fits	4
part dimensions	4
length	4
kit_contents (itemised)	3
contact ratings	3
thread	3
number of terminals	2
current status	2
lug kit	2
thread size	2
conductors per lug	2
kit_contents (lug count)	2
breaker compatibility	1
not found in 2008/2015 catalog tables	1
OEM confirmation	1
lug cover part number (footnote says a user-supplied lug cover is required)	1
FP variant number	1
G-number by kit	1
kits using it	1
horsepower ratings	1
relation to SL800M5	1
material of this specific number	1
terminals	1
other HCN sizes	1
hole diameter	1
head style	1
lockable	1
breaker family record not created for Square D G-frame	1
OEM table reference	1
kit quantity	1
Installation location	1
breaker spaces	1
listing basis	1

Open research leads (priority 1–2)

Lead	Pri.	Topic / detail
LEAD-0001	1	**Eaton instruction leaflets for KB/KL/KPRL3/KPRL4 kits** — Renewal-parts guides give catalog numbers and compatibility but no kit drawings, torque values, strap dimensions or hole patterns. Each kit ships with instructions (IL/IB numbers not cited in the guides). Search Eaton document library for IL numbers packed with KPRL4X32, KPRL3AFD3, KB13AFT, KL23AMS, PRLSEBFD.
LEAD-0002	1	**Supersession mapping 2017 -> 2021 (PRL4 KPRL4FD/FD1/FD2/ED/ED2/LD; PRL1a/2a deadfronts 4180B03/4180B61/4180B05; PRL3a covers 4176B68/4180B93/4178B08/4179B39-42; filler 4178B06H01)** — April 2021 edition replaced these numbers with KPRL4X12/X22/X32/LC and 42C80xx covers (same table rows). Distributor text says 4178B06H01 is for panels built before April 2019 and 42C8083H01 after - implies a chassis change, so old and new are probably NOT interchangeable. Confirm with Eaton Sumter aftermarket (803-481-6677) or a December 2020 edition of RP01400001E. Docs: RP01400001E

Lead	Pri.	Topic / detail
LEAD-0014	1	**Pow-R-Line C switchboard branch provision / connector kit catalog numbers** — Vol 12 p. V12-T15-5 says provisions/connectors are available for all PRLC ratings, but no catalog numbers are public. Obtain the PRLC distribution chassis renewal-parts/price list (Sumter) or a PRLC field-installation IL for adding group-mounted FD/JD/KD/LD/MDL/ND devices; confirm whether KPRL4/KPRL4X kits are the same parts. Docs: IM01500001E, CA08100003E Tab 4
LEAD-0015	1	**WF/WRP switchboard distribution-section connector and retrofit kits** — RP01400002E p.20 lists 'Retrofit kits for WF and WRP distribution sections' and 'Connector kits for WF and WRP distribution sections' from Sumter but gives no numbers. Check whether KCDP/KFDP kits are used, since WF/WRP feeders were CDP-type breakers and FDP switches. Docs: RP01400002E, PL01400002E
LEAD-0025	1	**2700CT1601 OEM QED-2 I-Line interiors catalog** — Contains single/double-row OEM interior selection tables (CF... numbers), likely end closures, splice/main lug kits. Blocked by Akamai (productinfo.se.com, download.se.com 403). Try a distributor mirror (media.distributordatasolutions.com), Rexel/Graybar spec-sheet links, or a browser session. Docs: 2700CT1601
LEAD-0026	1	**QED-2 instruction bulletin 80043-055-16 (2024) and -13 (2018)** — Handling, assembly, splice (through-bus) and torque data for QED-2; likely gives splice plate hardware and torque values. Blocked. Docs: 80043-055-16, 80043-055-13
LEAD-0027	1	**OEM interiors IB 80235-597-09** — Schneider FAQ cites IB 80235-597-09 for single/double-row OEM I-Line interiors. Docs: 80235-597-09
LEAD-0038	1	**Current ABB BuyLog Section 11 (2021/2022) - ReliaGear neXT kit numbers and Spectra retrofit kits** — Contains ReliaGear neXT catalog nomenclature, single breaker-installation-kit catalog number, 'Retrofit kit for Spectra panelboards' and 'Spectra (obsoleted) bolt-on mounting hardware'. Host electrification.us.abb.com returns 503/empty reply from this container; try another network or distributor mirror. Docs: BuyLog Section 11 (ABB)
LEAD-0039	1	**Spectra bolt-on strap instruction leaflets DEH-047, DEH-059, DEH-060, DEH-061, DEH-062 and DEH042 cover supports** — Would give strap part numbers, kit contents and torques for AMCB EB/SE, SF, SG, SK/KM and EY kits, plus cover-support catalog numbers by panel width. Copies exist on manualmachine.com (HTTP 403 here) - e.g. DEH061 AMCB3KM/AMCB2KM, DEH042 SE/SF/TE/TF/TQ/TEL cover supports, AMCB4GB/AMCB6GB, AMCB2GM/AMCB3GM. Docs: DEH-047, DEH-059, DEH-060, DEH-061, DEH-062, DEH042
LEAD-0047	1	**Legacy ITE / Gould-ITE lighting panelboard renewal parts (pre-Siemens S1/S2)** — No OEM ITE, ITE Imperial or Gould-ITE panelboard renewal-parts catalogue was found online. Type designations in the scope (ITE NQB/NLAB/NHB, EQ panelboards, 'CDP' early series) were NOT confirmed in any document reached. Need scanned ITE 'Distribution Products' catalogues (1960s-1980s) or Siemens-Allis price lists; try archive.org, worldradiohistory, eBay catalogue scans, and Siemens legacy support (1-800-333-7421).
LEAD-0048	1	**SpeedFax Section 12 (Switchboards) page 12-32 branch device mounting kits** — SpeedFax Sec.11 p.11-15 says: 'For Series 5, Series 6, CDP6 and VB6 panels as well as FC20, FCI, FCII, SB1, SB2 and SB3 distribution switchboards, see page 12-32 for branch device mounting kits.' US Section 12 PDF not retrieved; try media.distributordatasolutions.com siemenscomplete documents or usa.siemens.com/speedfax. Docs: SPEEDFAX Section 12 p.12-32
LEAD-0056	1	**Current Eaton Volume 4 Tab 2 (CA08100005E) terminal and accessory tables** — eaton.com blocked from container. Needed to confirm newer interphase barrier numbering (IPB2 vs IPB3), J-frame shield line/load, TA350K 350 vs 400 A, 3T225FD and 3TA150FB, K-frame keeper nut pack size, and status/supersessions. Docs: CA08100005E
LEAD-0057	1	**Square D PowerPact M/P/R catalog lug tables** — Need OEM tables for AL800M23K, AL800P6K, AL800P7K, AL1200P25K, CU800M..., R-frame lugs; only tapped versions (…TK) found in Digest. Docs: 0612CT0101
LEAD-0070	1	**FPE OEM panelboard catalog / renewal parts list** — Find original Federal Pacific (or American Circuit Breaker / Federal Pacific Equipment) panelboard catalog giving CDP/BDP/NDP/FDP/NA1B/NH1B/NBLP definitions and the KCDP/KBDP/KFDP/KQB kit tables with breaker compatibility, dimensions and bus details. Circuit Breaker Sales (Matthews NC, 704-882-1875) holds FPE technical documents per fpeparts.com.
LEAD-0071	1	**Confirm KBDP3C frame and KCDP5C/KBDP5C ratings** — Numbering pattern (1=NE/NEF, 2=NEJ, 3=NFJ, 4=NJL, 5=NM) is inferred; Superbreakers gives 225 A for KCDP5C (NM/NN) which looks wrong.
LEAD-0074	1	**Eaton CH/BR retrofit kits current status** — Verify whether RACH*/RBCH*/RCCH*/RDCH*/RABR*/RBBR*/RCBR*/RDBR*/REBR*/RAABR* kit numbers are still orderable (Lincoln Flex Center 800-330-6479) and find the original Eaton publication number/date; look for 480Y/277 V retrofit (PRL-based) offerings and Square D/Siemens equivalents.
LEAD-0084	1	**NQOD / NEHB legacy kit part numbers** — No OEM table of NQOD main breaker kits (bulletin 80043-699-03 covers a 250 A NQOD main kit but prints no catalog number), NQOD neutral/lug kits or NEHB kits found. Search Supplemental and Obsolescence Digest (Digest Plus 'Supplemental and Obsolescence Digest') and older Digest 170-175 PDFs for NQOD/NEHB accessory tables. Docs: 80043-699-03, 80043-687-03
LEAD-0085	1	**SKNQOD225 finger part numbers for reproduction** — OEM FAQ FA124209 gives component numbers 80110-005-01 (A/C finger), 80110-006-01 (B finger), 80025-068-01 (screw). Obtain drawings/dimensions; check whether a 400 A NQOD connector kit existed.
LEAD-0095	1	**Eaton RP01400003E - Vintage Cutler-Hammer panelboards and switchboards renewal parts (MP40, MP-200, PB, PH, PH-L, EP, EE)** — Primary kit tables for MP40/MP2/PH/EE/EP. eaton.com blocked from container (HTTP/2 error, empty reply); usermanual.wiki mirror redirects to manuals.plus captcha; Wayback unreachable. Try from a normal browser or ask Eaton Sumter Aftermarket Center (803-481-6677 per search snippet). Docs: RP01400003E
LEAD-0096	1	**Eaton PL01400003E - Vintage Cutler-Hammer price list (Jan 2008)** — Gives the OEM catalog numbers for MP40 retrofit kits ('KMP40...' pattern per snippet), PH cover plates/deadfront kits/trim lock, neutral assemblies, ground bars. Wesco copy 403, Carlton-Bates behind Cloudflare. Docs: PL01400003E
LEAD-0097	1	**GE GEJ-3006A / GEG-13610B scan (archive.org, access-restricted)** — Borrow/view the scanned pages to confirm part-number-to-row mapping for bus supports and lugs, and capture remaining rows (blank filler 1X, screw assembly use, any interior/bus parts). Docs: GEJ-3006A, GEG-13610B

Lead	Pri.	Topic / detail
LEAD-0107	1	**QED-2 IB 80043-055 torque tables (exact row pairing)** — Section 9 tables (printed pp.51-52 of -13; pp.53-54 of -12) read only through ManualsLib text rendering; hardware-type to torque pairing ambiguous. Get the PDF (productinfo.se.com / download.se.com 403; Scribd copy 881634201 JS-only) and re-transcribe Tables 6-8; also capture through-bus splice bolt size/grade (shipping-split instructions) and Qwik-Flange busway hardware. Docs: 80043-055-12, 80043-055-13, 80043-055-16
LEAD-0108	1	**2700CT1601 OEM QED-2 I-Line interiors catalog and IB 80235-597-09** — Still blocked (productinfo.se.com 403). Schneider STEP-model pages (se.com/us/en/download/document/<CF...>UMS-03) are readable by WebFetch and give interior titles, e.g. CF16KF63C = 1600A 63H double-row centre-feed copper; could be used to decode the CF nomenclature for all OEM interiors. Docs: 2700CT1601, 80235-597-09, CF16KF63C117UMS-03
LEAD-0120	1	**Siemens instruction-sheet bucket (remaining sheets)** — Public S3 bucket dcc-data-extract 'Compas/Instruction Sheet Quick Guide' holds ~1,290 Siemens SIE_IS_* sheets; this batch processed panelboard/switchboard kit sheets only. Not yet processed: MCCB terminal/lug kits (TA*/TC* lug sheets, e.g. SIE_IS_JD-LD_Distribution-Lug, SIE_IS_FD_Compression-Lug), Vacu-Break/HCP switch kits, PowerMod/meter-stack kits (reppartsspdfax: GMBC1/2, MMCVR1, MMBMT1, MMSCK1, MMPK11/13), MG1/SMND/NG1D image sheets, F672/F6162D fusible kits.
LEAD-0003	2	**RP.38F.01.T.E (February 2000) Cutler-Hammer panelboard renewal parts** — Predecessor of RP01400001E; would cover earlier PRL1a/2a/3a/4B part numbers and possibly vintage PRL1/2/3 connector straps. Not found online. Docs: RP.38F.01.T.E
LEAD-0004	2	**RP01400002E April 2009 edition and PL01400002E price list** — Earlier vintage-Westinghouse renewal parts edition and price list referenced by Feb 2013 edition. Docs: RP01400002E, PL01400002E, PL01400001E
LEAD-0005	2	**Drawings 42c8083.pdf etc. on Rexel** — Rexel product page for 42C8083H01 links a drawing file '42c8083.pdf' (not opened). Similar drawing links may exist for other 42C80xx/4176Bxx covers - source of dimensions/hole patterns.
LEAD-0006	2	**KPRL4LFD3 (distributor: 'CON KIT FD+LFD PRL4')** — Dixon Electric (Canada) lists Eaton KPRL4LFD3; not in any OEM table found (2021 table lists FD/LFD under KPRL4FBP). Redirect to dixon.ca not followed.
LEAD-0007	2	**Pow-R-Xpress PRL4X branch fillers PRXP4PD34FILL, PRXP4PD2FILL1 and P44X25** — Distributor-only numbers for PRL4X fillers and PRL4 4X blank cover (P44X25). Relationship to OEM 6554C0x not established.
LEAD-0016	2	**Price list PL01400002E (CDP/HCDP, FDP, PRL1-LX, PRL1, PRL2, PRL3) and PL01400001E** — Price lists would confirm full catalog-number sets (e.g. all KCDP retrofit permutations, KCDPnX fillers) and current availability. Docs: PL01400002E, PL01400001E
LEAD-0017	2	**RP01400003E renewal parts for Cutler-Hammer MP40, MP-200, PB, PH, PH-L, EP, EE panelboards** — Referenced in Vol 12 Tab 4 for branch-device retrofit kits for Cutler-Hammer legacy panelboards (also plug-in power panels/switchboards EE/EP). Not retrieved. Docs: RP01400003E, PL01400003E
LEAD-0018	2	**RP01414001E Panelboard Renewal Parts Supplement** — Referenced with RP01400001E in Vol 12 Tab 4 pp. V12-T4-15..19. Not found. Docs: RP01414001E
LEAD-0019	2	**PRL4 kit renumbering 2017 -> 2022 (KPRL4FD/ED/LD/MC/ND -> KPRL4X32/X22/LC/X34/X35)** — Comparison of RP01400001E Oct 2017 Table 37 and May 2022 Tables 46-47 suggests renumbering with Pow-R-Line Xpert (PD2-PD5 frames). Need explicit OEM supersession statement (April 2021 / Dec 2020 editions, Eaton product pages). Docs: RP01400001E
LEAD-0028	2	**Data Bulletin 0600DB1004 I-Line plug-on connection design** — Jaw design, bolt-on clamp details, I-Line busway/switchgear connections. Docs: 0600DB1004
LEAD-0029	2	**Current 2700CT1101 (v02, 2025-12, 140 MB) and 2110CT9701 v2.1 (2025-02)** — Newer revisions may add QED-2 Series 2 changes (QMB 63 in. only) and accessory tables. Only 2012 and 2019 editions retrieved. Docs: 2700CT1101, 2110CT9701
LEAD-0030	2	**Legacy QMB replacement attachment 'QMB Replacements.pdf' and Supplemental Digest** — Several se.com FAQs reference an attached QMB Replacements.pdf and the Supplemental Digest for QMB3400LA/QMB3300LA and EX/LEX extension kits. Would give full legacy cross-reference table.
LEAD-0031	2	**Unverified FAQs FA123288, FA87289, FA99653** — QMB3640, QMB303T and QMB306T replacement answers seen only in search summaries (rate-limited 403). Re-fetch to upgrade s36 claims to A. Docs: FA123288, FA87289, FA99653
LEAD-0040	2	**Spectra plug-in module instructions GEH-5623/5624/5625/5626/5643/5673/5675/5677 and hardware kits GEH-5913** — Module-level torques and bus-clip part numbers; GEH-5913 should confirm AHK/AHKB kit contents and the module-to-AHK mapping (PDF text column alignment on BuyLog p.11-44 is ambiguous). Docs: GEH-5623, GEH-5624, GEH-5625, GEH-5626, GEH-5643, GEH-5673, GEH-5675, GEH-5677, GEH-5913
LEAD-0041	2	**GEH5589 APN/APNB interiors installation** — Install of Spectra interiors into APB boxes; listed on manualmachine (blocked). Docs: GEH5589
LEAD-0042	2	**Main lug kit instructions GEH-5588 / GEH-5630 and AMB-numbered main lug kits (p.11-28)** — BuyLog p.11-28 lists a second main-lug numbering (AMB3600MAF, AMB3120MAF, AMB3120DMAF, AMB3250CAF, AMB3600CAF, AMB3800CAF, AMB3120CAF, AMB3120NF, cover plates AFPML4X/6X/6XW) apparently for factory-installed/merchandise panels; relationship to AML modules (p.11-45) unresolved. Not yet catalogued as parts. Docs: GEH-5588, GEH-5630
LEAD-0043	2	**Spectra ANK neutral kit full table (p.11-27) and ADS switch load bases 331A1519Gxx / 331A1545Gx / 331A1543G1** — About 70 ANK/ANKT neutral kit numbers by box width/main config and ~30 ADS load base renewal numbers are in the BuyLog but were not individually catalogued in this batch. Docs: BuyLog p.11-27, BuyLog p.11-44
LEAD-0049	2	**Installation instructions for P1/P2/P3/P4/P5 strap kits** — SpeedFax references Installation Instructions for S3VA41T(D) accommodating xGB/xGB2, and drawing refs (11-D-2267-01 BBKB32, 11-D-2894-01 BBKVA5262P2S, 11-A-2010-01 P1SCRWS, etc.). Siemens SIOS (support.industry.siemens.com) likely hosts these as PDFs; search by kit number. Needed for torque, fastener and dimension data (currently unknown for nearly all parts). Docs: 11-D-2267-01, 11-D-2894-01, 11-D-2895-61, 13-D-2011-13, 11-D-2572-02, 11-D-2573-01, 11-D-2573-02

Lead	Pri.	Topic / detail
LEAD-0050	2	**Original P1 / S1 / S2 branch connector replacement parts** — 2021 SpeedFax lists only Revised P1 branch connectors (P1CONACPHCU, P1CONBPHAL, P1CONBPHCU). Whether these fit original P1 or S1/S2 interiors is not stated (table column marks Revised P1 only). Older SpeedFax editions (2010-2014) should be checked for original P1 connector kits.
LEAD-0051	2	**Revised P1 main breaker kits with breaker (MBK...A with amp rating)** — SpeedFax p.11-14 lists ~47 factory kits with breaker included (MBKED3100A, MBKQR1125A..MBKQR3225HA, MBKVAM3150A..MBKVAH3400A, MBKFD3150A..MBKFD3250A, MBKJD1300A..MBKJD32400A). These are referenced in 'replacement' notes on strap-kit records but not catalogued individually in this batch. Canadian equivalents (MBKQR12225A, MBKFD33250A, MBKJD33400A, MBKHF33250A, MBKED33100A) in SI-LP-1633. Docs: SPEEDFAX p.11-14, SI-LP-1633
LEAD-0058	2	**Square D KA/KH lug kit supersession and FY/E-frame/QB-QD-QG-QJ lugs** — 2012 Digest lists AL250KA only against KI; KA/KH lists need older Digest (e.g., Digest 172/173) or instruction bulletins. No E-frame (EDB/EGB/EJB) or Q2/QB lug kits located; 2012 Digest notes threaded insert kit for EDB/EGB/EJB/FJA (table text partly garbled). Docs: Digest 172, Digest 173
LEAD-0059	2	**Square D lug-kit instruction bulletins** — 48940-221-02 (H/J lug kits) and AL100FA4 instructions exist; download blocked (se.com 403). Would give torque values and kit contents. Docs: 48940-221-02
LEAD-0060	2	**Current 0611CT1001 v5.0 (2024) PowerPact H/J/L catalog** — Verify whether 2013 lug tables (esp. column-scrambled CU L-frame rows in Table 121) changed; check PDC3JD20 vs PDC3JD2. Docs: 0611CT1001
LEAD-0063	2	**GE TCAL28 / TCAL38 / TCAL39 / TCAL51 / TCAL62 not found** — These numbers appear in the batch scope but are not in the GE BuyLog 2008 excerpt or the 2012, 2013 or 2019 lug tables. TCAL28 may be confused with TCAL28PD1/PD3 (SF power distribution lugs). Older GE lug numbers (TCAL2x/3x for the 1980s-90s TF/TJ lines) may appear in GEP-1100 / GET-xxxx renewal catalogs or older BuyLog editions (pre-2008). Docs: GEP-1100
LEAD-0064	2	**GE footnote digits fused into part numbers** — The pdftotext extraction of GE BuyLog runs footnote superscripts into part numbers (TCAL1212 = TCAL121 + fn2, TCAL811 = TCAL81 + fn1, TCLK3652 = TCLK365 + fn2, SKLVK6 = SKLVK + fn6, etc.). Base numbers were reconciled across the 2012 and 2019 editions (different footnote numbering). TCAL122, TCALK2122/3122, TCAL91, TCALK291/391, TCAL131 and 789A448G3 are inferred bases (conf B/C). Check them against distributor or ABB product pages. Docs: BuyLog Section 6 Rev 1/19, BuyLog Section 3 Rev 9/12
LEAD-0065	2	**Siemens QJ2 / pre-Sentron ITE lug kits** — SPEEDFAX 2017/2021 no longer lists QJ2, so the only QJ2 lug found is TA1Q300 (distributor). Old ITE numbers such as TA1D/3TA1D/TA1E/TA1F/TA1G/TA2DS/TA3J6500/TA2P400 were not found in the 2017 tables. Search older SPEEDFAX editions (e.g. SPEEDFAX 2004-2011, Section 7) and ITE 'Breaker Lug Selection' leaflets. Docs: SPEEDFAX 2011 Section 7
LEAD-0072	2	**Breaker King / PCS aftermarket FPE kits** — PCS (manufacturer of NEF1K/NEJ1K/NFJ1K/NJL1K/NEF3K/NEJ3K/NJL3K/NFJ3K) - identify company (Power Circuit Specialists?), obtain installation instructions and confirm listing status.
LEAD-0073	2	**Breaker King Obsolete Breaker Guide PDF** — Linked PDF https://www.breakerking.com/catalog/breaker_king_obsolete_book.pdf returned an HTML page to curl; try browser/WebFetch.
LEAD-0075	2	**Square D / Siemens retrofit interiors for FPE and Zinsco** — Forum posts say Square D (NQ/NF) and Eaton build custom interiors to fit existing enclosures; find Schneider 'retrofit panelboard' or 'replacement interior' literature and any listed-for-enclosure marking practice.
LEAD-0076	2	**Schneider/Federal Pioneer FAQs on FPE replacement breakers** — se.com FAQ000278110 and FA234570 blocked (403). Retrieve via browser to capture exact wording on NBLP/NB and CDP.
LEAD-0077	2	**Zinsco/Sylvania commercial panelboard catalogue** — Need GTE-Sylvania/Zinsco catalogue for QSF and double-slot/single-slot split-bus distribution panelboards, DSL* kit numbering (are DSL*/QSF*DS/SB OEM numbers or relectric dealer numbers?), and Sylvania SE/SEH/SC/SJD/SKM kit compatibility.
LEAD-0078	2	**Challenger PM4a/PM4b panelboard documentation** — Identify Challenger panelboard types (PM4a, PM4b) and the breaker frames for C?D?K kits; check whether Eaton KPRL4C*/KPRL4AC*/KPRL4BC* kits are Eaton OEM conversion kits for Challenger breakers in PRL4. Possibly overlaps Eaton batches (B0001/B0002).
LEAD-0086	2	**NQ/NF branch connector part numbers inside SKNQBC/SKNF250/SKNF600** — Bulletins 80043-735-01 and 80043-767-01 give contents but not component part numbers or dimensions. SKNF250 torque text is internally inconsistent (30-40 lb-in vs 6.74-8.99 N-m). Docs: 80043-735-01, 80043-767-01
LEAD-0087	2	**Bulletin number scan gaps** — download.schneider-electric.com accepts p_Doc_Ref=<doc number> (browser UA); HEAD scan found 80043-6xx..8xx bulletins, but rate-limiting (403) means some numbers were missed. 80043-0xx..5xx was scanned single-pass (only 9 hits) - rescan slowly with suffixes -01..-06. Also scan 48041-xxx and 80030-xxx series. Docs: 80043-xxx, 48041-xxx, 80030-xxx
LEAD-0088	2	**Downloaded but not yet mined bulletins** — 80043-616-03 / 80043-449-03 (I-Line 4-piece trim & door kits), 80043-660-04 (HCP trim), 80043-706-02 & 80043-789-01 (I-Line CT neutral bonding), 80043-817/818/820/822/826-01 (fingersafe replacement parts QOFSBF, QOFSLALB, QOFSHALB, NQHJLSC, NQQLSC, NQLALHLSC, NQMLLSC, NQNCC), 80043-844-01 (RPINTBK800HCP, RPINTBK1200HCPC, RPINTBK1200HCR barrier kits), 80043-772-01 (quarter-turn fastener kit, LP9503), 80043-773-01 (endwall/closing plate MHCOEW20A/F), 80043-350-04 (box extension), 80043-455-04 / 80043-771-01 / 80043-850-01 (MH WP enclosures), 80043-252-04 (MH NEMA 4/4X). Only some copied to library; re-download as needed. Docs: 80043-616-03, 80043-449-03, 80043-660-04, 80043-706-02, 80043-789-01, 80043-817-01, 80043-822-01, 80043-826-01, 80043-844-01, 80043-772-01, 80043-773-01, 80043-350-04
LEAD-0098	2	**GE AV-Line Switchboards publication GEA-7931** — Cited in 'Electrical Wiring and Design' (1983). Search archive.org/HathiTrust/eBay for GEA-7931 and AV-Line instruction books (GEH-xxxx). Docs: GEA-7931
LEAD-0099	2	**Electrozad 1985 (Copel) price book - full ITE-Siemens / Square D / Federal Pioneer panelboard pages** — archive.org lending item; borrow to read full NLAB/NHB/HR-7 selector tables, Square D NQO/NQOB/NYIB accessory list (more SF-/LK- part numbers) and Federal Pioneer NALP/NBLP.

Lead	Pri.	Topic / detail
LEAD-0100	2	**Schneider FAQs on NQO/NQOB/NEHB/NA1B/NY1B (blocked 403)** — Read individually to map statements to FAQ numbers: FA97632, FA124608, FA232958, FA87904, FA100575, FA332061, FAQ000266417, FA129512, FA119163, FA122757, FA166748, FA121261, FA125651, FA128561.
LEAD-0101	2	**Cutler-Hammer pre-1994 switchboard designations** — Only MP2 / MP-200 (group-mounted) and Type ES (existing family) found. 'Type MS' and Pow-R-Line predecessors for Cutler-Hammer switchboards not confirmed. Search ECM 1965-1990 issues on archive.org for Cutler-Hammer switchboard ads.
LEAD-0105	2	**Square D Digest 152 (1970) further mining** — Only panelboard index/accessory pages were mined. Pages 56-83 contain full NQO/NQOB/NA1B/NH1B/I-Line/QMB interior, box and front catalog numbers (e.g. HCN-0936-1M interiors, MTX cable ducts, QMB-1832-2 interior) and the Q1/QO breaker tables; Section 600 breaker catalog referenced. Docs: Digest 152
LEAD-0109	2	**I-Line plug-on data bulletin 0600DB1004 and SL250/SL800M5/SL1200P5-P7 instruction bulletins** — 0600DB1004 (12/2010) blocked on se.com. SL400 IB 48040-651-03 found via graybar.com (Salsify CDN) - same route likely works for SL250/SL800M5/SL1200Px product pages on graybar.com (search page is JS; need product page URLs). docs.steinerelectric.com hosts Schneider instruction sheets (e.g. Schneider_Electric_HCM18736MP_Instruction_Sheet.pdf) but its TLS certificate is expired (not fetched). Docs: 0600DB1004, 48040-651-03
LEAD-0110	2	**I-Line HCM/HCR-U neutral bonding straps 80043-446-06, 80121-082-02, 80010-600-01, hardware kit BBV57291** — Seen only in search-result summaries of se.com FAQs FA225933/FA117902/FA339459 (403 on fetch). Would add neutral bonding strap part numbers for HCR-U with/without neutral CT. Docs: 80043-446-06, 80121-082-02, 80010-600-01, BBV57291
LEAD-0111	2	**Current ABB BuyLog Section 11 Panelboards (2021/2022, ReliaGear neXT, "Spectra (obsoleted) bolt-on panelboard mounting hardware" p.11-63)** — electrification.us.abb.com PDF: curl HTTP/2 INTERNAL_ERROR / empty reply, WebFetch 503. pdf4pro.com has a text preview (TOC confirms p.11-63 Spectra obsoleted bolt-on hardware) but download is 403. ABB quick-selector guide (simplebooklet) gives the retrofit-kit table; product-number columns of its Spectra renewal tables are images.
LEAD-0112	2	**Tmax XT Spectra retrofit kit (SRFB/SRFN) installation instructions** — No instruction document number found; empower lists SRFB kits only inside breaker cross-reference entries (e.g. Tmax27292). Need kit contents, strap part numbers and torques.
LEAD-0116	2	**Eaton KB/KL/KCDP/KFDP/1C96608 kit instruction leaflets not public** — No Eaton instruction leaflet or SKU page exists online for KB* vertical main breaker kits, KL* lug kits, KCDP*, KFDP* or 1C96608/2C11642/1C96609 branch assemblies (skuPage 404 on Eaton mirror). Kit ILs ship in the box: obtain physical kits or Eaton satellite-plant copies to capture strap dimensions/torques.
LEAD-0117	2	**Eaton SPX0361126 project O&M manual (585 pp) on ManualsLib** — ManualsLib manual 1538842 'Eaton Pow-R-Line SPX0361126' compiles IM01500001E (2011), Pow-R-Line panelboard renewal parts (Feb 2009) and switchboard unit data incl. 'Circuit Breaker Mounting Bolt Drilling Plan' (p.413) and 'Branch Devices' (p.363). Curl/manualzz blocked (403); WebFetch works page by page. Docs: SPX0361126
LEAD-0121	2	**Siemens US SPEEDFAX Section 12 switchboard branch kit table** — Locate SPEEDFAX (2017-2021) Section 12 switchboard 'distribution section branch mounting kits' page (SB1/SB2/SB3, CDP6/FC) for US catalog numbers and breaker compatibility; distributordatasolutions 2021q3/q4 documents host Section 11 - try sibling document hashes for Section 12.
LEAD-0122	2	**Eaton cooperindustries.com mirror** — cooperindustries.com mirrors eaton.com DAM and skuPage URLs (www.eaton.com times out from container). Use it for Eaton switchboard ILs (e.g. Pow-R-Line C/i branch device instructions, IL 29C101H breaker leaflets) and for current RP01400001E.

The complete backlog is maintained in research/BACKLOG.md.